

AI ASSISTED CODING

ASSIGNMENT-14

Name: P.Susmija

Roll no: 2503A51L11

Batch: 24BTCAICSB19

TASK-1:

Scenario:


A student wants to showcase their projects, skills, and contact details in a portfolio website. Instead of writing all code manually, they want to speed up the process using GitHub Copilot.

- Use Copilot to generate an HTML structure for a personal portfolio page (sections: Home, About, Projects, Contact).
- Ask Copilot to suggest responsive CSS styling for the layout (e.g., grid/flexbox).
- Customize Copilot's suggestions to add a hover effect on project cards

Prompt:

generate an HTML structure for a personal portfolio page (sections: Home,About, Projects, Contact).suggest responsive CSS styling for the layout (e.g., grid/flexbox). add a hover effect on project cards give html css in same file.

Code generated:

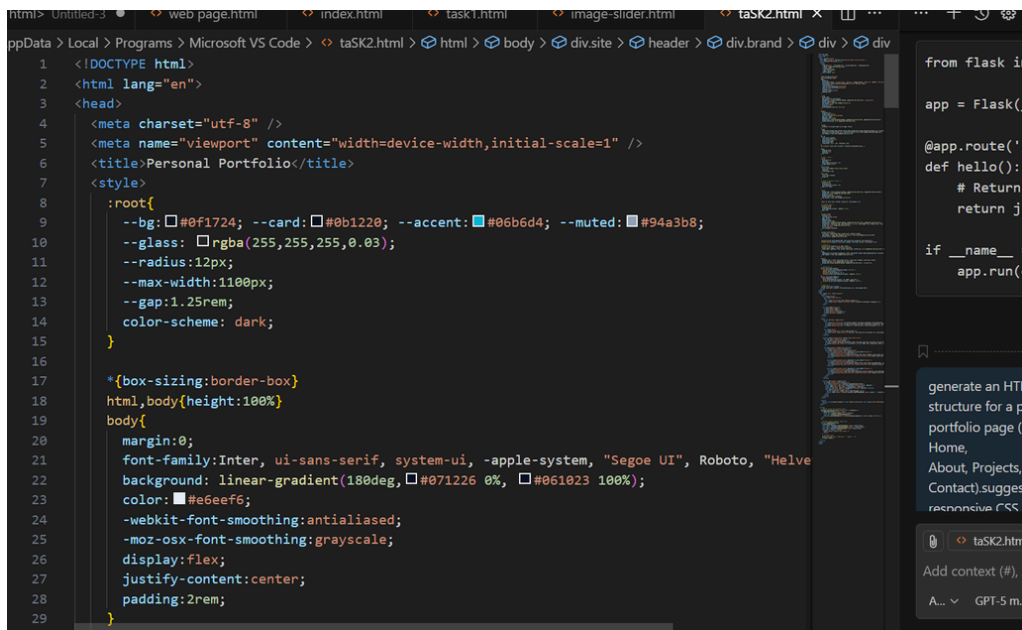

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="utf-8" />
5   <meta name="viewport" content="width=device-width,initial-scale=1" />
6   <title>Personal Portfolio</title>
7   <style>
8     :root{
9       --bg:#0f1724; --card:#0b1220; --accent:#06b6d4; --muted:#94a3b8;
10      --glass: rgba(255,255,255,0.03);
11      --radius:12px;
12      --max-width:1100px;
13      --gap:1.25rem;
14      color-scheme: dark;
15    }
16
17    /*{box-sizing:border-box}
18    html,body{height:100%}
19    body{
20      margin:0;
21      font-family:Inter, ui-sans-serif, system-ui, -apple-system, "Segoe UI", Roboto, "Helve
22      background: linear-gradient(180deg,#071226 0%, #061023 100%);
23      color:#e6eef6;
24      -webkit-font-smoothing:antialiased;
25      -moz-osx-font-smoothing:grayscale;
26      display:flex;
27      justify-content:center;
28      padding:2rem;
29    }
```

```
from flask import Flask, render_template
app = Flask(__name__)

@app.route('/')
def hello():
    # Returns a message
    return jsonify({'message': 'Hello, World!'})

if __name__ == '__main__':
    app.run(debug=True)
```

generate an HTML structure for a personal portfolio page (sections: Home, About, Projects, Contact).suggest responsive CSS styling for the layout (e.g., grid/flexbox). add a hover effect on project cards give html css in same file.

taSK2.html

Add context (#), e

A... v GPT-5 m...

```
html> Untitled-3 • web page.html index.html task1.html image-slider.html taSK2.html X ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > taSK2.html > html > head > style
2 <html lang="en">
3 <head>
7 <style>
31 .site{
32   width:100%;
33   max-width:var(--max-width);
34   background: linear-gradient(180deg, rgba(255,255,255,0.02), transparent);
35   border-radius:16px;
36   box-shadow: 0 8px 30px rgba(2,6,23,0.7);
37   overflow:hidden;
38   display:grid;
39   grid-template-rows:auto 1fr auto;
40 }
41
42 header{
43   display:flex;
44   align-items:center;
45   justify-content:space-between;
46   gap:var(--gap);
47   padding:1rem 1.5rem;
48   background: linear-gradient(90deg, rgba(255,255,255,0.02), rgba(255,255,255,0.01));
49   border-bottom:1px solid rgba(255,255,255,0.03);
50 }
51
52 .brand{
53   display:flex;align-items:center;gap:.75rem;
54 }
55 .logo{
56   width:44px;height:44px;border-radius:10px;background:linear-gradient(135deg,var(--acce
```

```
html> Untitled-3 • web page.html index.html task1.html image-slider.html taSK2.html X ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > taSK2.html > html > head > style
2 <html lang="en">
3 <head>
7 <style>
55 .logo{
56   width:44px;height:44px;border-radius:10px;background:linear-gradient(135deg,var(--acce
57   display:flex;align-items:center;justify-content:center;font-weight:700;color: #021221
58   box-shadow: 0 4px 14px rgba(6,182,212,0.12);
59 }
60 nav a{
61   color:var(--muted);
62   text-decoration:none;
63   margin-left:1rem;
64   font-weight:600;
65   transition: color .15s, transform .15s;
66 }
67 nav a:hover{ color:var(--accent); transform:translateY(-2px); }
68
69 main{
70   padding:2rem;
71   display:grid;
72   gap:2rem;
73 }
74
75 /* Home / Hero */
76 .hero{
77   display:grid;
78   gap:1rem;
79   grid-template-columns: 1fr;
80   align-items:center;
```

```
html> Untitled-3 • web page.html index.html task1.html image-slider.html taSK2.html X ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > taSK2.html > html > head > style
2 <html lang="en">
3 <head>
7 <style>
75 /* Home / Hero */
76 .hero{
77   display:grid;
78   gap:1rem;
79   grid-template-columns: 1fr;
80   align-items:center;
81 }
82 .hero-title{
83   font-size:clamp(1.4rem,2.6vw,2.2rem);
84   margin:0;
85   line-height:1.05;
86 }
87 .hero-sub{
88   color:var(--muted);
89   margin:0;
90 }
91
92 /* About + Projects layout */
93 .content-grid{
94   display:grid;
95   grid-template-columns: 1fr;
96   gap:var(--gap);
97 }
98
99 .card{
100   background: linear-gradient(180deg, rgba(255,255,255,0.01), rgba(255,255,255,0.00))
```

```
html> Untitled-3 • web page.html index.html task1.html image-slider.html taSK2.html X ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > taSK2.html > html > head > style
2 <html lang="en">
3 <head>
7 <style>
99 .card{
100   background: linear-gradient(180deg, rgba(255,255,255,0.01), rgba(255,255,255,0.00))
101   border:1px solid rgba(255,255,255,0.03);
102   padding:1.25rem;
103   border-radius:var(--radius);
104   box-shadow: 0 6px 18px rgba(2,6,23,0.5);
105 }
106
107 .about p{ color:var(--muted); margin:0; line-height:1.6;}
108
109 /* Projects grid */
110 .projects-grid{
111   display:grid;
112   grid-template-columns: repeat(1, 1fr);
113   gap:1rem;
114 }
115
116 .project-card{
117   display:flex;
118   flex-direction:column;
119   gap:.75rem;
120   padding:1rem;
121   border-radius:12px;
122   background: linear-gradient(180deg, rgba(255,255,255,0.02), rgba(255,255,255,0.01))
123   transition: transform .28s cubic-bezier(.2,.9,.2,1), box-shadow .28s, border-color .28
124   border:1px solid rgba(255,255,255,0.02);
```

```
html> Untitled-3 • web page.html index.html task1.html image-slider.html taSK2.html x ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > taSK2.html > html > head > style
2 <html lang="en">
3 <head>
7 <style>

129 .project-card:hover{
130   transform: translateY(-8px) scale(1.01) rotate(-0.2deg);
131   box-shadow: 0 18px 40px rgba(2,6,23,0.6), 0 4px 14px rgba(6,182,212,0.06);
132   border-color: rgba(6,182,212,0.18);
133 }
134
135 .project-title{ font-weight:700; font-size:1rem; margin:0; color:#eaf6f8 }
136 .project-desc{ margin:0; color:var(--muted); font-size:.95rem; line-height:1.45 }
137
138 /* Contact */
139 .contact-form{ display:grid; gap:.75rem; }
140 .contact-form input, .contact-form textarea{
141   width:100%; padding:.7rem; border-radius:8px; border:1px solid rgba(255,255,255,0.04)
142 }
143 .btn{
144   appearance:none;border:0;padding:.75rem 1rem;border-radius:10px;background:var(--accent)
145   box-shadow: 0 8px 22px rgba(6,182,212,0.12);
146 }
147
148 footer{
149   padding:1rem 1.5rem; text-align:center; color:var(--muted); font-size:.95rem;
150   border-top:1px solid rgba(255,255,255,0.02);
151   background:linear-gradient(90deg, rgba(255,255,255,0.01), transparent);
152 }
153
154 /* Responsive */
```


```
html> Untitled-3 • web page.html index.html task1.html image-slider.html taSK2.html x ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > taSK2.html > html > head > style
2 <html lang="en">
3 <head>
7 <style>

154 /* Responsive */
155 @media (min-width:720px){
156   .content-grid{ grid-template-columns: 1fr 1fr; }
157   .about{ grid-column:1 / 2; }
158   .projects{ grid-column:2 / 3; }
159   .projects-grid{ grid-template-columns: repeat(2, 1fr); }
160 }
161 @media (min-width:1000px){
162   main{ padding:2.5rem; }
163   .hero{ grid-template-columns: 1fr 380px; gap:2rem; }
164   .projects-grid{ grid-template-columns: repeat(3, 1fr); }
165 }
166
167 /* Utility */
168 .muted{ color:var(--muted) }
169 a.cta{ color:var(--accent); text-decoration:none; font-weight:700 }
170 </style>
171 </head>
172 <body>
173 <div class="site" role="document">
174   <header>
175     <div class="brand">
176       <div class="logo">PJ</div>
177       <div>
178         <div style="font-weight:800">Susmija Punnam</div>
179         <div class="muted" style="font-size:.85rem">Frontend • Developer • Design
```

```
html> Untitled-3 • web page.html index.html task1.html image-slider.html taSK2.html X ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > taSK2.html > html > head > style
2 <html lang="en">
172 <body>
173 <div class="site" role="document">
174 <header>
183 <nav aria-label="Primary">
184 <a href="#home">Home</a>
185 <a href="#about">About</a>
186 <a href="#projects">Projects</a>
187 <a href="#contact">Contact</a>
188 </nav>
189 </header>
190
191 <main>
192 <section id="home" class="hero">
193 <div>
194 <h1 class="hero-title">Hi, I'm Susmija Punnam – building thoughtful web experience
195 <p class="hero-sub muted">I design and develop web apps using modern JavaScript, C
196 <p style="margin-top:1rem"><a class="cta" href="#projects">See my projects →</a></p>
197 </div>
198
199 <div class="card">
200 <h3 style="margin:0 0 .5rem 0">Quick Info</h3>
201 <p class="muted" style="margin:0">Location: SR University · Available for internsh
202 </div>
203 </section>
204
205 <section class="content-grid" style="align-items:start">
206 <div id="about" class="card about">
207 <h2 style="margin-top:0">About</h2>
```

```
html> Untitled-3 • web page.html index.html task1.html image-slider.html taSK2.html X ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > taSK2.html > html > head > style
2 <html lang="en">
172 <body>
255 <script>
257 document.querySelectorAll('a[href^="#"]').forEach(a=>{
258 a.addEventListener('click', (e)=>{
259 const id = a.getAttribute('href').slice(1);
260 const el = document.getElementById(id);
261 if(el){ e.preventDefault(); el.scrollIntoView({behavior:'smooth',block:'start'})}; }
262 });
263
264
265 // Minimal contact handler (demo only)
266 function handleContact(e){
267 e.preventDefault();
268 const name = document.getElementById('cname').value.trim();
269 const email = document.getElementById('cemail').value.trim();
270 const msg = document.getElementById('cmsg').value.trim();
271 if(!name || !email || !msg){
272 alert('Please complete all fields.');
```

Output:

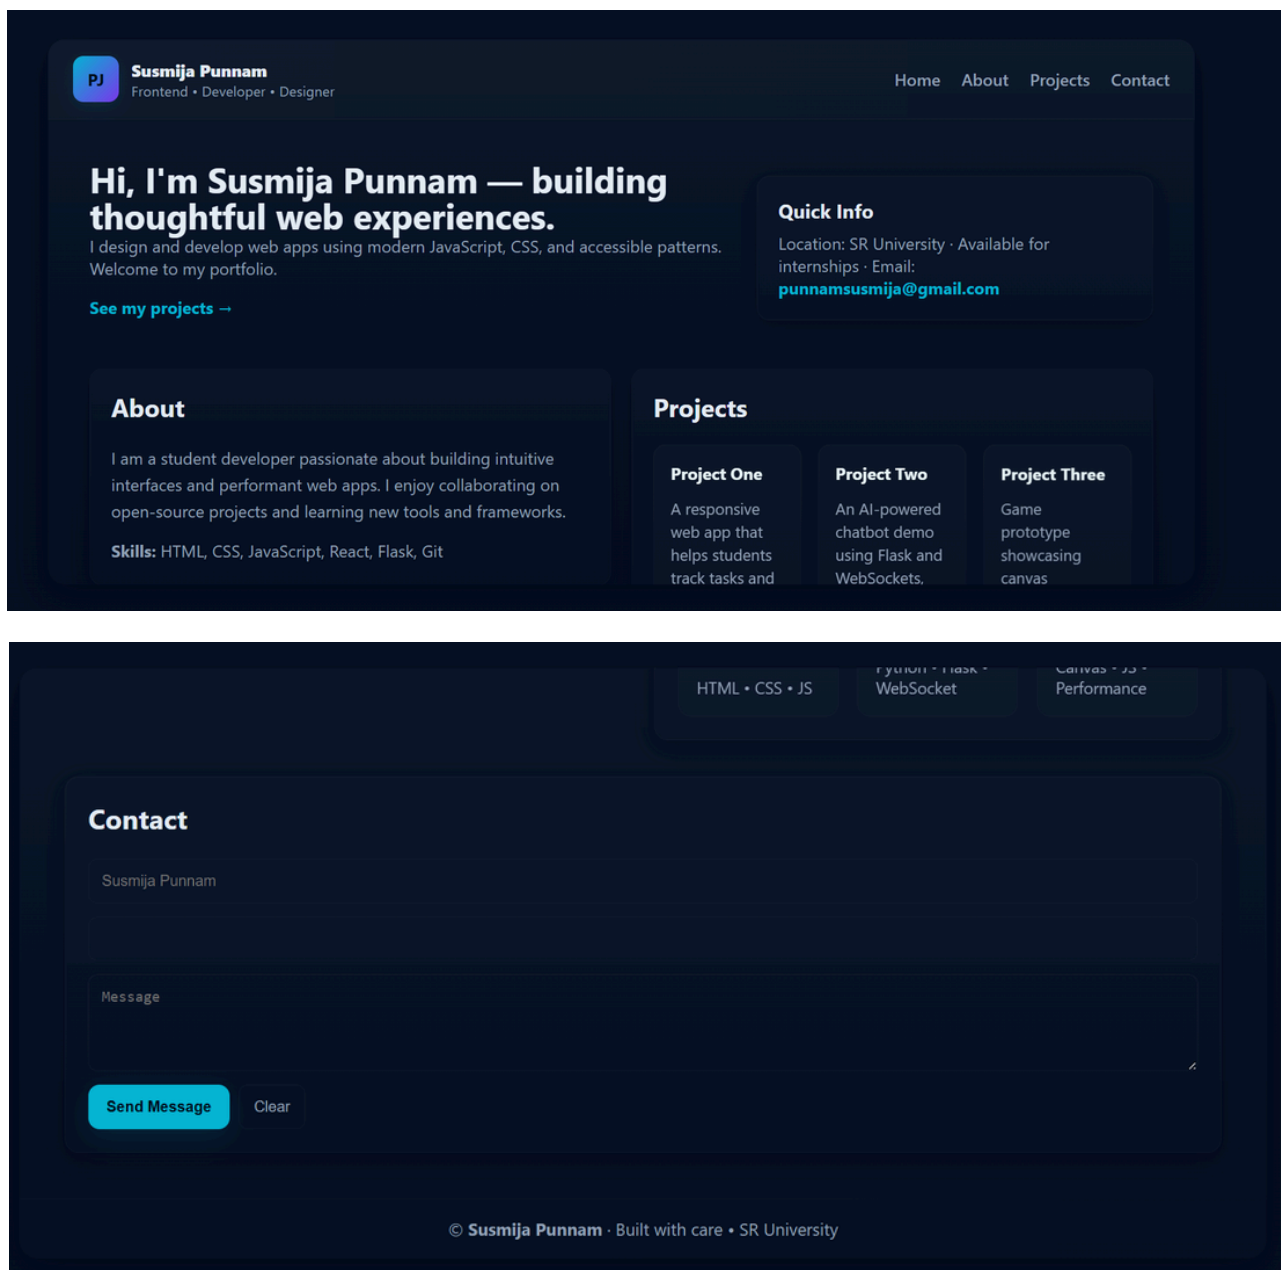

Observation:

The code builds a responsive personal portfolio webpage with four main sections: Home, About, Projects, and Contact. It uses flexbox and CSS grid for layout, ensuring adaptability across screen sizes. The navigation is sticky, the project cards include a hover effect (lift + shadow), and a simple contact form is provided, making the design clean, modern, and user- friendly.

Task #2:

AI-Generated Restaurant Landing Page

Scenario:

A local restaurant needs simple landing page with navigation bar, menu highlights, and an image gallery. The developer wants to quickly generate it using AI assistance.

Prompt:

A local restaurant needs simple landing page with navigation bar, menu highlights, and an image gallery.

Code generated:

```
web page.html  index.html  image-slider.html  taSK2.html  task3.html  task1.html X  ...
C:\Users\Susmija> AppData\Local\Programs\Microsoft VS Code> task1.html > html
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>Restaurant Landing Page</title>
7      <style>
8          * {
9              margin: 0;
10             padding: 0;
11             box-sizing: border-box;
12             font-family: Arial, sans-serif;
13         }
14
15         nav {
16             background-color: #333;
17             padding: 1rem;
18             position: fixed;
19             width: 100%;
20             top: 0;
21         }
22
23         nav a {
24             color: white;
25             text-decoration: none;
26             margin-right: 20px;
27         }
28
29         .hero {
```

```
web page.html  index.html  image-slider.html  taSK2.html  task3.html  task1.html X  ...
C:\Users\Susmija> AppData\Local\Programs\Microsoft VS Code> task1.html > html
2  <html lang="en">
3  <head>
7      <style>
29         .hero {
30             background-color: #f4f4f4;
31             padding: 10px 20px 40px;
32             text-align: center;
33         }
34
35         .menu-highlights {
36             padding: 40px 20px;
37             max-width: 1200px;
38             margin: 0 auto;
39         }
40
41         .menu-item {
42             margin: 20px 0;
43             padding: 10px;
44             border-bottom: 1px solid #ddd;
45         }
46
47         .gallery {
48             display: grid;
49             grid-template-columns: repeat(auto-fit, minmax(300px, 1fr));
50             gap: 20px;
51             padding: 20px;
52             background-color: #f9f9f9;
53         }
54
```



```
web page.html index.html image-slider.html taSK2.html task3.html task1.html X ...
C:\Users\Susmija> AppData\Local\Programs\Microsoft VS Code> task1.html > html

2  <html lang="en">
3  <head>
7  <style>
55      .gallery img {
56          width: 100%;
57          height: 200px;
58          object-fit: cover;
59          border-radius: 8px;
60      }
61  </style>
62  </head>
63  <body>
64      <nav>
65          <a href="#home">Home</a>
66          <a href="#menu">Menu</a>
67          <a href="#gallery">Gallery</a>
68          <a href="#contact">Contact</a>
69      </nav>
70
71      <div class="hero" id="home">
72          <h1>Welcome to Our Restaurant</h1>
73          <p>Experience the finest dining in town</p>
74      </div>
75
76      <div class="menu-highlights" id="menu">
77          <h2>Menu Highlights</h2>
78          <div class="menu-item">
79              <h3>Signature Dish</h3>
80              <p>Chef's special with seasonal ingredients - $24</p>
```



```
web page.html index.html image-slider.html taSK2.html task3.html task1.html X ...
C:\Users\Susmija> AppData\Local\Programs\Microsoft VS Code> task1.html > html

2  <html lang="en">
63  <body>
76      <div class="menu-highlights" id="menu">
77          <h2>Menu Highlights</h2>
78          <div class="menu-item">
79              <h3>Signature Dish</h3>
80              <p>Chef's special with seasonal ingredients - $24</p>
81          </div>
82          <div class="menu-item">
83              <h3>Fresh Pasta</h3>
84              <p>Handmade daily with organic ingredients - $18</p>
85          </div>
86          <div class="menu-item">
87              <h3>Grilled Salmon</h3>
88              <p>Wild-caught salmon with herbs - $26</p>
89          </div>
90      </div>
91
92      <div class="gallery" id="gallery">
93          
94          
95          
96          
97      </div>
98
99      <footer id="contact" style="text-align: center; padding: 20px; background-color: #333; color: white">
100          <p>Contact us: (555) 123-4567</p>
101          <p>123 Restaurant Street, Foodville</p>
102      </footer>
```



```
web page.html index.html image-slider.html taSK2.html task3.html task1.html X ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > task1.html > html
2 <html lang="en">
63 <body>
76 <div class="menu-highlights" id="menu">
89 </div>
90 </div>
91
92 <div class="gallery" id="gallery">
93 
94 
95 
96 
97 </div>
98
99 <footer id="contact" style="text-align: center; padding: 20px; background-color: #333;
100 <p>Contact us: (555) 123-4567</p>
101 <p>123 Restaurant Street, Foodville</p>
102 </footer>
103 </body>
104 </html>
```

Output:

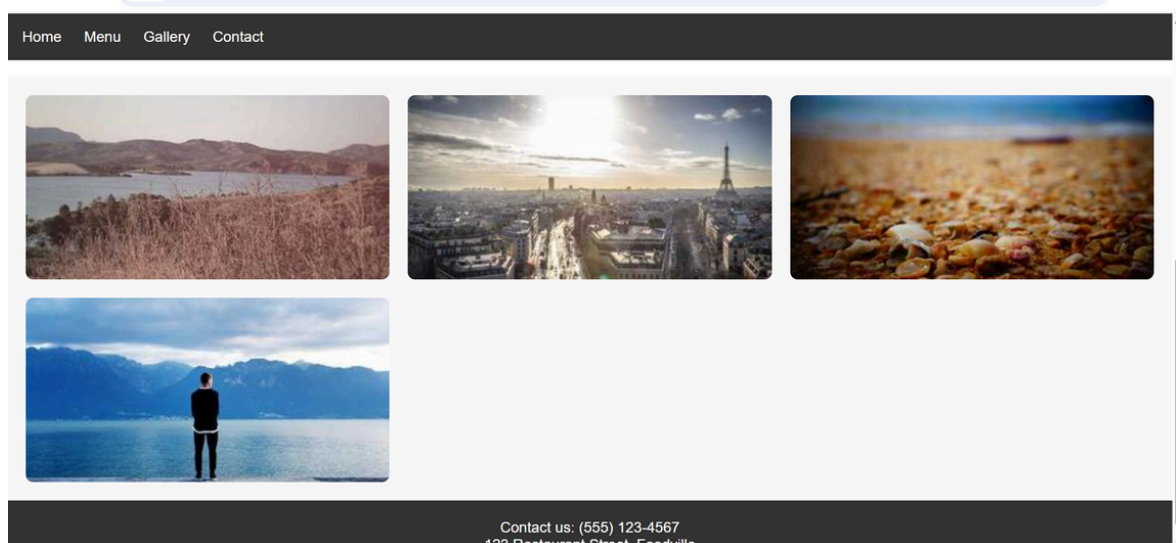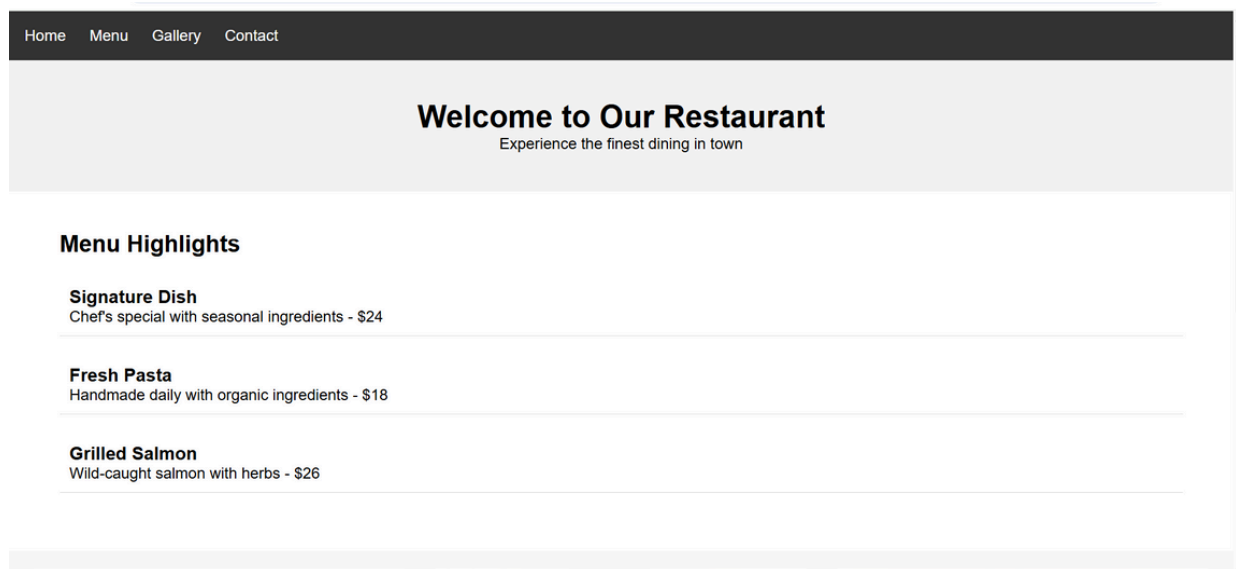

Observation:

The code designs a simple and responsive restaurant landing page with a sticky navigation bar, a menu section styled using CSS cards, and an interactive JavaScript-based image slider for the gallery. The layout is clean, user-friendly, and effectively highlights the restaurant's offerings while ensuring easy navigation.

Task #3:

AI-Powered Event Registration Form

Scenario:


SR University is hosting a tech fest. They need a web-based registration form for students. The form must validate user input in real-time.

Prompt:

SR University is hosting a tech fest. They need a web-based registration form for students. The form must validate user input in real-time. generate an HTML form (fields: Name, Email, Phone, Department, Event Selection). Assist in adding CSS styling for an attractive form layout.

- Implement JavaScript validation (e.g., email format check, phone number length check) using Copilot's suggestions. Give js html css in single file.

Code generated:

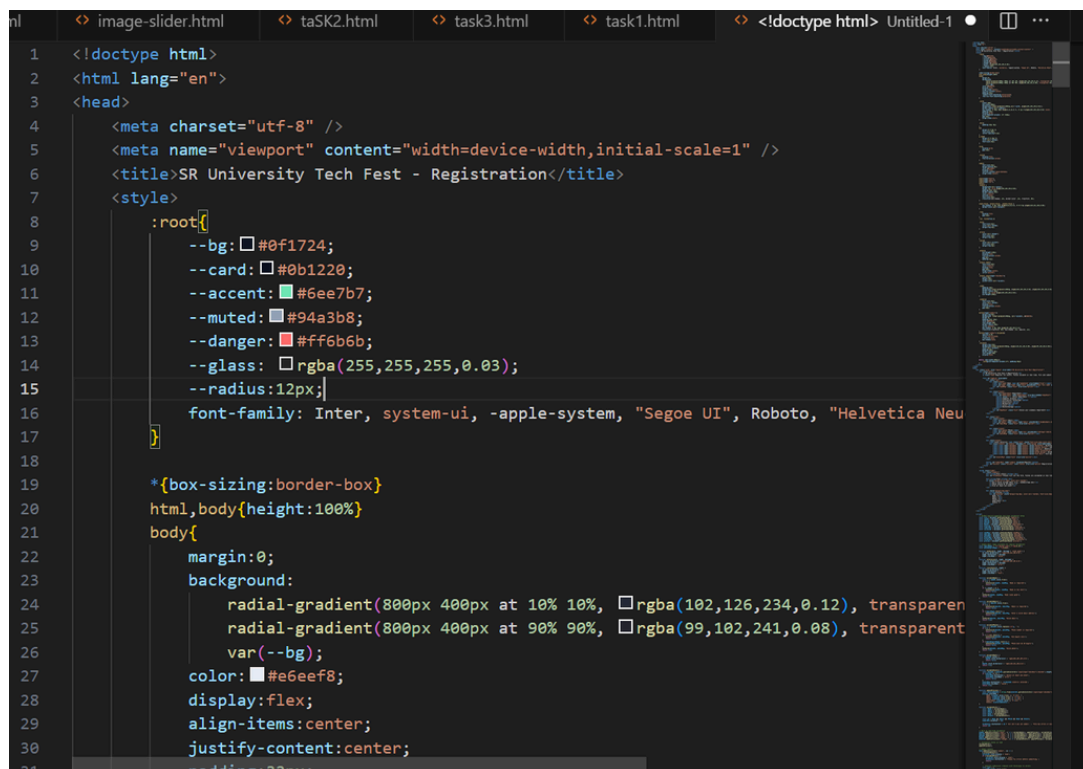

```
1 <!doctype html>
2 <html lang="en">
3 <head>
4   <meta charset="utf-8" />
5   <meta name="viewport" content="width=device-width,initial-scale=1" />
6   <title>SR University Tech Fest - Registration</title>
7   <style>
8     :root{
9       --bg: #0f1724;
10      --card: #0b1220;
11      --accent: #6ee7b7;
12      --muted: #94a3b8;
13      --danger: #ff6b6b;
14      --glass: rgba(255,255,255,0.03);
15      --radius:12px;
16      font-family: Inter, system-ui, -apple-system, "Segoe UI", Roboto, "Helvetica Neu
17    }
18
19    *{box-sizing:border-box}
20    html,body{height:100%}
21    body{
22      margin:0;
23      background:
24        radial-gradient(800px 400px at 10% 10%, rgba(102,126,234,0.12), transparent
25        radial-gradient(800px 400px at 90% 90%, rgba(99,102,241,0.08), transparent
26        var(--bg);
27      color: #e6eef8;
28      display:flex;
29      align-items:center;
30      justify-content:center;
31      padding: 20px;
```

```
image-slider.html taSK2.html task3.html task1.html <!doctype html> Untitled-1
<html lang="en">
<head>
<style>

*{box-sizing:border-box}
html,body{height:100%}
body{
margin:0;
background:
radial-gradient(800px 400px at 10% 10%, rgba(102,126,234,0.12), transparent 0%),
radial-gradient(800px 400px at 90% 90%, rgba(99,102,241,0.08), transparent 0%),
var(--bg);
color:#e6eef8;
display:flex;
align-items:center;
justify-content:center;
padding:32px;
-webkit-font-smoothing:antialiased;
-moz-osx-font-smoothing:grayscale;
}

.card{
width:100%;
max-width:900px;
background:linear-gradient(180deg,var(--card), rgba(255,255,255,0.02));
border-radius:var(--radius);
box-shadow: 0 10px 30px rgba(2,6,23,0.7), 0 1px 0 rgba(255,255,255,0.02) inset;
padding:28px;
display:grid;
grid-template-columns: 1fr 420px;
```

```
image-slider.html taSK2.html task3.html task1.html <!doctype html> Untitled-1
<html lang="en">
<head>
<style>

.hero{
padding:18px 8px;
}
h1{
margin:0 0 8px 0;
font-size:20px;
letter-spacing:0.2px;
}
p.lead{
margin:0 0 18px 0;
color:var(--muted);
font-size:14px;
}

form{
display:grid;
gap:12px;
}

.field{
display:flex;
flex-direction:column;
}

label{
font-size:13px;
margin-bottom:8px;
```

```
image-slider.html taSK2.html task3.html task1.html <!doctype html> Untitled-1
<html lang="en">
<head>
  <style>
    input[type="text"],
    input[type="email"],
    input[type="tel"],
    select,
    .events {
      background:var(--glass);
      border:1px solid rgba(255,255,255,0.04);
      padding:12px 14px;
      border-radius:10px;
      color:inherit;
      outline:none;
      font-size:14px;
      transition:box-shadow .15s, border-color .15s, transform .05s;
    }

    input:focus, select:focus, .events:focus {
      box-shadow: 0 6px 18px rgba(0,0,0,0.6), 0 0 4px rgba(110,231,183,0.06);
      border-color:var(--accent);
    }

    .row{
      display:flex;
      gap:12px;
    }

    .row .field{flex:1}

    .hint{
```

```
image-slider.html taSK2.html task3.html task1.html <!doctype html> Untitled-1
<html lang="en">
<head>
  <style>
    .hint{
      font-size:14px;
      color:var(--muted);
      margin-top:6px;
    }

    .error{
      color:var(--danger);
      font-size:13px;
      margin-top:6px;
    }

    .valid{
      color:var(--accent);
      font-size:13px;
      margin-top:6px;
    }

    .events{
      min-height:110px;
      display:flex;
      flex-direction:column;
      gap:6px;
      padding:12px;
    }

    .events label{
      font-size:13px;
      color:inherit;
      display:flex;
```

```
image-slider.html taSK2.html task3.html task1.html <!doctype html> Untitled-1
2 <html lang="en">
3 <head>
4   <style>
5     .events label{
6       display:flex;
7       gap:10px;
8       align-items:center;
9       cursor:pointer;
10    }
11    .events input[type="checkbox"]{
12      width:16px;
13      height:16px;
14      accent-color:var(--accent);
15    }
16    .side{
17      padding:18px;
18      background:linear-gradient(180deg, rgba(255,255,255,0.02), rgba(255,255,255,
19      border-radius:10px;
20      border:1px solid rgba(255,255,255,0.02);
21      min-height:260px;
22    }
23
24    .summary{
25      font-size:13px;
26      color:var(--muted);
27      display:flex;
28      flex-direction:column;
29      gap:10px;
30    }
31  }
32
33  }
34
35  }
36
37  }
38
39  }
40
41  }
42
43  }
44
45  }
46
47  }
48
49  }
50
51  }
52
53  }
54
55  }
56
57  }
58
59  }
60
61  }
62
63  }
64
65  }
66
67  }
68
69  }
70
71  }
72
73  }
74
75  }
76
77  }
78
79  }
80
81  }
82
83  }
84
85  }
86
87  }
88
89  }
90
91  }
92
93  }
94
95  }
96
97  }
98
99  }
100 }
```

```
image-slider.html taSK2.html task3.html task1.html <!doctype html> Untitled-1
2 <html lang="en">
3 <head>
4   <style>
5     button[type="submit"]{
6       margin-top:8px;
7       background: linear-gradient(90deg, var(--accent), #3b82f6);
8       border:0;
9       padding:12px 14px;
10      color:#042017;
11      font-weight:600;
12      border-radius:10px;
13      cursor:pointer;
14      box-shadow: 0 8px 20px rgba(59,130,246,0.12);
15      transition:transform .08s, box-shadow .12s, opacity .12s;
16    }
17    button[type="submit"]:disabled{
18      opacity:0.45;
19      cursor:not-allowed;
20      transform:none;
21      box-shadow:none;
22    }
23    .success{
24      margin-top:12px;
25      background:linear-gradient(90deg, rgba(110,231,183,0.08), rgba(59,130,246,0.
26      color:var(--accent);
27      padding:10px;
28      border-radius:8px;
29      font-weight:600;
30      display:none;
31    }
32  }
33
34  }
35
36  }
37
38  }
39
40  }
41
42  }
43
44  }
45
46  }
47
48  }
49
50  }
51
52  }
53
54  }
55
56  }
57
58  }
59
60  }
61
62  }
63
64  }
65
66  }
67
68  }
69
70  }
71
72  }
73
74  }
75
76  }
77
78  }
79
80  }
81
82  }
83
84  }
85
86  }
87
88  }
89
90  }
91
92  }
93
94  }
95
96  }
97
98  }
99
100 }
```

```

2      <html lang="en">
195    <body>
282      <script>
411        // Wire up real-time validation
412        nameEl.addEventListener('input', () => { validateName(); updatePreview(); validateFo
413        emailEl.addEventListener('input', () => { validateEmail(); updatePreview(); validate
414        phoneEl.addEventListener('input', () => { validatePhone(); updatePreview(); validate
415        deptEl.addEventListener('change', () => { validateDept(); updatePreview(); validateF
416        eventsEl.addEventListener('change', () => { validateEvents(); updatePreview(); valid
417
418        // Initialize states on load
419        validateForm();
420        updatePreview();
421
422        // Submit handler
423        form.addEventListener('submit', (e) => {
424          e.preventDefault();
425          successEl.style.display = 'none';
426          if (!validateForm()) {
427            successEl.style.display = 'none';
428            formStatus.textContent = 'Please fix errors before submitting.';
429            return;
430          }
431
432          // Simulate submission (replace with fetch/ajax to server)
433          const data = {
434            name: nameEl.value.trim(),
435            email: emailEl.value.trim(),
436            phone: phoneEl.value.trim(),
437            department: deptEl.value,

```

```


tml      <img> image-slider.html      <taSK2.html>      <task3.html>      <task1.html>      <!doctype html> Untitled-1
2      <html lang="en">
195    <body>
282      <script>
423        form.addEventListener('submit', (e) => {
433          const data = {
438            events: Array.from(eventsEl.querySelectorAll('input[type="checkbox"]):checked
439          };
440
441          // Mock delay to mimic network call
442          submitBtn.disabled = true;
443          submitBtn.textContent = 'Submitting...';
444          setTimeout(() => {
445            successEl.style.display = 'block';
446            successEl.textContent = 'Registration successful! Thank you.';
447            submitBtn.textContent = 'Register';
448            // Optionally reset form:
449            // form.reset();
450            // Clear styles and re-validate for fresh state
451            submitBtn.disabled = false;
452            validateForm();
453          }, 800);
454
455          console.log('Submitted data:', data);
456        });
457      </script>
458    </body>
459    </html>

```

Output:

The registration form is divided into several sections:

- Name:** Input field with "susmija punnam". Feedback: "Name looks good".
- Department:** Dropdown menu with "Computer Science". Instruction: "Choose your academic department".
- Email:** Input field with "punnamsusmija@gmail.com". Feedback: "Valid email".
- Phone:** Input field with "7674905200". Feedback: "Valid phone".
- Event Selection:** A list of events with checkboxes: Hackathon (checked), Coding Contest, Robotics, Paper Presentation, UI/UX Design, and Tech Quiz. Summary: "1 event(s) selected".
- Preview:** A summary of the entered data: Name: susmija punnam, Email: punnamsusmija@gmail.com, Phone: 7674905200, Department: Computer Science, Events: Hackathon.
- Validation Rules:** A list of rules: "Use a valid college email (e.g., name@college.edu)", "Phone should be 10 digits", and "Pick at least one event".
- Register Button:** A large blue button at the bottom.

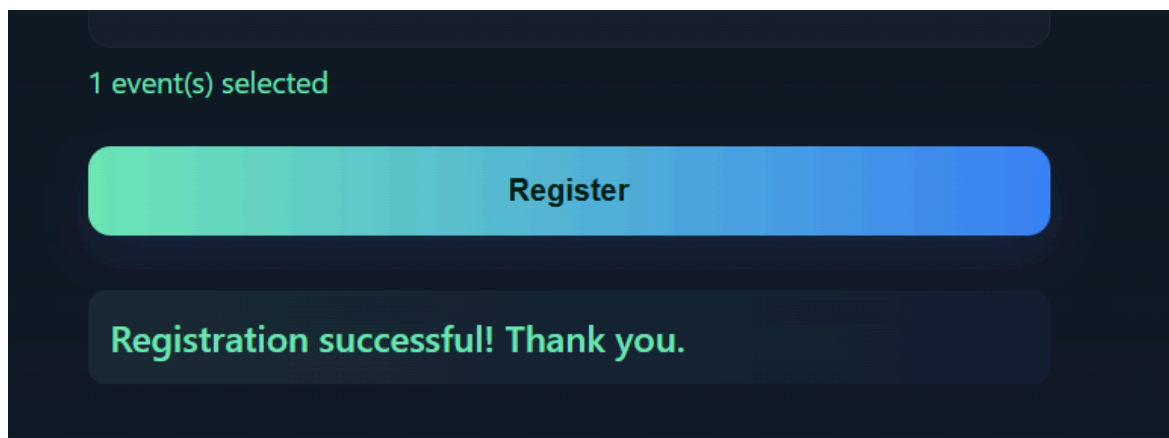

Observation:

The code provides a modern, responsive registration form with fields for student details and event selection. It uses CSS for an attractive layout and JavaScript for real-time validation (checking email format, phone length, and required fields). Error messages are displayed instantly, and a success message confirms registration, making the form both user-friendly and reliable.

Task#4:

AI-Assisted E-Commerce Product Page

Prompt:

A startup wants a basic e-commerce product page to display products with prices and an "Add to Cart" button.

- generate a grid-based product catalog in HTML/CSS.
- include a cart counter at the top-right corner of the page. give html,css and js in the same file.

Code generated:


```
image-slider.html  taSK2.html  task4.html X  ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > task4.html > html
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>Product Page</title>
7      <style>
8          body {
9              font-family: Arial, sans-serif;
10         }
11         .product {
12             border: 1px solid #ccc;
13             padding: 16px;
14             margin: 16px;
15             text-align: center;
16         }
17         .product h2 {
18             margin: 0 0 8px;
19         }
20         .product p {
21             margin: 0 0 16px;
22         }
23         .add-to-cart {
24             background-color: #28a745;
25             color: white;
26             border: none;
27             padding: 10px 20px;
28             cursor: pointer;
29         }

```

```
image-slider.html  taSK2.html  task4.html X  ...
C: > Users > Susmija > AppData > Local > Programs > Microsoft VS Code > task4.html > html
2  <html lang="en">
3  <head>
7      <style>
23         .add-to-cart {
24             background-color: #28a745;
25             color: white;
26             border: none;
27             padding: 10px 20px;
28             cursor: pointer;
29         }
30     </style>
31 </head>
32 <body>
33
34     <div class="product">
35         <h2>Product Name</h2>
36         <p>Price: $19.99</p>
37         <button class="add-to-cart">Add to Cart</button>
38     </div>
39
40     <div class="product">
41         <h2>Another Product</h2>
42         <p>Price: $29.99</p>
43         <button class="add-to-cart">Add to Cart</button>
44     </div>
45
46 </body>
47 </html>

```

Output:

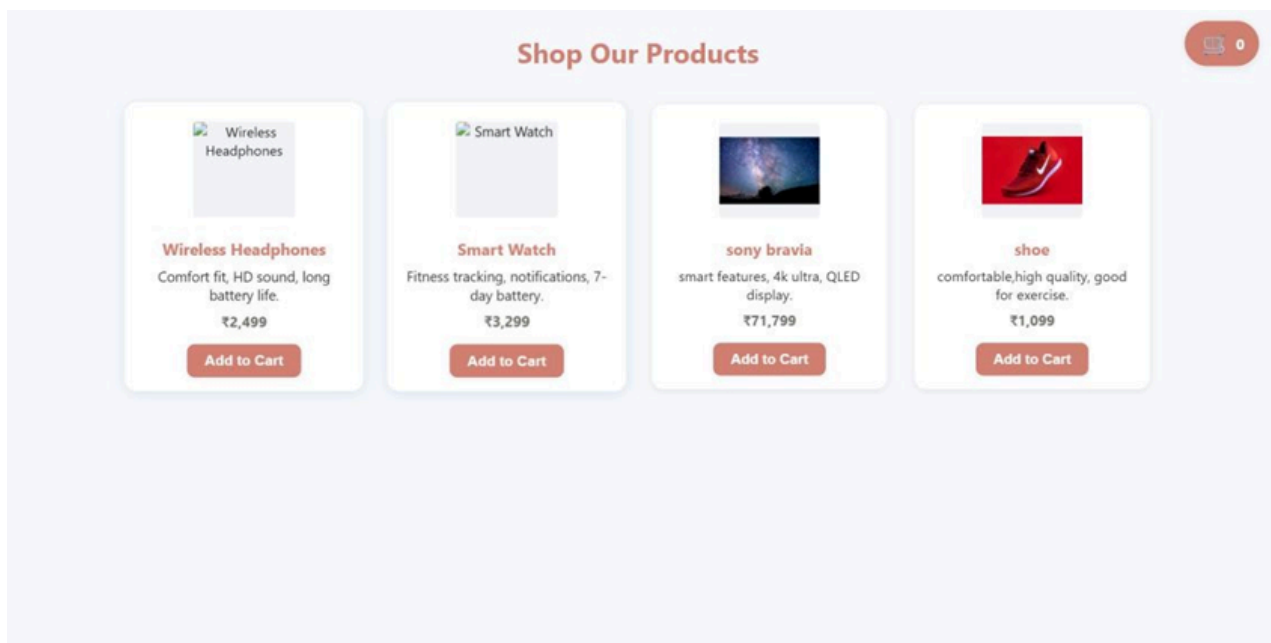

Observation:

The code creates a basic e-commerce product page using HTML, CSS, and JavaScript in a single file. It displays products in a responsive grid layout with images, names, prices, and an “Add to Cart” button. A cart counter is placed at the top-right corner inside the header and dynamically updates whenever the user clicks “Add to Cart.” The implementation is simple, lightweight, and serves as a starting point for building a full shopping cart system.