

MODULE 5

Java Collections Framework


Store, manipulate, and organize data efficiently with the interfaces and classes of `java.util`.







JAVA COLLECTIONS FRAMEWORK

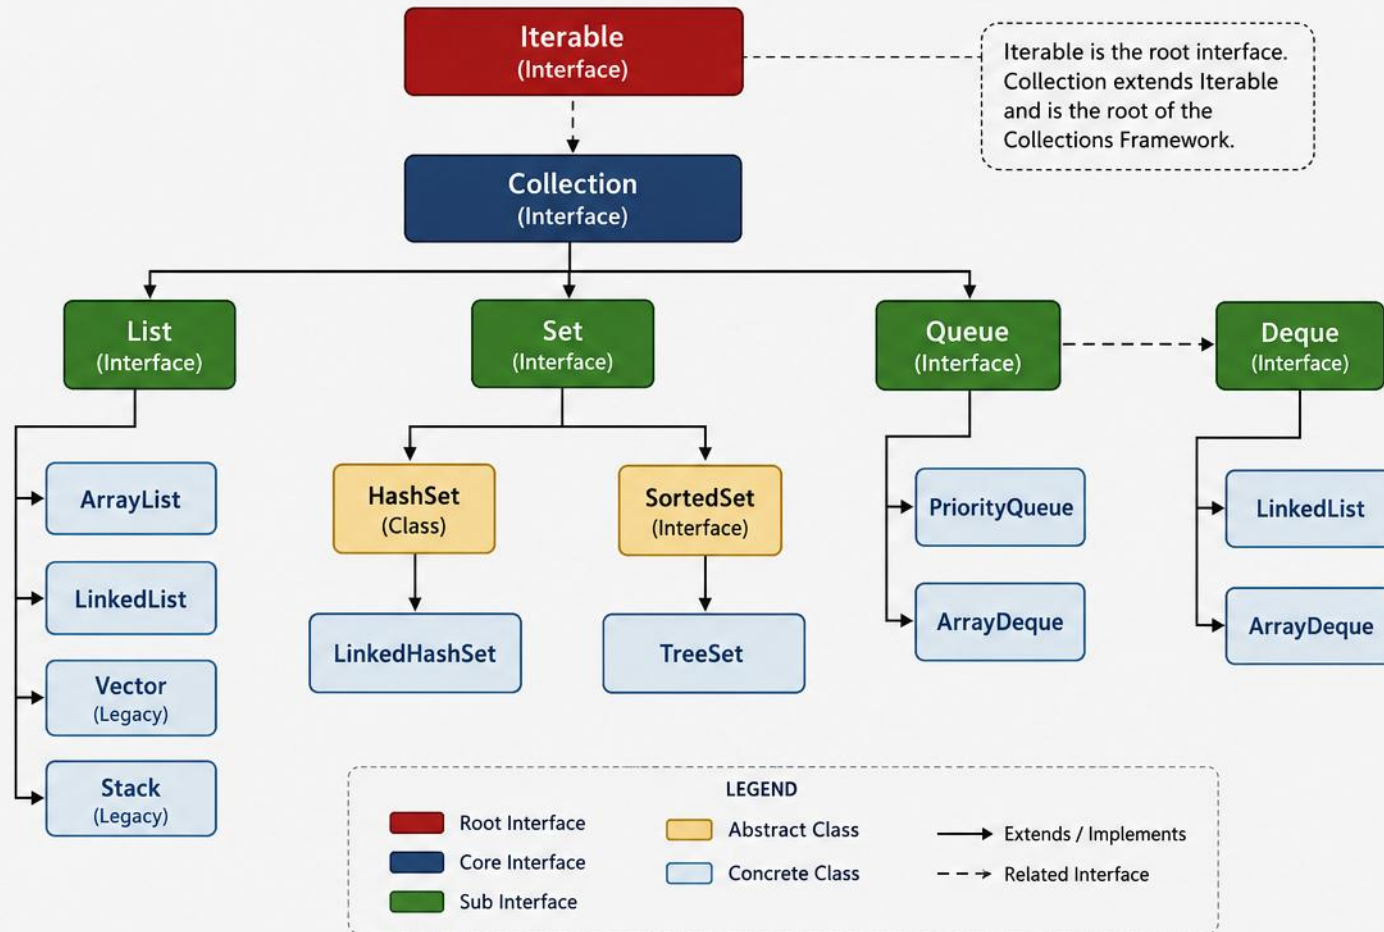

COLLECTIONS FRAMEWORK KEY INTERFACES

Iterable

The root interface that allows foreach iteration.

Collection

The root interface for all collection types.

List

An ordered collection (may contain duplicates).

Set

A collection that does not allow duplicates.

Queue

A collection designed for holding elements prior to processing.

Deque

A double-ended queue that supports adding/removing elements from both ends.

COLLECTIONS FRAMEWORK PROVIDES



High Performance and Efficiency



Standardized Architecture



Interoperability and Reusability



Scalability and Flexibility



Type Safety and Generics Support

MODULE OVERVIEW

The Java Collections Framework provides interfaces and classes to store, manipulate, and organize data efficiently.

LEARNING OBJECTIVES

- Understand the architecture of the Collections Framework.
- Work with Lists, Sets, Queues, and Maps.
- Choose the right collection for a given use case.
- Apply common operations and iterate effectively.
- Use utility classes and best practices.



Framework Features

- Reusable — pre-built structures & algorithms
- Efficient — optimized for performance
- Type Safe — Generics for compile-time safety




When to Use What?

- List: ordered, duplicates allowed
- Set: unique elements, no duplicates
- Queue: FIFO / priority processing
- Map: key–value pairs

KEY TAKEAWAY Think: what am I storing, do I need order, duplicates, or fast lookups? That guides your choice.

COLLECTIONS FRAMEWORK HIERARCHY

Everything traces back to one root interface: Iterable.

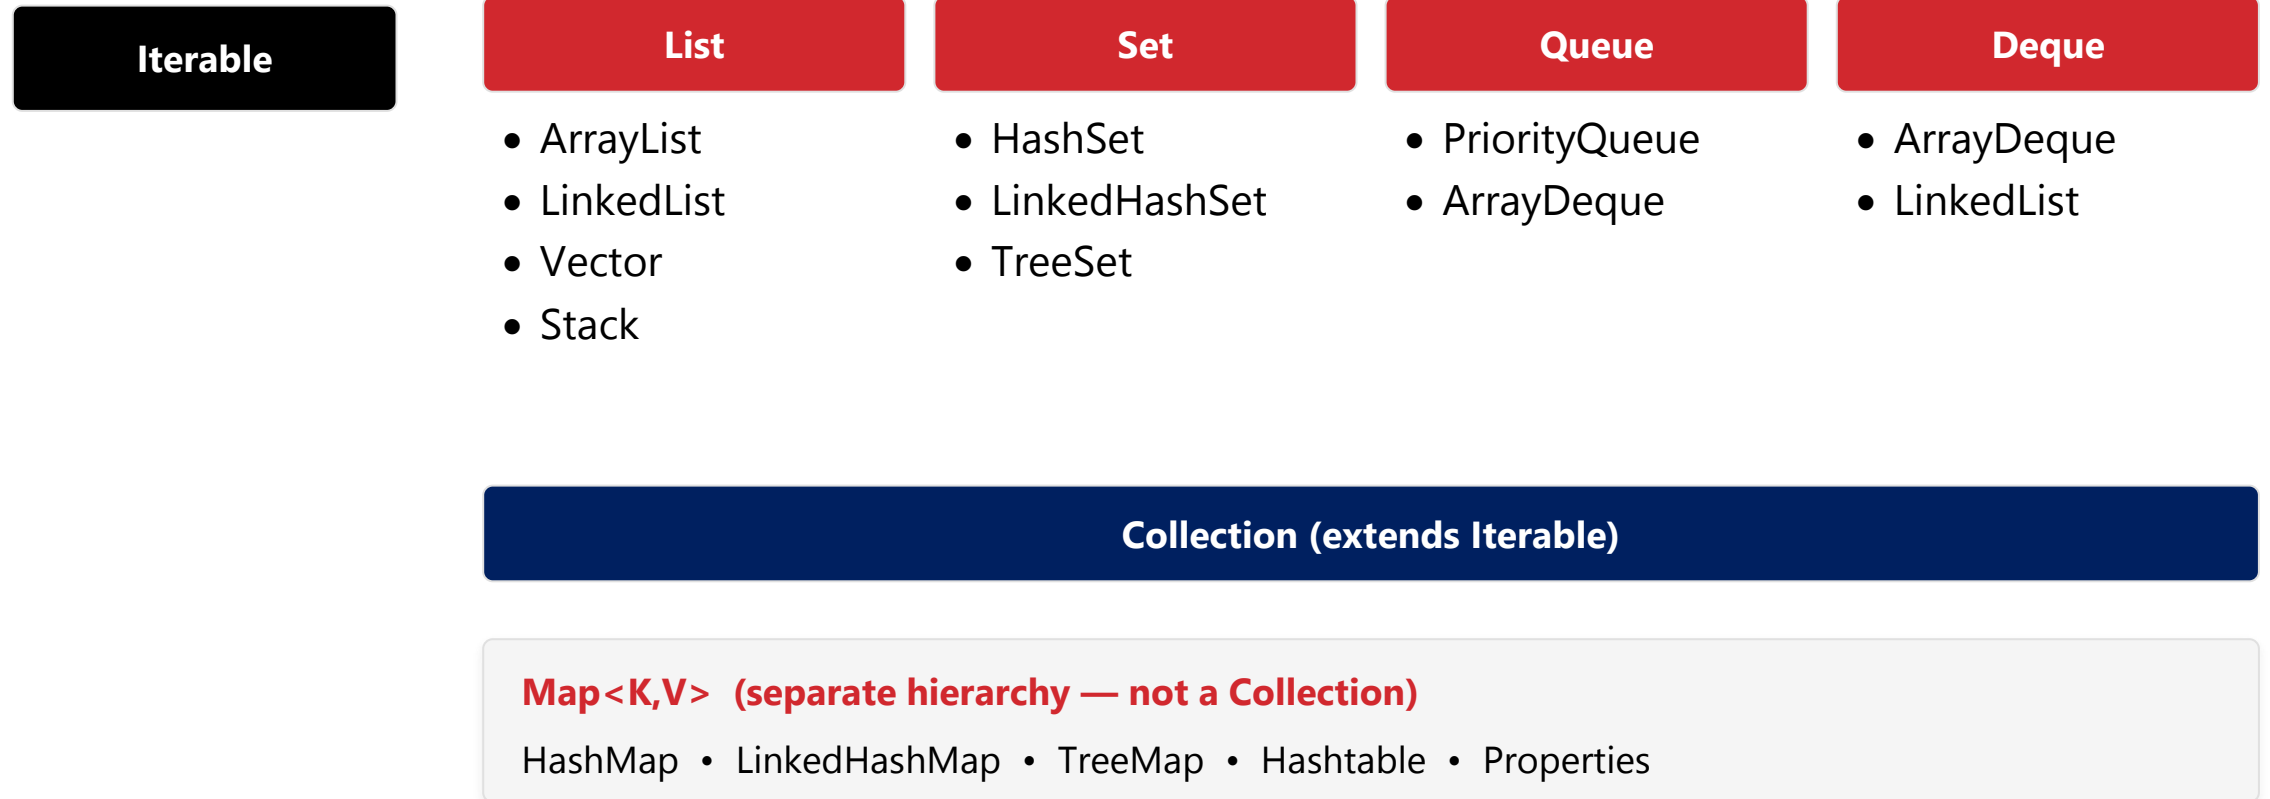

KEY TAKEAWAY Map is intentionally separate — it stores key-value pairs, not a group of individual objects.

KEY INTERFACES

Six interfaces define the shape of everything in this module.



Iterable

Root interface for all collection types.



Collection

Represents a group of objects.



List

Ordered collection, allows duplicates.



Set

Collection that does not allow duplicates.



Queue

Holds elements for processing in sequence.



Map<K,V>

Maps keys to values; keys are unique.

KEY TAKEAWAY Interfaces define behavior; the classes you actually instantiate provide the implementation.

COMMON COLLECTION CLASSES — PART 1

List and Set implementations, at a glance.

TYPE	CLASS	DESCRIPTION	KEY CHARACTERISTICS
List	ArrayList	Resizable array implementation	Fast random access, slow insert/delete in middle
	LinkedList	Doubly-linked list implementation	Fast insert/delete, slow random access
	Vector	Synchronized resizable array	Thread-safe, legacy
	Stack	LIFO stack (extends Vector)	Legacy stack class
Set	HashSet	Hash table based set	No duplicates, no order
	LinkedHashSet	Hash table + linked list	No duplicates, insertion order maintained
	TreeSet	Red-Black tree based set	No duplicates, sorted order

KEY TAKEAWAY Every List keeps insertion order; every Set enforces uniqueness — the class you choose decides the rest.

COMMON COLLECTION CLASSES — PART 2

Queue and Map implementations, at a glance.

TYPE	CLASS	DESCRIPTION	KEY CHARACTERISTICS
Queue	PriorityQueue	Priority heap based queue	Elements ordered by priority (natural/custom)
	ArrayDeque	Resizable array double-ended queue	Efficient queue and stack operations
Map	HashMap	Hash table based map	No order, one null key, multiple null values
	LinkedHashMap	HashMap + linked list	Insertion/access order maintained
	TreeMap	Red-Black tree based map	Sorted by keys
	Hashtable	Synchronized hash table	Thread-safe, does not allow nulls
	Properties	Hashtable subclass	Used for configuration (key-value as strings)

KEY TAKEAWAY Map is the odd one out in this list — it isn't a Collection, but it's just as central to the framework.

UTILITY CLASSES & BEST PRACTICES

java.util.Collections, Arrays, Comparator, and Optional round out the framework.



Collections

Static methods: sorting, searching, sync, shuffling.



Arrays

sort(), binarySearch(), equals(), and more.



Comparator

Defines custom ordering for objects.



Optional

Container object to handle null-safe values.

- Use interfaces (List, Set, Map) instead of implementations.
- Choose the right collection for your use case.
- Prefer ArrayList over Vector unless thread safety is required.
- Use enhanced for-loop or Iterators for traversal.
- Avoid unnecessary boxing and unboxing.
- Use immutable collections when data should not change.

KEY TAKEAWAY Mastering the Collections Framework helps you handle data efficiently and build scalable enterprise applications.

WHY COLLECTIONS MATTER

Collections are at the heart of almost every real-world Java application.



1. Efficient Data Handling

- Optimized data structures and algorithms that save time and memory.



2. Type Safety & Reliability

- Generics and interface-based design catch errors at compile time.



3. Cleaner, Maintainable Code

- Simpler, more readable code that's easier to maintain and extend.



4. Flexibility & Scalability

- Different types let you pick the best fit and scale as data grows.

KEY TAKEAWAY Collections help you store, organize, and manipulate data efficiently and safely.

COLLECTIONS IN REAL-WORLD APPLICATIONS

Five domains where collections do the heavy lifting every day.



E-Commerce

Store products, manage carts, track orders and history.



Banking

Manage accounts, store transactions, detect fraud patterns.



Social Media

Store users/friends, maintain feeds, manage likes and comments.



Analytics & Reporting

Aggregate data, group and summarize, produce fast reports.



Enterprise Systems

Cache data, manage configuration, handle job queues.

KEY TAKEAWAY Wherever an application needs to store more than one thing, collections are doing the work.

THE ALTERNATIVE — WITHOUT COLLECTIONS

Manual array management is verbose, error-prone, and slow to write.

WITHOUT COLLECTIONS

```
String[] users = new String[10];
int size = 0;
if (size == users.length) {
    String[] newArr = new String[users.length * 2];
    System.arraycopy(users, 0, newArr, 0, size);
    users = newArr;
}
users[size++] = "Alice"; // lots of manual work!
```

WITH COLLECTIONS

```
List<String> users = new ArrayList<>();
users.add("Alice");
users.add("Bob");
users.add("Charlie");
for (String user : users) {
    System.out.println(user);
}
// Simple, clean, and efficient!
```

- Without: manual resizing, more code and complexity, more bugs, poor performance.
- With: no manual resizing, less code, fewer bugs, better performance, easy to scale.

KEY TAKEAWAY Collections let you focus on business logic instead of low-level data management.

KEY TAKEAWAY

The proven foundation for building efficient, reliable, maintainable Java applications.

Collections let you focus on business logic instead of low-level data management. They are a proven foundation for building efficient, reliable, and maintainable Java applications.

- Choose the right collection for the right job.
- Understand the trade-offs: order, uniqueness, performance.
- Good collection usage = better performance + cleaner code.

KEY TAKEAWAY Choose the right collection for the right job, and understand the trade-offs: order, uniqueness, performance.

COLLECTIONS FRAMEWORK OVERVIEW

A unified architecture for representing and manipulating collections of objects, part of java.util.

WHAT IS IT? A set of interfaces, implementations, and algorithms for working with collections of objects.



Standardization

- Provides standard ways to store and manipulate data.



Reusability

- Reusable structures and algorithms reduce development effort.



Performance

- Optimized implementations for efficient common operations.




Type Safety

- Generics ensure compile-time checking, prevent runtime errors.

KEY TAKEAWAY These four goals — standardization, reusability, performance, type safety — shape every design choice in the framework.

JAVA COLLECTIONS FRAMEWORK

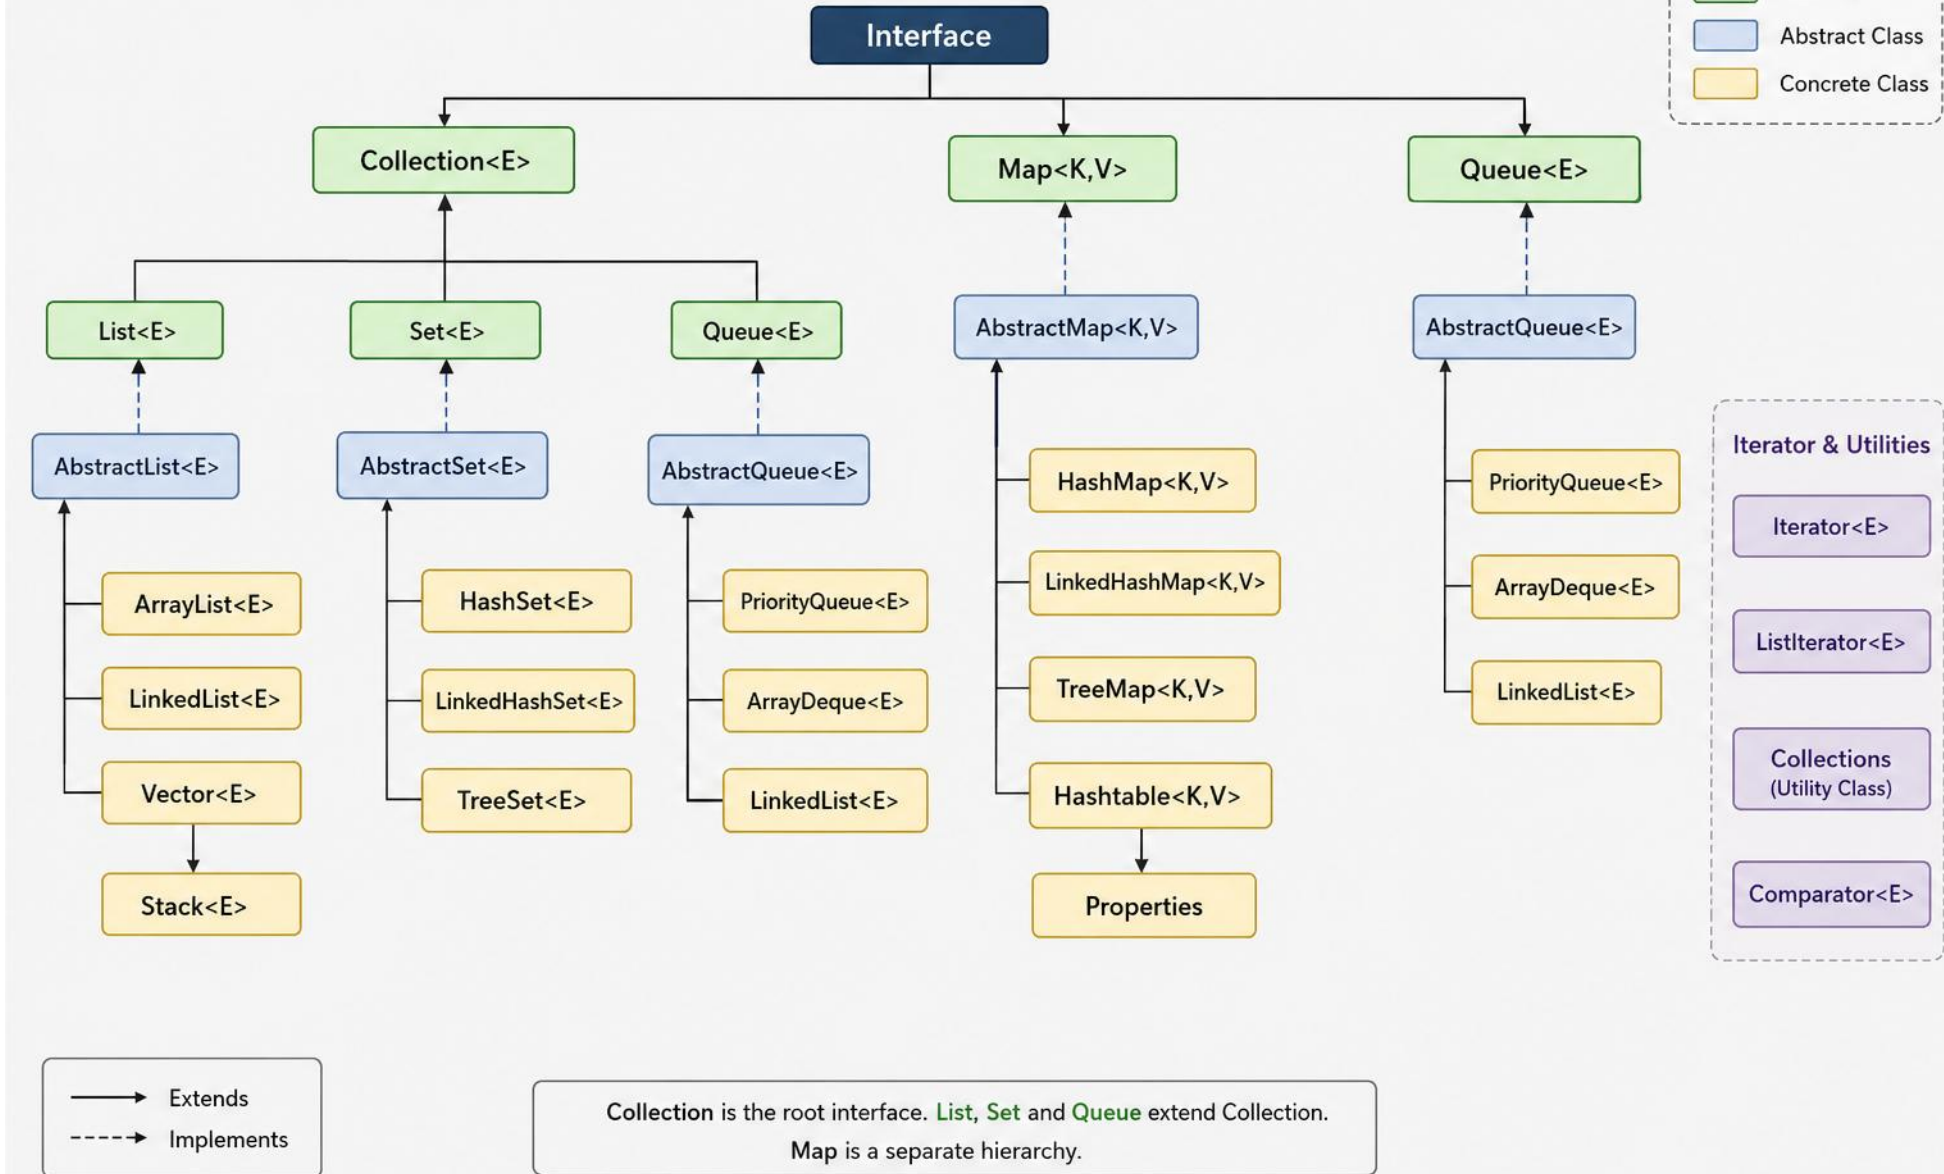

BUILT AROUND INTERFACES

Interfaces define what can be done; implementations define how it's done.



Collection

- Root interface for a group of objects.



List

- Ordered collection (duplicates allowed).



Set

- Collection with no duplicates.



Map<K,V>

- Key-value pairs (not a Collection).

- Reduces programming effort with ready-to-use implementations.
- Improves code quality, readability, and maintainability.
- Designed for performance and scalability; easily interchangeable implementations.

KEY TAKEAWAY Why use the framework? Well-tested, widely used implementations you don't have to write yourself.

KEY CHARACTERISTICS & CORE INTERFACES

What makes the framework consistent, and the four interfaces you'll use constantly.

**Unified Architecture**
Consistent API across collection types.

**Generic Support**
Type-safe collections using generics.

**Interoperability**
Works well with the rest of the Java platform.

**Extensibility**
Easy to extend with custom implementations.

INTERFACE	DESCRIPTION	EXAMPLES
List	Ordered, index-based, allows duplicates.	ArrayList, LinkedList
Set	No duplicates, unordered.	HashSet, LinkedHashSet, TreeSet
Queue	Processes elements in order (FIFO by default).	LinkedList, PriorityQueue
Map<K,V>	Key-value pairs; keys are unique.	HashMap, TreeMap

KEY TAKEAWAY Every core interface trades off order and duplicates differently — that's the first decision you make.

COMMON IMPLEMENTATIONS & UTILITIES

The seven classes you'll reach for most, plus `java.util.Collections`.

- `ArrayList` — Resizable array, fast random access.
- `LinkedList` — Doubly-linked list, fast insert/delete.
- `HashSet` — Hash table based set. | `TreeSet` — Sorted set (Red-Black tree).
- `HashMap` — Hash table based map. | `TreeMap` — Sorted map by keys.
- `PriorityQueue` — Elements ordered by priority.

ALGORITHMS & UTILITIES (`java.util.Collections`)

Sorting, searching (`binarySearch`), min/max, synchronized & unmodifiable collections, frequency, copy, fill, and more.

KEY TAKEAWAY The Collections Framework lets you focus on solving problems, not reinventing the wheel.

LIST INTERFACE (JAVA.UTIL.LIST<E>)


An ordered collection (sequence) that allows duplicate elements, accessed by index.

- Maintains insertion order.
- Allows duplicate elements.
- Elements are accessed by zero-based index.
- Provides positional operations (insert, update, delete).
- Can contain null elements.

Common implementations: ArrayList, LinkedList, Vector

KEY TAKEAWAY List is the go-to interface when order matters and duplicates are allowed.

LIST INTERFACE

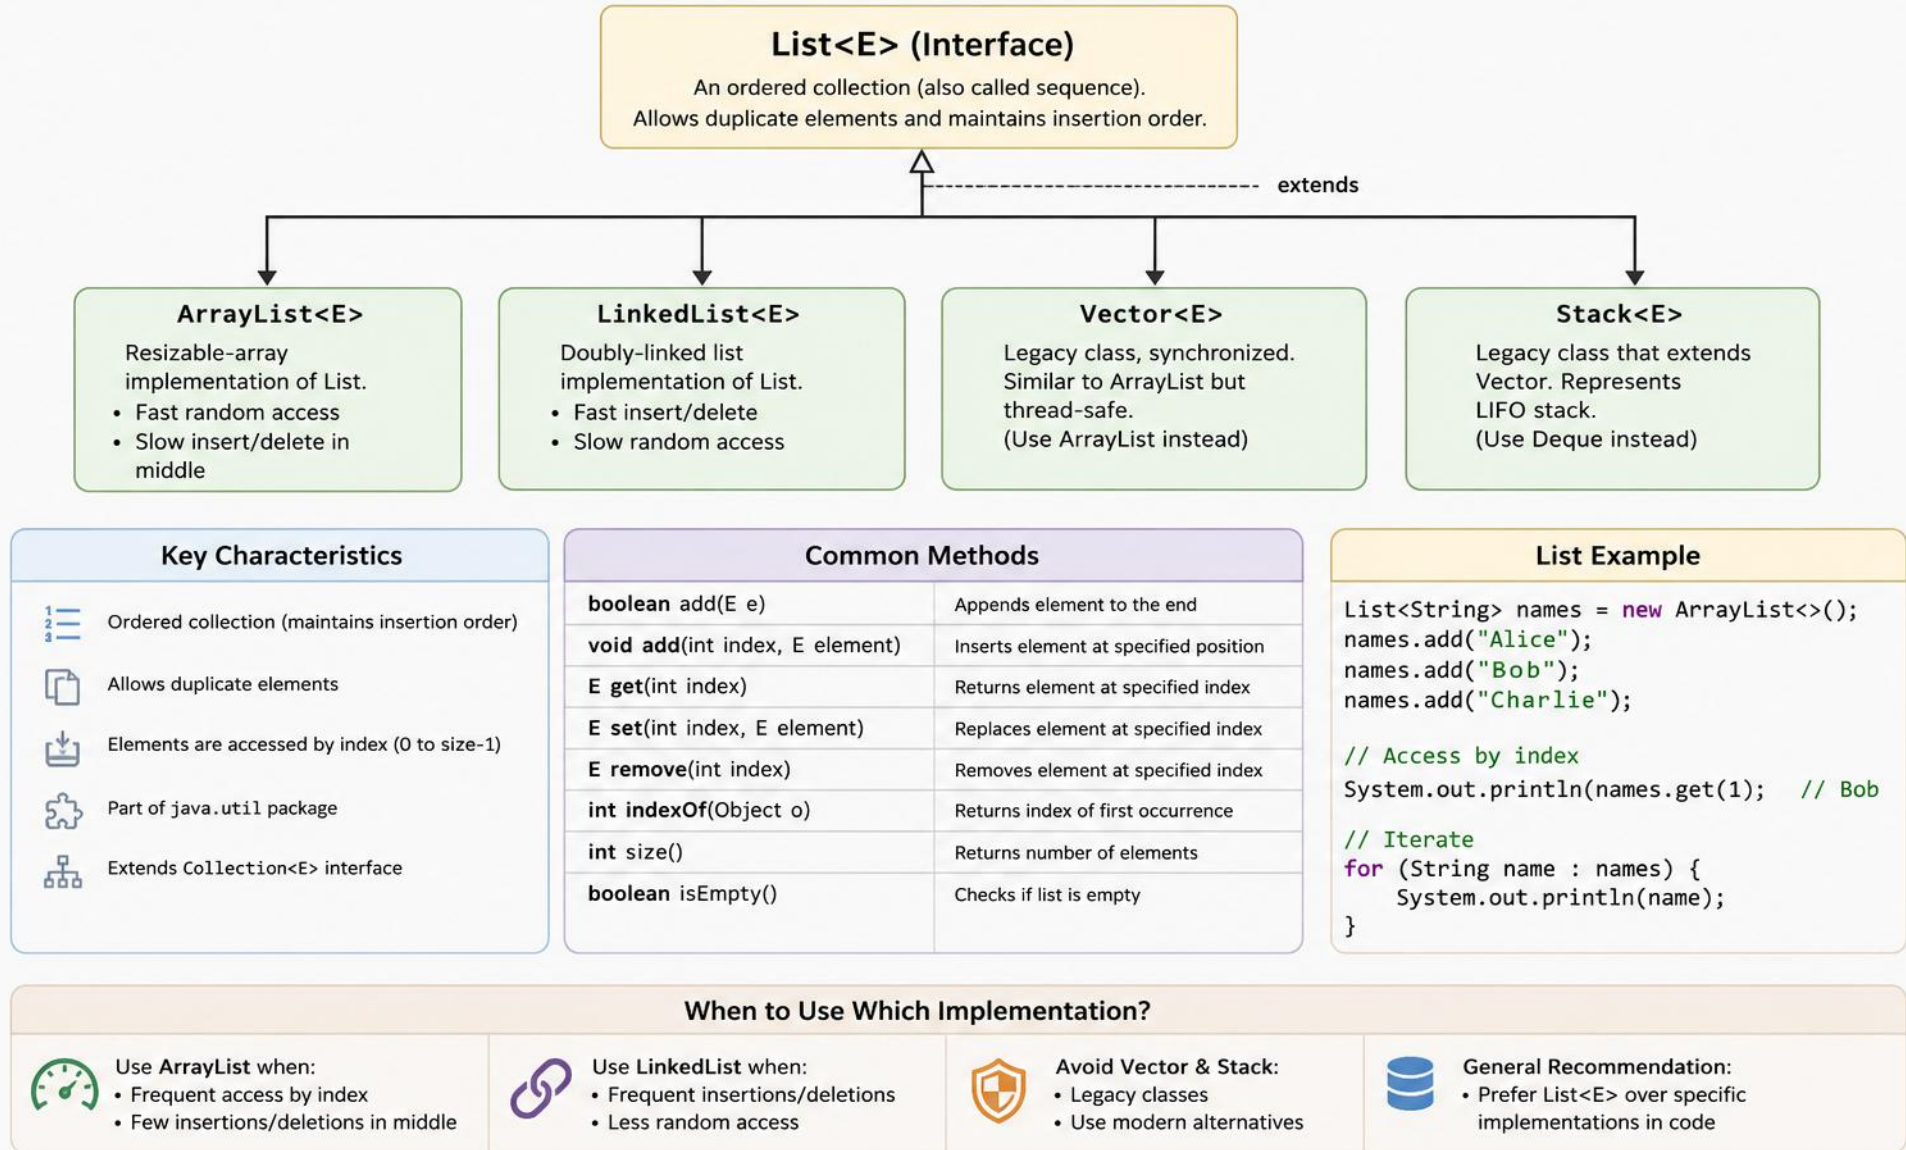


LIST — DECLARATION & HIERARCHY

List extends Collection, which extends Iterable.

```
// java.util.List
public interface List<E> extends Collection<E> {
    // List specific methods
}
```

- ArrayList — resizable array, fast random access.
- LinkedList — doubly-linked list, fast insert/delete.
- Vector — synchronized resizable array (legacy).

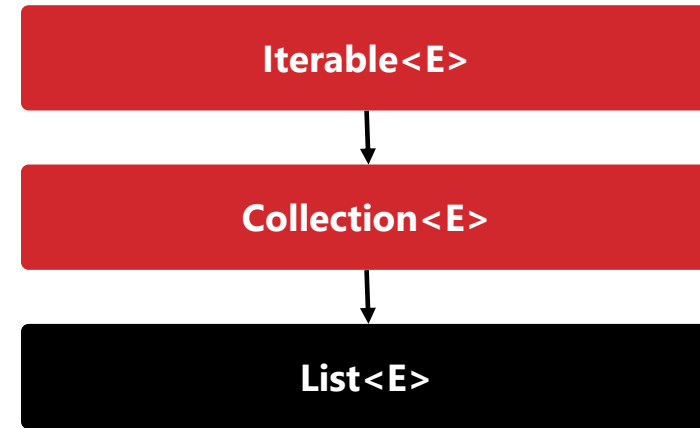

KEY TAKEAWAY Three concrete implementations, one shared contract — that's the power of programming to the interface.

LIST — COMMON METHODS

The core operations every List implementation provides.

METHOD	DESCRIPTION	EXAMPLE
<code>add(E e)</code>	Appends element at the end	<code>list.add("A");</code>
<code>add(int index, E e)</code>	Inserts element at specified position	<code>list.add(1, "B");</code>
<code>get(int index)</code>	Returns element at specified index	<code>list.get(0);</code>
<code>set(int index, E e)</code>	Replaces element at specified index	<code>list.set(2, "C");</code>
<code>remove(int index)</code>	Removes element at specified index	<code>list.remove(1);</code>
<code>indexOf(Object o)</code>	Returns index of first occurrence	<code>list.indexOf("B");</code>
<code>size() / isEmpty()</code>	Returns count / checks if empty	<code>list.size();</code>

KEY TAKEAWAY `get()/set()` by index are what set List apart from Set and Queue — that positional access is the whole point.

LIST IMPLEMENTATIONS & IMPORTANT NOTES

How ArrayList, LinkedList, and Vector differ.

IMPLEMENTATION	STRUCTURE	USE WHEN...
ArrayList	Resizable Array	More reads than writes; random access needed
LinkedList	Doubly-Linked List	Frequent additions/removals in the middle
Vector	Resizable Array (Synchronized)	Need thread safety or maintaining legacy code

- Zero-Based Indexing: first element is at index 0.
- Duplicates and multiple null values are allowed.
- Order is maintained in insertion order.
- ArrayList provides $O(1)$ get()/set(); LinkedList provides $O(n)$.

KEY TAKEAWAY Random-access performance is the single biggest differentiator between ArrayList and LinkedList.

EXAMPLE: USING LIST

Add, access, update, remove, and iterate — the five core operations.

```
List<String> list = new ArrayList<>();  
list.add("Apple");           // [Apple]  
list.add("Banana");          // [Apple, Banana]  
list.add(1, "Blueberry");    // [Apple, Blueberry, Banana]  
  
System.out.println(list.get(2)); // Banana  
list.set(2, "Blackberry");      // updates index 2  
list.remove("Apple");           // [Blueberry, Blackberry]  
  
for (String fruit : list) {  
    System.out.print(fruit + " ");  
}
```

KEY TAKEAWAY `add(index, e)` shifts everything after it — that's the $O(n)$ cost hiding behind a simple insert.

WHEN TO USE LIST

Four signals that tell you List is the right interface.

- You need an ordered collection.
- You need to access elements by index.
- Duplicates are allowed.
- You need rich positional operations: insert, update, and remove.

List is the go-to interface when you need an ordered collection with index-based access and duplicates are allowed. Choose the implementation that best matches your performance requirements.

KEY TAKEAWAY Choose ArrayList for reads, LinkedList for frequent inserts and deletes — that's covered in depth next.

ARRAYLIST

Resizable-array implementation of List — insertion order, duplicates allowed, fast random access.



Key Points

- Implements List<E> using a dynamic array.
- Maintains insertion order, allows duplicates.
- Fast random access (get()/set()).
- Not synchronized by default.



Constructors

- ArrayList() — default capacity 10.
- ArrayList(int initialCapacity)
- ArrayList(Collection<? extends E> c)

KEY TAKEAWAY ArrayList is the most widely used List — a resizable, ordered list with fast random access.


ARRAYLIST (java.util.ArrayList)

ArrayList is a resizable array implementation of the List interface.
It allows dynamic storage of elements with random access.

KEY FEATURES

- ✓ Resizes automatically when capacity is full
- ✓ Maintains insertion order
- ✓ Allows duplicate elements
- ✓ Allows null elements
- ✓ Provides fast random access using index
- ✓ Not synchronized (not thread-safe)

INTERNAL STRUCTURE

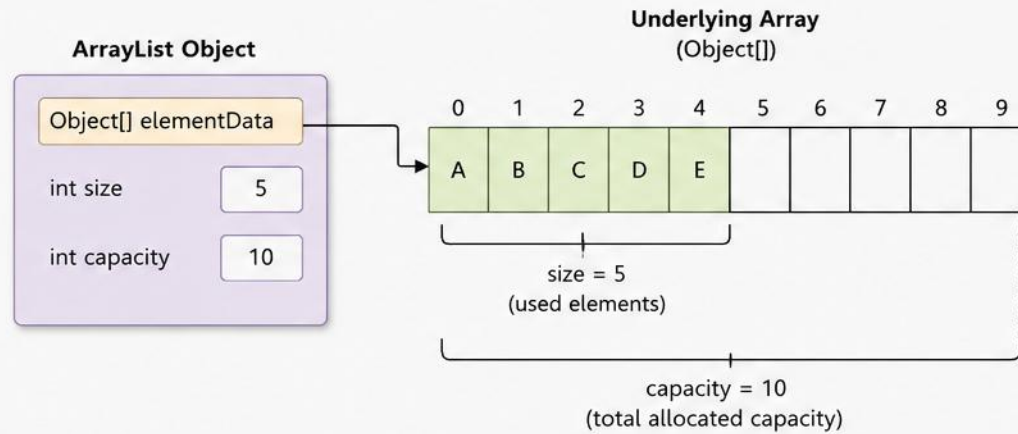

COMMON OPERATIONS

add(E e)

Adds element at the end

add(int index, E e)

Inserts element at specified index

get(int index)

Returns element at specified index

set(int index, E e)

Replaces element at specified index

remove(int index)

Removes element at specified index

remove(Object o)

Removes first occurrence of object

size()

Returns number of elements


isEmpty()

Checks if list is empty

clear()

Removes all elements

COLLECTION FRAMEWORK HIERARCHY

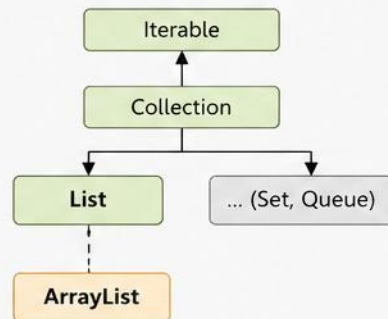

EXAMPLE

```
ArrayList<String> list = new ArrayList<>();
list.add("A");
list.add("B");
list.add("C");
list.add("D");
list.add("E");

// Internal State
// elementData = ["A", "B", "C", "D", "E", null, null, null, null, null]
// size = 5, capacity = 10
```

KEY POINTS



Fast random access
O(1) using index



Add at end
amortized O(1)




Insert/Delete in middle
O(n) (elements shifted)



Resizes automatically
(grows by 1.5x)

ARRAYLIST — UNDERLYING STRUCTURE

A resizable object array; size tracks elements used, capacity tracks total slots.

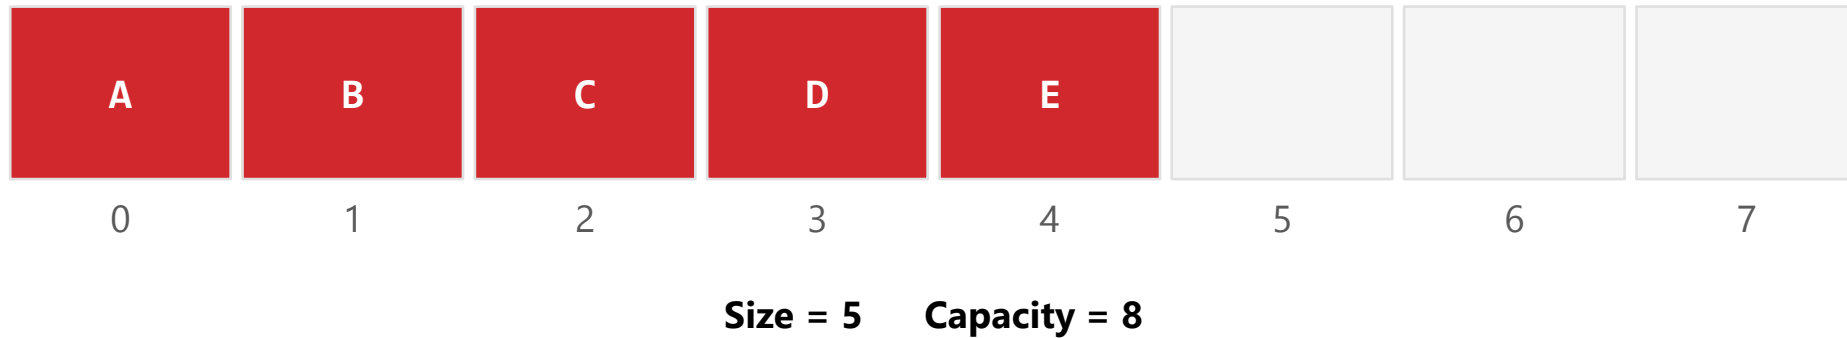

HOW IT GROWS

When size exceeds capacity, a new array with a larger capacity is created (typically about 1.5× the previous capacity), and all elements are copied over.

KEY TAKEAWAY Growth is amortized $O(1)$ — occasional resizes are expensive, but rare enough that the average stays cheap.

ARRAYLIST — COMMON METHODS

The same core List operations, plus clear() and toString().

METHOD	DESCRIPTION	EXAMPLE
<code>add(E e)</code>	Appends element to end	<code>list.add("A");</code>
<code>add(int index, E e)</code>	Inserts element at index	<code>list.add(1, "B");</code>
<code>get(int index)</code>	Returns element at index	<code>list.get(0);</code>
<code>set(int index, E e)</code>	Replaces element at index	<code>list.set(2, "C");</code>
<code>remove(int index)</code>	Removes element at index	<code>list.remove(3);</code>
<code>contains(Object o)</code>	Checks if element exists	<code>list.contains("X");</code>
<code>clear() / toString()</code>	Removes all / string representation	<code>list.clear();</code>

KEY TAKEAWAY These methods cover the vast majority of everyday ArrayList usage.

ARRAYLIST — PERFORMANCE CHARACTERISTICS

Index-based operations are fast; anything requiring a shift is not.

OPERATION	COMPLEXITY	EXPLANATION
<code>get(index) / set(index, e)</code>	$O(1)$	Direct access / update by index
<code>add(e)</code> at end	Amortized $O(1)$	Usually $O(1)$; occasionally $O(n)$ during resize
<code>add(index, e)</code>	$O(n)$	Elements after index are shifted
<code>remove(index)</code>	$O(n)$	Elements after index are shifted
<code>contains(Object)</code>	$O(n)$	Linear search

KEY TAKEAWAY ArrayList trades slow middle-insertion for fast everything-else — that's the core design trade-off.

EXAMPLE: BASIC USAGE

Add, insert, access, and remove — with output shown inline.

```
ArrayList<String> list = new ArrayList<>();  
list.add("Apple");  
list.add("Banana");  
list.add("Cherry");  
list.add(1, "Blueberry");           // insert at index 1  
  
System.out.println(list.get(2));    // Banana  
System.out.println(list);           // [Apple, Blueberry, Banana, Cherry]  
list.remove("Banana");  
System.out.println(list);           // [Apple, Blueberry, Cherry]
```

KEY TAKEAWAY Insert-at-index shifts every following element — watch out for this in performance-sensitive loops.

WHEN TO USE ARRAYLIST

And how to pre-size it for better performance.



When to Use

- Ordered list with frequent reads.
- Fast random access is important.
- More reads than insertions/deletions.



When Not To

- Frequent middle insertions (use LinkedList).
- Thread safety needed (synchronize or use CopyOnWriteArrayList).

```
ArrayList<Integer> list = new ArrayList<>(5);  
list.ensureCapacity(100);    // pre-allocate – reduces resizes/copies
```

KEY TAKEAWAY Pre-sizing an ArrayList with ensureCapacity() improves performance by avoiding repeated resize-and-copy.

TRY IT YOURSELF — EXERCISE 1: WORKING WITH LIST

Reinforces: ArrayList, as just covered.

#	STEP	CODE	RESULT
1	Goal	Use ArrayList<String> — add, update, remove, search, and iterate	Ordered list, duplicates allowed
2	Declare	List<String> books = new ArrayList<>();	Empty, ordered list ready
3	Populate	books.add("Dune"); books.add("Dune");	Duplicates are kept, unlike a Set
4	Operate	books.set(0, "Dune (2nd ed.)"); books.remove(1);	Update by index, remove by index
5	Iterate	for (String b : books) System.out.println(b);	Prints in insertion order
6	Key concept	List preserves insertion order and allows index-based access	Ties to the List interface you just saw
7	Reference	exercises/exercise-01-arraylist.md	Full starter code and steps

TRY IT NOW Complete Exercise 1 before continuing — see exercises/exercise-01-arraylist.md.

LINKEDLIST

Doubly-linked list implementation of List and Deque — efficient insertions and deletions anywhere.



Key Points

- Implements List<E> and Deque<E>.
- Doubly-linked list (prev/next references).
- Fast insert/delete anywhere — no shifting.
- Slower random access (get(index)).





Constructors

- LinkedList() — creates an empty list.
- LinkedList(Collection<? extends E> c)

KEY TAKEAWAY LinkedList shines exactly where ArrayList struggles: insertions and deletions in the middle.

LINKED LIST

A Linked List is a linear data structure where elements (nodes) are stored in non-contiguous memory locations. Each node contains data and a reference (link) to the next node in the sequence.

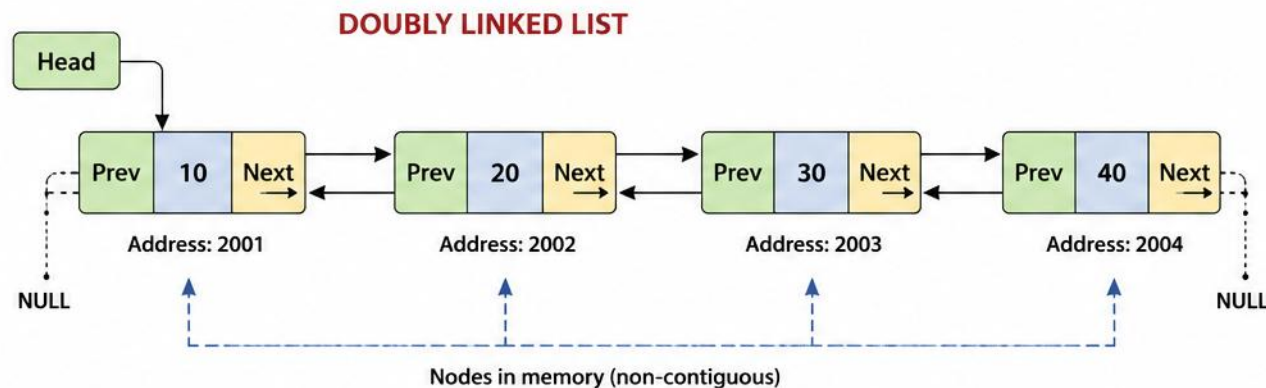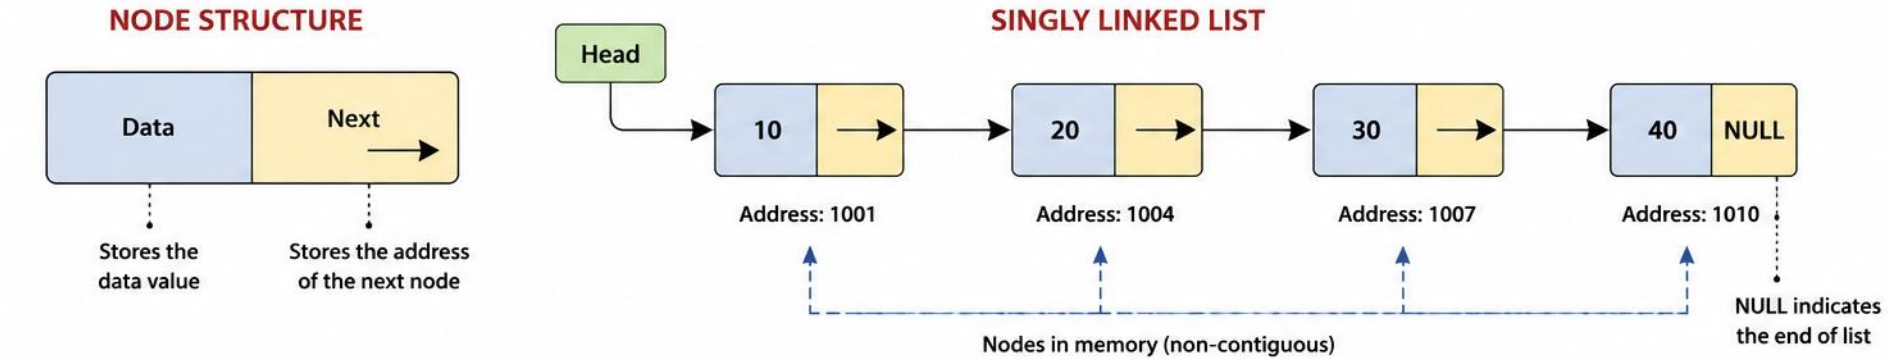

Prev – Address of previous node
Data – Actual data
Next – Address of next node

COMMON OPERATIONS

- +** Insertion Add a new node at the beginning, end or any position.
- Deletion Remove a node from the beginning, end or any position.
- Q** Traversal Visit each node in the list sequentially.
- ≡** Search Find a node with a specific value.
- ↺** Update Modify the data of an existing node.




ADVANTAGES

- Dynamic size
- Efficient insertion and deletion
- Does not require contiguous memory

LINKEDLIST — UNDERLYING STRUCTURE

Each node stores data plus references to the previous and next nodes.

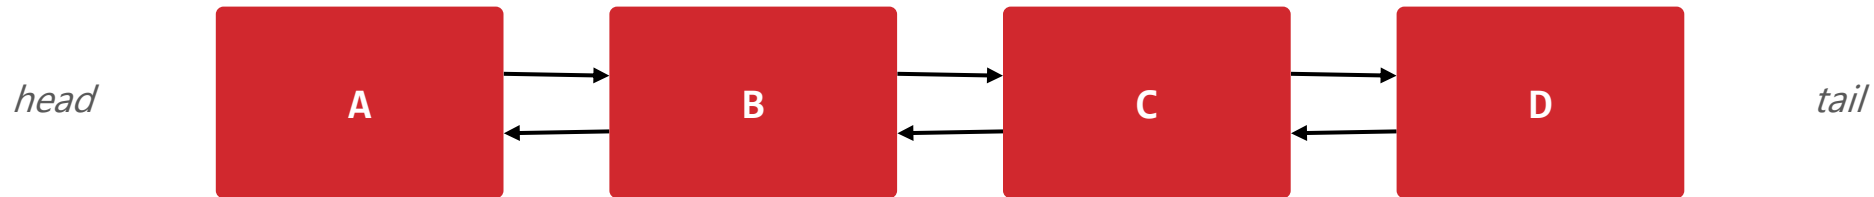

HOW IT WORKS

- Each node stores the element (data), a reference to the previous node, and a reference to the next node.
- Insertion/deletion just relinks pointers — no shifting of other elements required.

KEY TAKEAWAY Because nodes only relink pointers, insert/delete anywhere is $O(1)$ once you've located the position.

LINKEDLIST — COMMON METHODS

List methods, plus Deque-style addFirst/addLast/removeFirst/removeLast.

METHOD	DESCRIPTION	EXAMPLE
<code>add(E e)</code>	Appends element at the end	<code>list.add("A");</code>
<code>add(int index, E e)</code>	Inserts element at index	<code>list.add(1, "B");</code>
<code>get(int index)</code>	Returns element at index	<code>list.get(0);</code>
<code>addFirst(E e) / addLast(E e)</code>	Inserts at beginning / end	<code>list.addFirst("A");</code>
<code>removeFirst() / removeLast()</code>	Removes first / last element	<code>list.removeFirst();</code>
<code>remove(Object o)</code>	Removes first occurrence	<code>list.remove("A");</code>

KEY TAKEAWAY `addFirst/addLast/removeFirst/removeLast` are what make `LinkedList` double as a `Deque`.

LINKEDLIST — PERFORMANCE CHARACTERISTICS

Fast at the ends, slow in the middle — the opposite of ArrayList.

OPERATION	COMPLEXITY	EXPLANATION
<code>get(index) / set(index, e)</code>	$O(n)$	Must traverse from head or tail
<code>add(e) at end</code>	$O(1)$	Add at tail in constant time
<code>add(index, e) / remove(index)</code>	$O(n)$	Traverse to index, then insert/remove
<code>addFirst() / addLast()</code>	$O(1)$	Constant time
<code>removeFirst() / removeLast()</code>	$O(1)$	Constant time

KEY TAKEAWAY Traversal, not the operation itself, is what makes LinkedList's random access $O(n)$.

EXAMPLE: BASIC USAGE

addFirst/addLast, indexed insert, and getFirst/getLast in action.

```
LinkedList<String> list = new LinkedList<>();  
list.add("Apple"); list.add("Banana"); list.add("Cherry");  
list.addFirst("Start"); list.addLast("End");  
list.add(2, "Blueberry");  
  
System.out.println("First: " + list.getFirst()); // Start  
System.out.println("Last: " + list.getLast()); // End  
  
list.remove("Apple"); list.removeFirst(); list.removeLast();  
// Remaining: Blueberry Banana Cherry
```

KEY TAKEAWAY getFirst()/getLast() and addFirst()/addLast() are constant time — LinkedList is a great Deque.

WHEN TO USE LINKEDLIST

And the Deque operations that make it a queue and a stack in one.



When to Use

- Frequent insertions/deletions at start, end, or middle.
- Working with Deque operations (queue or stack).



When Not To

- Fast random access needed (use ArrayList).
- Reads far more frequent than updates.

DEQUE METHOD	PURPOSE
<code>addFirst(e) /</code> <code>addLast(e)</code>	Insert at front / end
<code>removeFirst() /</code> <code>removeLast()</code>	Remove from front / end
<code>peekFirst() /</code> <code>peekLast()</code>	View first / last without removing

KEY TAKEAWAY Choose ArrayList for fast reads and random access; choose LinkedList for fast updates and deque operations.

SET INTERFACE (JAVA.UTIL.SET<E>)


A collection that does not allow duplicate elements — best for storing unique items.

- Extends Collection<E>.
- Does not allow duplicate elements (no two elements are equal).
- At most one null element is allowed.
- Ideal for representing mathematical sets.
- Order is not guaranteed (depends on implementation).

Common implementations: HashSet, LinkedHashSet, TreeSet

KEY TAKEAWAY Set is a core abstraction for working with collections of unique elements.

SET INTERFACE IN JAVA

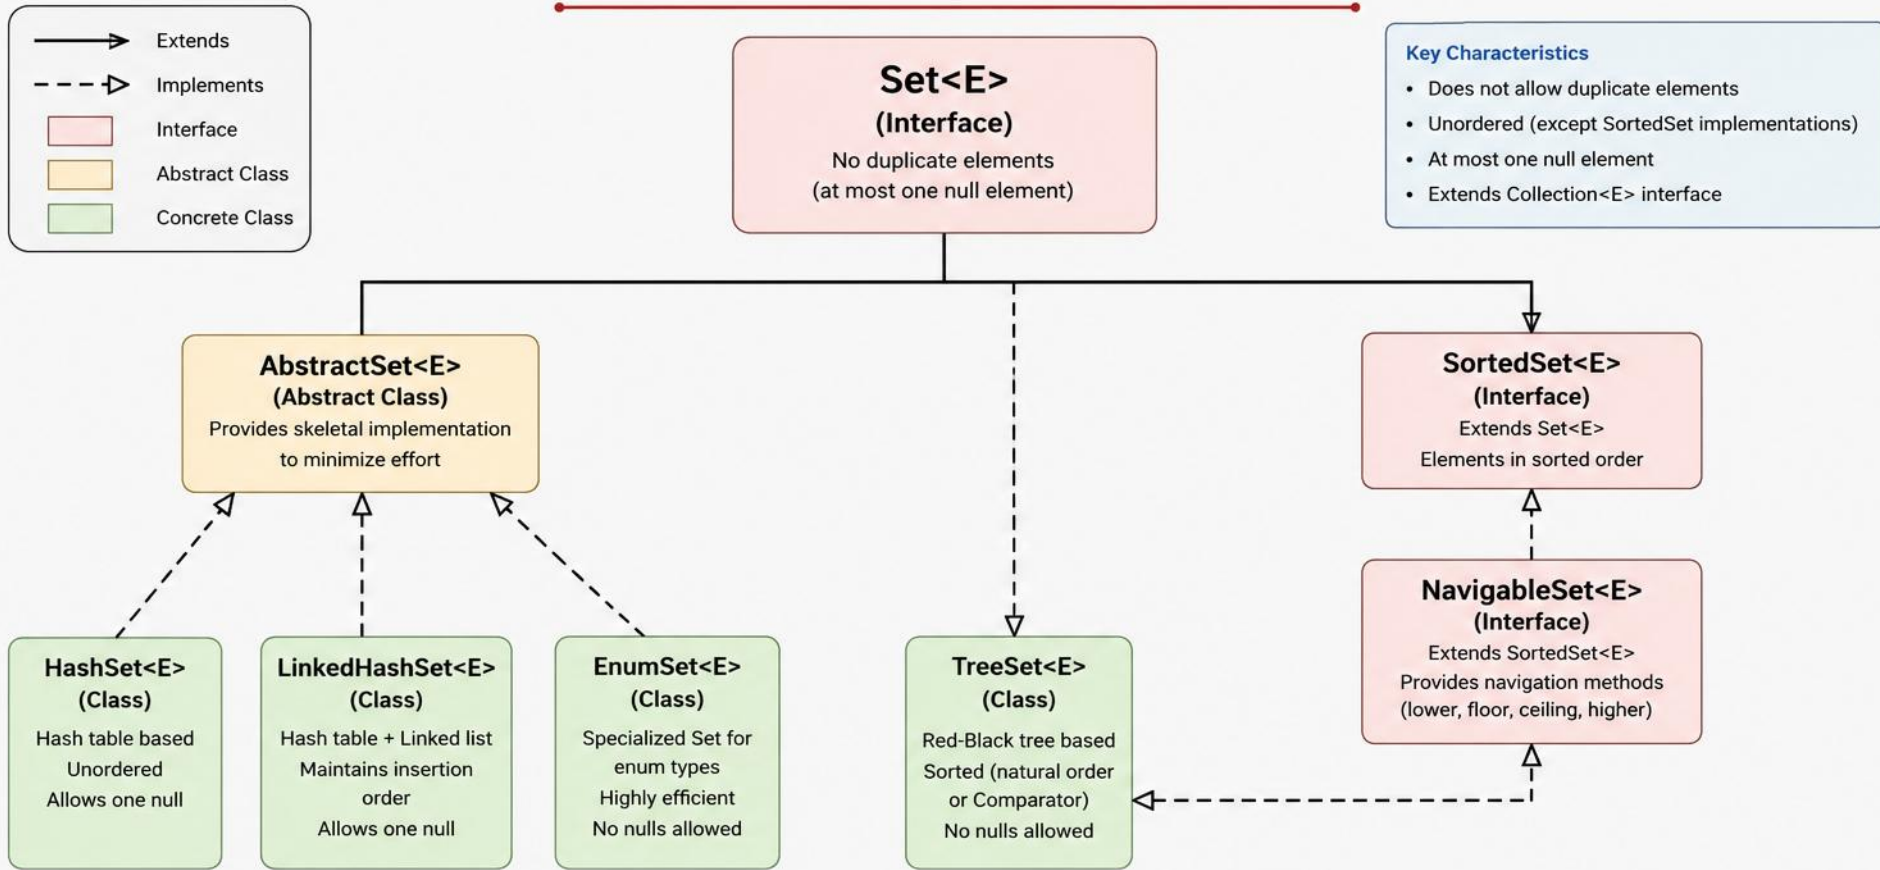

Key Characteristics

- Does not allow duplicate elements
- Unordered (except SortedSet implementations)
- At most one null element
- Extends Collection<E> interface

Important Notes



No Duplicates

Set does not allow duplicate elements. Adding a duplicate returns false.



At Most One Null

HashSet and LinkedHashSet allow one null. TreeSet and EnumSet do not allow null.



Unordered vs Sorted

HashSet and LinkedHashSet are unordered. TreeSet maintains elements in sorted order.



Equals & hashCode

Set relies on equals() and hashCode() to determine uniqueness.



Performance

HashSet offers constant-time performance for basic operations.




Use Cases

Use HashSet for general use, TreeSet when sorting is required.

SET — DECLARATION & HIERARCHY

No additional methods beyond Collection — all behavior comes from the Set contract.

```
public interface Set<E> extends Collection<E> {  
    // no additional methods  
}
```

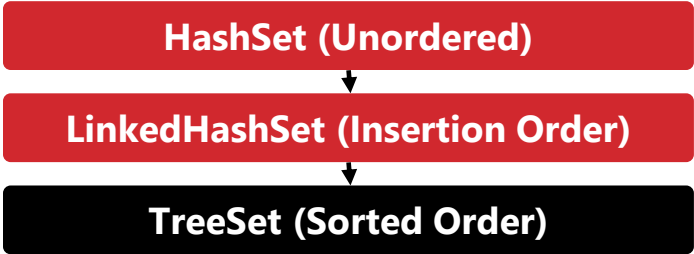

CHARACTERISTIC	BEHAVIOR
Uniqueness	No duplicate elements (based on equals()).
Null Handling	At most one null allowed (except TreeSet).
Equality	Two sets are equal if they contain the same elements.
Indexed Access	Not supported — no get(index) or set(index).

KEY TAKEAWAY Set uses equals() and hashCode() to determine uniqueness — indexed access simply doesn't exist.

SET — METHODS & IMPLEMENTATIONS

Every method is inherited from Collection; the three implementations differ only in ordering.

METHOD	DESCRIPTION
<code>add(E e)</code>	Adds element if not already present
<code>remove(Object o) / contains(Object o)</code>	Removes / checks for the element
<code>size() / isEmpty() / clear()</code>	Count, empty check, and remove all

IMPLEMENTATION	ORDERING	PERFORMANCE	BEST FOR
HashSet	No order guaranteed	O(1) avg	Fast operations, order doesn't matter
LinkedHashSet	Insertion order	O(1) avg	When insertion order must be preserved
TreeSet	Sorted order	O(log n)	When sorted order / range ops are needed

KEY TAKEAWAY Set has no methods of its own — the contract is entirely about what `add()` and iteration guarantee.

EXAMPLE: USING SET

Duplicates are silently ignored; one null is allowed.

```
Set<String> set = new HashSet<>();
set.add("Apple");
set.add("Banana");
set.add("Apple");    // duplicate, ignored
set.add(null);       // one null allowed
set.add("Cherry");

System.out.println(set.contains("Banana")); // true
set.remove("Apple");
System.out.println(set); // [null, Banana, Cherry] (order may vary)
```

KEY TAKEAWAY HashSet's iteration order is not guaranteed and can change after resizing — never rely on it.

WHEN TO USE SET

Choosing between the three implementations.



When to Use

- Unique elements only.
- Fast lookup, insert, remove.
- Order doesn't matter → HashSet.
- Insertion order → LinkedHashSet.
- Sorted order → TreeSet.



When Not To


- You need duplicates.
- You need index-based access (use List).

```
Set<Integer> treeSet = new TreeSet<>();  
treeSet.add(30); treeSet.add(10); treeSet.add(20);  
System.out.println(treeSet); // [10, 20, 30] – always sorted
```

KEY TAKEAWAY Choose HashSet for best performance, LinkedHashSet to preserve order, TreeSet to keep things sorted.

HASHSET

Implementation of Set using a hash table — unique elements, no guaranteed order, very fast.



Key Points

- Stores unique elements only.
- Allows one null element.
- No guaranteed order of elements.
- Uses a hash table for storage.
- Very fast add/remove/contains.



Constructors

- `HashSet()` — capacity 16, load factor 0.75
- `HashSet(Collection<? extends E> c)`
- `HashSet(int initialCapacity)`
- `HashSet(int cap, float loadFactor)`

KEY TAKEAWAY HashSet is the go-to implementation when you need uniqueness and speed, and order doesn't matter.


HASHSET

HashSet in Java is implemented using a HashMap.
It stores unique elements and does not maintain insertion order.

Usage

```
Set<String> set = new HashSet<>();  
set.add("Apple");  
set.add("Banana");  
set.add("Cherry");  
set.add("Apple"); // Duplicate - not added
```


INTERNAL IMPLEMENTATION

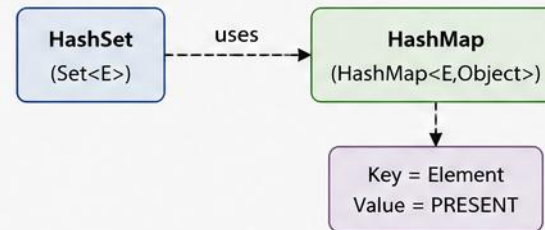

KEY CHARACTERISTICS

- Stores unique elements only
- Allows one null element
- Unordered (no insertion order)
- O(1) average time complexity for add, remove, contains
- Not synchronized (use Collections.synchronizedSet() for thread-safety)

HashMap

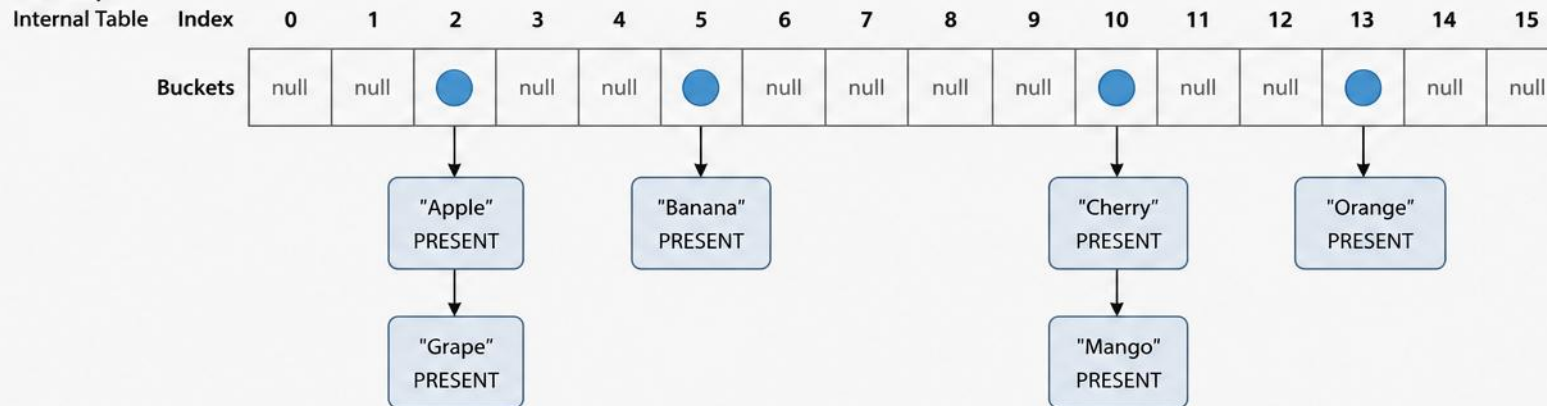

HOW IT WORKS

1. Element is hashed to an index in the table.
2. If bucket is empty, element is added.
3. If bucket is not empty, element is added to the linked list (chaining).
4. Duplicate elements are not added.

EXAMPLE

- Add: Apple, Banana, Cherry, Grape, Mango, Orange, Apple
- Internal storage (HashMap): Keys = unique elements, Value = PRESENT
- Duplicate "Apple" is ignored.

NOTE

Since HashSet is backed by HashMap, it does not guarantee any order of elements.
Use LinkedHashSet to maintain insertion order.
Use TreeSet to keep elements sorted.

LEGEND

- Bucket with at least one element
- Node (Key = Element, Value = PRESENT)
- Empty Bucket (null)

HOW HASHSET WORKS

Hashing determines the bucket; buckets absorb collisions via chaining (or trees in Java 8+).

- HashSet uses hashing to determine the bucket index for each element.
- Elements with the same hash code are stored in the same bucket (chaining).

DEFAULT CAPACITY

16

LOAD FACTOR

0.75

RESIZE TRIGGER

$\text{size} > \text{capacity} \times \text{load factor}$

RESIZE RESULT

Capacity typically doubles

Always override both `equals()` and `hashCode()` in custom classes used in a HashSet.

KEY TAKEAWAY Two objects are duplicates only if `equals()` returns true AND `hashCode()` matches — both must be correct.

HASHSET — COMMON METHODS

Standard Set operations, all averaging constant time.

METHOD	DESCRIPTION	EXAMPLE
<code>add(E e)</code>	Adds element if not already present	<code>set.add("A");</code>
<code>remove(Object o)</code>	Removes the element	<code>set.remove("A");</code>
<code>contains(Object o)</code>	Checks if element exists	<code>set.contains("A");</code>
<code>size() / isEmpty() / clear()</code>	Count, empty check, remove all	<code>set.size();</code>

KEY TAKEAWAY Every operation here runs in average $O(1)$ — the performance breakdown continues on the next slide.

HASHSET — PERFORMANCE

Average vs. worst-case time complexity for the core operations.

OPERATION	AVERAGE	WORST CASE	NOTES
<code>add(E e)</code>	$O(1)$	$O(n)$	If many collisions occur in one bucket
<code>remove / contains</code>	$O(1)$	$O(n)$	Same collision risk
<code>iterator()</code>	$O(n)$	$O(n)$	n = number of elements

KEY TAKEAWAY Worst-case $O(n)$ is rare in practice — it only happens when `hashCode()` quality is poor.

EXAMPLE: BASIC USAGE

Duplicates and repeated nulls are silently ignored.

```
Set<String> set = new HashSet<>();  
set.add("Apple"); set.add("Banana"); set.add("Cherry");  
set.add("Apple");    // duplicate (ignored)  
set.add(null); set.add(null);    // only one null kept  
  
System.out.println(set.contains("Banana")); // true  
System.out.println(set.remove("Apple"));    // true  
System.out.println(set);    // [Banana, null, Cherry] (order may vary)
```

KEY TAKEAWAY When to use HashSet: eliminating duplicates, fast lookup, and you don't care about element order.

CUSTOM OBJECTS & SET OPERATIONS

Correct equals()/hashCode() are required for custom keys; union/intersection/difference use standard methods.

```
class Student {  
    int id; String name;  
    @Override  
    public boolean equals(Object o) {  
        if (!(o instanceof Student)) return false;  
        return id == ((Student) o).id;  
    }  
    @Override  
    public int hashCode() {  
        return Objects.hash(id);  
    }  
}
```

```
Set<String> a = Set.of("A","B","C");  
Set<String> b = Set.of("B","C","D");  
  
// Union  
union.addAll(b);           // [A,B,C,D]  
// Intersection  
intersection.retainAll(b); // [B,C]  
// Difference  
difference.removeAll(b);   // [A]
```

KEY TAKEAWAY retainAll(), addAll(), and removeAll() turn HashSet into a ready-made set-algebra toolkit.

TRY IT YOURSELF — EXERCISE 2: WORKING WITH SET

Reinforces: HashSet, as just covered.

#	STEP	CODE	RESULT
1	Goal	Add duplicate strings to a HashSet and prove uniqueness	Duplicates collapse to one entry
2	Declare	<code>Set<String> tags = new HashSet<>();</code>	Empty, unordered set ready
3	Populate	<code>tags.add("java"); tags.add("java");</code>	Second add is silently ignored
4	Verify	<code>System.out.println(tags.size());</code>	Prints 1, not 2
5	Optional	<code>new TreeSet<>(tags)</code>	Same elements, now in sorted order
6	Key concept	A Set enforces uniqueness — no duplicate elements, unlike a List	Ties to the Set interface you just saw
7	Reference	<code>exercises/exercise-02-hashset.md</code>	Full starter code and steps

TRY IT NOW Complete Exercise 2 before continuing — see `exercises/exercise-02-hashset.md`.

TREESET

Implementation of SortedSet using a Red-Black Tree — unique elements, always sorted.



Key Points

- Implements SortedSet<E> (extends Set<E>).
- Elements sorted ascending (natural or Comparator).
- No null element allowed.
- Guarantees $O(\log n)$ for basic operations.



Constructors

- TreeSet() — natural ordering
- TreeSet(Comparator<? super E> c)
- TreeSet(Collection<? extends E> c)
- TreeSet(SortedSet<E> s)

KEY TAKEAWAY TreeSet is the right choice when you need a set of unique elements that must always remain sorted.


TreeSet in Java

TreeSet is a class that implements the **NavigableSet** interface. It stores elements in a **sorted order** (ascending by default) using a Red-Black Tree.

Key Features


- Stores unique elements only (no duplicates).
- Elements are sorted in natural ordering or by a custom **Comparator**.
- Provides efficient operations like adding, removing and retrieval.
- Implements **NavigableSet** interface.

Class Hierarchy

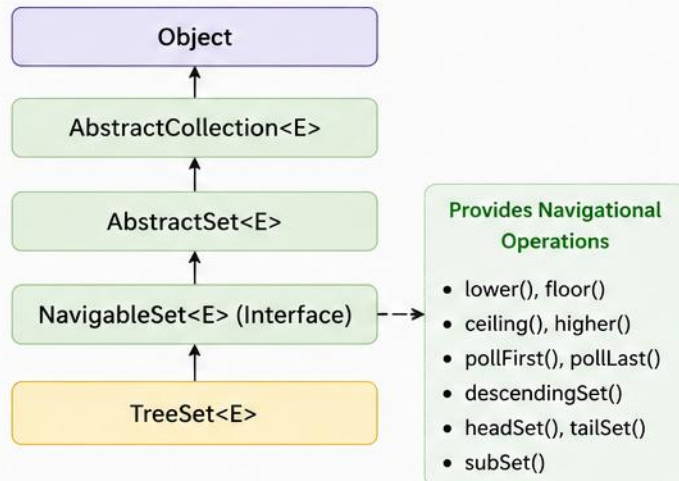

TreeSet does not allow null elements. It is not synchronized. Use `Collections.synchronizedSortedSet()` for thread safety.

Internal Data Structure

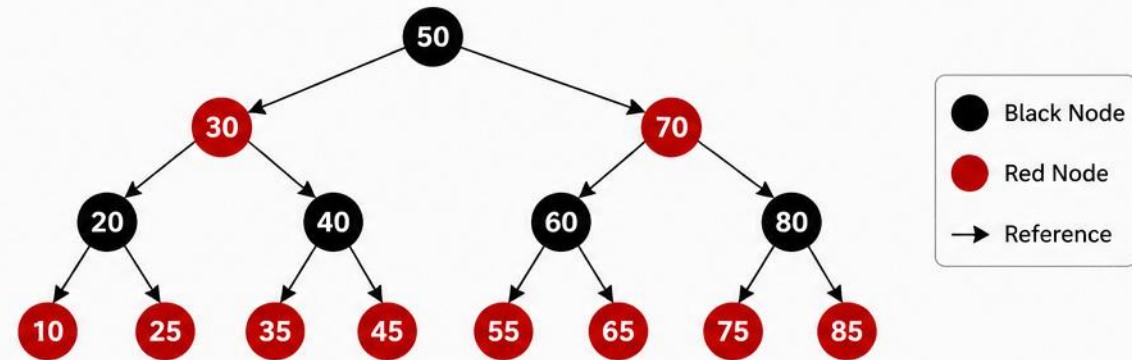

In-order traversal of the above tree: 10, 20, 25, 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85
(Sorted Order)

Common Operations

Operation	Time Complexity
add(E e)	$O(\log n)$
remove(Object o)	$O(\log n)$
contains(Object o)	$O(\log n)$
first() / last()	$O(\log n)$
size()	$O(1)$
iterator()	$O(n)$


Ordering

- By default, elements are sorted in natural ascending order.
- To use custom order, provide a **Comparator** while creating **TreeSet**.

```
TreeSet<Integer> set = new TreeSet<>();  
  
TreeSet<String> set = new TreeSet<>(  
    Comparator.reverseOrder());
```

HOW TREESSET WORKS

A Red-Black Tree keeps elements balanced and sorted; in-order traversal yields the sorted sequence.

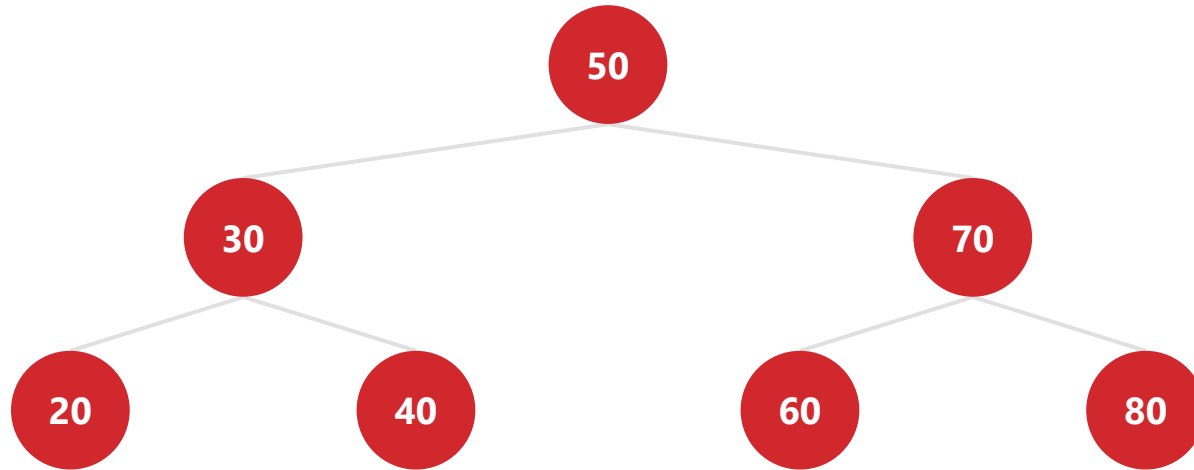

In-order traversal (sorted order): 20, 30, 40, 50, 60, 70, 80

Elements must be Comparable, or a Comparator must be provided.

KEY TAKEAWAY Guarantees $O(\log n)$ time for basic operations because the tree stays balanced.

TREESET — COMMON METHODS (1 OF 2)

Basic set operations shared with every Set implementation.

METHOD	DESCRIPTION	EXAMPLE
<code>add(E e) / remove(Object o)</code>	Adds if absent / removes the element	<code>set.add("A");</code>
<code>contains(Object o)</code>	Checks if element exists	<code>set.contains("A");</code>
<code>size() / isEmpty()</code>	Count elements / check empty	<code>set.size();</code>
<code>first() / last()</code>	Returns lowest / highest element	<code>set.first();</code>

KEY TAKEAWAY The navigation methods that set TreeSet apart from HashSet continue on the next slide.

TREESet — COMMON METHODS (2 OF 2)

The navigation methods that set TreeSet apart from HashSet.

METHOD	DESCRIPTION	EXAMPLE
<code>ceiling(E e) / floor(E e)</code>	Least element $\geq e$ / greatest element $\leq e$	<code>set.ceiling(40);</code>
<code>higher(E e) / lower(E e)</code>	Least element $> e$ / greatest element $< e$	<code>set.higher(40);</code>
<code>subSet(from, to)</code>	View of elements in range	<code>set.subSet(20, 60);</code>
<code>headSet(to) / tailSet(from)</code>	Elements below to / at-or-above from	<code>set.headSet(60);</code>
<code>descendingSet()</code>	Returns a reverse-order view	<code>set.descendingSet();</code>

KEY TAKEAWAY ceiling/floor/higher/lower give you nearest-neighbor search — something a HashSet simply can't do.

TREESet — PERFORMANCE & EXAMPLE

Every operation costs $O(\log n)$; duplicates are silently ignored.

OPERATION	COMPLEXITY	NOTES
add / remove / contains	$O(\log n)$	Tree remains balanced
first() / last()	$O(\log n)$	Finds leftmost/rightmost node
ceiling/floor/higher/lower	$O(\log n)$	Tree navigation

```
TreeSet<Integer> set = new TreeSet<>();
set.add(50); set.add(30); set.add(20); set.add(40); set.add(80); set.add(60);
System.out.println(set);           // [20, 30, 40, 50, 60, 80]
System.out.println(set.ceiling(35)); // 40
System.out.println(set.floor(35));  // 30
```

KEY TAKEAWAY Order is always sorted, and duplicates are never added — the tree enforces both automatically.

NATURAL VS CUSTOM ORDERING

Sort by Comparable by default, or supply your own Comparator.

```
// Natural Ordering
TreeSet<String> set = new TreeSet<>();
set.add("Banana"); set.add("Apple");
set.add("Cherry");
// [Apple, Banana, Cherry]
```

```
// Custom Ordering
TreeSet<String> set = new TreeSet<>(
    Comparator.reverseOrder());
// [Cherry, Banana, Apple]
```



When to Use

- Sorted order, range queries needed.



When Not To

- Sorted order not needed (use HashSet).

KEY TAKEAWAY TreeSet elements must be mutually comparable — a ClassCastException occurs otherwise.

TREESet — SET OPERATIONS & TAKEAWAY

Union, intersection, and difference stay sorted automatically.

```
Set<String> a = new TreeSet<>(List.of("A", "B", "C"));
Set<String> b = new TreeSet<>(List.of("B", "C", "D"));

union.addAll(b);           // [A, B, C, D]
intersection.retainAll(b); // [B, C]
difference.removeAll(b);   // [A]
```

KEY TAKEAWAY If order doesn't matter → HashSet. If insertion order matters → LinkedHashSet. If sorted order matters → TreeSet.

MAP INTERFACE (JAVA.UTIL.MAP<K, V>)

A collection that stores key-value pairs — keys unique, values may repeat.


- Represents real-world associations (e.g., ID → Name).
- Fast retrieval of values by key.
- Keys are unique (no duplicates); values may be duplicated.
- Each key can map to only one value.
- Not a subinterface of Collection.

```
public interface Map<K, V> {  
    // Core operations – no implementation  
}
```

KEY TAKEAWAY Map is deliberately not a Collection — it models associations, not a group of individual objects.

MAP INTERFACE

Java Collections Framework

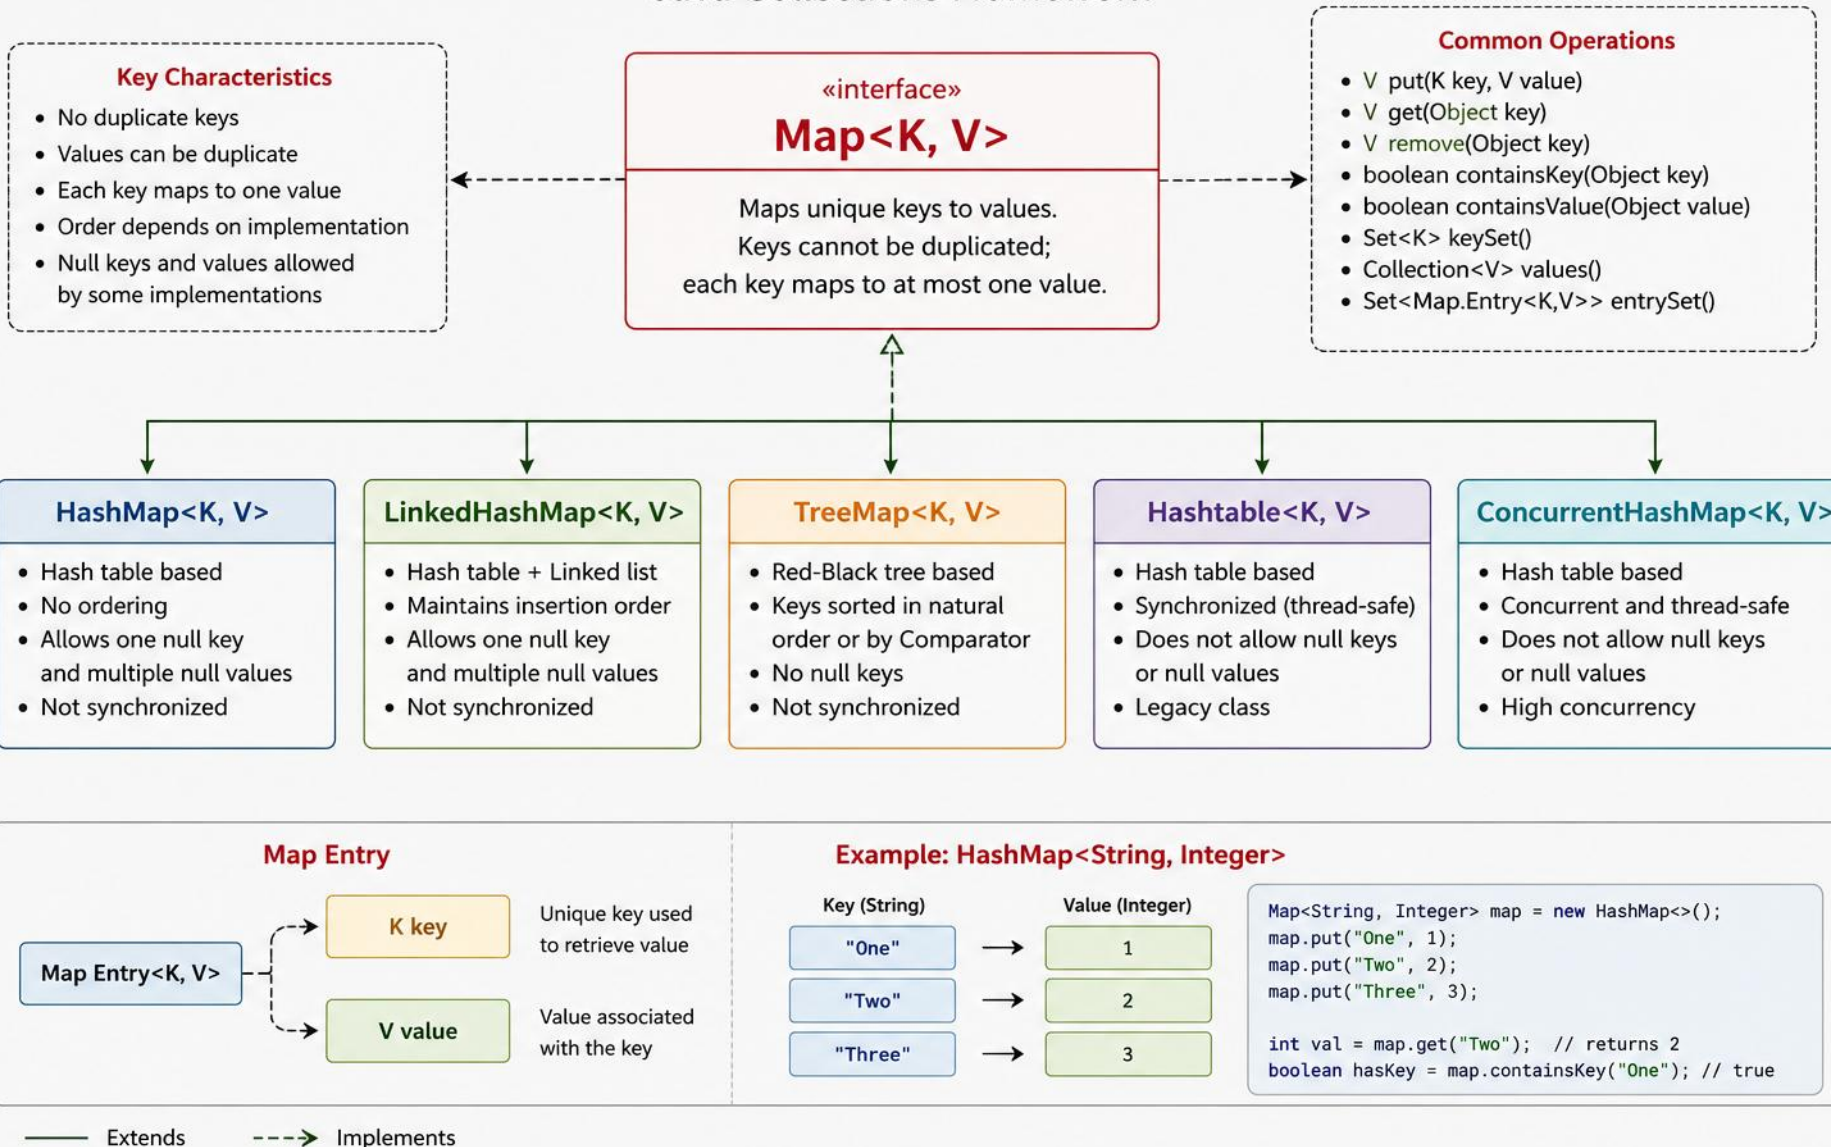

MAP HIERARCHY & COMMON METHODS

Five implementations with distinct ordering stories, and the core operations they all share.

HashMap<K,V> Unordered	LinkedHashMap<K,V> Insertion Order	TreeMap<K,V> Sorted Order	Hashtable<K,V> Legacy, Synchronized	ConcurrentHashMap<K,V> Unordered, Concurrent
--	--	---	---	--

METHOD	DESCRIPTION	EXAMPLE
<code>put(K key, V value)</code>	Adds or updates the mapping	<code>map.put(1, "A");</code>
<code>get(Object key)</code>	Returns value for the key	<code>map.get(1);</code>
<code>remove(Object key)</code>	Removes the mapping	<code>map.remove(1);</code>
<code>containsKey / containsValue</code>	Checks if key / value exists	<code>map.containsKey(1);</code>
<code>keySet() / values() / entrySet()</code>	Returns keys / values / pairs	<code>map.entrySet();</code>

KEY TAKEAWAY `entrySet()` is the most efficient way to iterate both keys and values together.

MAP IMPLEMENTATIONS COMPARISON

Five implementations, side by side.

IMPLEMENTATION	ORDER	NULL KEY	GET/PUT	USE CASE
HashMap	No order	1 allowed	O(1) avg	General-purpose, best performance
LinkedHashMap	Insertion order	1 allowed	O(1) avg	Preserve insertion order
TreeMap	Sorted	Not allowed	O(log n)	Sorted keys, range operations
Hashtable	No order	Not allowed	O(1) avg	Legacy synchronized class
ConcurrentHashMap	No order	Not allowed	O(1) avg	Thread-safe, high concurrency

KEY TAKEAWAY ConcurrentHashMap, not synchronizedMap(), is the modern choice for thread-safe maps.

EXAMPLE: BASIC USAGE WITH HASHMAP

put() updates the value if the key already exists.

```
Map<Integer, String> map = new HashMap<>();
map.put(1, "Apple"); map.put(2, "Banana"); map.put(3, "Cherry");
map.put(2, "Blueberry");    // updates value for key 2

System.out.println(map.get(1));           // Apple
System.out.println(map.get(2));           // Blueberry

for (Map.Entry<Integer, String> e : map.entrySet()) {
    System.out.println(e.getKey() + " -> " + e.getValue());
}
```

KEY TAKEAWAY Map.Entry<K,V> represents a single key-value pair — that's what entrySet() iterates over.

WHEN TO USE MAP & MAP VIEWS

Three views into the same underlying data.



When to Use

- Data as key-value pairs, unique keys.
- Fast retrieval by key.



When Not To

- Only need a list of values (use List).
- Frequently search by value, not key.

VIEW METHOD	RETURNS
keySet()	Set<K> of all keys
values()	Collection<V> of all values
entrySet()	Set<Map.Entry<K, V>> of all mappings

KEY TAKEAWAY HashMap is fastest, LinkedHashMap preserves order, TreeMap keeps keys sorted — choose accordingly.

HASHMAP<K, V>

Implementation of Map using a hash table — unique keys, one null key, multiple null values.

- Stores key-value pairs; keys must be unique, values can be duplicate.
- Not synchronized by default; provides constant-time average performance.


INTERNAL WORKING

- HashMap stores data in an array of buckets (Node[] table); each key is hashed to a bucket index.
- Collisions are stored in a linked list within that bucket.
- Java 8+: if bucket size ≥ 8 and table size ≥ 64 , the linked list becomes a Red-Black Tree for faster lookups.

KEY TAKEAWAY HashMap is the most commonly used Map — excellent average performance, but no ordering guarantee.

HASHMAP (Java)

HashMap stores data in key-value pairs. It uses a hash function to compute an index's (bucket) for the key. If multiple keys map to the same index, they are stored in a linked list.

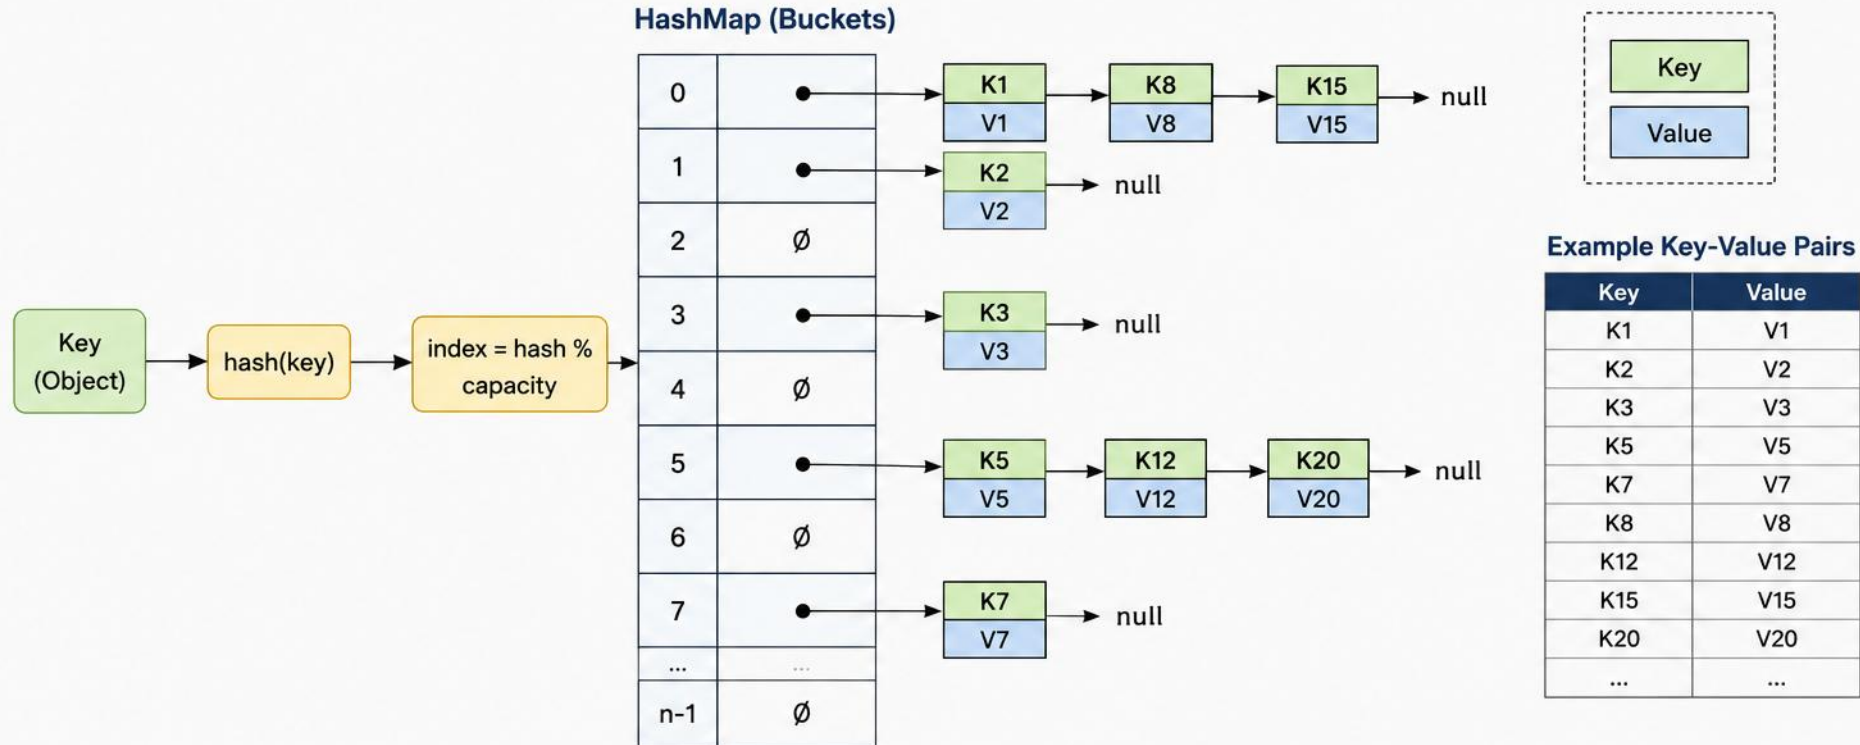

Key Points

- Fast operations: get(), put(), remove() – Average Time Complexity: O(1)
- Uses hashing for efficient data retrieval.
- Handles collisions using Separate Chaining (Linked Lists).
- Does not maintain any order of elements.

Common Operations

- put(key, value) – Adds or updates a key-value pair
- get(key) – Returns value for the key
- remove(key) – Removes the key-value pair
- containsKey(key) – Checks if key exists
- size() – Returns number of key-value pairs

HASHMAP — CONSTRUCTORS & DEFAULTS

Capacity and load factor together decide when a resize happens.

- `HashMap()` — default capacity 16, load factor 0.75.
- `HashMap(int initialCapacity)`
- `HashMap(int initialCapacity, float loadFactor)`
- `HashMap(Map<? extends K, ? extends V> m)` — copies all mappings.

DEFAULT CAPACITY

16

DEFAULT LOAD FACTOR

0.75

RESIZE TRIGGER

$\text{size} > \text{capacity} \times \text{loadFactor}$

NEW CAPACITY

Typically doubled

KEY TAKEAWAY Rehashing is relatively expensive — pre-sizing a HashMap can meaningfully improve performance.

HASHMAP — METHODS & PERFORMANCE

Constant-time average performance for every basic operation.

METHOD	DESCRIPTION	EXAMPLE
<code>put(K key, V value)</code>	Adds or updates the mapping	<code>map.put(1, "A");</code>
<code>putIfAbsent(K key, V value)</code>	Adds only if key is absent	<code>map.putIfAbsent(2, "B");</code>
<code>replace(K key, V value)</code>	Replaces value if key exists	<code>map.replace(1, "C");</code>
<code>get</code> / <code>containsKey</code> / <code>remove</code>	Retrieve / check / remove by key	<code>map.get(1);</code>

OPERATION	COMPLEXITY	NOTES
<code>put</code> / <code>get</code> / <code>remove</code> / <code>containsKey</code>	$O(1)$ avg	$O(n)$ worst case with many collisions
<code>clear()</code> / <code>keySet()</code> / <code>values()</code> / <code>entrySet()</code>	$O(n)$	Iterates over all elements

KEY TAKEAWAY `putIfAbsent()` and `replace()` let you express intent atomically instead of check-then-act.

EXAMPLE: BASIC USAGE

One null key, multiple null values — both are allowed.

```
Map<Integer, String> map = new HashMap<>();
map.put(1, "Apple"); map.put(2, "Banana"); map.put(3, "Cherry");
map.put(2, "Blueberry");    // updates value for key 2
map.put(null, "No Key");    // one null key allowed
map.put(4, null);           // multiple null values allowed

System.out.println(map.get(1));           // Apple
System.out.println(map.containsValue("Blueberry")); // true
```

KEY TAKEAWAY When to use HashMap: fast key-based lookup where order doesn't matter — caches, indexes, dictionaries.

HASH FUNCTION, EQUALITY & RESIZING

Correct equals()/hashCode() implementations are essential for correct behavior.



Hash Function & Equality

- Uses key.hashCode() to find the bucket.
- Equal keys must have the same hashCode().
- Bucket index $\approx (n - 1) \& \text{hashCode}$.



Resizing (Rehashing)

- Occurs when $\text{size} > \text{capacity} \times \text{loadFactor}$.
- New capacity = $\text{oldCapacity} \times 2$.
- All entries are rehashed into the new table.

```
Map<String, Integer> map = new HashMap<>();  
map.put(null, 100); map.put(null, 200); // updates the null key  
System.out.println(map.get(null));      // 200
```

KEY TAKEAWAY Only one null key is allowed — putting a second null value just updates the existing entry.

TRY IT YOURSELF — EXERCISE 3: WORKING WITH MAP

Reinforces: HashMap, as just covered.

#	STEP	CODE	RESULT
1	Goal	CRUD on a <code>HashMap<String, Integer></code> (ISBN → copies)	Key-value CRUD works
2	Declare	<code>Map<String, Integer> copies = new HashMap<>();</code>	Empty map ready
3	Populate	<code>copies.put("978-...", 3);</code>	Associates a key with a value
4	Operate	<code>copies.get("978-...");</code> <code>copies.remove("978-...");</code>	Read and delete by key
5	Iterate	<code>for (var e : copies.entrySet()) ...</code>	<code>e.getKey()</code> / <code>e.getValue()</code> per pair
6	Key concept	HashMap stores key-value pairs; keys are unique, values can repeat	Ties to the Map interface you just saw
7	Reference	<code>exercises/exercise-03-hashmap.md</code>	Full starter code and steps

TRY IT NOW Complete Exercise 3 before continuing — see `exercises/exercise-03-hashmap.md`.

TREEMAP<K, V>

Implementation of NavigableMap using a Red-Black Tree — keys always sorted.



Key Points

- Implements NavigableMap<K, V>.
- Keys stored in sorted (ascending) order.
- null key not allowed (NullPointerException).
- O(log n) for basic operations.



Constructors

- TreeMap() — natural key ordering
- TreeMap(Comparator<? super K> c)
- TreeMap(Map<? extends K, ? extends V> m)
- TreeMap(SortedMap<K, ? extends V> m)


KEY TAKEAWAY Use TreeMap when you require sorted keys and efficient navigation operations.

TreeMap<K, V> in Java

TreeMap is a Red-Black Tree based NavigableMap implementation.
It stores key-value pairs in sorted order of keys.

Key Characteristics

- Keys are unique and sorted
- Implemented using Red-Black Tree
- Provides log(n) time complexity
- Implements NavigableMap interface
- Not synchronized (use Collections.synchronizedSortedMap())
- Null key is not allowed
- Allows one null value

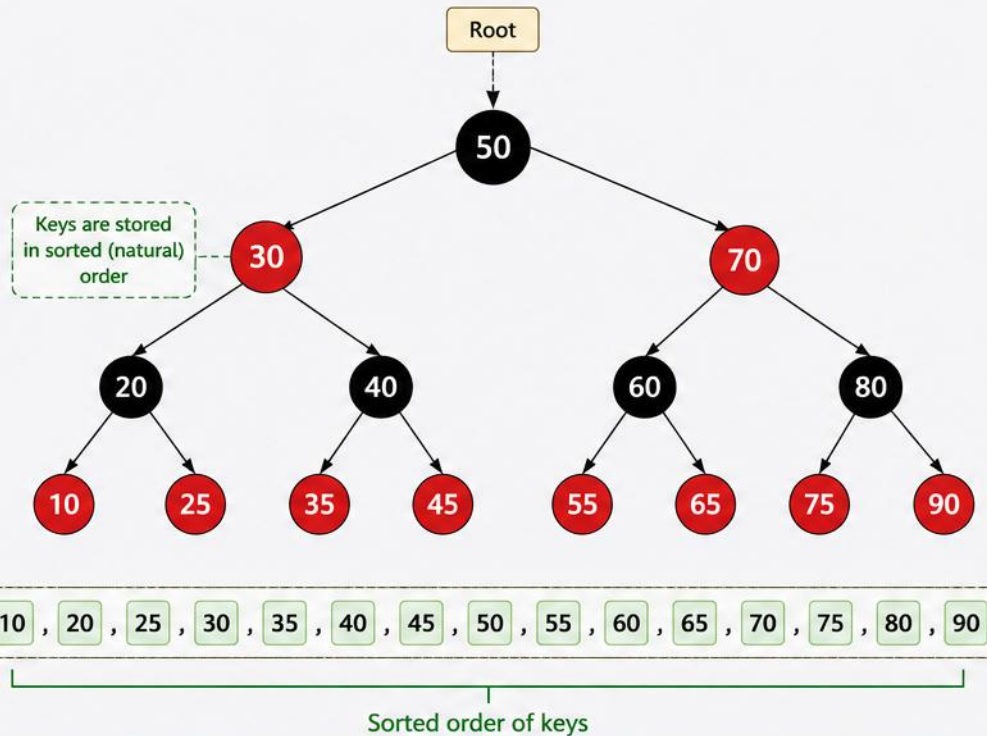

Tree Structure (Red-Black Tree)

- Black Node
- Red Node

Common Operations

- `put(K key, V value)`
 - Inserts a key-value pair
- `get(Object key)`
 - Retrieves value for key
- `remove(Object key)`
 - Removes key-value pair
- `firstKey() / lastKey()`
 - Returns lowest / highest key
- `higherKey(K key)`
 - Returns next higher key
- `lowerKey(K key)`
 - Returns next lower key
- `subMap(K from, K to)`
 - Returns a portion of the map

Example

```
TreeMap<Integer, String> treeMap = new TreeMap<>();
treeMap.put(50, "Fifty");
treeMap.put(30, "Thirty");
treeMap.put(70, "Seventy");
treeMap.put(20, "Twenty");
treeMap.put(40, "Forty");
...
```


```
treeMap.get(30);           // Returns "Thirty"
treeMap.firstKey();        // Returns 10
treeMap.lastKey();         // Returns 90
treeMap.higherKey(40);     // Returns 45
treeMap.lowerKey(60);      // Returns 55
treeMap.subMap(20, 70);    // Returns keys from 20 (inclusive) to 70 (exclusive)
```

Time Complexity

- | | |
|----------------------------|---------------|
| <code>put()</code> | : $O(\log n)$ |
| <code>get()</code> | : $O(\log n)$ |
| <code>remove()</code> | : $O(\log n)$ |
| <code>containsKey()</code> | : $O(\log n)$ |
| Traversal | : $O(n)$ |

HOW TREEMAP WORKS

Entries live as nodes in a Red-Black Tree; in-order traversal returns them sorted by key.

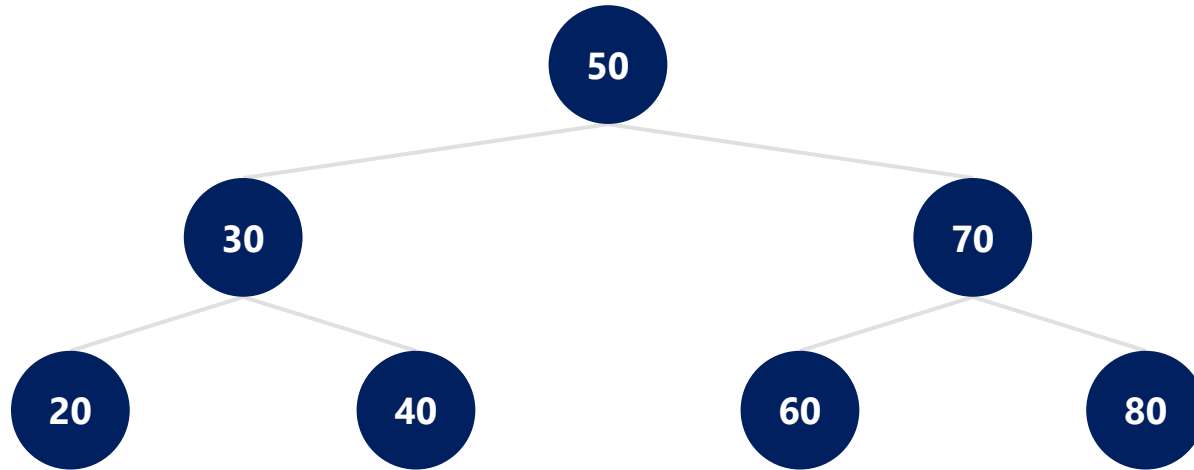

In-order traversal (sorted by key): 20, 30, 40, 50, 60, 70, 80

Guarantees $O(\log n)$ time for insertions, deletions, and lookups.

KEY TAKEAWAY The Red-Black Tree keeps the map balanced, so performance stays $O(\log n)$ regardless of insertion order.

TREEMAP — COMMON METHODS (1 OF 2)

Core put/get operations shared with every Map implementation.

METHOD	DESCRIPTION	EXAMPLE
<code>put(K key, V value)</code>	Adds or updates mapping	<code>map.put(10, "Ten");</code>
<code>get / containsKey / remove</code>	Retrieve / check / remove by key	<code>map.get(10);</code>
<code>firstKey() / lastKey()</code>	Returns the lowest / highest key	<code>map.firstKey();</code>

KEY TAKEAWAY The range views and nearest-key search that are TreeMap's superpower continue on the next slide.

TREEMAP — COMMON METHODS (2 OF 2)

The range views and nearest-key search that are TreeMap's superpower.

METHOD	DESCRIPTION	EXAMPLE
<code>ceilingKey(K)</code> / <code>floorKey(K)</code>	Least key $\geq k$ / greatest key $\leq k$	<code>map.ceilingKey(25);</code>
<code>higherKey(K)</code> / <code>lowerKey(K)</code>	Least key $> k$ / greatest key $< k$	<code>map.higherKey(25);</code>
<code>subMap(from, to)</code>	View from fromKey (incl.) to toKey (excl.)	<code>map.subMap(30, 70);</code>
<code>headMap(to)</code> / <code>tailMap(from)</code>	Keys below to / at-or-above from	<code>map.headMap(50);</code>
<code>descendingMap()</code>	Returns a reverse-order view	<code>map.descendingMap();</code>

KEY TAKEAWAY `subMap/headMap/tailMap` give you cheap range queries without scanning the whole map.

TREEMAP — PERFORMANCE & EXAMPLE

Sorted natural-order keys, with $O(\log n)$ operations throughout.

OPERATION	COMPLEXITY	NOTES
put / get / remove / containsKey	$O(\log n)$	Insert, update, or lookup
firstKey / lastKey / ceilingKey / floorKey	$O(\log n)$	Tree navigation
containsValue(Object)	$O(n)$	Linear value search

```
TreeMap<Integer, String> map = new TreeMap<>();
map.put(50, "Fifty"); map.put(20, "Twenty"); map.put(70, "Seventy");
System.out.println(map);           // {20=Twenty, 50=Fifty, 70=Seventy}
System.out.println(map.ceilingKey(35)); // 50
System.out.println(map.subMap(30, 70)); // {50=Fifty}
```

KEY TAKEAWAY If multiple keys compare equal (compareTo() returns 0), the new value simply replaces the old one.

WHEN TO USE TREEMAP

Sorted-key storage with efficient navigation operations.



When to Use

- Keys need sorted order.
- Range views: `subMap()`, `headMap()`, `tailMap()`.
- Nearest-key search needed.



When Not To

- Key order doesn't matter (use `HashMap`).
- Need insertion order (use `LinkedHashMap`).
- Need concurrent access (use `ConcurrentSkipListMap`).

VIEW	DESCRIPTION
<code>subMap(fromKey, toKey)</code>	Keys from <code>fromKey</code> (inclusive) to <code>toKey</code> (exclusive)
<code>headMap(toKey)</code> / <code>tailMap(fromKey)</code>	Keys strictly below <code>toKey</code> / at-or-above <code>fromKey</code>

KEY TAKEAWAY Need fastest lookup without order? `HashMap`. Need insertion order? `LinkedHashMap`. Need sorted order? `TreeMap`.

TRY IT YOURSELF — EXERCISE 4: SORTED COLLECTIONS

Reinforces: TreeMap and sorted key order, as just covered.

#	STEP	CODE	RESULT
1	Goal	Build a TreeMap from a HashMap	Keys now print in sorted order
2	Declare	<code>Map<String, Double> prices = new HashMap<>();</code>	Unsorted map, populated first
3	Sort	<code>new TreeMap<>(prices)</code>	Same entries, natural key order
4	Extra methods	<code>tree.firstKey(); tree.lastKey();</code>	TreeMap-only, not on the Map interface
5	Key concept	TreeMap key order is guaranteed	HashMap key order is not
6	Builds on	Exercise 2 <code>new TreeSet<>(...)</code>	Same idea, now for key-value pairs
7	Reference	<code>exercises/exercise-04-sorted-collections.md</code>	Full starter code and steps

TRY IT NOW Complete Exercise 4 before continuing — see `exercises/exercise-04-sorted-collections.md`.

MUTABILITY VS IMMUTABILITY

Mutability: state can change after creation. Immutability: state cannot change after creation.

Mutability (State Can Change)

- Object state can be modified after creation.
- Changes affect the same object (same reference).
- Generally better performance.
- Not thread-safe by default.

Immutability (State Cannot Change)

- Any "change" creates a new object.
- Inherently thread-safe.
- More reliable, easier to reason about.

KEY TAKEAWAY Mutable classes: `StringBuilder`, `ArrayList`, `HashMap`, `Date`. Immutable classes: `String`, `Integer`, `LocalDate`, `List.of()`.

MUTABILITY vs IMMUTABILITY IN JAVA

Mutability means an object's state can be changed after creation.

Immutability means an object's state cannot be changed after creation.


MUTABLE (Changeable)

- State can be modified after creation
- Same object reference is used
- Changes reflect to all references
- Not thread-safe by default

Example: StringBuilder

```
StringBuilder sb = new StringBuilder("Hello");  
sb.append(" World"); // modifies the same object  
System.out.println(sb); // Hello World
```

Memory Representation

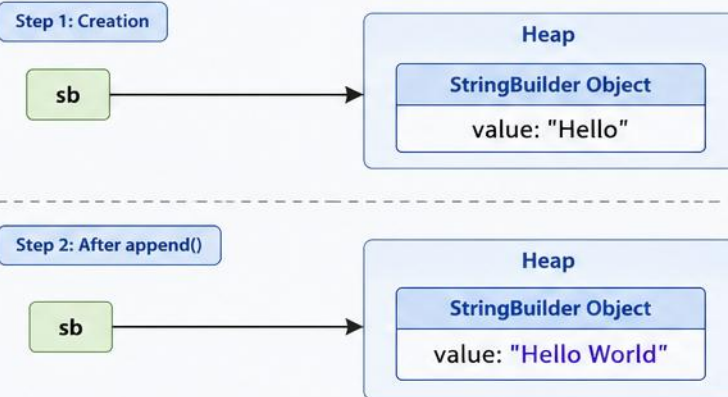

One object, state changes.
All references see the updated value.


IMMUTABLE (Unchangeable)

- State cannot be modified after creation
- Any change creates a new object
- Original object remains unchanged
- Thread-safe

Example: String

```
String s1 = "Hello";  
String s2 = s1.concat(" World"); // creates new object  
System.out.println(s1); // Hello  
System.out.println(s2); // Hello World
```

Memory Representation

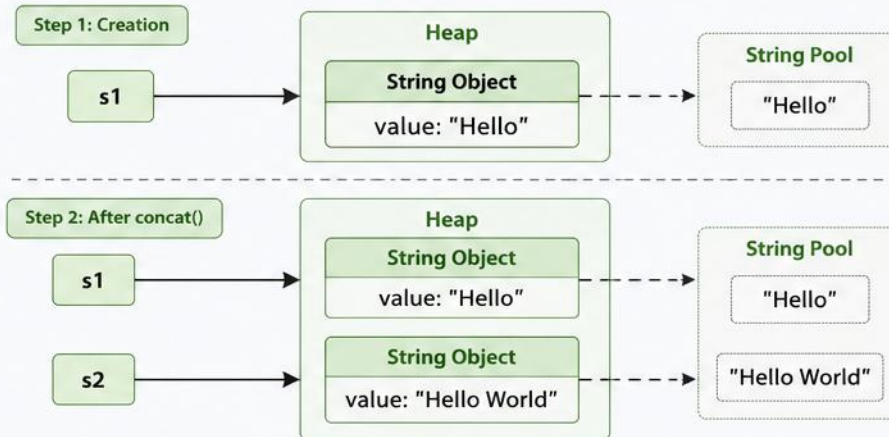


New object created for changes.
Original object remains unchanged.

Thread Safe vs Thread Unsafe in Java

✓ THREAD SAFE

Multiple threads can access a shared resource concurrently without causing inconsistent state or data corruption.

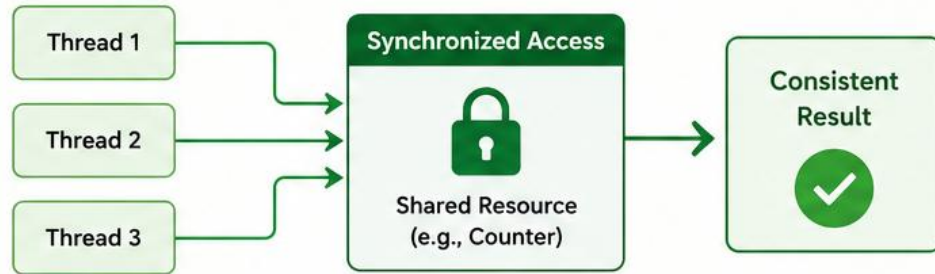

Example (Thread Safe)

```
class Counter {  
    private int count = 0;  
  
    public synchronized void increment() {  
        count++;  
    }  
  
    public synchronized int getCount() {  
        return count;  
    }  
}
```

Why Thread Safe?

- ✓ Uses synchronization (synchronized keyword)
- ✓ Only one thread can execute critical section at a time
- ✓ Data remains consistent and accurate




Examples of Thread Safe Classes

String, Integer, Long, StringBuffer, Vector, Hashtable, ConcurrentHashMap, CopyOnWriteArrayList, etc.

✗ THREAD UNSAFE

Multiple threads can access a shared resource concurrently and may lead to inconsistent state or data corruption.

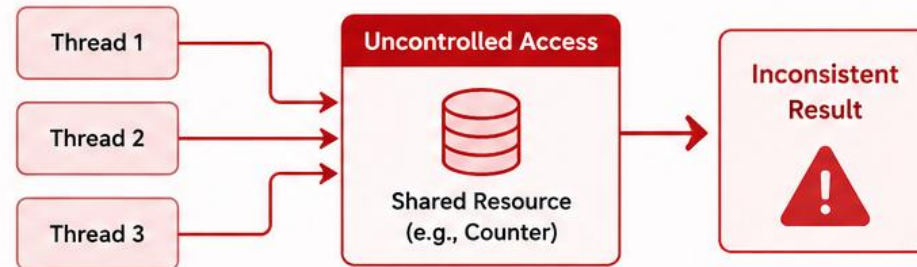

Example (Thread Unsafe)

```
class Counter {  
    private int count = 0;  
  
    public void increment() {  
        count++;  
    }  
  
    public int getCount() {  
        return count;  
    }  
}
```

Why Thread Unsafe?

- ✗ No synchronization
- ✗ Multiple threads can modify data simultaneously
- ✗ May cause race conditions and inconsistent results



Examples of Thread Unsafe Classes

ArrayList, HashMap, HashSet, StringBuilder, SimpleDateFormat, Random, etc.



Key Takeaway


Use thread-safe classes or proper synchronization when multiple threads access shared data. This ensures data consistency, reliability, and predictable behavior in concurrent applications.



HOW THEY WORK


Mutation updates the same object; immutable operations return a brand-new one.

MUTABILITY

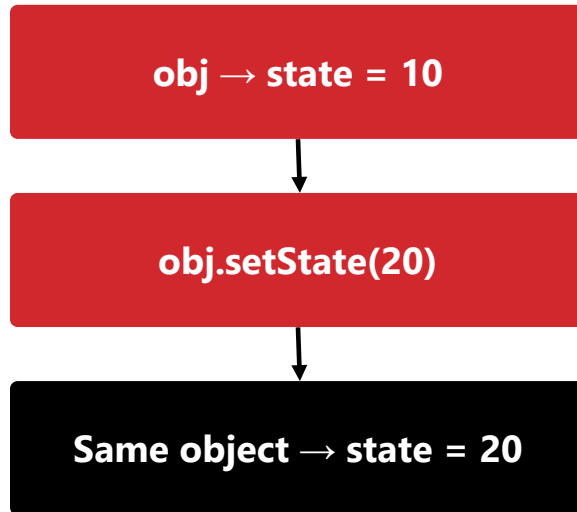

All references see the change — the object was mutated in place.

IMMUTABILITY

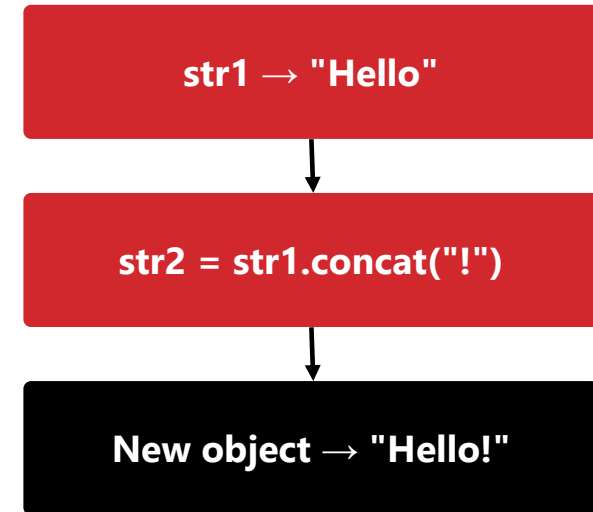

The original object remains unchanged — a brand-new object was returned.

KEY TAKEAWAY The same object is updated in mutability; a new object is created in immutability.

MUTABLE VS IMMUTABLE — IN CODE

StringBuilder mutates in place; String always returns something new.

MUTABLE (StringBuilder)

```
StringBuilder sb = new StringBuilder("Hello");
System.out.println(sb);    // Hello
sb.append(" World");
System.out.println(sb);    // Hello World
// Same object is modified
```

IMMUTABLE (String)

```
String s1 = "Hello";
String s2 = s1.concat(" World");
System.out.println(s1);    // Hello
System.out.println(s2);    // Hello World
// New object is created (s1 unchanged)
```

- Mutable classes: StringBuilder, StringBuffer, ArrayList, HashMap, Date, int[].
- Immutable classes: String, Integer, Long, Boolean, LocalDate, BigDecimal, List.of(), Map.of().

KEY TAKEAWAY concat() never modifies s1 — it always returns a new String, leaving the original untouched.

KEY DIFFERENCES

Mutable and immutable objects side by side.

ASPECT	MUTABLE	IMMUTABLE
State Change	Can be changed	Cannot be changed
Object Creation	Same object	New object for changes
Thread Safety	Not thread-safe	Thread-safe
Performance	Generally faster	Slightly slower (more objects)
Memory Usage	Less	More (new objects)
Complexity	More error-prone	Easier to reason about

KEY TAKEAWAY Immutability trades a little performance and memory for a lot of safety and simplicity.

WHEN TO USE WHICH & BEST PRACTICES

Default to immutability unless you have a specific reason not to.



Use Mutable When...

- Performance is critical, state changes often.
- Working with large structures needing modification.
- Memory usage must be minimized.



Use Immutable When...

- Objects are shared between threads.
- Data should remain constant (configs, keys).
- Used as HashMap/HashSet keys.

- Prefer immutability for data objects (DTOs, value objects); use final fields with no setters.
- Use immutable collections (List.of(), Map.of(), Set.of()) whenever possible.

KEY TAKEAWAY Default to immutability unless you have a specific reason to use mutability, like performance or memory constraints.

ITERATION TECHNIQUES

Accessing each element of a collection or array, one by one — five techniques, one goal.

1. FOR LOOP (Arrays / Lists)

```
for (int i = 0; i < names.size(); i++) {  
    String name = names.get(i);  
    System.out.println(name);  
}
```

- Advantages: simple, gives index access, can modify by position.
- Notes: not ideal for Set/Map; risk of `IndexOutOfBoundsException`.

KEY TAKEAWAY The traditional for-loop is the only technique that gives you the index for free.



ITERATION TECHNIQUES IN JAVA

Different ways to traverse elements of Collections, Arrays and other data structures in Java

1

For Loop

Index-based iteration

01234

1020304050

→

```
int[] arr = {10, 20, 30, 40, 50};
for (int i = 0; i < arr.length; i++) {
    int value = arr[i];
    System.out.println(value);
}
```

2

Enhanced For Loop (For-Each)

Simplified iteration

10→20→30→40→50

```
int[] arr = {10, 20, 30, 40, 50};
for (int value : arr) {
    System.out.println(value);
}
```

3

Iterator

Via Iterator interface

Collection

↓

Iterator

→

```
Iterator<Integer> it = list.iterator();
while (it.hasNext()) {
    Integer value = it.next();
    System.out.println(value);
}
```

4

ListIterator

Bi-directional iteration

List

↓

ListIterator

↔

```
ListIterator<String> it = list.listIterator();
while (it.hasNext()) {
    System.out.println(it.next());
}
while (it.hasPrevious()) {
    System.out.println(it.previous());
}
```

5

Stream API

Functional style iteration

Collection / Array

↓

Stream Pipeline

↓

filter()map()forEach()

```
list.stream()
    .filter(s -> s.startsWith("A"))
    .map(String::toUpperCase)
    .forEach(System.out::println);
```

6

Enumeration

Legacy (for Vector, Hashtable)

Vector / Hashtable

↓

Enumeration

→

```
Enumeration<String> e = vector.elements();
while (e.hasMoreElements()) {
    String value = e.nextElement();
    System.out.println(value);
}
```

COMPARISON AT A GLANCE

	For Loop	Enhanced For Loop	Iterator	ListIterator	Stream API	Enumeration
🎯 Use Case	Arrays, Lists (index access needed)	Collections, Arrays (simple read-only)	Collections (safe removal)	Lists (bi-directional access)	Collections, Arrays (functional operations)	Legacy Collections (Vector, Hashtable)
↔ Direction	Forward	Forward	Forward	Forward & Backward	Forward (pipeline)	Forward
🗑 Remove Support	No	No	Yes (it.remove())	Yes (it.remove())	No (without collect) (Use collect to modify)	No
🕒 Performance	Fast	Fast	Moderate	Moderate	Depends on operations	Slow (Legacy)
📅 Introduced In	Java 1.0	Java 1.5	Java 1.2	Java 1.2	Java 8	Java 1.0



BEST PRACTICES

- Use Enhanced For Loop for simple read-only traversal.
- Use Iterator when you need to remove elements while iterating.
- Use ListIterator for bi-directional traversal of Lists.
- Use Stream API for declarative, functional and parallel processing.
- Avoid Enumeration in modern applications (legacy).

2. ENHANCED FOR LOOP (FOR-EACH)

Simpler, read-only syntax to iterate over elements.

```
for (String name : names) {  
    System.out.println(name);  
}
```

- Advantages: clean, concise, less error-prone. Works on arrays, collections, and maps (via `entrySet()`).
- Notes: cannot remove/add while iterating; no index access.

KEY TAKEAWAY Modifying a collection during a for-each loop throws `ConcurrentModificationException`.

3. ITERATOR & 4. LISTITERATOR

Explicit iteration objects — one for safe removal, one for bidirectional traversal.

3. ITERATOR — SAFE REMOVAL

```
Iterator<String> it = names.iterator();
while (it.hasNext()) {
    String name = it.next();
    if (name.equals("B")) {
        it.remove();    // safe removal
    }
}
```

4. LISTITERATOR — BIDIRECTIONAL

```
ListIterator<String> li = names.listIterator();
while (li.hasNext()) {    // forward
    System.out.println(li.next());
}
while (li.hasPrevious()) {    // backward
    System.out.println(li.previous());
}
```

- Iterator works for all Collection implementations; ListIterator is List-only but can add, set, and remove in both directions.

KEY TAKEAWAY `Iterator.remove()` is the only safe way to remove elements while iterating.

5. FOREACH() WITH LAMBDA (JAVA 8+)

Concise, functional-style iteration for Lists and Maps.

FOR LIST

```
names.forEach(name ->
    System.out.println(name));
```

FOR MAP

```
map.forEach((key, value) ->
    System.out.println(key + " -> " + value));
```

- Advantages: very concise and readable; encourages functional programming style.
- Notes: cannot use break or continue inside the lambda; not suitable when you need the index.
- The Streams API is another powerful way to iterate: `list.stream().forEach(System.out::println);`

KEY TAKEAWAY `forEach()` with a lambda is the most concise technique — but you give up early exit and index access.

ITERATION WITH MAP

Four ways to walk a Map, depending on what you need.

```
// 1. Using entrySet()
for (Map.Entry<Integer, String> e : map.entrySet()) {
    System.out.println(e.getKey() + " -> " + e.getValue());
}

// 2. Using forEach()
map.forEach((k, v) -> System.out.println(k + " -> " + v));

// 3. Using keySet()          // 4. Using values()
for (Integer key : map.keySet()) { ... }
for (String value : map.values()) { ... }
```

KEY TAKEAWAY `entrySet()` is fastest when you need both key and value — `keySet()` alone forces a second `get()` per key.

COMPARISON SUMMARY & KEY TAKEAWAY

Weighing readability, index access, safe removal, and direction.

TECHNIQUE	INDEX ACCESS	SAFE REMOVAL	BIDIRECTIONAL	BEST USED FOR
For Loop	✓	✗	✗	Arrays, Lists (index needed)
Enhanced For	✗	✗	✗	Collections, Arrays
Iterator	✗	✓	✗	Collections (removal needed)
ListIterator	✓	✓	✓	Lists (bidirectional)
forEach() + Lambda	✗	✗	✗	Simple traversal, functional style

Modifying a collection while iterating — except through `Iterator.remove()` — throws `ConcurrentModificationException`.

Prefer immutable collections (`List.of()`, `Map.of()`) for read-only data.

KEY TAKEAWAY Choose the right iteration technique based on your goal, not out of habit.

TRY IT YOURSELF — EXERCISE 5: SAFE ITERATION

Reinforces: the iteration techniques you just saw.

#	STEP	CODE	RESULT
1	Goal	Use <code>Iterator.remove()</code> to delete elements mid-loop safely	No <code>ConcurrentModificationException</code>
2	Declare	<code>Iterator<String> it = list.iterator();</code>	Positioned before the first element
3	Loop	<code>while (it.hasNext()) { String s = it.next(); ... }</code>	Advances one element per call
4	Remove	<code>if (condition) it.remove();</code>	Safely removes the current element
5	Avoid	<code>list.remove(s)</code> inside a for-each loop	Throws <code>ConcurrentModificationException</code>
6	Key concept	Only the <code>Iterator</code> itself may safely modify a collection mid-loop	Ties to the iteration techniques you just saw
7	Reference	<code>exercises/exercise-05-iteration.md</code>	Full starter code and steps

TRY IT NOW Complete Exercise 5 before continuing — see `exercises/exercise-05-iteration.md`.

JAVA COLLECTION PERFORMANCE COMPARISON

Average time complexity of common operations, at a glance.



Excellent

$O(1)$



Good

$O(\log n)$ or amortized $O(1)$



Poor

$O(n)$

- Hash-based collections (HashMap, HashSet) offer the best average performance for most operations.
- Tree-based collections (TreeMap, TreeSet) provide sorted order with $O(\log n)$ operations.
- ArrayList is ideal for random access; LinkedList for frequent insertions/deletions in the middle.
- Choose based on your use case: need order, need speed, or need both.

KEY TAKEAWAY These are average-case complexities — worst case for hash-based collections can degrade to $O(n)$.

JAVA COLLECTION PERFORMANCE COMPARISON

Collection Type	Access (get) Average Case	Insert (add) Average Case	Delete (remove) Average Case	Search (contains) Average Case	Iteration (for-each) Average Case	Key Characteristics
 ArrayList	O(1)	O(1)*	O(n)	O(n)	O(n)	- Dynamic array - Fast access, slow insert/delete in middle
 LinkedList	O(n)	O(1)**	O(1)**	O(n)	O(n)	- Doubly linked list - Fast insert/delete, slow access
 HashSet	N/A	O(1)	O(1)	O(1)	O(n)	- Hash table - Unordered, no duplicates
 LinkedHashSet	N/A	O(1)	O(1)	O(1)	O(n)	- Hash table + Linked list - Maintains insertion order
 TreeSet	N/A	O(log n)	O(log n)	O(log n)	O(n)	- Red-Black Tree - Sorted order, no duplicates
 HashMap	O(1)	O(1)	O(1)	O(1)	O(n)	- Hash table - Unordered key-value pairs
 LinkedHashMap	O(1)	O(1)	O(1)	O(1)	O(n)	- Hash table + Linked list - Maintains insertion order
 TreeMap	O(log n)	O(log n)	O(log n)	O(log n)	O(n)	- Red-Black Tree - Sorted by keys

Legend:

Excellent
(O(1))

Good
(O(log n))

Poor
(O(n))

N/A
Not Applicable

* Amortized O(1). Resize is O(n)

** When adding/removing at head or known position

COLLECTION PERFORMANCE SUMMARY

Add, remove, and search costs for the six collections you'll use most.

COLLECTION	ADD	REMOVE	SEARCH	LEGEND
ArrayList	$O(1)$ end / $O(n)$ mid	$O(n)$	$O(n)$	
LinkedList	$O(1)$	$O(1)$	$O(n)$	
HashSet	$O(1)$	$O(1)$	$O(1)$	
TreeSet	$O(\log n)$	$O(\log n)$	$O(\log n)$	
HashMap	$O(1)$ put	$O(1)$	$O(1)$ get	
TreeMap	$O(\log n)$ put	$O(\log n)$	$O(\log n)$ get	

KEY TAKEAWAY Hash-based collections win on raw speed; tree-based collections win when you also need sorted order.

DETAILED NOTES — PART 1

ArrayList, LinkedList, and HashSet, in their own words.



ArrayList

- Backed by a dynamic array.
- Fast access by index.
- Adding at the end is amortized $O(1)$.
- Best for: random access, read-heavy apps.



LinkedList

- Doubly linked list.
- Fast insert/delete at head, tail, or known position.
- Slow random access (requires traversal).
- Best for: frequent insertions and deletions.



HashSet

- Backed internally by a HashMap (keys only).
- Allows one null element.
- Performance depends on hashCode() quality.
- Best for: fast uniqueness checks.

KEY TAKEAWAY Each collection's "best for" case follows directly from its underlying data structure.

DETAILED NOTES — PART 2

TreeSet, HashMap, and TreeMap, in their own words.

TreeSet

- Backed by a TreeMap.
- Elements must implement Comparable or use a Comparator.
- Does not allow null (natural ordering).
- Best for: maintaining sorted unique elements.

HashMap

- Allows one null key and multiple null values.
- Performance depends on hashCode() quality.
- Best for: fast key-value lookup.

TreeMap

- Keys must implement Comparable or use a Comparator.
- Does not allow null keys (natural ordering).
- Best for: sorted key-value storage.

KEY TAKEAWAY Notice the pattern: every tree-based collection trades a bit of raw speed for guaranteed order.

UNDERLYING DATA STRUCTURES & BIG-O CHEAT SHEET

What's really happening under the hood.

COLLECTION	DATA STRUCTURE
ArrayList	Resizable Array
LinkedList	Doubly Linked List
HashSet	Hash Table (backed by HashMap)
TreeSet	Red-Black Tree (backed by TreeMap)
HashMap	Hash Table
TreeMap	Red-Black Tree

COMPLEXITY	MEANING
$O(1)$	Constant — independent of input size (best)
$O(\log n)$	Logarithmic — grows slowly with n
$O(n)$	Linear — grows directly with n (worst here)

KEY TAKEAWAY Every performance characteristic in this section traces back to one of these six data structures.

USE CASE GUIDE & CONCLUSION

Matching the right collection to the right requirement.

USE CASE	BEST CHOICE
Fast lookups, no order needed	HashMap, HashSet
Keep elements sorted	TreeMap, TreeSet
Frequent random access by index	ArrayList
Frequent insertions/deletions in middle	LinkedList
Unique elements, no duplicates	HashSet (unsorted) or TreeSet (sorted)

KEY TAKEAWAY Use HashMap/HashSet for maximum average performance; TreeMap/TreeSet when sorted data is required.

CHOOSING THE RIGHT COLLECTION

A practical guide to select the best Collection or Map for your use case.


BEFORE CHOOSING, ASK YOURSELF:

- Do you need to store individual objects, or key-value pairs?
- Should duplicates be allowed?
- Do you need elements in a specific order?
- How important is performance, and where are most operations happening — start, middle, or end?
- Do you need access by index?
- Is the collection read-heavy or write-heavy?
- Will the collection be accessed by multiple threads?

KEY TAKEAWAY The right choice makes your code faster and cleaner — always start with these seven questions.

CHOOSING THE RIGHT COLLECTION IN JAVA

Select the most appropriate Collection based on your data needs

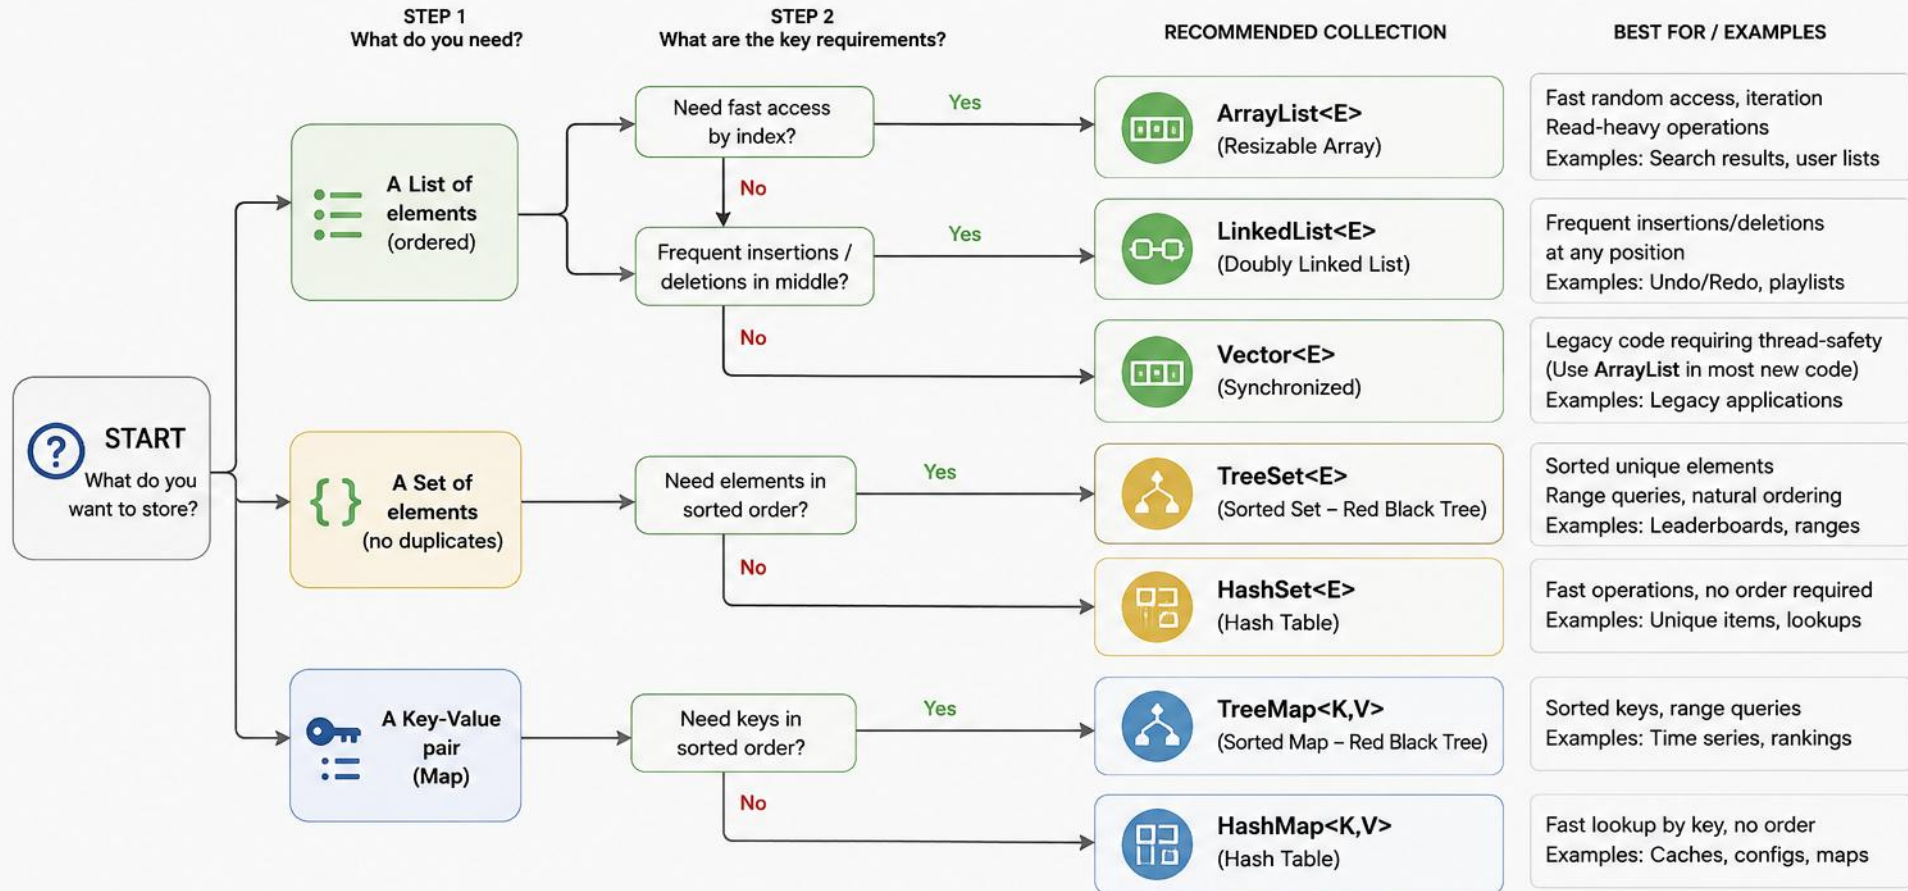

QUICK REFERENCE

ArrayList	LinkedList	Vector	HashSet	TreeSet	HashMap	TreeMap	Legend
✓ Fast random access	✓ Fast insert/delete	✓ Synchronized	✓ No duplicates	✓ No duplicates	✓ Key-Value pairs	✓ Key-Value pairs	■ List
✓ Resizable array	✓ Doubly linked list	✓ Legacy class	✓ No order guarantee	✓ Sorted order	✓ No order guarantee	✓ Sorted by keys	■ Set
✓ Not synchronized	✓ More memory	✓ Use ArrayList instead	✓ Backed by HashMap	✓ Slower than HashSet	✓ Allows one null key	✓ Slower than HashMap	■ Map



General Rule: Prefer ArrayList, HashSet, HashMap for most use cases unless you have a specific reason (sorting, frequent middle updates, legacy, etc.).


DECISION FLOW — COLLECTIONS & MAPS

Sorted? Unique? Duplicates? A few questions narrow it down fast, for both.

A. INDIVIDUAL OBJECTS (COLLECTION)



B. KEY-VALUE PAIRS (MAP)

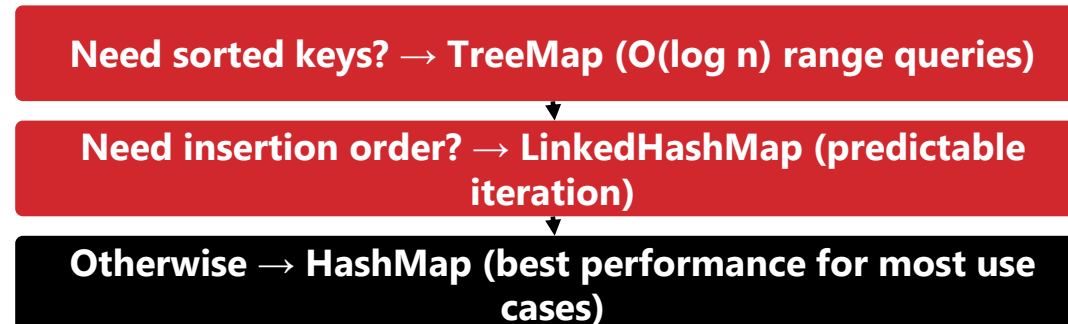

KEY TAKEAWAY When in doubt, ArrayList and HashMap are almost always the right defaults.

COLLECTION / MAP COMPARISON — ORDER & NULLS (1 OF 2)

Order, duplicates, and nulls for the List and Set implementations.

TYPE	ORDER	DUPLICATES	NULLS
ArrayList	Insertion order	Allowed	Yes (multiple)
LinkedList	Insertion order	Allowed	Yes (multiple)
HashSet	No order	Not allowed	Yes (1 null)
LinkedHashSet	Insertion order	Not allowed	Yes (1 null)
TreeSet	Sorted	Not allowed	No

KEY TAKEAWAY TreeSet is the strictest of the five — sorted, no duplicates, and no nulls at all.

COLLECTION / MAP COMPARISON — ORDER & NULLS (2 OF 2)

Order, duplicates, and nulls for the Map implementations.

TYPE	ORDER	DUPLICATES	NULLS
HashMap	No order	Keys: no, Values: yes	1 null key, many null values
LinkedHashMap	Insertion order	Keys: no, Values: yes	1 null key, many null values
TreeMap	Sorted by key	Keys: no, Values: yes	No null keys

KEY TAKEAWAY Nulls are the detail everyone forgets — TreeSet and TreeMap reject them outright.

COLLECTION / MAP COMPARISON — TIME COMPLEXITY (1 OF 2)

Add, remove, get, and search costs for the List and Set implementations.

TYPE	ADD	REMOVE	GET	SEARCH
ArrayList	Amortized $O(1)$	$O(n)$	$O(1)$	$O(n)$
LinkedList	$O(1)$	$O(1)$	$O(n)$	$O(n)$
HashSet	$O(1)$	$O(1)$	—	$O(1)$
LinkedHashSet	$O(1)$	$O(1)$	—	$O(1)$
TreeSet	$O(\log n)$	$O(\log n)$	—	$O(\log n)$

KEY TAKEAWAY TreeSet trades $O(1)$ speed for guaranteed sorted order — $O(\log n)$ is the price of staying sorted.

COLLECTION / MAP COMPARISON — TIME COMPLEXITY (2 OF 2)

Add, remove, get, and search costs for the Map implementations.

TYPE	ADD	REMOVE	GET	SEARCH
HashMap	O(1)	O(1)	O(1)	O(1)
LinkedHashMap	O(1)	O(1)	O(1)	O(1)
TreeMap	O(log n)	O(log n)	O(log n)	O(log n)

KEY TAKEAWAY The Linked* variants match their non-linked counterparts in speed — the only cost is a little extra memory.

QUICK USE CASE GUIDE (1 OF 2)

Five List and Set scenarios, and the recommended collection for each.

USE CASE	BEST CHOICE
Store items and access by index frequently	ArrayList
Frequent insertions/deletions in the middle	LinkedList
Need unique elements, order doesn't matter	HashSet
Need unique elements with insertion order	LinkedHashSet
Need sorted unique elements	TreeSet

KEY TAKEAWAY The three Map scenarios continue on the next slide.

QUICK USE CASE GUIDE (2 OF 2)

Three Map scenarios, and the recommended collection for each.

USE CASE	BEST CHOICE
Store key-value pairs with best performance	HashMap
Store key-value pairs, maintain insertion order	LinkedHashMap
Store key-value pairs sorted by key	TreeMap

KEY TAKEAWAY Keep this table handy — it answers 90% of "which collection should I use?" questions.

ONE-LINERS & BEST PRACTICES

Declaring each collection, and the habits that keep code clean.

```
List<String> list = new ArrayList<>();  
List<String> linked = new LinkedList<>();  
  
Set<String> set = new HashSet<>();  
Set<String> tree = new TreeSet<>();  
  
Map<String, Integer> map = new HashMap<>();  
Map<String, Integer> tm = new TreeMap<>();
```

- Program to interfaces (List, Set, Map), not implementations.
- Choose the simplest collection that meets your requirements.
- Consider ordering, uniqueness, and performance before choosing.
- Use an appropriate initial capacity for better performance.
- Avoid unnecessary synchronization; use concurrent collections when needed.
- Profile your application — real data may differ from theoretical complexity.

KEY TAKEAWAY There is no one-size-fits-all solution — the right collection depends on your data and operations.

KEY TAKEAWAY

Data type, ordering, uniqueness, performance — in that order.

Understand your requirements first — data type, ordering, uniqueness, and performance — then choose the collection that best fits your use case.

TIP: There is no one-size-fits-all solution.

- The right choice depends on your data model.
- The operations you need to perform.
- Your performance requirements.

KEY TAKEAWAY The "right" collection depends on your data, required operations, and performance requirements.

TRY IT YOURSELF — EXERCISE 6: CHOOSE THE RIGHT COLLECTION

Reinforces: the collection comparison you just saw.

#	STEP	CODE	RESULT
1	Goal	Justify List vs Set vs Map for ordered tasks, unique tags, id→user	Choices match List/Set/Map roles
2	Ordered tasks	List (e.g. ArrayList)	Preserves insertion order, allows duplicates
3	Unique tags	Set (e.g. HashSet)	Automatically rejects duplicate values
4	id → user lookup	Map (e.g. HashMap)	Fast lookup by a unique key
5	Deliverable	A short List / Set / Map choice table with your reasoning	No code required
6	Key concept	Match the collection to the shape of the problem, not habit	Ties to the comparison tables you just saw
7	Reference	exercises/exercise-06-choose-collection.md	Full starter code and steps

TRY IT NOW Complete Exercise 6 before continuing — see [exercises/exercise-06-choose-collection.md](#).

ENTERPRISE COLLECTION USAGE PATTERNS

How and when to use Java Collections and Maps in real enterprise applications.

- Choose the right collection based on data characteristics and business needs.
 - Consider ordering, uniqueness, performance, and access patterns.
 - Design for scalability, thread safety, and maintainability.
 - Follow proven enterprise usage patterns; measure and profile real performance.
-
- Usage Principles: model data and access patterns before choosing; prefer interface types in APIs.
 - Use the simplest collection that satisfies requirements; use concurrent collections in multi-threaded apps.

KEY TAKEAWAY Enterprise-scale decisions are the same fundamentals, applied consistently across a whole codebase.

ENTERPRISE COLLECTION USAGE PATTERNS (Java)

Choose the right Collection for common enterprise use cases to ensure performance, scalability and maintainability.

USE CASE / PATTERN	RECOMMENDED COLLECTION	KEY CHARACTERISTICS	TYPICAL ENTERPRISE SCENARIOS
 Ordered Sequence Maintain insertion order, allow duplicates, index access	→ ArrayList<E> →	• Dynamic array • Fast random access O(1) • Fast iteration • Add/remove at end amortized O(1)	→  • Caching rows • Search results • Configuration lists • Pagination data
 Frequent Insert/Delete Frequent additions or removals in middle	→ LinkedList<E> →	• Doubly linked list • Fast insert/delete O(1) • No random access O(n) • Higher memory overhead	→  • Task queues • Undo/Redo operations • Message processing
 Unique Elements / Membership Check No duplicates, fast lookup	→ HashSet<E> →	• Hash table based • Fast add/remove/contains O(1) • No order guaranteed	→  • User roles/permissions • Feature flags • De-duplication • Access control lists
 Sorted Unique Elements No duplicates, sorted order by natural/comparator	→ TreeSet<E> →	• Red-Black tree based • Elements sorted • Add/remove/contains O(log n) • Navigable (headSet, tailSet, etc.)	→  • Leaderboards • Range queries • Sorted reports • Scheduling/time slots
 Key-Value Lookup Fast lookup by key, unique keys	→ HashMap<K,V> →	• Hash table based • Fast put/get/remove O(1) • No order guaranteed • Keys must be unique	→  • Caches • Session stores • Configuration maps • Reference data
 Sorted Key-Value Keys sorted, range queries on keys	→ TreeMap<K,V> →	• Red-Black tree based • Keys sorted • put/get/remove O(log n) • Navigable (subMap, headMap, etc.)	→  • Time series data • Financial data • Range lookups • Scheduling
Quick Guide  Need order & index? Use ArrayList  Frequent insert/delete? Use LinkedList  Need uniqueness & fast lookup? Use HashSet  Need sorted unique set? Use TreeSet  Key-Value lookup? Use HashMap  Sorted keys & range queries? Use TreeMap	Best Practice • Program to interfaces (List, Set, Map) • Choose based on use case, not habit • Consider performance & memory trade-offs		

ENTERPRISE PATTERNS

Seven recurring patterns and the collections that implement them.



1. Caching

- LinkedHashMap (accessOrder), ConcurrentHashMap
- Use: LRU caches, session stores



2. Lookup / Indexing

- HashMap, ConcurrentHashMap
- Use: ID lookup, SKU lookup, config



3. Unique Items

- HashSet, LinkedHashSet (order matters)
- Use: roles, tag dedup, permissions



4. Sorted Data

- TreeSet, TreeMap
- Use: leaderboards, time-series



5. Ordered Data

- ArrayList (random access), LinkedList (insert/delete)
- Use: order history, task queues



6. Key-Value Config

- HashMap, Properties (String→String)
- Use: settings, feature flags



7. Grouping / Multimap

- Map<Key, List<Value>>, Map<Key, Set<Value>>
- Use: orders by customer, events by date

KEY TAKEAWAY Caching and lookup are the two most common enterprise patterns — both usually start with a Map.

ANTI-PATTERNS TO AVOID & BEST PRACTICES

What experienced teams stop doing, and what they do instead.



Anti-Patterns to Avoid

- Using Vector or Hashtable in new code.
- Using ArrayList when only uniqueness is needed (use Set).
- Using LinkedList for random access (use ArrayList).
- Using TreeSet/TreeMap when sorting isn't required.
- Exposing concrete collection types in public APIs.



Best Practices

- Code to interfaces, not implementations.
- Use generics to ensure type safety.
- Set appropriate initial capacity to reduce resizing.
- Use immutable collections for read-only data.
- Use the Streams API for declarative data processing.

KEY TAKEAWAY Ignoring initial capacity is one of the quietest performance bugs — it causes silent resizing overhead.

SUMMARY

Understand your data, access patterns, and business requirements before selecting a collection.

Choosing the right Collection or Map helps build applications that are scalable, maintainable, and high-performance.

TIP: There is no single "best" collection. The best choice depends on:

- Your data model and required operations.
- Ordering requirements and concurrency needs.
- Performance characteristics.

KEY TAKEAWAY There is no single "best" collection — the best choice depends on your data model, operations, ordering, and concurrency needs.

TRY IT YOURSELF — EXERCISE 7: LIBRARY WARM-UP

Reinforces: using List and Map together, before the graded Lab 5 project.

#	STEP	CODE	RESULT
1	Goal	Tiny service: a List of titles plus a Map of memberId to borrowed title	Checkout updates both structures
2	Declare	List<String> titles = ...; Map<String, String> borrowed = ...;	Two collections working together
3	Checkout	if (titles.remove(title)) borrowed.put(memberId, title);	Moves a title from the list into the map
4	Verify	Print titles and borrowed after checkout	titles shrinks; borrowed gains an entry
5	Key concept	Real systems combine multiple collections, like Lab 5 does	Library Management System uses this exact pattern
6	Next	Lab 5: Library Management System	The full graded project — see the following slides
7	Reference	exercises/exercise-07-library-warmup.md	Full starter code and steps

TRY IT NOW Complete Exercise 7 before continuing — see [exercises/exercise-07-library-warmup.md](#).

LAB 5 OVERVIEW — LIBRARY MANAGEMENT SYSTEM

Build a console Library Management System using Lists, Sets, and Maps for real data.

LAB GOAL

Apply List, Set, and Map together in one working application

ESTIMATED TIME

45 Minutes

STRUCTURE

16 Guided Steps + Bonus Challenges

PREREQUISITES

Lab 0 (JDK 21), Core Java (OOP, Generics)

SKILLS YOU WILL PRACTICE

- Choosing List, Set, or Map for each domain concept
- CRUD, search, and borrow/return operations
- Comparable and Comparator sorting
- TreeSet/TreeMap reporting and insights

KEY TAKEAWAY Lab 5 turns Collections theory into a working system you compile and run yourself.

PRE-LAB EXERCISES OVERVIEW

Seven short warm-ups — practice each collection type before starting the graded Lab 5 project.

#	TOPIC	KEY COLLECTIONS	OUTCOME
1	Working with List	ArrayList	Add, update, remove, search, and iterate an ordered list
2	Working with Set	HashSet, TreeSet	Prove uniqueness by adding duplicates; compare hash vs sorted order
3	Working with Map	HashMap	CRUD on key-value pairs; iterate entrySet()
4	Sorted Collections: TreeMap	TreeMap	Build a TreeMap from a HashMap; retrieve sorted keys with firstKey() and lastKey()
5	Safe Iteration	Iterator	Remove elements mid-loop with Iterator.remove() safely
6	Choose the Right Collection	List / Set / Map	Justify a collection choice for ordered tasks, unique tags, and id-to-user lookups
7	Library Warm-up	List + Map	Checkout one book using two collections together
—	Lab 5: Library Management System	List, Set, Map (combined)	The full graded project — see the following slides

KEY TAKEAWAY Complete these seven exercises before Lab 5 — they build the muscle memory it assumes.

COLLECTIONS QUICK REFERENCE & DEV ENVIRONMENT

Rule of thumb: start with the simplest collection that meets your requirements.



List

- ArrayList — fast random access
- LinkedList — fast middle inserts/deletes



Set

- HashSet — no order, best performance
- TreeSet — sorted (natural/custom)



Map

- HashMap — no order, best performance
- TreeMap — sorted by keys

JDK

21 (Temurin / OpenJDK)

IDE

IntelliJ IDEA Community (primary), VS Code (optional)

BUILD TOOL

Not required — plain javac / java

OS

Windows / macOS / Linux

KEY TAKEAWAY Lab 5 runs on plain JDK 21 — no Maven, no Spring, no database required.

LAB 5 DELIVERABLES & SUCCESS CRITERIA

What you'll submit for the Library Management System, and how to push further.



Deliverables

- Source code for every class
- Menu + sample-session screenshots
- Field-to-collection mapping notes
- LMS write-up with run commands



Success Criteria

- Menu compiles and runs via `javac -d out / java -cp out`
- Duplicate book/member IDs rejected by HashSet before insert
- Reports and TreeSet/TreeMap category insights match the sample session



Challenge Yourself

- Add borrow history + Top 5 Borrowed Books (menu 15-16)
- Export a report to `library-report.txt` (menu 17)
- Add partial-title search and multi-field sort
- Time ArrayList vs LinkedList inserts (menu 14, bonus)

KEY TAKEAWAY The rubric scores collection choice and a working menu — not clever one-liners.

LAB 5 BUSINESS SCENARIO & CORE CLASSES

A campus Library Management System — the vehicle for practicing List, Set, and Map together.



What You Will Build

- Book, Member, BorrowRecord — domain models
- LibraryService — collections + operations
- ReportService — summary reporting
- BookComparator — price-based sorting



Core Collections Used

- ArrayList<Book>, ArrayList<Member> — catalog and roster
- HashSet<String> — bookIds and memberIds
- HashMap<String,String> — borrow records (bookId to memberId)
- TreeSet/TreeMap — categories and category counts



Time & Structure

- Estimated Time: 45 Minutes
- 16 Guided Steps + Bonus Challenges

KEY TAKEAWAY Every field in the Library domain maps to a deliberate List, Set, or Map choice.

LAB 5 IMPLEMENTATION STEPS (1 OF 2)

Project setup, domain models, and wiring the collections.

#	TITLE	DESCRIPTION	KEY COLLECTIONS
1	Project Setup	Create src/com/academy/library folders matching the package declaration	—
2-4	Domain Models	Book (Comparable by title), Member, and BorrowRecord with final IDs and clear toString()	—
5	Wire LibraryService Collections	Declare the List/Set/Map fields that back every catalog, ID guard, and lookup	ArrayList, HashSet, HashMap, TreeSet, TreeMap
6	Add Book & Register Member	Reject duplicate IDs via HashSet before inserting into the ArrayList catalog	ArrayList, HashSet

KEY TAKEAWAY Steps 1-6 build the domain models and wire every collection before any menu exists.

LAB 5 IMPLEMENTATION STEPS (2 OF 2)

Display, search, borrow/return, sorting, reports, and the menu.

#	TITLE	DESCRIPTION	KEY COLLECTIONS
7-8	Display & Search	Four iteration styles (for, for-each, Iterator, forEach) plus search by ID, title, author, category	Iterator, forEach
9-11	Borrow/Return, Sort & Reports	HashMap tracks borrowers; sort by title or price; reports show TreeSet/TreeMap insights	HashMap, TreeSet, TreeMap
12-16	Menu, Compile & Verify	Build the Main menu, compile with javac -d out, run the sample session, then time ArrayList vs LinkedList	ArrayList vs LinkedList

KEY TAKEAWAY Step 15's ArrayList vs LinkedList timing turns Big-O theory into numbers you measured yourself.

LAB 5 CHECKPOINTS & EVALUATION RUBRIC

Self-check before submitting Lab 5, and how the 100 points break down.

CHECKPOINT	DETAILS
Packages & Models	Every file declares package com.academy.library; Book, Member, (BorrowRecord) present
Collections Wired	List/Set/Map/TreeSet/TreeMap fields present; duplicate IDs rejected
Borrow / Return	HashMap tracks the current borrower; return clears the entry
Compile & Menu	javac -d out succeeds; java -cp out com.academy.library.Main shows the menu
Evidence & Reflection	Screenshots plus notes/lab5-answers.md answering the 7 reflection questions

CRITERIA	PTS
Collections Used	20
Models & CRUD	25
Borrow/Return	15
Sorting	10
Reports	10
Menu & Quality	20

KEY TAKEAWAY Correct List/Set/Map usage plus a working borrow/return flow account for well over half the score.

LAB 5 SUBMISSION GUIDELINES & TIPS

Package the Library Management System correctly, and answer the reflection questions.

SUBMISSION

Keep source under examples/Lab5-LibraryManagement/src/com/academy/library, screenshots and reflection answers under notes/. Do not submit verbatim copies of the solution/ folder.

- Answer all 7 reflection questions in notes/lab5-answers.md (List vs Set, HashSet before insert, Map vs boolean, HashMap vs TreeMap, Comparable vs Comparator, iteration style, CRM lookup).
- Test edge cases: duplicate IDs, borrowing an unregistered book, returning a book that was never borrowed.
- Use the sample session (Book 101, Member 1, borrow, reports) to confirm your output themes match.

KEY TAKEAWAY By the end, you should choose collections confidently and explain every design choice you made.

MODULE 5 SUMMARY

Java Collections provide powerful, ready-to-use data structures for clean, efficient, scalable applications.

The right collection, used the right way, makes your code simpler and your system faster.



Lists & Sets

- Lists — ordered, allow duplicates: ArrayList, LinkedList
- Sets — no duplicates: HashSet, LinkedHashSet, TreeSet



Maps & Iteration

- Maps — key-value pairs: HashMap, LinkedHashMap, TreeMap
- Iteration techniques and performance comparison

KEY TAKEAWAY Mastering the Collections Framework helps you handle data efficiently and write cleaner code.

COLLECTION QUICK GUIDE (1 OF 2)

Order, duplicates, and best-for, for the List and Set implementations.

COLLECTION	ORDER	DUPLICATES	BEST FOR
ArrayList	Ordered	Allowed	Fast access, frequent reads
LinkedList	Ordered	Allowed	Frequent insert/delete in middle
HashSet	No Order	Not Allowed	Fast lookups, uniqueness
LinkedHashSet	Insertion Order	Not Allowed	Predictable order + uniqueness
TreeSet	Sorted	Not Allowed	Sorted unique elements

KEY TAKEAWAY The three Map implementations continue on the next slide.

COLLECTION QUICK GUIDE (2 OF 2)

Order, duplicates, and best-for, for the Map implementations.

COLLECTION	ORDER	DUPLICATES	BEST FOR
HashMap	No Order	N/A	Fast key lookup
LinkedHashMap	Insertion Order	N/A	Predictable order of keys
TreeMap	Sorted by Key	N/A	Sorted keys, range queries

KEY TAKEAWAY This table is the single most useful reference from the entire module — bookmark it.

PERFORMANCE INSIGHTS

A quick recap of where each collection is fast, and where it isn't.



ArrayList / LinkedList

- ArrayList: fast random access (get); slower insert/delete in middle.
- LinkedList: fast insert/delete in middle; slower random access.



HashSet / HashMap

- Average $O(1)$ for add, remove, contains, get (HashMap).



TreeSet / TreeMap

- $O(\log n)$ operations; keeps elements/keys sorted.

KEY TAKEAWAY LinkedHashMap/LinkedHashMap are slightly slower than pure hash-based collections but preserve insertion order.

WHEN TO USE WHAT? (1 OF 2)

Five List and Set questions, and their answers.

NEED	USE
Frequent reads by index?	ArrayList
Frequent insertions/deletions in the middle?	LinkedList
Unique items with fast lookup?	HashSet
Uniqueness with predictable insertion order?	LinkedHashSet
Sorted unique items?	TreeSet

KEY TAKEAWAY Three Map questions continue on the next slide.

WHEN TO USE WHAT? (2 OF 2)

Three Map questions, and their answers.

NEED	USE
Key-value pairs with fast lookup?	HashMap
Key insertion order?	LinkedHashMap
Sorted keys or range queries?	TreeMap

KEY TAKEAWAY This decision table is worth memorizing — it's the fastest path to the right collection under time pressure.

BEST PRACTICES & COMMON PITFALLS

What to do, and what experienced teams have learned to avoid.



Best Practices

- Program to interfaces, not implementations.
- Use generics to ensure type safety.
- Choose the simplest collection that meets requirements.
- Set an initial capacity for large collections.
- Handle null values and edge cases properly.



Common Pitfalls to Avoid

- Using Vector or Hashtable instead of modern collections.
- Using ArrayList when you only need uniqueness (use Set).
- Using LinkedList for random access (use ArrayList).
- Ignoring initial capacity, leading to resizing overhead.
- Modifying collections during iteration incorrectly.

KEY TAKEAWAY Profile with real data and optimize based on measurements — theory alone isn't enough.

APPLY IN THE REAL WORLD

Where collections show up in day-to-day enterprise development.



Course Registration

Manage enrollments and prerequisites.



Inventory Management

Track stock, SKUs, and reorder levels.



E-Commerce Platforms

Carts, orders, and product catalogs.



Reporting Systems

Aggregate, group, and summarize data.



Configuration Mgmt

Settings, feature flags, parameters.



Caching

Speed up repeated lookups.

- Keep learning: Concurrent Collections, Stream API, Immutable Collections.

KEY TAKEAWAY Good collection choices today lead to scalable systems tomorrow.

KNOWLEDGE CHECK — MULTIPLE CHOICE (1–6)

Choose the best answer. Correct answers are marked ✓.

1. Which collection maintains insertion order and allows duplicates?

A) HashSet **B) LinkedList ✓** C) TreeSet D) LinkedHashSet

2. Which collection does NOT allow duplicate elements?

A) ArrayList **B) HashSet ✓** C) LinkedHashSet D) TreeMap

3. Which Map implementation keeps entries sorted by key?

A) HashMap B) LinkedHashMap **C) TreeMap ✓** D) Hashtable

4. What is the average time complexity of get() in HashMap?

A) O(1) ✓ B) O(log n) C) O(n) D) O(n log n)

5. Which of the following is true about ArrayList?

A) Fast inserts/deletes in the middle **B) Fast random access by index ✓** C) Maintains elements in sorted order D) Thread-safe by default

6. Best suited for unique items with frequent add, remove, and contains?

A) ArrayList **B) HashSet ✓** C) LinkedList D) TreeMap

KEY TAKEAWAY Six more multiple-choice questions continue on the next slide.

KNOWLEDGE CHECK — MULTIPLE CHOICE (7–12)

Choose the best answer. Correct answers are marked ✓.

7. Which of these would you use when you only want to read data, not modify it?

A) Collection B) Iterable C) List **D) Collections.unmodifiableList() ✓**

8. Which iterator type allows you to remove elements safely during iteration?

A) Iterator B) ListIterator C) Enhanced for-loop **D) Both A and B ✓**

9. Modifying an ArrayList while iterating (without iterator.remove()) causes:

A) The element is skipped B) The list is re-sorted **C) A ConcurrentModificationException ✓** D) The iterator resets automatically

10. Which maintains insertion order with average O(1) get/put/remove?

A) HashMap **B) LinkedHashMap ✓** C) TreeMap D) Hashtable

11. Which would you choose to maintain a sorted set of unique integers?

A) HashSet **B) TreeSet ✓** C) LinkedHashSet D) PriorityQueue

12. Which statement about HashMap is TRUE?

A) It is synchronized by default B) It does not allow null keys or values **C) It does not guarantee any order ✓** D) It supports duplicate keys

KEY TAKEAWAY 12 questions, 1 point each — that's the multiple-choice portion of this knowledge check.

MINI CHALLENGES

Three quick code-reading exercises — predict the output before checking the answer.

1 Predict the Output

- `list.add("A"); list.add("B"); list.add("C");`
- `list.remove(1);`
- `System.out.println(list);`
- Answer: [A, C]

2 What's the Size?

- `set.add(10); set.add(20);`
- `set.add(10); set.add(30);`
- `System.out.println(set.size());`
- Answer: 3 (HashSet ignores duplicates)

3 Identify the Collection

- "I maintain insertion order, allow duplicates, provide fast random access, and am backed by a dynamic array."
- Answer: ArrayList

KEY TAKEAWAY If you can answer all three without running the code, you've internalized this module.

Nicely done

You can choose the right List, Set, or Map for any job — and explain why it's the right one.

Streams and functional programming are next in your toolkit.