

Deduction and Induction in One Diagram: A Machine-Checked Semantics with Applications to Quantum Information and Plant Disease Diagnosis

Hsuan Fu Wang

Department of Plant Pathology, University of Minnesota, St. Paul, MN, USA
wan00965@umn.edu

Abstract

We give a diagrammatic representation of deductive and inductive reasoning: deduction is a certain passage from thought to existence, $\varphi \rightarrow \exists$, and induction a tentative, iterated passage from the study of existence to the theory of thought, $s\exists \circ t\varphi$. We make the diagram precise in a possible-worlds semantics, in which deduction is semantic entailment and a theory is supported by a study when some world is consistent with both. We prove that deduction is sound and transitive, that iterated observation can only narrow the supported theories, that a single counterexample falsifies a universal theory, and that no finite study entails a universal theory over an unobserved individual, which is the logical part of Hume’s problem of induction. A Bayesian refinement shows that every genuine test a theory predicts confirms it; a ranked semantics treats defeasible inference; and ordered levels show iteration moving upward. We apply the framework to plant disease diagnosis and forecasting: diagnosis is elimination and refinement, Koch’s postulates are hypothetico-deductive confirmation, forecasting rules are defeasible, and a new theorem characterizes when an assay can resolve a diagnosis. A quantum information model realizes the same structure, with the classical setting as the case of commuting observables and the single-basis limit of state tomography as an instance of assay resolution. Every theorem is verified in the Lean 4 proof assistant with Mathlib.

Keywords: deductive logic; inductive logic; diagrammatic reasoning; possible-worlds semantics; Bayesian confirmation; problem of induction; quantum logic; quantum state tomography; plant disease diagnosis; disease forecasting; Lean theorem prover.

MSC 2020: 03A05, 03B48, 68T27, 68V20, 81P10.

1 Introduction

Deductive logic derives particular conclusions from general premises with certainty: all men are mortal; Socrates is a man; therefore Socrates is mortal [2]. Inductive logic builds general theories from particular observations with only tentative support: many swans have been seen to be white, so perhaps all swans are white. Textual arguments and static diagrams, such as Venn diagrams and Peirce’s existential graphs [31], show the structure of a single inference well but do not show reasoning as a process in which deduction and induction alternate.

This paper proposes a diagram (Figure 1) that places both modes of reasoning in one picture, with a straight arrow for deduction, a circular arrow for induction, and a foundation of iterations, hypotheses, levels, binary states and polarities. We then give the diagram a precise semantics and prove what it asserts.

Related work. Diagrams as rigorous logical representations go back to Peirce and have been given formal semantics, for example for Venn diagrams by Shin [34]; our diagram differs in depicting two modes of inference and their interaction rather than the content of a single argument. The semantics of Section 3 is the standard possible-worlds reading of propositions [25]. Our qualitative notion of support is the consistency requirement underlying confirmation theory [16], and its quantitative refinement in Section 5.3 is Bayesian incremental confirmation [8, 13, 14]. Falsification follows Popper [32], and the treatment of defeasible inference in Section 5.4 uses the preferential semantics of Kraus, Lehmann and Magidor [24, 29]. The quantum model draws on quantum logic [7, 9] and quantum state tomography [18, 30]. The plant-pathology application draws on quantitative work on diagnosis, forecasting and decision-making in plant disease epidemiology [19, 28, 37]. Machine-checked formalization of philosophical arguments has been pursued with automated and interactive provers [5, 15]; we use Lean 4 and Mathlib [10, 35].

Contributions.

1. A diagrammatic framework for deduction $\varphi \rightarrow \exists$ and induction $s\exists \circ t\varphi$ (Section 2).
2. A possible-worlds semantics for every symbol of the diagram (Section 3).
3. Theorems for each mode: soundness, transitivity and modus tollens for deduction (Section 4); monotone refinement, falsification and the failure of induction as deduction (Theorem 5.4) for induction (Section 5); and a truth-value characterization of the foundation (Section 6).
4. An application to quantum information theory (Section 7): a dictionary from the framework to quantum states, measurements and Hamiltonians; quantum counterparts of the deductive and inductive theorems (Propositions 7.1 and 7.5); the classical framework as the commuting case (Proposition 7.3); and physical implementations, a thermodynamic reading and experimental proposals.
5. An application to plant disease diagnosis and forecasting (Section 8): an assay-resolution theorem (Theorem 8.2) that gives the hypothesis index h a concrete reading, Koch’s postulates as hypothetico-deductive confirmation (Proposition 8.5), and diagnostic tests and forecasts as confirmation and defeasible inference (Propositions 8.6 and 8.7).
6. Three extensions: Bayesian confirmation as the quantitative inductive polarity (Section 5.3), defeasible inference (Section 5.4), and ordered levels (Section 6.1).
7. A machine-checked formalization of every theorem of Sections 4–8 in Lean 4 [10] and Mathlib [35] (Appendix A).

Outline. Section 2 presents the diagram and Section 3 its semantics. Sections 4 to 6 prove the results for deduction, induction and the foundation, including the extensions. Section 7 develops the quantum model and Section 8 the application to plant pathology, Section 9 discusses the results and their limitations, and Appendix A maps every result to its Lean declaration.

2 The diagrammatic framework

The diagram has two primary rows and a foundation (Figure 1).

- **Deduction**, $\varphi \rightarrow \exists$. A thought φ (premises) leads to an existence $\exists$ (a conclusion) along a straight arrow, read *hence*. The passage is certain. Polarity $\uparrow$ marks an affirmed conclusion and $\downarrow$ a negated one.
- **Induction**, $s\exists \circ t\varphi$. The study of existence $s\exists$ (observations) leads to a theory of thought $t\varphi$ (a hypothesis) along a circular arrow, read *conclude*. The passage is tentative and is repeated as new observations arrive.
- **Foundation**. Iterations i , hypotheses h and levels l , together with binary states $0, 1$ and polarities $\uparrow, \downarrow$, generate the thoughts used above.

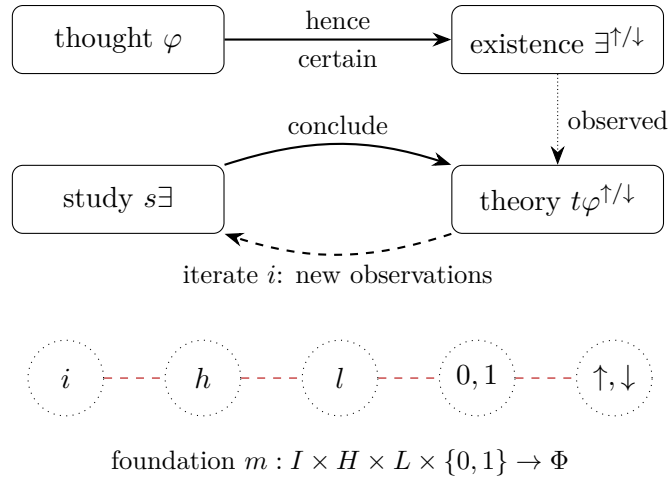


Figure 1: Deduction (top row), induction (middle row) and the foundation (bottom).

Table 1 fixes the reading of each symbol. The symbol $\exists$ is kept for the diagram only; the set of possible existences is written $\mathcal{W}$, so that it is not confused with the existential quantifier.

Symbol	Informal meaning	Formal reading (Section 3)
φ	thought	proposition $\varphi : \mathcal{W} \rightarrow \text{Prop}$
$\exists$	existence	proposition about worlds; $\mathcal{W}$ is the set of worlds
s	study	list of observations
t	theory	proposition about worlds
$\rightarrow$	hence	semantic entailment $\models$
$\circ$	conclude	support (Definition 3.4)
i	iteration	adding an observation to a study
h, l	hypothesis, level	indices of the foundation map m
$0, 1$	binary state	truth values
$\uparrow, \downarrow$	polarity	affirmation, negation

Table 1: Symbols of the framework.

3 Formal setting

Fix a set $\mathcal{W}$ of *possible worlds*. Every symbol of the diagram is read as follows.

Definition 3.1 (Thought). A *thought* is a proposition about worlds, that is, a map $\varphi : \mathcal{W} \rightarrow \text{Prop}$. We write Φ for the set of thoughts and $\varphi(w)$ for “ φ holds in w ”. An existence is likewise a thought; the distinction between φ and $\exists$ in the diagram is one of role (premise versus conclusion), not of type.

Definition 3.2 (Entailment). A thought φ *entails* ψ , written $\varphi \models \psi$, if $\{w \in \mathcal{W} : \varphi(w)\} \subseteq \{w \in \mathcal{W} : \psi(w)\}$.

Entailment is a relation, not a function: a thought entails many conclusions, so no map $\Phi \rightarrow \exists$ could assign to each thought its single conclusion.

Definition 3.3 (Polarity). The polarities are $\uparrow$ and $\downarrow$. For a proposition p , set $p^\uparrow = p$ and $p^\downarrow = \neg p$.

Definition 3.4 (Study and support). A *study* is a finite list $s = (o_1, \dots, o_n)$ of thoughts, the observations. A theory t is *supported* by s , written $s \circ t$, if some world satisfies t and every o_k :

$$s \circ t \quad :\Longleftrightarrow \quad \exists w \in \mathcal{W}, t(w) \wedge \bigwedge_{k=1}^n o_k(w).$$

Remark 3.5. A probabilistic reading of the circular arrow would require $P(t \mid s) > 0$. That quantity is undefined when the study has probability zero. If $\mathcal{W}$ is finite and P gives every world positive probability, then $P(t \wedge s) > 0$ holds exactly when $s \circ t$, so [Definition 3.4](#) is the qualitative content of the probabilistic condition and needs no choice of prior. (The same holds for countable $\mathcal{W}$; the Lean proof treats the finite case.) A quantitative refinement is given in [Section 5.3](#).
Prior.prob_and_pos_iff_supported

4 Deduction

Proposition 4.1 (Material implication). For propositions p, q , $(p \rightarrow q) \iff (\neg p \vee q)$.
imp_iff_not_or

Proof. If $p \rightarrow q$, then either p holds and so q holds, or $\neg p$ holds; this case split uses the law of excluded middle. Conversely, if $\neg p \vee q$ and p , the first disjunct is impossible, so q . $\square$

Theorem 4.2 (Deduction is certain). If $\varphi \models \psi$ and $\varphi(w)$, then $\psi(w)$. deduction_sound

Proof. By [Definition 3.2](#), w lies in the set of worlds satisfying φ , which is contained in the set satisfying ψ . $\square$

Proposition 4.3 (Chains of deduction). If $\varphi \models \psi$ and $\psi \models \chi$, then $\varphi \models \chi$. Entails.trans

Proof. Set inclusion is transitive. $\square$

Proposition 4.4 (Negative polarity is modus tollens). If $\varphi \models \psi$ and $\psi(w)^\downarrow$, then $\varphi(w)^\downarrow$.
modus_tollens

Proof. If $\varphi(w)$ held, [Theorem 4.2](#) would give $\psi(w)$, contradicting $\neg\psi(w)$. $\square$

Example 4.5 (Deductive swan). Let B be a set of birds with predicates Swan and White. If $\forall b, \text{Swan}(b) \rightarrow \text{White}(b)$ and $\text{Swan}(a)$, then $\text{White}(a)$. In the diagram this is $\varphi \rightarrow \exists^\uparrow$. swan_syllogism

5 Induction

5.1 Iterative refinement

Iteration i adds an observation to a study. The following results say that iteration can only narrow the set of supported theories, which is the precise sense in which induction refines.

Proposition 5.1. *If $(o, o_1, \dots, o_n) \circ t$, then $(o_1, \dots, o_n) \circ t$.* *Supported.of_cons*

Theorem 5.2 (Refinement is monotone). *If every observation of s occurs in s' and $s' \circ t$, then $s \circ t$.* *Supported.mono*

Proof. A world witnessing $s' \circ t$ satisfies t and every observation of s' , hence every observation of s . [Proposition 5.1](#) is the case $s' = (o) \dashv\vdash s$. □

5.2 Falsification and the problem of induction

For the swan examples take worlds to be colourings $c : B \rightarrow \{\text{true}, \text{false}\}$ recording which birds are white. For a finite list *seen* of birds define

$$\text{SeenWhite}_{\text{seen}}(c) :\iff \forall x \in \text{seen}, c(x) = \text{true}, \quad \text{AllWhite}(c) :\iff \forall x \in B, c(x) = \text{true}.$$

Proposition 5.3 (Falsification). *If $\text{Swan}(b)$ and $\neg \text{White}(b)$, then $\neg \forall x, \text{Swan}(x) \rightarrow \text{White}(x)$.*
falsification

Proof. Instantiate the universal statement at b . □

Falsification is deductive: a single observation settles the matter, in line with Popper [32]. Confirmation is not, however many observations are made.

Theorem 5.4 (Induction is not deduction). *Let B have decidable equality, let *seen* be a finite list of birds, and let $b \in B$ with $b \notin \text{seen}$. Then $\text{SeenWhite}_{\text{seen}} \not\models \text{AllWhite}$.* *induction_not_deduction*

Proof. Define $c(x) = \text{false}$ if $x = b$ and $c(x) = \text{true}$ otherwise. Every $x \in \text{seen}$ differs from b , so $c(x) = \text{true}$ and $\text{SeenWhite}_{\text{seen}}(c)$ holds. But $c(b) = \text{false}$, so $\text{AllWhite}(c)$ fails. Hence the worlds satisfying $\text{SeenWhite}_{\text{seen}}$ are not contained in those satisfying AllWhite . □

Proposition 5.5 (Inductive swan). *For every finite list *seen*, $(\text{SeenWhite}_{\text{seen}}) \circ \text{AllWhite}$.*
allWhite_supported

Proof. The colouring that makes every bird white satisfies both. □

Together, [Theorem 5.4](#) and [Proposition 5.5](#) state the asymmetry the diagram depicts: the theory “all swans are white” remains supported by every finite study, so it may be held along the circular arrow, but no finite study entails it, so it never travels the straight arrow. This is a formal version of the logical part of Hume’s problem of induction [20]: the step from observed to unobserved cases is not deductively valid. Whether and how such steps can be justified, the core of Hume’s problem, is not addressed by these results.

5.3 Quantitative support: Bayesian confirmation

Support is qualitative: it asks only whether a theory survives the study. It is also weak: every theory consistent with the study is supported, including one conjoined with an irrelevant claim. The inductive polarity $t\varphi^\uparrow$ suggests more, an “ascending probability”: the study should make the theory more probable. This is the notion of incremental confirmation in Bayesian confirmation theory [8, 13, 14]. We make it precise for a finite set of worlds.

Definition 5.6 (Prior and confirmation). Let $\mathcal{W}$ be finite. A *prior* is a weight $p : \mathcal{W} \rightarrow (0, \infty)$; it defines $P(\varphi) = \sum_{\varphi(w)} p(w) / \sum_w p(w)$ and $P(t \mid s) = P(t \wedge s) / P(s)$, where a study s is read as the conjunction of its observations. The study *confirms* t , written $t\varphi^\uparrow$, if $P(t \mid s) > P(t)$, and *disconfirms* it, $t\varphi^\downarrow$, if $P(t \mid s) < P(t)$. Confirms, Disconfirms

Proposition 5.7 (Confirmation implies support). *If s confirms t , then $s \circlearrowright t$.* Confirms.supported

Proof. $P(t \mid s) > P(t) \geq 0$, so $P(t \wedge s) > 0$, and Remark 3.5 applies. □

Theorem 5.8 (Hypothetico-deductive confirmation). *Suppose t is satisfiable, $t \models s$, and some world falsifies s . Then s confirms t .* confirms_of_entails

Proof. Since $t \models s$, $P(t \wedge s) = P(t) > 0$, so $P(t \mid s) = P(t) / P(s)$. A world falsifying s has positive weight, so $P(s) < 1$ and $P(t) / P(s) > P(t)$. □

Theorem 5.8 joins the two arrows: a theory gains probability from a study exactly of the kind it deductively predicts, provided the study was a genuine test (it could have failed).

Theorem 5.8 inherits the classical *tacking problem* of hypothetico-deductive confirmation [13, 14]: if $t \models s$, then $t \wedge x \models s$ for any claim x , so s also confirms $t \wedge x$ whenever $t \wedge x$ is satisfiable. The Bayesian reading limits the damage. Confirmation is not closed under consequence: s may confirm $t \wedge x$ without confirming x , and it does not raise the probability of x at all when x is probabilistically independent of s . Measures of how much a study confirms a theory, rather than whether it does, are the usual tool for comparing t with $t \wedge x$ [14].

Proposition 5.9 (Iteration raises confirmation). *If t is satisfiable, $t \models s'$ and $s' \models s$, then $P(t \mid s) \leq P(t \mid s')$.* condProb_mono

Proof. Both posteriors equal $P(t)$ divided by the probability of the study, and $P(s') \leq P(s)$. □

Proposition 5.10 (Falsification, quantitatively). *If $s \models \neg t$ and t is satisfiable, then $P(t \mid s) = 0 < P(t)$, so s disconfirms t .* Disconfirms.of_refutes

Corollary 5.11 (Bayesian swan). *Let B be finite and fix any prior on colourings. For every non-empty list $seen$, $(\text{SeenWhite}_{seen})$ confirms AllWhite; and if every bird of $seen$ occurs in $seen'$, then $P(\text{AllWhite} \mid \text{SeenWhite}_{seen}) \leq P(\text{AllWhite} \mid \text{SeenWhite}_{seen'})$.* allWhite_confirmed, allWhite_condProb_mono

Proof. AllWhite $\models$ SeenWhite_{seen}, the all-white colouring satisfies AllWhite, and the all-black colouring falsifies SeenWhite_{seen}; apply Theorem 5.8 and Proposition 5.9. □

With Theorem 5.4, Corollary 5.11 gives the full inductive picture: white sightings raise the probability of “all swans are white” at every step, yet never entail it, while one black swan sends its probability to 0 (Proposition 5.10). This is the ascending probability of the circular arrow.

5.4 Defeasible inference

Between certain deduction and probabilistic confirmation lies defeasible inference: conclusions drawn from several premises that hold normally but may be withdrawn. We use the ranked semantics of Kraus, Lehmann and Magidor [24].

Definition 5.12 (Defeasible entailment). A *ranking* is a map $r : \mathcal{W} \rightarrow \mathbb{N}$, lower ranks being more normal. Premises $\Gamma = (\gamma_1, \dots, \gamma_n)$ *defeasibly entail* ψ , written $\Gamma \mid \sim \psi$, if ψ holds in every r -minimal world satisfying all γ_k . Normally, NormallyFrom

Theorem 5.13 (Preferential reasoning). *Defeasible entailment contains entailment ($\varphi \models \psi$ implies $\varphi \mid \sim \psi$) and satisfies right weakening, AND, OR, CUT and cautious monotonicity: if $\varphi \mid \sim \psi$ and $\varphi \mid \sim \chi$ then $\varphi \wedge \psi \mid \sim \chi$.* Normally.of_entails, Normally.cautious_mono

Proof. All but cautious monotonicity are immediate from the definition. For cautious monotonicity let w be minimal among $\varphi \wedge \psi$ -worlds and v any φ -world. Since ranks are natural numbers there is a minimal φ -world m with $r(m) \leq r(v)$; it satisfies ψ , so $r(w) \leq r(m) \leq r(v)$. Thus w is minimal among φ -worlds and satisfies χ . □

Proposition 5.14 (Defeasible inference is nonmonotone). *With worlds $(\text{penguin}, \text{flies}) \in \{0, 1\}^2$ ranked so that flying non-penguins are most normal and flightless penguins next, a bird normally flies, $() \mid \sim \text{flies}$, but $(\text{penguin}) \not\mid \sim \text{flies}$.* normally_nonmonotone

By contrast, entailment is monotone in its premises (`entails_premises_mono`). Defeasible inference thus sits between the arrows: like deduction it is closed under the rules of [Theorem 5.13](#), and like induction it can be overturned by new information.

6 The foundation

Definition 6.1 (Foundation map). Let I, H, L be sets of iterations, hypotheses and levels, and let $\beta : I \times H \times L \rightarrow \Phi$ assign a base thought to each index. The *foundation map* $m : I \times H \times L \times \{0, 1\} \rightarrow \Phi$ is

$$m(i, h, l, 1) = \beta(i, h, l), \quad m(i, h, l, 0) = \neg\beta(i, h, l).$$

Thus state 1 carries polarity $\uparrow$ and state 0 carries polarity $\downarrow$. Since existences are thoughts ([Section 3](#)), m takes values in Φ .

Proposition 6.2 (The binary state is the truth value). *For every world w and $b \in \{0, 1\}$, $m(i, h, l, b)(w)$ holds if and only if $\beta(i, h, l)(w)$ agrees with b , that is, $\beta(i, h, l)(w) \iff b = 1$.* *m_spec*

Proof. For $b = 1$ both sides say $\beta(i, h, l)(w)$. For $b = 0$ both sides say $\neg\beta(i, h, l)(w)$. □

6.1 Ordered levels

The indices i, h, l are uninterpreted. We now order the levels, reading lower levels as observational and higher ones as theoretical.

Definition 6.3 (Hierarchy). Let L be preordered. A *hierarchy* assigns a thought β_l to each level so that $l \leq l'$ implies $\beta_{l'} \models \beta_l$: a theory entails its observable consequences. Given a study s , level l is *established* if $s \models \beta_l$ and *tenable* if $s \odot \beta_l$. Hierarchy

Theorem 6.4 (Iteration moves upward). *Established and tenable levels form down-sets. If every observation of s occurs in s' , every level established by s is established by s' , and every level tenable given s' is tenable given s . If s is satisfiable, every established level is tenable. Hierarchy.Established.mono*

Proof. Down-sets: entailment is transitive, and a world satisfying $\beta_{l'}$ satisfies β_l . A world satisfying s' satisfies s , so $s \models \beta_l$ gives $s' \models \beta_l$; the tenable case is Theorem 5.2. A world satisfying s then satisfies every established β_l . $\square$

Iteration therefore raises the floor of established levels and lowers the ceiling of tenable ones, with the floor below the ceiling as long as the study is consistent. Along an iteration $i \mapsto s_i$ that only adds observations, a level established at step i stays established at every later step (Hierarchy.Established.iterate).

7 Application: a quantum information model

This section gives a physical realization of the framework in quantum information theory. Thoughts become subspaces of a Hilbert space, deduction becomes certain measurement and unitary evolution, induction becomes quantum state tomography, and the binary and polarized foundation becomes qubits and spins. The classical setting of Section 3 reappears as the special case in which all observables commute (Proposition 7.3). All propositions of this section are formalized in Lean with Mathlib (Appendix A); the physical implementations, Landauer’s principle and the experimental proposals are not.

Throughout, $\mathcal{H}$ is a finite-dimensional complex Hilbert space, a *state* is a unit vector $|v\rangle \in \mathcal{H}$ or a density operator ρ , and a *projector* is an operator P with $P = P^\dagger = P^2$. For projectors, $P \leq Q$ means $\text{ran } P \subseteq \text{ran } Q$, equivalently $QP = P$. Physical time is written τ , to keep t for theories.

7.1 Dictionary

7.2 Deduction as certain measurement

A thought φ is realized by a projector P_φ : the property “the system lies in $\text{ran } P_\varphi$ ”. Entailment is subspace inclusion, and negative polarity is the orthogonal complement, $P^\perp = I - P$.

Proposition 7.1 (Quantum deductive certainty). *Let $P_\varphi \leq P_\psi$ and let $|v\rangle$ be a state with $P_\varphi|v\rangle = |v\rangle$. Then measuring $\{P_\psi, I - P_\psi\}$ on $|v\rangle$ yields P_ψ with probability $\langle v|P_\psi|v\rangle = 1$. Moreover $I - P_\psi \leq I - P_\varphi$. quantum_deduction_sound*

Proof. Since $P_\psi P_\varphi = P_\varphi$, we get $P_\psi|v\rangle = P_\psi P_\varphi|v\rangle = P_\varphi|v\rangle = |v\rangle$, so $\langle v|P_\psi|v\rangle = \langle v|v\rangle = 1$. For the second claim, $(I - P_\varphi)(I - P_\psi) = I - P_\psi - P_\varphi + P_\varphi P_\psi = I - P_\psi$, using $P_\varphi P_\psi = (P_\psi P_\varphi)^\dagger = P_\varphi$. $\square$

Proposition 7.1 is the quantum form of Theorem 4.2 and Proposition 4.4. Unitary evolution is deductive in the same sense: $|v\rangle \mapsto U|v\rangle$ is deterministic.

Symbol	Quantum entity	Physical meaning
φ (thought)	projector P_φ , or a state $ v\rangle$	a property; a superposition of possibilities
$\exists$ (existence)	eigenstate $ n\rangle$	a definite measurement outcome
$\models$ (hence)	$P_\varphi \leq P_\psi$	subspace inclusion
s (study)	outcomes of measurements $\{P_n\}$	observed statistics
t (theory)	reconstructed state $\hat{\rho}$, or model $U(\theta)$	hypothesis about the system
i (iteration)	$U(\tau) = e^{-i\hat{H}\tau/\hbar}$, circuit layers, adaptive rounds	refinement in time
h (hypothesis)	measurement basis $\{ n\rangle\}$	what is asked of the system
l (level)	energy levels E_n of $\hat{H}$	hierarchical structure
0, 1 (binary)	qubit basis $ 0\rangle, 1\rangle$	computational basis
$\uparrow, \downarrow$ (polarity)	spin states $ \uparrow\rangle, \downarrow\rangle$; $P^\downarrow = I - P$	affirmation, negation

Table 2: Quantum realization of the symbols of Table 1.

Proposition 7.2 (Unitary deduction). *Let $U^\dagger U = I$. If $UP_\varphi U^\dagger \leq P_\psi$ and $P_\varphi|v\rangle = |v\rangle$, then $P_\psi U|v\rangle = U|v\rangle$. Moreover $\text{Tr}(U\rho U^\dagger U P U^\dagger) = \text{Tr}(\rho P)$ for all ρ, P .* *unitary_deduction, born_unitary_conj*

Proof. $U|v\rangle = UP_\varphi|v\rangle = (UP_\varphi U^\dagger)U|v\rangle$, and $P_\psi(UP_\varphi U^\dagger) = UP_\varphi U^\dagger$. The second claim is cyclicity of the trace. $\square$

A general measurement is not certain. For a projective measurement $\{P_n\}$ with $\sum_n P_n = I$ and $P_n P_m = \delta_{nm} P_n$, the Born rule gives

$$|v\rangle \mapsto \frac{P_n|v\rangle}{\|P_n|v\rangle\|} \quad \text{with probability} \quad p(n) = \langle v|P_n|v\rangle.$$

What is deduced from the state is the distribution p , not the individual outcome. For a spin, $|v\rangle = \alpha|\uparrow\rangle + \beta|\downarrow\rangle$ yields $|\uparrow\rangle$ with probability $|\alpha|^2$ and $|\downarrow\rangle$ with probability $|\beta|^2$; certainty is the case $|\alpha| = 1$ or $|\beta| = 1$.

Proposition 7.3 (The classical framework is the commuting case). *Let $\{|n\rangle\}_{n \in \mathcal{W}}$ be an orthonormal basis indexed by the finite set of worlds $\mathcal{W}$, and set $P_\varphi = \sum_{n: \varphi(n)} |n\rangle\langle n|$. Then*

1. $P_\varphi \leq P_\psi$ if and only if $\varphi \models \psi$, and $P_{\neg\varphi} = I - P_\varphi$; *classicalProj_le_iff, classicalProj_not*
2. if $\rho = \sum_n p_n |n\rangle\langle n|$ with every $p_n > 0$, then for a study $s = (o_1, \dots, o_k)$ and theory t , $\text{Tr}(\rho P_t P_{o_1} \cdots P_{o_k}) > 0$ if and only if $s \circlearrowleft t$. *classical_trace_pos_iff*

Proof. (1) $\text{ran } P_\varphi$ is spanned by the $|n\rangle$ with $\varphi(n)$, and such a basis vector lies in $\text{ran } P_\psi$ exactly when $\psi(n)$. The second claim holds because every basis vector satisfies exactly one of φ and $\neg\varphi$. (2) The projectors are diagonal, so their product is the projector onto the $|n\rangle$ with $t(n) \wedge o_1(n) \wedge \cdots \wedge o_k(n)$, and the trace is $\sum p_n$ over those n . A sum of positive numbers is positive exactly when it is non-empty, which is Definition 3.4. $\square$

Part (2) realizes Remark 3.5 physically. Outside the commuting case the projectors of $\mathcal{H}$ do not form a Boolean algebra [7, 36]. For a spin, with P_{x+} the projector onto $(|\uparrow\rangle + |\downarrow\rangle)/\sqrt{2}$,

$$P_{x+} \wedge (P_{z+} \vee P_{z-}) = P_{x+} \wedge I = P_{x+}, \quad (P_{x+} \wedge P_{z+}) \vee (P_{x+} \wedge P_{z-}) = 0,$$

so the distributive law fails.

Proposition 7.4 (Quantum logic is not distributive). *In the lattice of subspaces of $\mathbb{C}^2$, with $Z_{\pm}$ spanned by $|\uparrow\rangle, |\downarrow\rangle$ and X_{+} by $|\uparrow\rangle + |\downarrow\rangle$: $X_{+} \wedge (Z_{+} \vee Z_{-}) = X_{+} \neq 0$ while $(X_{+} \wedge Z_{+}) \vee (X_{+} \wedge Z_{-}) = 0$.*
quantum_not_distributive

Proof. $Z_{+} \vee Z_{-} = \mathbb{C}^2$. A vector $c(1, 1) = d(a, b)$ with $a \neq b$ forces $c = 0$, so both meets are 0. $\square$

This marks where the quantum model goes beyond [Section 4](#): the identity of [Proposition 4.1](#) relies on a Boolean structure that incompatible observables lack.

7.3 Induction as state tomography

In the quantum model a study is a record of outcomes $n_1, \dots, n_N$ obtained by measuring identical copies of an unknown state, and a theory is a state ρ that explains them. The likelihood of ρ is $L_N(\rho) = \prod_{k=1}^N \text{Tr}(\rho P_{n_k})$, and ρ is *supported* when $L_N(\rho) > 0$. Maximum-likelihood tomography [\[18\]](#) selects

$$\hat{\rho}_{\text{ML}} = \arg \max_{\rho} \prod_{k=1}^N \text{Tr}(\rho P_{n_k}),$$

and adaptive tomography chooses the next basis from the outcomes so far,

$$h_{k+1} = f(n_1, \dots, n_k; h_1, \dots, h_k).$$

This is the circular arrow $s \exists \circ t \varphi$ with iteration i indexing the rounds.

Proposition 7.5 (Quantum refinement, falsification and underdetermination).

1. *Each further outcome can only shrink the set of supported states: $L_{N+1}(\rho) > 0$ implies $L_N(\rho) > 0$.*
QSupported.of_concat
2. *Suppose N measurements of $\{|\uparrow\rangle\langle\uparrow|, |\downarrow\rangle\langle\downarrow|\}$ all give $\uparrow$. Then $|\uparrow\rangle$ is the maximum-likelihood state, yet every state $|\theta, \phi\rangle = \cos \theta |\uparrow\rangle + e^{i\phi} \sin \theta |\downarrow\rangle$ with $0 \leq \theta < \pi/2$ is supported, with likelihood $\cos^{2N} \theta > 0$.*
spinUp_maxLikelihood, spinState_supported
3. *A single outcome $\downarrow$ refutes the theory $|\uparrow\rangle$: its likelihood becomes 0.*
spinUp_refuted
4. *No number of measurements in this basis distinguishes $|\theta, \phi\rangle$ from $|\theta, \phi'\rangle$: their outcome statistics are equal for all ϕ, ϕ' .*
likelihood_spinState_phase

Proof. (1) $L_{N+1}(\rho) = L_N(\rho) \text{Tr}(\rho P_{n_{N+1}})$, and every factor $\text{Tr}(\rho P)$ lies in $[0, 1]$, so $0 \leq L_{N+1}(\rho) \leq L_N(\rho)$. (2) $\langle \theta, \phi | \uparrow \rangle \langle \uparrow | \theta, \phi \rangle = \cos^2 \theta$, so the likelihood is $\cos^{2N} \theta$, which is positive for $\theta < \pi/2$ and largest at $\theta = 0$. (3) $\langle \uparrow | \downarrow \rangle \langle \downarrow | \uparrow \rangle = 0$. (4) The outcome probabilities are $\cos^2 \theta$ and $\sin^2 \theta$, independent of ϕ . $\square$

Parts (1)–(3) are the quantum counterparts of [Theorem 5.2](#), [Theorem 5.4](#) and [Proposition 5.3](#). Part (4) is an instance of assay resolution ([Corollary 8.3](#)): data from one basis leave the phase undetermined however much of it is collected, so a tomographically complete set of bases is needed. In the language of the framework, the hypothesis h (the basis) bounds what any study can reveal. What is specifically quantum is that no single basis is informationally complete for all states, whereas the world basis is complete classically.

7.4 Foundation: qubits and spins

The foundation map m of Section 6 is realized by the projector onto $|b\rangle$ in the basis selected by h : state 1 affirms and state 0 negates, as in Proposition 6.2. A register of n qubits with spin degrees of freedom has states

$$|v\rangle = \sum_{x \in \{0,1\}^n} \sum_{\sigma \in \{\uparrow, \downarrow\}^n} c_{x,\sigma} |x\rangle |\sigma\rangle,$$

and iteration is a circuit of depth d , $|v_{\text{final}}\rangle = U_d \cdots U_2 U_1 |v_{\text{initial}}\rangle$.

7.5 Physical implementations

Deduction: quantum gates. Single-qubit gates (X , Y , Z , Hadamard) and two-qubit gates (CNOT, CZ) act as $|v\rangle \mapsto U|v\rangle$, deterministic transformations that realize the straight arrow [12, 30].

Induction: variational algorithms. The variational quantum eigensolver and the quantum approximate optimization algorithm prepare $|v(\theta)\rangle = U(\theta)|0\rangle$ and update

$$\theta_{k+1} = \theta_k - \eta \nabla_{\theta} \langle v(\theta_k) | \hat{H} | v(\theta_k) \rangle,$$

with the gradient estimated from measurement outcomes. The parameters are the theory, the measurements are the study, and each update is one turn of the circular arrow [33].

Induction: quantum machine learning. Training data $\{(x_k, y_k)\}$ form the study, a parametrized circuit $U(\theta)$ is the theory, and training minimizes $L(\theta) = \sum_k |y_k - \langle v(x_k) | M | v(x_k) \rangle|^2$ for an observable M [6].

7.6 Thermodynamic reading

Information has a physical cost. Recording a study of N binary outcomes uses N bits, and by Landauer's principle resetting that record for reuse dissipates at least $Nk_B T \ln 2$ of heat [4, 26]. The two arrows then differ thermodynamically:

- *Deduction preserves entropy.* Unitary evolution leaves the von Neumann entropy $S(\rho) = -\text{Tr} \rho \ln \rho = -\sum_k \lambda_k \ln \lambda_k$ unchanged, $S(U\rho U^\dagger) = S(\rho)$, because $U\rho U^\dagger$ and ρ have the same characteristic polynomial; no information is gained or lost. `vonNeumannEntropy_unitary_conj`
- *Induction lowers the observer's entropy, at a price.* Observation reduces the expected Shannon entropy of the observer's belief about the theory, $H(T | S) \leq H(T)$. As with Maxwell's demon, the reduction is paid for by the Landauer cost of erasing the record [4].

7.7 Noise

Real devices are noisy. A simple model is the depolarizing channel $\mathcal{D}_\varepsilon(\rho) = (1 - \varepsilon)\rho + \varepsilon I/d$ on a d -dimensional system.

Proposition 7.6 (Deduction and falsification under noise). *Let $0 \leq \varepsilon$. If $\text{Tr}(\rho P) = 1$ for a projector P , then $\text{Tr}(\mathcal{D}_\varepsilon(\rho)P) \geq 1 - \varepsilon$. For a spin and $\varepsilon > 0$, $\text{Tr}(\mathcal{D}_\varepsilon(|\uparrow\rangle\langle\uparrow|) |\downarrow\rangle\langle\downarrow|) = \varepsilon/2 > 0$.*
`born_depolarize_ge, noisy_spinUp_not_refuted`

Proof. $\text{Tr}(\mathcal{D}_\varepsilon(\rho)P) = (1 - \varepsilon) \text{Tr}(\rho P) + \varepsilon \text{Tr}(P)/d$ and $\text{Tr} P \geq 0$. For the spin, $\text{Tr}(|\uparrow\rangle\langle\uparrow| |\downarrow\rangle\langle\downarrow|) = 0$ and $\text{Tr}(|\downarrow\rangle\langle\downarrow|)/2 = 1/2$. $\square$

Noise thus weakens both arrows in a controlled way: deductive certainty degrades by at most the noise rate, and falsification (Proposition 7.5(3)) becomes statistical, since a single outcome $\downarrow$ no longer refutes $\uparrow$. Error correction is the means of restoring them.

7.8 Experimental proposals

1. *Tomography.* Prepare an unknown state $|v\rangle$, measure in a tomographically complete set of bases, reconstruct $\hat{\rho}$ by maximum likelihood, and report the fidelity $F = \langle v|\hat{\rho}|v\rangle$. Plotting F against N shows inductive refinement directly.
2. *Quantum walk.* The state $|v(\tau)\rangle = \sum_n \alpha_n(\tau)|n\rangle|c_n\rangle$, with position $|n\rangle$ and coin $|c_n\rangle$, displays iteration as coherent evolution.
3. *Error correction.* A logical qubit $|v_L\rangle$ is a protected thought, the noisy physical qubits are existence, the syndrome measurement is the study $s\exists$, and the decoder's inferred error is the theory $t\varphi$; applying the correction is then a deduction.

8 Application: plant disease diagnosis and forecasting

Plant disease diagnosis and forecasting use both arrows of the diagram every day. A diagnostician reasons from a causal hypothesis to what must be observed, which is deduction, and from symptoms, signs and assay results to the hypotheses they leave open, which is induction. A forecast reasons from weather and field conditions to the risk of disease and is revised season by season. Unlike Section 7, this application needs no mathematics beyond Sections 3 to 5 and one new definition, the resolution of an assay (Definition 8.1). Diagnosis and disease management decisions have long been studied quantitatively in plant disease epidemiology [19, 28]; the aim here is to place them in the framework, not to replace those methods.

Symbol	Plant pathology
$\mathcal{W}$ (worlds)	candidate states of a plant or field: causal agent (if any), host, conditions
φ, t	a diagnosis (“the cause is X ”) or a disease-risk model
$\exists$	a symptom, a sign, or the result of an assay
s (study)	a diagnostic work-up, or the record of past seasons
$\models$ (hence)	the hypothesis predicts the observation
$\odot$ (conclude)	the diagnosis remains consistent with the record
i (iteration)	a further assay, or a further season
h (hypothesis index)	the choice of assay (Definition 8.1)
$\uparrow, \downarrow$	a positive or negative result; disease forecast or not

Table 3: Plant-pathology reading of the symbols of Table 1.

8.1 Elimination and refinement

The deductive results of [Section 4](#) and the refinement results of [Section 5](#) apply without change. If a diagnosis H entails an observation o and o fails, H is eliminated ([Proposition 4.4](#)); this is why one clean negative result can end a candidate diagnosis. Each further result can only shrink the set of diagnoses that remain supported ([Theorem 5.2](#)), so a diagnosis once eliminated returns only if an earlier result is withdrawn.

8.2 Assay resolution

Definition 8.1 (Assay and resolution). An *assay* is a map $a : \mathcal{W} \rightarrow R$ to a set of results R , and the observation “ a gave r ” is the thought $[a = r]$, which holds in w when $a(w) = r$. The assay a *resolves* a diagnosis H if worlds with the same result agree on H :

$$a(w) = a(w') \implies (H(w) \iff H(w')) \quad \text{for all } w, w' \in \mathcal{W}.$$

AssayResult, Resolves

Theorem 8.2 (Assay resolution). *An assay a resolves H if and only if, for every world w , the result $[a = a(w)]$ entails H or entails $\neg H$.* resolves_iff

Proof. Suppose a resolves H and fix w . If $H(w)$, every v with $a(v) = a(w)$ satisfies H , so $[a = a(w)] \models H$; otherwise the same argument gives $[a = a(w)] \models \neg H$. Conversely, let $a(w) = a(w')$. Then w and w' both satisfy $[a = a(w)]$; if this result entails H both satisfy H , and if it entails $\neg H$ neither does. □

Corollary 8.3 (Underdetermination by an assay). *If $a(w) = a(w')$, $H(w)$ and $\neg H(w')$, then the result $[a = a(w)]$ entails neither H nor $\neg H$. If a resolves H , so does the joint assay $w \mapsto (a(w), b(w))$ for any further assay b .* undetermined, Resolves.pair_left

Proof. The world w' satisfies the result but not H , and w satisfies it and H . For the joint assay, equal pairs have equal first components. □

Within the model, repeating an assay adds an observation that holds in exactly the worlds where the first one holds, so it removes no world. The limit of [Corollary 8.3](#) therefore lies in what the assay can tell apart, not in how often it is run. This gives the hypothesis index h of the foundation a concrete reading: h selects the assay, and the assay bounds what any study can reveal.

Example 8.4 (Formae speciales). Pathogenic strains of *Fusarium oxysporum* are classified into formae speciales by host specificity [21]: f.sp. *cubense* causes Fusarium wilt (Panama disease) of banana, and f.sp. *lycopersici* causes Fusarium wilt of tomato. Take a two-world model in which culture morphology gives the same result for both, and a host test records the host on which the isolate causes wilt. By [Corollary 8.3](#), morphology does not resolve “the isolate is f.sp. *cubense*”, however many cultures are examined; by [Theorem 8.2](#), the host test does. The same pattern covers races distinguished only on differential hosts and cryptic species distinguished only by molecular markers. morphology_not_resolves, hostTest_resolves

[Corollary 8.3](#) is the classical form of [Proposition 7.5\(4\)](#): measurements in one basis do not resolve the phase of a spin, just as morphology does not resolve the forma specialis. What is specifically quantum is that no single basis is informationally complete for all states, whereas classically the assay that reports the world itself resolves every hypothesis.

8.3 Koch’s postulates as hypothetico-deductive confirmation

Koch’s postulates establish that a pathogen causes a disease by isolating it from diseased plants, inoculating it into healthy hosts, reproducing the symptoms and re-isolating the same organism [1]. The inoculation step has the form of [Theorem 5.8](#).

Proposition 8.5 (Koch’s postulates). *Let H be “ X causes the disease” and o be “inoculating healthy hosts with X reproduces the symptoms”. Suppose H is possible, $H \models o$, and some world falsifies o . Then, under every prior on finitely many worlds, o confirms H ; and if o fails, H is eliminated.*

confirms_of_entails, modus_tollens

Proof. The first claim is [Theorem 5.8](#) with the study (o), the second [Proposition 4.4](#). □

The condition that o could fail excludes tests that succeed whatever the cause; mock-inoculated controls serve this purpose in practice, by showing that the procedure itself does not produce the symptoms. The entailment $H \models o$ holds only under conditions favourable to disease: a susceptible host, enough inoculum and a suitable environment, the disease triangle of plant pathology [1]. A failed inoculation therefore eliminates H only together with these auxiliary assumptions.

8.4 Diagnostic tests and forecasts

Diagnostic tests and forecasts are usually judged by counts. Of D diseased and N healthy units (plants, samples or fields), suppose tp diseased and fp healthy units test positive, or are forecast positive.

Proposition 8.6 (When a positive result raises the risk). *The share of diseased units among the positives exceeds the prevalence exactly when the sensitivity exceeds the false-positive rate:*

$$\frac{tp}{tp + fp} > \frac{D}{D + N} \iff \frac{tp}{D} > \frac{fp}{N}.$$

In cross-multiplied form, $D(tp + fp) < tp(D + N) \iff Dfp < tpN$ for all natural numbers, with no positivity assumption.

positive_raises_risk_iff

Proof. Expand both products: $Dtp + Dfp < tpD + tpN$, and cancel Dtp . □

[Proposition 8.6](#) is [Definition 5.6](#) in frequency form: a positive result confirms “diseased” exactly when the test discriminates. The prevalence affects how far the risk rises, not whether it rises, as the prior does in [Corollary 5.11](#). Whether the higher risk justifies action is a separate decision, in which the risk is compared with a threshold set by the costs of treatment and of loss [19, 28].

A forecast is an assay applied before disease appears, to weather and field variables. For Sclerotinia stem rot of soybean, weather-based models predict whether apothecia of *Sclerotinia sclerotiorum*, the source of ascospore inoculum, are present during flowering, with 67–70% accuracy on independent data sets [37]. Three results of the framework apply to such forecasts.

1. A risk model fitted to past seasons is supported by them but never entailed: the next season is an unobserved individual, so [Theorem 5.4](#) applies with seasons in place of birds.
2. [Proposition 8.6](#) applies with “forecast positive” as the test.
3. Forecasting rules are defeasible, as the next proposition shows.

Proposition 8.7 (A defeasible forecasting rule). *Consider a soybean field at flowering under weather favourable to disease, with worlds $(\text{noApothecia}, \text{infected}) \in \{0, 1\}^2$ ranked so that apothecia with infection is most normal, no apothecia without infection next, and the other two combinations least normal. Then the field is normally infected, $() \mid \sim \text{infected}$, but $(\text{noApothecia}) \not\mid \sim \text{infected}$; indeed $(\text{noApothecia}) \mid \sim \neg \text{infected}$. *sclerotinia_nonmonotone, noApothecia_normally_not_infected**

The ranking is a stylized model: infection without local apothecia, for instance from ascospores blown in from neighbouring fields, is ranked abnormal rather than impossible. Like the Tweety example of Proposition 5.14, the forecast is closed under the rules of Theorem 5.13 and is withdrawn when new information arrives.

The decision thresholds, the accuracy figures and the biological premises of the models above are empirical; the Lean formalization covers the logical results only.

9 Discussion

Philosophy. The straight arrow is read here as semantic entailment: what is entailed holds in every world where the premises hold (Theorem 4.2). The phrase “from thought to existence” is a mnemonic borrowed from Descartes [11], not a claim about his argument. The circular arrow follows Hume’s and Popper’s view of induction: a generalization is supported, never entailed (Theorem 5.4), and can be overturned by a single counterexample (Proposition 5.3). These results capture the logical side of Hume’s problem; they do not settle whether inductive conclusions are justified. Levels l in the foundation give a place for Kant’s hierarchical structuring of thought [23].

Quantum model. Proposition 7.5(4) gives a physical limit on what a study can reveal, distinct from the logical limit of Theorem 5.4, and Corollary 8.3 shows that it is an instance of assay resolution. Broader analogies sometimes drawn between quantum phenomena, such as complementarity or entanglement, and human reasoning are not developed here, since nothing in the formal results supports them.

Education and cognition. The top row of the diagram is suitable for a first course in logic; the foundation invites discussion of polarity and iteration. The visual layout follows the view that diagrams make inferential structure explicit [22, 27].

Limitations and future work.

- *Infinite sets of worlds.* The confirmation results of Section 5.3 assume finitely many worlds. For infinite or continuous sets of worlds the same definitions can be stated with measures and conditional measures, and we expect Theorem 5.8 and Proposition 5.9 to carry over for theories of positive prior probability. The sign of confirmation does not depend on the prior (Corollary 5.11); its size does.
- *Hypotheses and iterations.* Levels are now ordered (Section 6.1), and Section 8 reads the hypothesis index h as the choice of assay. A natural reading lets h index a partition of $\mathcal{W}$, the distinctions a study under h can draw, so that a theory is identifiable under h only if it is a union of cells. Proposition 7.5(4) is the quantum instance.
- *Higher-order logic.* Every theorem is proved for an arbitrary type of worlds, including function spaces: in the swan examples a world is a predicate on birds, so AllWhite already quantifies over a predicate. A higher-order logic with its own syntax and proof system is not treated;

Henkin semantics [17], with soundness proved against the possible-worlds reading, is the natural route.

- *Physical realization.* The quantum model is limited in practice by decoherence, state-preparation and measurement errors, and scale [3, 33]. Proposition 7.6 quantifies the effect of depolarizing noise on both arrows. Showing that the three-qubit repetition code restores deductive certainty to order ε^2 is a next step; error-corrected implementations remain experimental work.
- *Thermodynamics.* Landauer’s principle is a physical law, assumed rather than derived. The inequality $H(T \mid S) \leq H(T)$ is a standard consequence of the concavity of entropy but is not formalized here.
- *Learners.* Whether the diagram helps learners is an empirical question. We propose a preregistered randomized trial: students in an introductory logic course receive a lesson built on the diagram or the same lesson in prose, and are tested on classifying arguments as deductive or inductive, on recognizing fallacies (affirming the consequent, hasty generalization) and on predicting the effect of a counterexample, with a retention test four weeks later. Detecting a medium effect ($d = 0.5$) with power 0.8 at $\alpha = 0.05$ requires about 64 students per arm.

10 Conclusion

We have given a diagram for deduction and induction, a possible-worlds semantics for its symbols, and machine-checked theorems for what it depicts: deduction is certain and transitive, negative polarity is modus tollens, iteration narrows the supported theories, one counterexample falsifies, and no finite study entails a universal theory. Bayesian confirmation makes the ascending probability of the circular arrow precise: a theory is confirmed by every genuine test it predicts, more so as the tests accumulate, yet never entailed. Defeasible inference sits between the two arrows, and ordered levels show iteration moving upward. Realized in quantum information theory, the same structure appears as certain measurement and unitary evolution on one side and state tomography on the other, with the classical framework as the commuting case and with a limit on what a single basis can resolve. Read in plant pathology, the framework describes diagnosis as elimination and refinement, Koch’s postulates as hypothetico-deductive confirmation and forecasting rules as defeasible inference, and its assay-resolution theorem says when a diagnosis needs a further assay. The same two arrows thus organize reasoning in fields as different as quantum measurement and plant disease diagnosis; applying them to real diagnostic and forecasting data is the next step.

Statements and declarations

Code availability. The Lean 4 formalization (toolchain v4.34.1, Mathlib commit d13f23b7) is in the directory `lean` of the repository

<https://github.com/pupubear007/deductive-inductive-logic>

Appendix A lists the declaration proving each result.

Funding. The author received no funding for this work.

Competing interests. The author has no competing interests to declare.

Use of AI tools. The Lean formalization and parts of the text were prepared with the assistance of an AI coding assistant (Claude Code, Anthropic). All proofs are checked by the Lean kernel. The author takes full responsibility for the content of the paper.

A Lean formalization

All theorems of the paper are formalized in Lean 4 (toolchain v4.34.1) in the directory `lean/WangLogic/` of the repository given under Code availability. `Basic.lean` covers Sections 3–6 except the extensions below and uses only the core library. The other files use Mathlib [35] (commit d13f23b7): `Confirmation.lean` (Remark 3.5 and Section 5.3), `Defeasible.lean` (Section 5.4), `Levels.lean` (Section 6.1), `Quantum.lean` (Propositions 7.1, 7.3 and 7.5) and `QuantumExtensions.lean` (Propositions 7.2, 7.4 and 7.6 and entropy invariance), and `Plant.lean` (Section 8), which uses only the core library besides `Basic.lean` and `Defeasible.lean`. No file contains `sorry`, and every declaration depends at most on the axioms `propext`, `Quot.sound` and `Classical.choice`. The project builds with

```
cd lean && lake exe cache get && lake build
```

The file `lean/ComparatorChallenges/InductionNotDeduction.json` states Theorem 5.4 for independent checking with the Comparator tool (<https://github.com/leanprover/comparator>). Not formalized: Landauer’s principle, the inequality $H(T \mid S) \leq H(T)$, and the physical implementations and experimental proposals of Section 7.

Conventions. In Section 5.3 the set of worlds is finite and a prior is a strictly positive weight; probabilities are normalized sums of weights. In Section 5.4 a ranking takes values in $\mathbb{N}$. In Proposition 7.1 a projector is the orthogonal projection `K.starProjection` onto a subspace K of a finite-dimensional complex inner product space, and $P \leq Q$ is inclusion of subspaces; `starProjection_comp_eq_iff` proves that this agrees with $QP = P$, and `starProjection_orthogonal_eq_sub` that $I - P$ projects onto $K^\perp$. In Propositions 7.3 and 7.5 operators are complex matrices, a projector is a Hermitian idempotent matrix, a density operator is a positive semidefinite matrix of trace 1, and the Born probability is $\text{Re Tr}(\rho P)$. In Proposition 7.3 the order $P \leq Q$ is used in its algebraic form $QP = P$, and in Proposition 7.5 $|\uparrow\rangle$ and $|\downarrow\rangle$ are the standard basis vectors of $\mathbb{C}^2$. In part (2) of Proposition 7.5, “ $|\uparrow\rangle$ is the maximum-likelihood state” is proved in the form: the likelihood of $|\uparrow\rangle$ is at least that of every density operator. Propositions 7.2 and 7.6 use the same matrix model, with unitarity written $U^\dagger U = I$; Proposition 7.4 uses the lattice of subspaces of $\mathbb{C}^2$; and the entropy $S(\rho)$ is $\sum_k -\lambda_k \ln \lambda_k$ over the roots of the characteristic polynomial, which for Hermitian ρ are its eigenvalues (`vonNeumannEntropy_eq_sum_eigenvalues`).

Result	Lean declaration (namespace WangLogic)
Definition 3.2	Entails
Definition 3.4	Supported
Proposition 4.1	imp_iff_not_or
Theorem 4.2	deduction_sound
Proposition 4.4	modus_tollens
Proposition 5.1	Supported.of_cons
Theorem 5.2	Supported.mono
Proposition 5.3	falsification
Theorem 5.4	induction_not_deduction
Proposition 5.5	allWhite_supported
Proposition 6.2	m_spec
Remark 3.5	Prior.prob_and_pos_iff_supported
Definition 5.6	Prior, Confirms, Disconfirms
Proposition 5.7	Confirms.supported
Theorem 5.8	confirms_of_entails
Proposition 5.9	condProb_mono
Proposition 5.10	Disconfirms.of_refutes
Corollary 5.11	allWhite_confirmed, allWhite_condProb_mono
Definition 5.12	Normally, NormallyFrom
Theorem 5.13	Normally.of_entails, .and, .or, .cut, .cautious_mono
Proposition 5.14	normally_nonmonotone
Definition 6.3	Hierarchy
Theorem 6.4	Hierarchy.Established.of_le, .mono, .tenable, Hierarchy.Tenable.of_le, .anti
Proposition 7.1	quantum_deduction_sound
Proposition 7.3(1)	classicalProj_le_iff, classicalProj_not
Proposition 7.3(2)	classical_trace_pos_iff
Proposition 7.5(1)	QSupported.of_concat, likelihood_concat_le
Proposition 7.5(2)	spinState_supported, spinUp_maxLikelihood
Proposition 7.5(3)	spinUp_refuted
Proposition 7.5(4)	likelihood_spinState_phase
Proposition 7.2	unitary_deduction, born_unitary_conj
Proposition 7.4	quantum_not_distributive
Entropy invariance (Section 7)	vonNeumannEntropy_unitary_conj
Proposition 7.6	born_depolarize_ge, noisy_spinUp_not_refuted
Definition 8.1	AssayResult, Resolves
Theorem 8.2	resolves_iff
Corollary 8.3	undetermined, Resolves.pair_left
Example 8.4	morphology_not_resolves, hostTest_resolves
Proposition 8.5	confirms_of_entails, modus_tollens
Proposition 8.6	positive_raises_risk_iff
Proposition 8.7	apothecia_normally_infected, noApothecia_normally_not_infected, sclerotinia_nonmonotone

References

- [1] George N. Agrios. *Plant Pathology*. Elsevier Academic Press, Burlington, MA, 5th edition, 2005.
- [2] Aristotle. *Prior Analytics*. Hackett, Indianapolis, 1989. Translated by Robin Smith.
- [3] Frank Arute et al. Quantum supremacy using a programmable superconducting processor. *Nature*, 574(7779):505–510, 2019. doi: 10.1038/s41586-019-1666-5.
- [4] Charles H. Bennett. The thermodynamics of computation—a review. *International Journal of Theoretical Physics*, 21(12):905–940, 1982. doi: 10.1007/BF02084158.
- [5] Christoph Benz Müller and Bruno Woltzenlogel Paleo. Automating Gödel’s ontological proof of God’s existence with higher-order automated theorem provers. In *ECAI 2014*, volume 263 of *Frontiers in Artificial Intelligence and Applications*, pages 93–98. IOS Press, 2014. doi: 10.3233/978-1-61499-419-0-93.
- [6] Jacob Biamonte, Peter Wittek, Nicola Pancotti, Patrick Rebentrost, Nathan Wiebe, and Seth Lloyd. Quantum machine learning. *Nature*, 549(7671):195–202, 2017. doi: 10.1038/nature23474.
- [7] Garrett Birkhoff and John von Neumann. The logic of quantum mechanics. *Annals of Mathematics*, 37(4):823–843, 1936. doi: 10.2307/1968621.
- [8] Rudolf Carnap. *Logical Foundations of Probability*. University of Chicago Press, Chicago, 1950.
- [9] Maria Luisa Dalla Chiara, Roberto Giuntini, and Richard Greechie. *Reasoning in Quantum Theory: Sharp and Unsharp Quantum Logics*, volume 22 of *Trends in Logic*. Kluwer, Dordrecht, 2004. doi: 10.1007/978-94-017-0526-4.
- [10] Leonardo de Moura and Sebastian Ullrich. The Lean 4 theorem prover and programming language. In *Automated Deduction – CADE 28*, volume 12699 of *Lecture Notes in Computer Science*, pages 625–635. Springer, 2021. doi: 10.1007/978-3-030-79876-5_37.
- [11] René Descartes. Discourse on the method. In John Cottingham, Robert Stoothoff, and Dugald Murdoch, editors, *The Philosophical Writings of Descartes*, volume 1. Cambridge University Press, Cambridge, 1985. Originally published 1637.
- [12] David Deutsch. Quantum theory, the Church–Turing principle and the universal quantum computer. *Proceedings of the Royal Society of London A*, 400(1818):97–117, 1985. doi: 10.1098/rspa.1985.0070.
- [13] John Earman. *Bayes or Bust? A Critical Examination of Bayesian Confirmation Theory*. MIT Press, Cambridge, MA, 1992.
- [14] Branden Fitelson. The plurality of Bayesian measures of confirmation and the problem of measure sensitivity. *Philosophy of Science*, 66(S3):S362–S378, 1999. doi: 10.1086/392738.
- [15] Branden Fitelson and Edward N. Zalta. Steps toward a computational metaphysics. *Journal of Philosophical Logic*, 36(2):227–247, 2007. doi: 10.1007/s10992-006-9038-7.
- [16] Carl G. Hempel. Studies in the logic of confirmation (I). *Mind*, 54(213):1–26, 1945. doi: 10.1093/mind/LIV.213.1.

- [17] Leon Henkin. Completeness in the theory of types. *Journal of Symbolic Logic*, 15(2):81–91, 1950. doi: 10.2307/2266967.
- [18] Zdeněk Hradil. Quantum-state estimation. *Physical Review A*, 55(3):R1561–R1564, 1997. doi: 10.1103/PhysRevA.55.R1561.
- [19] Gareth Hughes, Neil McRoberts, and Fiona J. Burnett. Decision-making and diagnosis in disease management. *Plant Pathology*, 48:147–153, 1999.
- [20] David Hume. *An Enquiry Concerning Human Understanding*. Oxford University Press, Oxford, 1999. Edited by Tom L. Beauchamp. Originally published 1748.
- [21] Edan Jackson, Josh Li, Thilini Weerasinghe, and Xin Li. The ubiquitous wilt-inducing pathogen *Fusarium oxysporum*—a review of genes studied with mutant analysis. *Pathogens*, 13(10):823, 2024. doi: 10.3390/pathogens13100823.
- [22] Philip N. Johnson-Laird. *Mental Models: Towards a Cognitive Science of Language, Inference, and Consciousness*. Harvard University Press, Cambridge, MA, 1983.
- [23] Immanuel Kant. *Critique of Pure Reason*. Cambridge University Press, Cambridge, 1998. Translated and edited by Paul Guyer and Allen W. Wood. Originally published 1781.
- [24] Sarit Kraus, Daniel Lehmann, and Menachem Magidor. Nonmonotonic reasoning, preferential models and cumulative logics. *Artificial Intelligence*, 44(1–2):167–207, 1990. doi: 10.1016/0004-3702(90)90101-5.
- [25] Saul A. Kripke. Semantical considerations on modal logic. *Acta Philosophica Fennica*, 16:83–94, 1963.
- [26] Rolf Landauer. Irreversibility and heat generation in the computing process. *IBM Journal of Research and Development*, 5(3):183–191, 1961. doi: 10.1147/rd.53.0183.
- [27] Jill H. Larkin and Herbert A. Simon. Why a diagram is (sometimes) worth ten thousand words. *Cognitive Science*, 11(1):65–99, 1987. doi: 10.1111/j.1551-6708.1987.tb00863.x.
- [28] Laurence V. Madden, Gareth Hughes, and Frank van den Bosch. *The Study of Plant Disease Epidemics*. APS Press, St. Paul, MN, 2007. doi: 10.1094/9780890545058.
- [29] David Makinson. *Bridges from Classical to Nonmonotonic Logic*, volume 5 of *Texts in Computing*. College Publications, London, 2005.
- [30] Michael A. Nielsen and Isaac L. Chuang. *Quantum Computation and Quantum Information*. Cambridge University Press, Cambridge, 10th anniversary edition, 2010. doi: 10.1017/CBO9780511976667.
- [31] Charles S. Peirce. Prolegomena to an apology for pragmatism. *The Monist*, 16(4):492–546, 1906.
- [32] Karl R. Popper. *The Logic of Scientific Discovery*. Hutchinson, London, 1959.
- [33] John Preskill. Quantum computing in the NISQ era and beyond. *Quantum*, 2:79, 2018. doi: 10.22331/q-2018-08-06-79.
- [34] Sun-Joo Shin. *The Logical Status of Diagrams*. Cambridge University Press, Cambridge, 1994.

- [35] The mathlib Community. The Lean mathematical library. In *Proceedings of the 9th ACM SIGPLAN International Conference on Certified Programs and Proofs (CPP 2020)*, pages 367–381. ACM, 2020. doi: 10.1145/3372885.3373824.
- [36] John von Neumann. *Mathematical Foundations of Quantum Mechanics*. Princeton University Press, Princeton, 1955. German original 1932.
- [37] Jaime F. Willbur, Mamadou L. Fall, Christopher Bloomingdale, Adam M. Byrne, Scott A. Chapman, Scott A. Isard, Roger D. Magarey, Monica M. McCaghey, Brian D. Mueller, Joseph M. Russo, Jeffrey Schlegel, Martin I. Chilvers, Daren S. Mueller, Mehdi Kabbage, and Damon L. Smith. Weather-based models for assessing the risk of *Sclerotinia sclerotiorum* apothecial presence in soybean (*Glycine max*) fields. *Plant Disease*, 102(1):73–84, 2018. doi: 10.1094/PDIS-04-17-0504-RE.