UniGraph2: original MLP, per-expert attention and shared pre-router attention

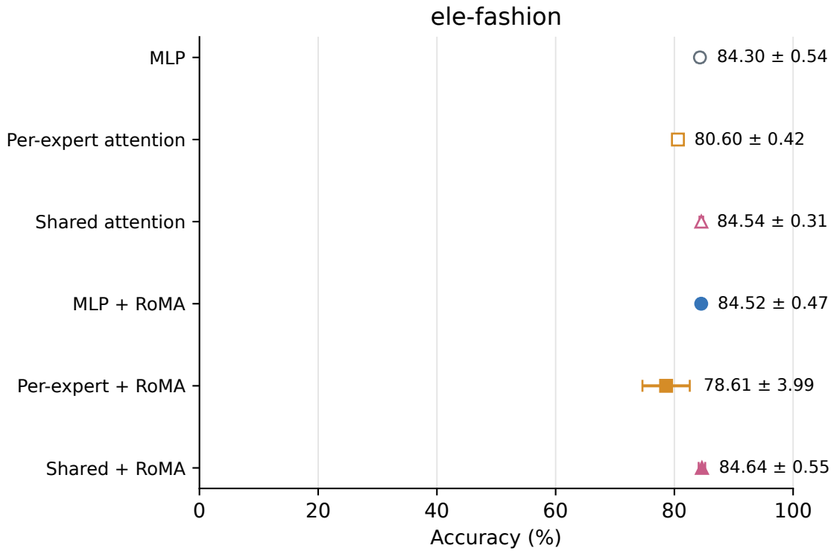

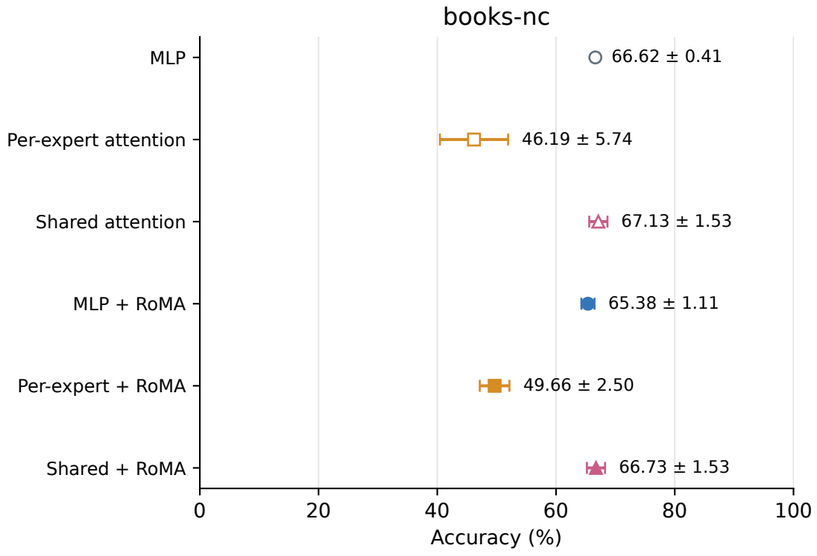

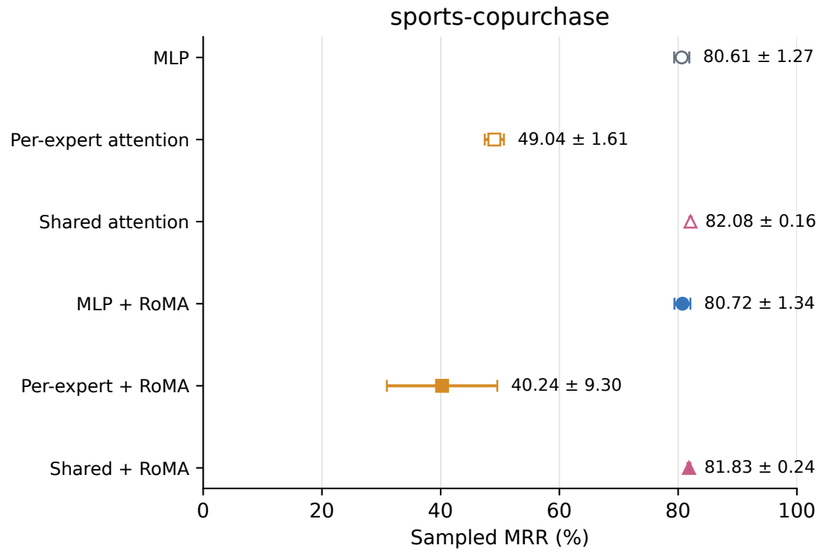

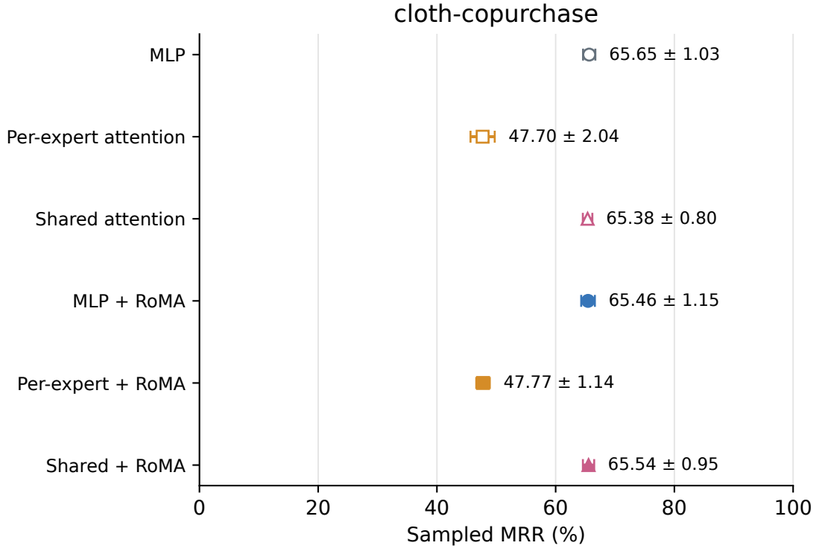

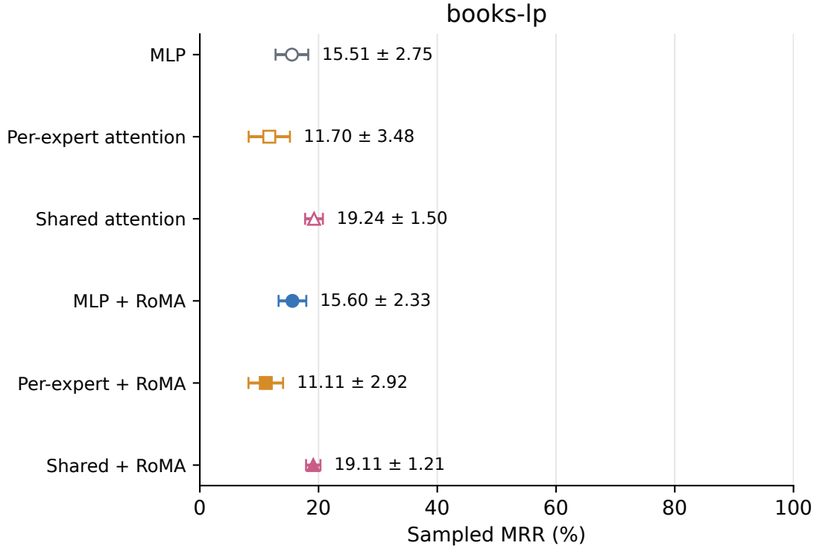

Mean over 3 encoder seeds
Each encoder averages 3 probe seeds
Error bars: population SD across encoders

4,096-node target cohorts
LP: 100 fixed negatives/query
Shared attention: 4 heads
Routing top-k: 0 (0 = dense)

Task-only controls are in the dataset reports.
Extra attention parameters are not matched away.