

MongoDB Notes Simple Excecution

Monish Putti

2520030395

1. Launch your IDE(MongoDB Atlas)
2. signup using Organization credentials
3. Create free tier cluster
4. If it is already created, RESUME it.
5. Click on Browse collections
6. Atlas Dashboard → Database → Browse Collections → Add My Own Data.
7. You're now inside MongoDB Atlas Data Explorer, and you have the sample_mflix database open with the comments collection selected. 8. To run CRUD operations,
 - a) Create (Insert)

DID the basic things through cmd prompt

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
Microsoft Windows [Version 10.0.26200.9168]
(c) Microsoft Corporation. All rights reserved.

C:\Users\MONISH PUTTI>mongosh --version
'mongosh' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\MONISH PUTTI>where mongosh
INFO: Could not find files for the given pattern(s).

C:\Users\MONISH PUTTI>dir "C:\Program Files\MongoDB" /s /b | findstr /i "mongosh.exe"
File Not Found

C:\Users\MONISH PUTTI>where /R C:\ mongosh.exe
C:\Users\MONISH PUTTI\Downloads\mongosh-2.9.2-win32-x64\mongosh-2.9.2-win32-x64\bin\mongosh.exe

C:\Users\MONISH PUTTI>"C:\Users\MONISH PUTTI\Downloads\mongosh-2.9.2-win32-x64\mongosh-2.9.2-win32-x64\bin\mongosh.exe" --version
2.9.2

C:\Users\MONISH PUTTI>"C:\Users\MONISH PUTTI\Downloads\mongosh-2.9.2-win32-x64\mongosh-2.9.2-win32-x64\bin\mongosh.exe" "mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/" --apiVersion 1 --username puttimonish_db_user
Enter password: *****
Current Mongosh Log ID: 6a892c762d71267c8b95ac13
Connecting to:      mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/?appName=mongosh+2.9.2
Using MongoDB:      8.0.29 (API Version 1)
Using Mongosh:       2.9.2
mongosh 2.10.0 is available for download: https://www.mongodb.com/try/download/shell

For mongosh info see: https://www.mongodb.com/docs/mongosh-shell/


Atlas atlas-7wh58m-shard-0 [primary] test> show dbs
sample_mflix 155.49 MiB
schoolDB      80.00 KiB
admin         0 B
local         0 B
Atlas atlas-7wh58m-shard-0 [primary] test> use schoolDB
switched to db schoolDB
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```

Click “INSERT DOCUMENT” (top-right).

A JSON editor will open. Enter the details in JSON

```
{
  "name": "Alice",
  "email": "alice@example.com",
  "movie_id": "12345",
  "text": "This is my first review!",
  "date": "2025-08-23T10:00:00Z"
}
```

Click Insert to save.

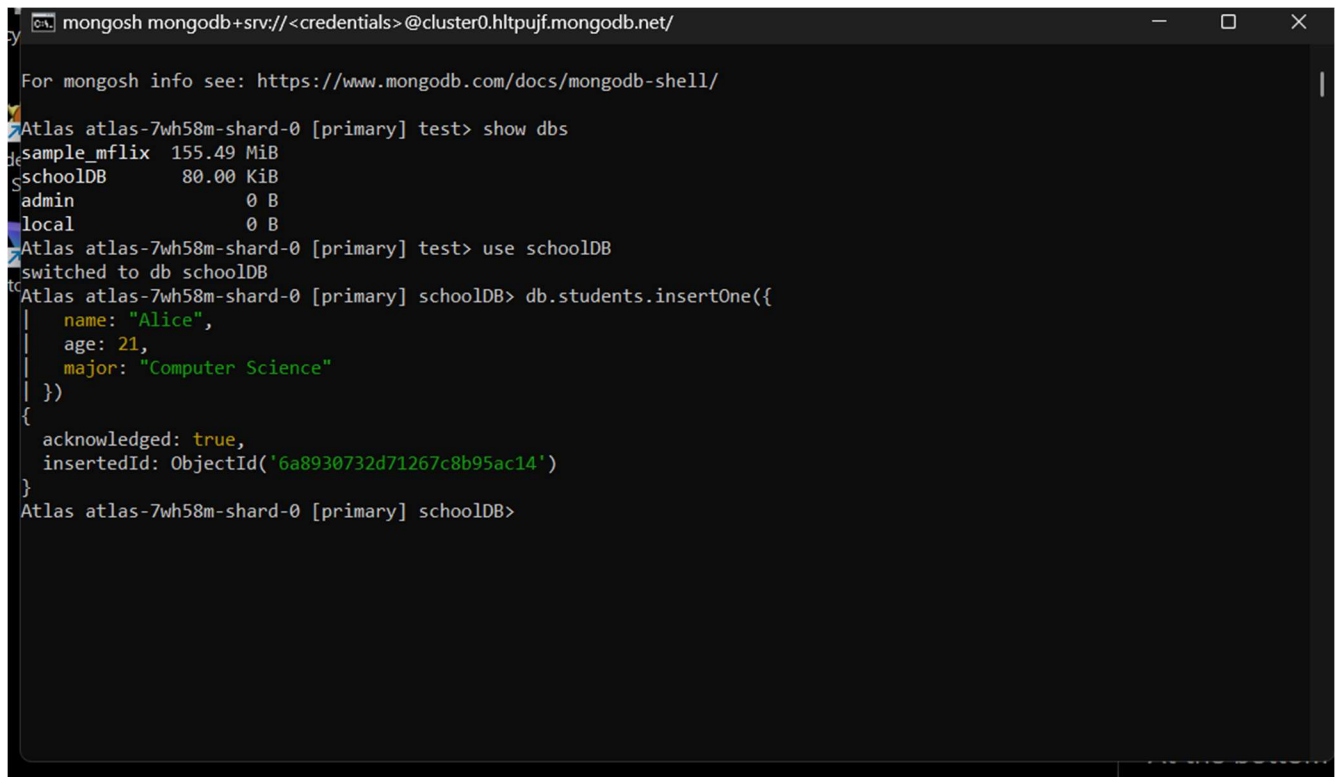

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/

For mongosh info see: https://www.mongodb.com/docs/mongodb-shell/

Atlas atlas-7wh58m-shard-0 [primary] test> show dbs
sample_mflix 155.49 MiB
schoolDB      80.00 KiB
admin         0 B
local         0 B

Atlas atlas-7wh58m-shard-0 [primary] test> use schoolDB
switched to db schoolDB

Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.insertOne({
  name: "Alice",
  age: 21,
  major: "Computer Science"
})
{
  acknowledged: true,
  insertedId: ObjectId('6a8930732d71267c8b95ac14')
}

Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```

b) Read (Find)

In the Filter box, type queries in JSON format.

Example: Find comments by Alice:

{ "name": "Alice" } click Apply.

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
acknowledged: true,
insertedId: ObjectId('6a8930732d71267c8b95ac14')
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.find({ major: "Computer Science" })
[
  {
    _id: ObjectId('6a867af0d44ce90bd13e0e62'),
    name: 'Alice',
    age: 22,
    major: 'Computer Science'
  },
  {
    _id: ObjectId('6a867d1fd44ce90bd13e0e65'),
    name: 'David',
    age: 21,
    major: 'Computer Science'
  },
  {
    _id: ObjectId('6a8930732d71267c8b95ac14'),
    name: 'Alice',
    age: 21,
    major: 'Computer Science'
  }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```

c)Update

Find the document first using a filter (e.g., { "name": "Alice" }).

Hover over the document → click pencil icon (Edit).

Modify fields, e.g. change "text" to "Updated review!".

Save it.

db.students.updateOne(

 { name: "Alice" },

 { \$set: { age: 22 } }

)

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
},
{
  _id: ObjectId('6a8930732d71267c8b95ac14'),
  name: 'Alice',
  age: 21,
  major: 'Computer Science'
}
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.updateOne(
|   { name: "Alice" },
|   { $set: { age: 22 } }
| )
{
  acknowledged: true,
  insertedId: null,
  matchedCount: 1,
  modifiedCount: 0,
  upsertedCount: 0
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```

D)Delete

Hover over the document you want to remove.

Click the trash bin icon (Delete).

```
db.students.deleteOne({ name: "Alice" })
```

```

mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
    major: 'Computer Science'
  }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.updateOne(
|   { name: "Alice" },
|   { $set: { age: 22 } }
| )
{
  acknowledged: true,
  insertedId: null,
  matchedCount: 1,
  modifiedCount: 0,
  upsertedCount: 0
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.deleteOne({ name: "Alice" })
{ acknowledged: true, deletedCount: 1 }
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>

```

2. Run Queries:

-> use schoolDB

Insert one document,

->db.students.insertOne({ name: "Alice", age: 21, major: "Computer Science" })

Find document,

->db.students.find({ major: "Computer Science" })

Update document,

->db.students.updateOne({ name: "Alice" }, { \$set: { age: 22 } })

Delete document,

->db.students.deleteOne({ name: "Alice" })

Indexing in MongoDB:

Indexes make searches much faster (just like an index in a book).


Insert many documents in the same database.

```

db.students.insertMany([
  { name: "Alice", age: 21, major: "Computer Science" },
  { name: "Bob", age: 22, major: "Mathematics" },

```

```
{ name: "Charlie", age: 23, major: "Physics" },
{ name: "David", age: 21, major: "Computer Science" },
{ name: "Eve", age: 22, major: "Mathematics" }
]);
```

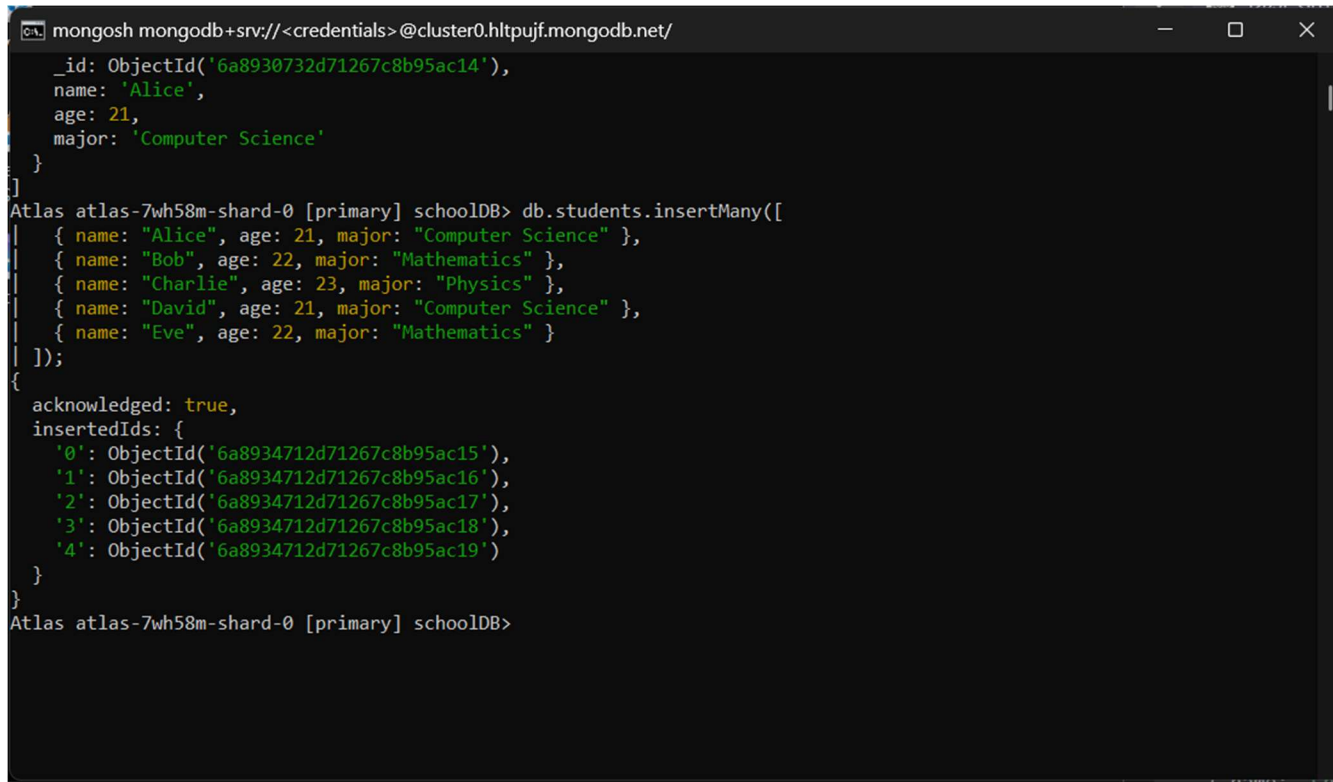

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
{
  _id: ObjectId('6a8930732d71267c8b95ac14'),
  name: 'Alice',
  age: 21,
  major: 'Computer Science'
}
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.insertMany([
|   { name: "Alice", age: 21, major: "Computer Science" },
|   { name: "Bob", age: 22, major: "Mathematics" },
|   { name: "Charlie", age: 23, major: "Physics" },
|   { name: "David", age: 21, major: "Computer Science" },
|   { name: "Eve", age: 22, major: "Mathematics" }
| ]);
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6a8934712d71267c8b95ac15'),
    '1': ObjectId('6a8934712d71267c8b95ac16'),
    '2': ObjectId('6a8934712d71267c8b95ac17'),
    '3': ObjectId('6a8934712d71267c8b95ac18'),
    '4': ObjectId('6a8934712d71267c8b95ac19')
  }
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```

2. Create an Index

->db.students.createIndex({ major: 1 });

(1 = ascending, -1 = descending)

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
[
  { name: "David", age: 21, major: "Computer Science" },
  { name: "Eve", age: 22, major: "Mathematics" }
]);
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6a8934712d71267c8b95ac15'),
    '1': ObjectId('6a8934712d71267c8b95ac16'),
    '2': ObjectId('6a8934712d71267c8b95ac17'),
    '3': ObjectId('6a8934712d71267c8b95ac18'),
    '4': ObjectId('6a8934712d71267c8b95ac19')
  }
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.createIndex({ major: 1 });
major_1
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```


3. View Indexes

-> db.students.getIndexes();

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
[
  {
    acknowledged: true,
    insertedIds: {
      '0': ObjectId('6a8934712d71267c8b95ac15'),
      '1': ObjectId('6a8934712d71267c8b95ac16'),
      '2': ObjectId('6a8934712d71267c8b95ac17'),
      '3': ObjectId('6a8934712d71267c8b95ac18'),
      '4': ObjectId('6a8934712d71267c8b95ac19')
    }
  }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.createIndex({ major: 1 });
major_1
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.getIndexes();
[
  { v: 2, key: { _id: 1 }, name: '_id_' },
  { v: 2, key: { major: 1 }, name: 'major_1' }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```


4. Compound Index

-> db.students.createIndex({ major: 1, age: -1 });

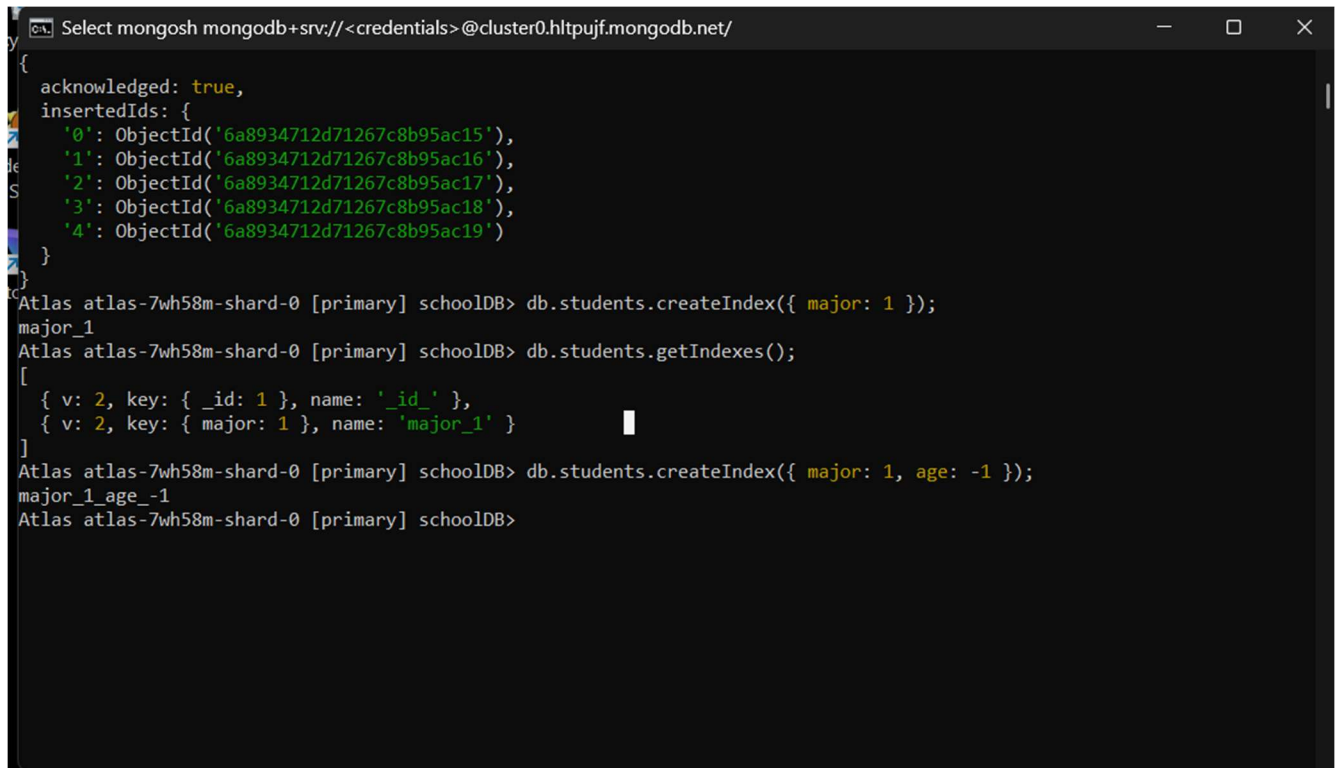

```
Select mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6a8934712d71267c8b95ac15'),
    '1': ObjectId('6a8934712d71267c8b95ac16'),
    '2': ObjectId('6a8934712d71267c8b95ac17'),
    '3': ObjectId('6a8934712d71267c8b95ac18'),
    '4': ObjectId('6a8934712d71267c8b95ac19')
  }
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.createIndex({ major: 1 });
major_1
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.getIndexes();
[
  { v: 2, key: { _id: 1 }, name: '_id_' },
  { v: 2, key: { major: 1 }, name: 'major_1' }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.createIndex({ major: 1, age: -1 });
major_1_age_-1
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```

5. Drop Index

-> db.students.dropIndex("major_1"); Aggregation Framework

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
'2': ObjectId('6a8934712d71267c8b95ac17'),
'3': ObjectId('6a8934712d71267c8b95ac18'),
'4': ObjectId('6a8934712d71267c8b95ac19')
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.createIndex({ major: 1 });
major_1
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.getIndexes();
[
  { v: 2, key: { _id: 1 }, name: '_id_' },
  { v: 2, key: { major: 1 }, name: 'major_1' }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.createIndex({ major: 1, age: -1 });
major_1_age_-1
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.dropIndex("major_1");
{
  nIndexesWas: 3,
  ok: 1,
  '$clusterTime': {
    clusterTime: Timestamp({ t: 1787376969, i: 6 }),
    signature: {
      hash: Binary.createFromBase64('0Rj3J81+yUJgo9yjuYUdEYO9fMk=', 0),
      keyId: Long('7636780945567121423')
    }
  },
  operationTime: Timestamp({ t: 1787376969, i: 6 })
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```

in MongoDB:

Count Students by Major

```
-> db.students.aggregate([
  { $group: { _id: "$major", total: { $sum: 1 } } }
]);
```

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.dropIndex("major_1");
{
  nIndexesWas: 3,
  ok: 1,
  '$clusterTime': {
    clusterTime: Timestamp({ t: 1787376969, i: 6 }),
    signature: {
      hash: Binary.createFromBase64('0Rj3J81+yUJgo9yjuYUdEY09fMk=', 0),
      keyId: Long('7636780945567121423')
    }
  },
  operationTime: Timestamp({ t: 1787376969, i: 6 })
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.aggregate([
| { $group: { _id: "$major", total: { $sum: 1 } } }
| ]);
[
  { _id: 'Mathematics', total: 4 },
  { _id: 'Physics', total: 2 },
  { _id: 'Computer Science', total: 4 }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```

Groups by major and counts students.

2. Average Age by Major

```
-> db.students.aggregate([
  { $group: { _id: "$major", avgAge: { $avg: "$age" } } } ]);
```

```

mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
ok: 1,
'$clusterTime': {
  clusterTime: Timestamp({ t: 1787376969, i: 6 }),
  signature: {
    hash: Binary.createFromBase64('0Rj3J81+yUJgo9yjuYUdEY09fMk=', 0),
    keyId: Long('7636780945567121423')
  }
},
operationTime: Timestamp({ t: 1787376969, i: 6 })
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.aggregate([
  { $group: { _id: "$major", total: { $sum: 1 } } }
]);
[
  { _id: 'Mathematics', total: 4 },
  { _id: 'Physics', total: 2 },
  { _id: 'Computer Science', total: 4 }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.aggregate([
  { $group: { _id: "$major", avgAge: { $avg: "$age" } } }
]);
[
  { _id: 'Mathematics', avgAge: 22 },
  { _id: 'Physics', avgAge: 23 },
  { _id: 'Computer Science', avgAge: 21 }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>

```

```


mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.aggregate([
  { $group: { _id: "$major", avgAge: { $avg: "$age" } } }
]);
[
  { _id: 'Mathematics', avgAge: 22 },
  { _id: 'Physics', avgAge: 23 },
  { _id: 'Computer Science', avgAge: 21 }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.aggregate([
  { $group: { _id: "$major", avgAge: { $avg: "$age" } } }
]);
[
  { _id: 'Physics', avgAge: 23 },
  { _id: 'Mathematics', avgAge: 22 },
  { _id: 'Computer Science', avgAge: 21 }
]
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>

```

3. sort by Age

-> db.students.aggregate([

```
{ $sort: { age: -1 } }  
]);
```

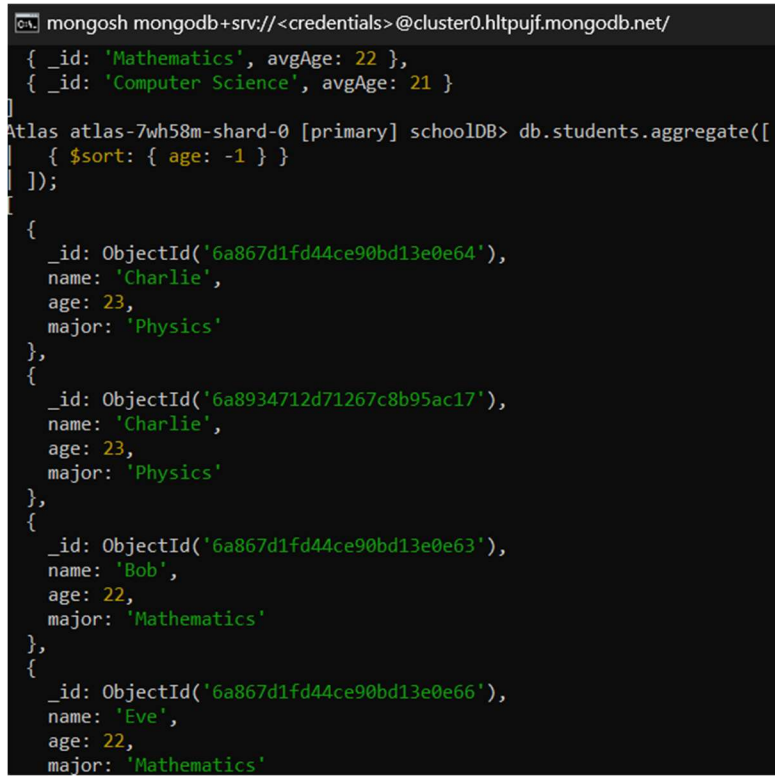

The screenshot shows a MongoDB shell window with the following content:

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/  
{ _id: 'Mathematics', avgAge: 22 },  
{ _id: 'Computer Science', avgAge: 21 }  
]  
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.aggregate([  
  { $sort: { age: -1 } }  
]);  
  
{  
  _id: ObjectId('6a867d1fd44ce90bd13e0e64'),  
  name: 'Charlie',  
  age: 23,  
  major: 'Physics'  
},  
{  
  _id: ObjectId('6a8934712d71267c8b95ac17'),  
  name: 'Charlie',  
  age: 23,  
  major: 'Physics'  
},  
{  
  _id: ObjectId('6a867d1fd44ce90bd13e0e63'),  
  name: 'Bob',  
  age: 22,  
  major: 'Mathematics'  
},  
{  
  _id: ObjectId('6a867d1fd44ce90bd13e0e66'),  
  name: 'Eve',  
  age: 22,  
  major: 'Mathematics'
```

4. Lookup (Join with another collection) create another collection

```
-> db.courses.insertMany([  
  { course: "DBMS", major: "Computer Science" },  
  { course: "Algebra", major: "Mathematics" },  
  { course: "Quantum Physics", major: "Physics" }  
]);
```

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
{
  _id: ObjectId('6a8934712d71267c8b95ac18'),
  name: 'David',
  age: 21,
  major: 'Computer Science'
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.courses.insertMany([
  { course: "DBMS", major: "Computer Science" },
  { course: "Algebra", major: "Mathematics" },
  { course: "Quantum Physics", major: "Physics" }
]);
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6a8936a02d71267c8b95ac1a'),
    '1': ObjectId('6a8936a02d71267c8b95ac1b'),
    '2': ObjectId('6a8936a02d71267c8b95ac1c')
  }
}
Atlas atlas-7wh58m-shard-0 [primary] schoolDB>
```

Join with students:

```
-> db.students.aggregate([ {
  $lookup: {    from: "courses",
  localField: "major",    foreignField:
  "major",    as: "enrolledCourses"
  }}
]);
```

```
mongosh mongodb+srv://<credentials>@cluster0.hltpujf.mongodb.net/
Atlas atlas-7wh58m-shard-0 [primary] schoolDB> db.students.aggregate([
{
  $lookup: {
    from: "courses",
    localField: "major",
    foreignField: "major",
    as: "courseInfo"
  }
}
]);
[
  {
    _id: ObjectId('6a867d1fd44ce90bd13e0e63'),
    name: 'Bob',
    age: 22,
    major: 'Mathematics',
    courseInfo: [
      {
        _id: ObjectId('6a8936a02d71267c8b95ac1b'),
        course: 'Algebra',
        major: 'Mathematics'
      }
    ]
  },
  {
    _id: ObjectId('6a867d1fd44ce90bd13e0e64'),
    name: 'Charlie',
    age: 23,
    major: 'Physics',
    courseInfo: [

```

