


Q'loQ

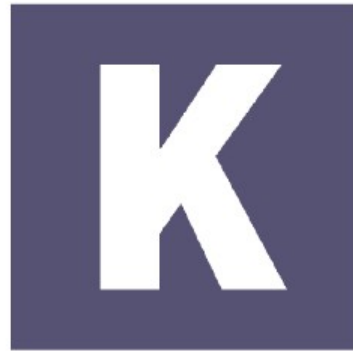

K r y p t o M a g i k

Q'loQ

A Public Key Encryption Algorithm

Based on RSA

- RSA encryption algorithm invented in 1977 by Ron Rivest, Adi Shamir and Leonard Adleman
- RSA is the most popular public key encryption algorithm today

Q'loQ

- Invented in 2019
- Reference implementation in Python
- Based on the idea of the Klingon cloaking device
- Codenamed EtherX

Governing Principles

- Base
- Cloak
- Key generation

Base

- Generate 4 primes of equal prime size, let them be P , Q , A , B and let them not be equal
- Establish a sub-totient S as the product of $P - 1$, $Q - 1$ and P
- Establish the totient as the product of $A - 1$, $B - 1$, S , A and Q

Cloak

- Establish the cloaking parameter C by taking P modulo Q
- Generate the cloaking mask M with the following formula:

$$(((p \% q) + (q \% p)) * p) * a = M$$

Cloak

- The cloaking mask is generated with the following formula:

$$((K * G) * (C+K) / K) + (((P/Q) + (Q/P)) / (K+C))$$

Public Key Generation

- Next find a number between 1 and the totient T where the number and T are co-prime and call it PK . This is the public key.

Private Key Generation

- Find the multiplicative inverse of the public key PK and the totient T and call it SK , the secret key.

Encryption/Decryption

- Encryption is achieved by taking the plain text and raising it to the power of the public key modulo N . This is called phase1. Then phase1 is raised to the power of the public modulo M
- Decryption is achieved by taking the cipher text and raising it to the power of the private key modulo M producing phase1 and then taking phase1 to the power of the N

Cryptanalysis

- Factoring the base primes from N or M is not always possible using Fermat's theorem. Q'loQ was designed to be resistant to the theorem.