


A)

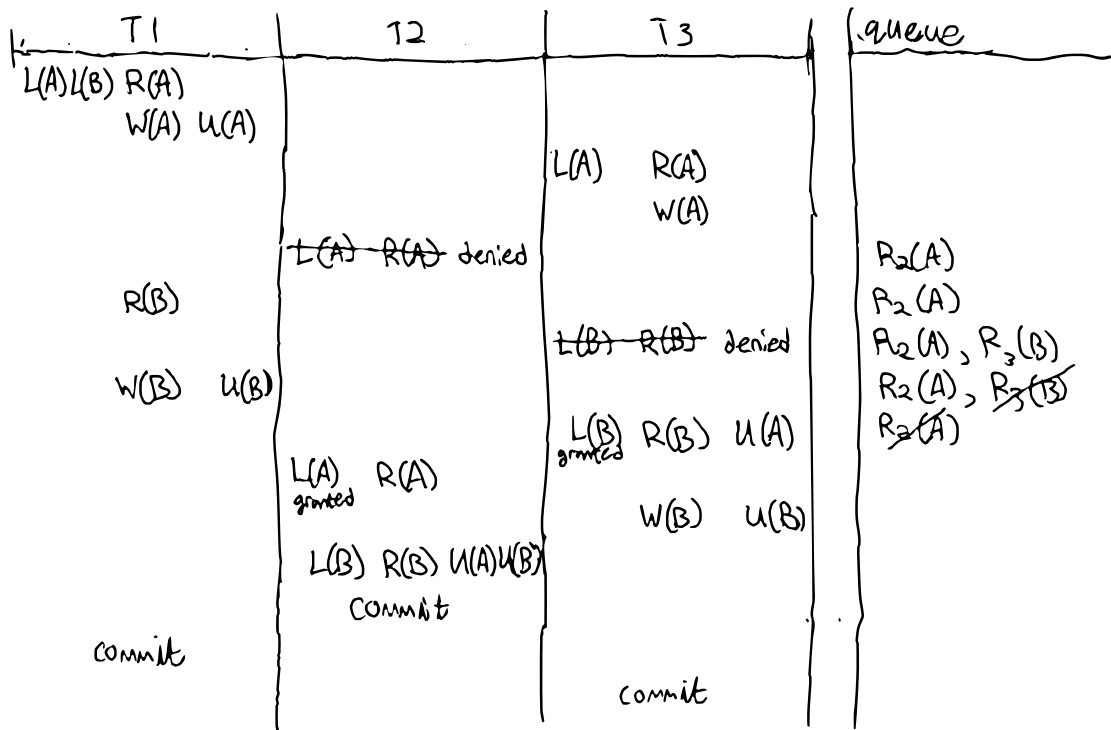

B) To additionally ensure recoverability by only releasing locks after commit.
 With nonstrict 2PL, a rollback in one transaction can invalidate the queries of another since they were treated as committed.