

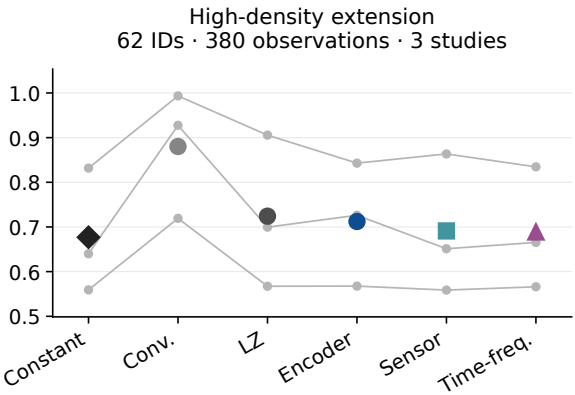


a


b Absolute held-out prediction loss

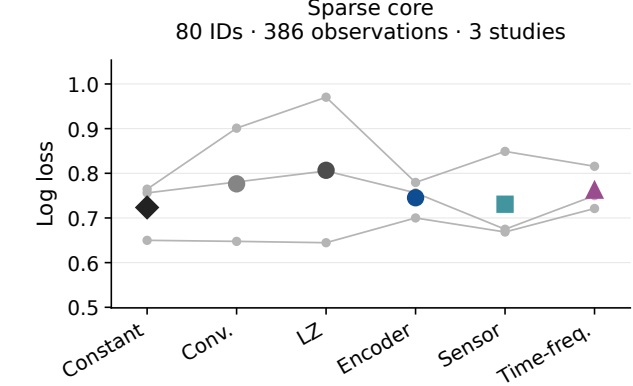



c Against conventional features

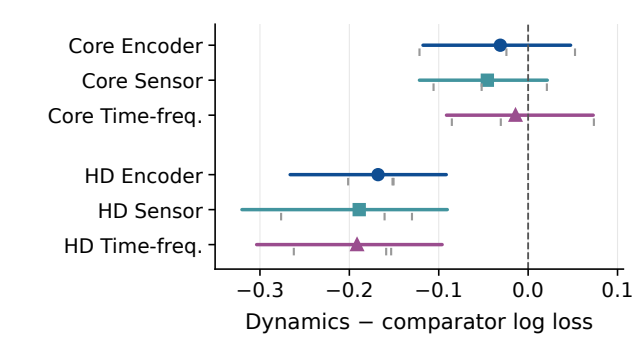


d Against nonlinear LZ

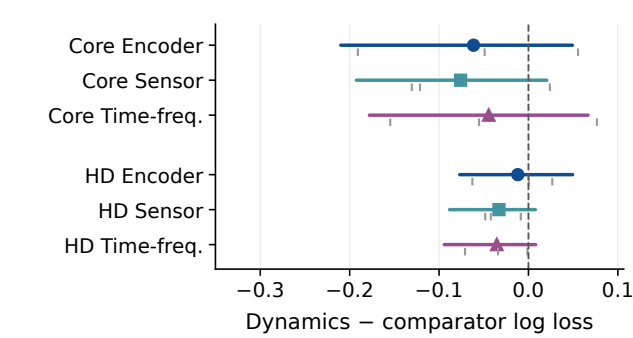

e Discrimination varies across held-out studies

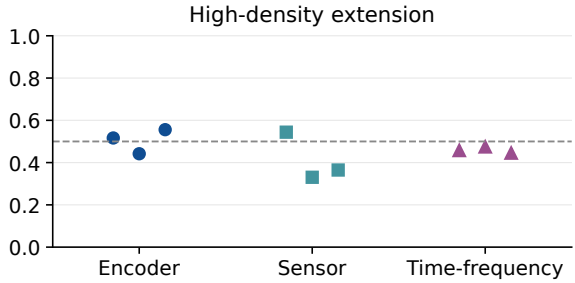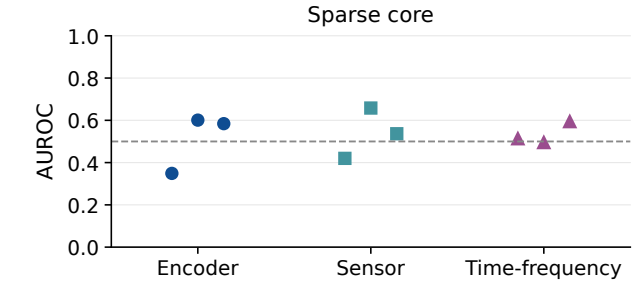


a Matched null-control logic

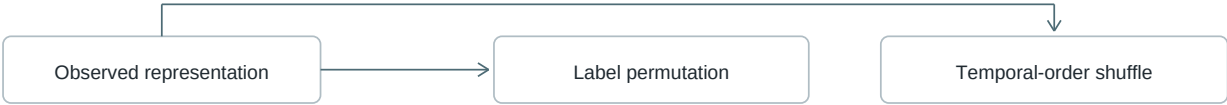


Each transformed dataset repeats the complete nested fit and held-out evaluation.

b Absolute dynamics loss

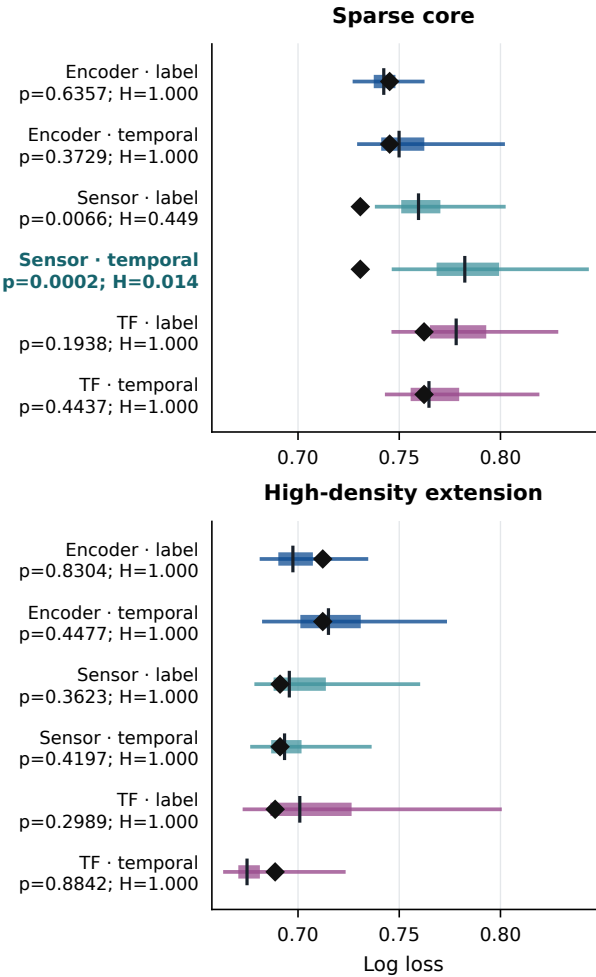


c Dynamics – conventional loss

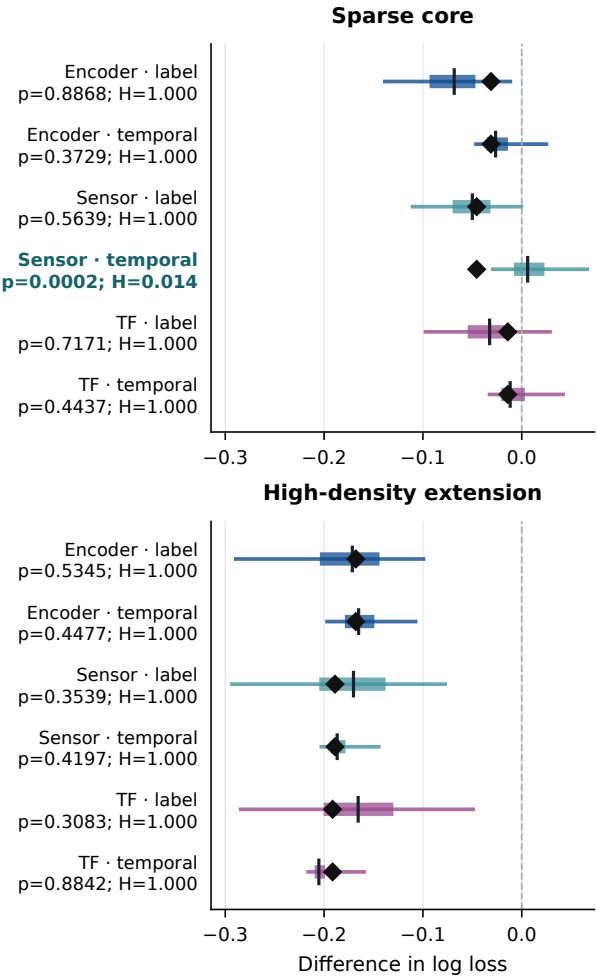


Thin line: 2.5–97.5% of 5,000 null refits; thick line: IQR; tick: median; black diamond: observed.
Lower is better. p: lower-tail Monte Carlo; H: Holm over all 72 exploratory tests. Bold: $H < 0.05$.


a All context-versus-rest differences in session change

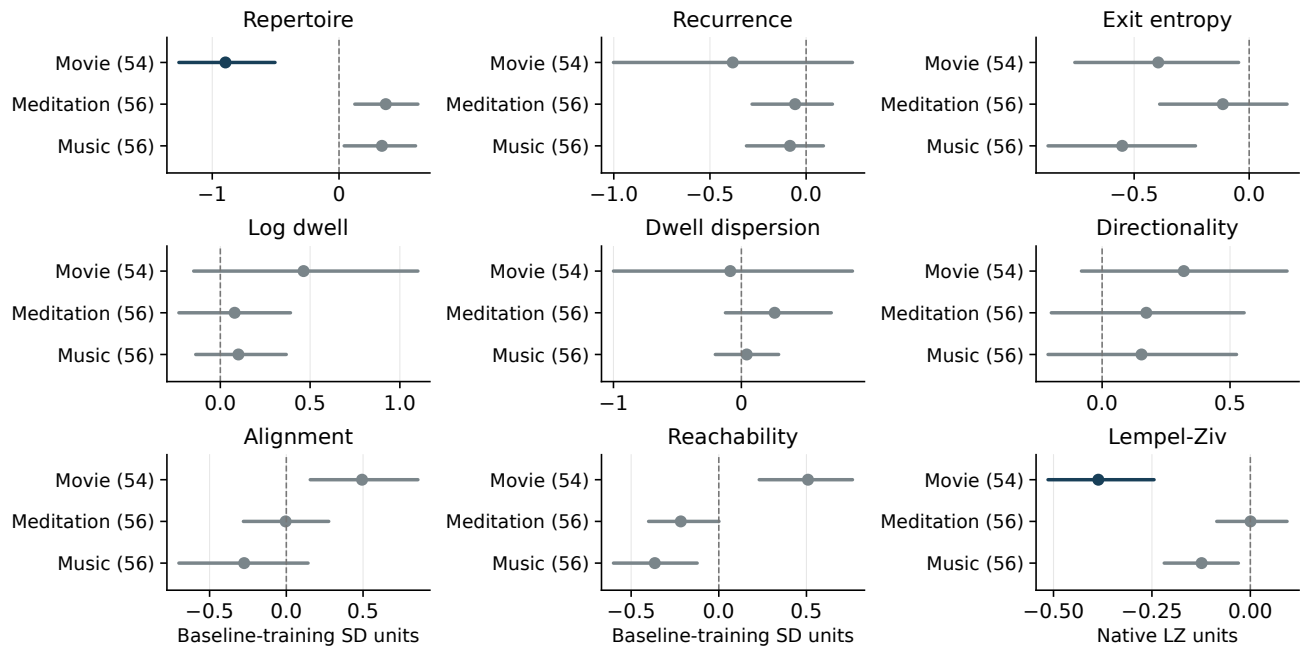


b Participant variation in the two corrected movie/rest interactions

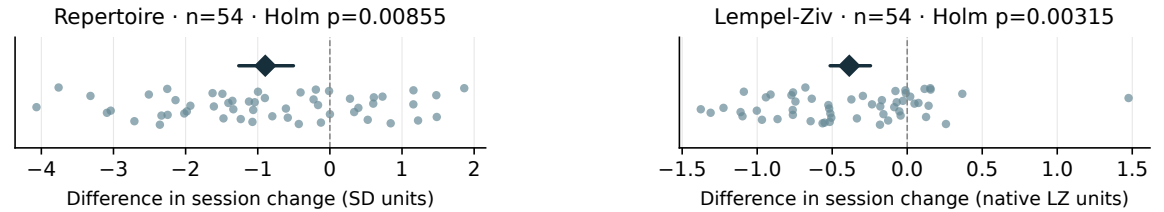


c All 396 associations with global post-session ASC11 ratings

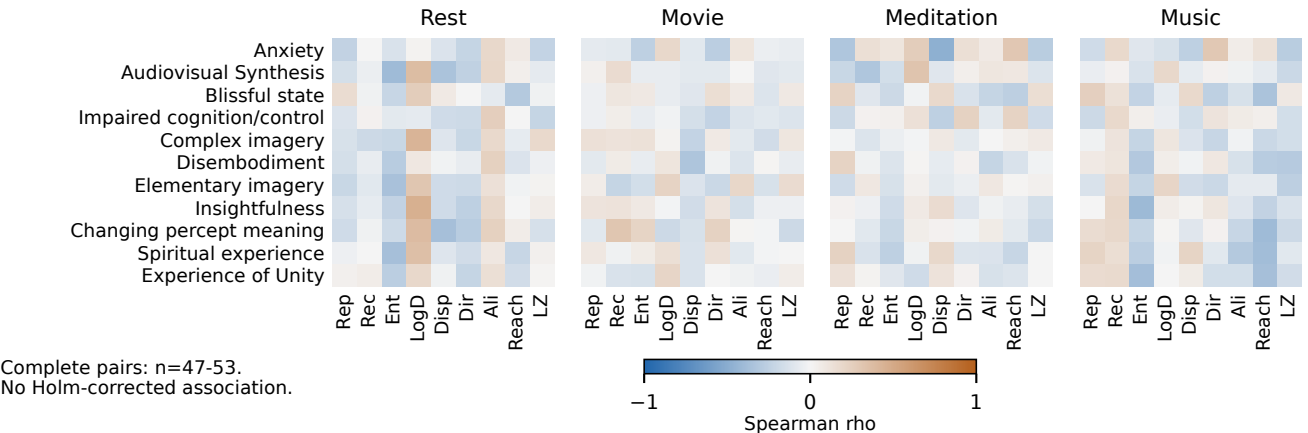


a Same state sequence, different segmentation

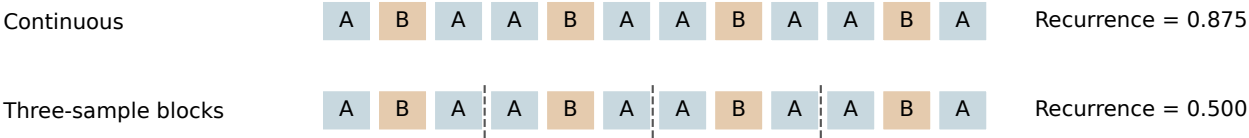

b Coverage across all 12 simulation settings

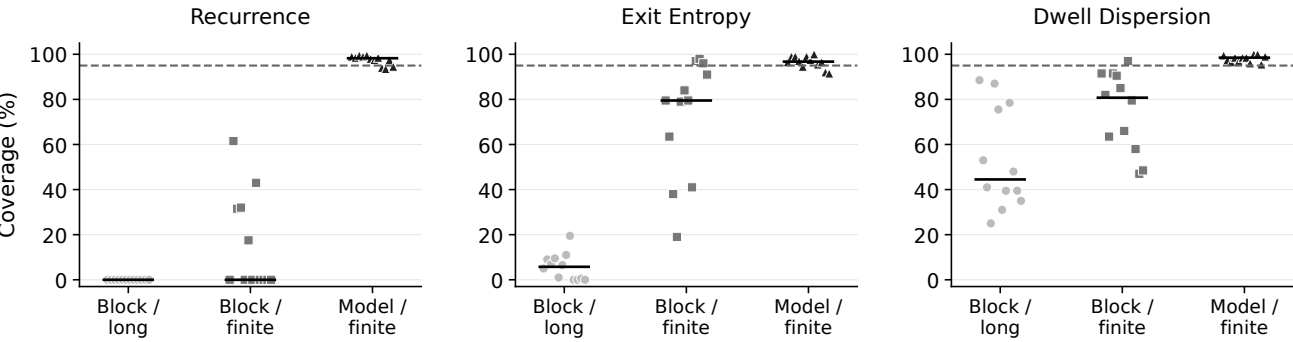

c Finite-window targets versus long-record references

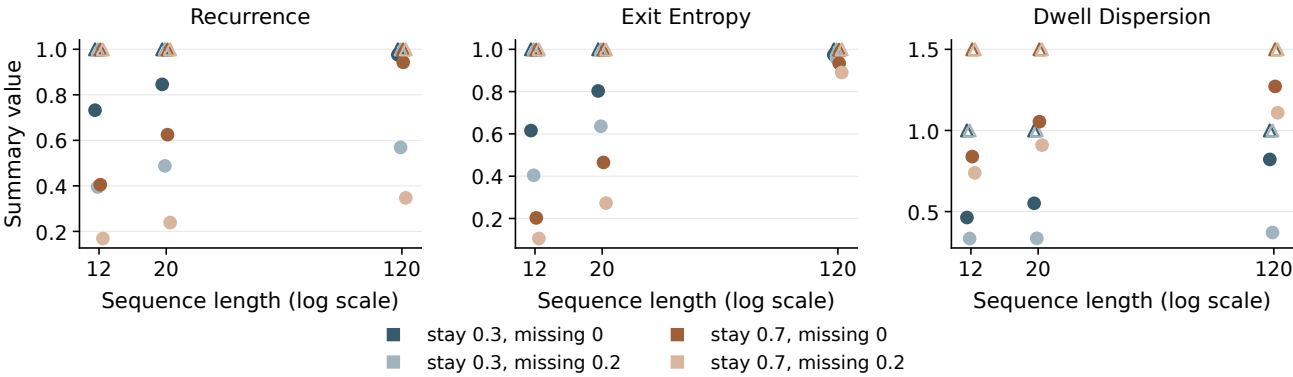

Filled circles: Monte Carlo finite-window targets. Open triangles: simulated long-record references.