

Built-in BobCAD-CAM Post Processor Lua Functions

Introduction

This topic contains the reference for built-in BobCAD-CAM Post Processor Lua Functions. These functions can be used through-out the post processor to add more customized modifications to the Post Variables or other Post Processor output.

How to use Lua Functions:

Below will describe how you can set up your own Lua Scripts in the Post Processor. The built-in Lua Functions in this document are already defined. You will be able to call these functions two ways:

Call Lua Function Method 1:

Use **lua_func_FunctionName** in a standard Post Block in the Post Processor.

Call Lua Function Method 2:

Call these Lua functions directly in Lua Blocks 2701 – 2799

- Example Function with No Arguments: **ShowOperationData()**
- Example Function with Arguments: **round(-0.23456, 3)**
- Example Function with Table as Argument: **formatNumber({num = "MILL_GetXRapid", prefix = "X", numDecimalPlaces = 1 , includeDotAfterInt = false})**

For more details about BobCAD Lua APIs, navigate [HERE](#)

For more information about the Lua Programming Language, navigate [HERE](#)

Creating Lua Functions

We have defined two different methods for utilizing Lua scripting with the BobCAD post processing system:

Method 1

Much like the VB scripting blocks that have existed for years, the same structure can be utilized starting with blocks **2701-2799** within a *.bcpst post processor file.

By utilizing a variable named **lua_block_#** this will call the corresponding block within the post containing the Lua scripting, for example:

lua_block_1 calls the 2701. block

lua_block_2 calls the 2702. block

...

lua_block_99 calls the 2799. block

Method 2

Alternatively, we have created a second method for linking your Lua scripts to a post processor which involves just keeping all your Lua scripts in a separate *.lua file with the same name as the *.BcPst file.

Let's say you are working on the BC_3x_Mill.bcpst post processor.

Method 2a

- You can simply create a BC_3x_Mill.lua file and put all of your Lua scripts in this file. These files must be located in the same directory, which is typically the Posts\Mill, Posts\Lathe, or Posts\MillTurn folder located in your products Data folder.

OR

Method 2b

You can also create a sub directory inside of your Posts\Mill, Posts\Lathe, or Posts\MillTurn folder and add block 732. Lua sub folder? "MySubFolder" into the post processor itself, and then the posting engine will look for this sub folder and load any *.lua files that are located inside of this sub folder.

- Inside of your Posts/Mill folder you can create a folder named whatever you want, let's use 3x_Mill as our folder name.
- Inside of this 3x_Mill folder you create the MyLua.lua file which contains all of your Lua scripting functions. The name can be whatever you like and you can also have multiple Lua files.
- Add block 732. Lua sub folder? "3x_Mill" to the BC_3x_Mill.bcpst so that the system knows where to find your Lua scripts.

By utilizing a variable named **lua_func_FunctionName** inside the post processor this will call the corresponding Lua function from the loaded Lua file using the methods mentioned above.

BC_Lua_Functions.lua

** Use `lua_func_` if calling from a standard Post Block. If used in Lua Blocks 2701 – 2799, remove this.

lua_func_ShowOperationData	
Mill Job	This function retrieves the current operations ID value of the Operation in the CAM Tree, iterates through the returned table and displays the key-value pairs in a message box. Use ShowValueFromOperation function to extract the key or subkey you need to use.
Lathe Job	
Mill Turn Job	
Example: 1003. Tool change for turning cycles lua_func_ShowOperationData	

lua_func_ShowValueFromOperation("operation_value")	
Mill Job	This function takes a operation_value as an argument, retrieves the current operations ID value in the CAM Tree, iterates through the returned table and returns the value of the key or subkey that matches the operation_value. If the key or subkey is not found, it returns nil. Use ShowOperationData function to find out to key you need to use
Lathe Job	
Mill Turn Job	
Example: lua_func_ShowValueFromOperation("depth_of_cut_or_stepover")	

BC_NC_Output_Lua_Functions.lua

** Use `lua_func_` if calling from a standard Post Block. If used in Lua Blocks 2701 – 2799, remove this.

lua_func_round(num, numDecimalPlaces)	
Mill Job	Round a number to a specified number of decimal places ** Ideally used in lua blocks 2701 – 2799
Lathe Job	Args: num: The number to be rounded numDecimalPlaces: The number of decimal places to round to
Mill Turn Job	Returns: The rounded number
Example: (In Lua Block 2701 - 2799) local threads_per_inch = "E" .. round(1 / pitch, 0)	

<code>lua_func_formatNumber(args)</code>	
Mill Job	Format a number to a specified number of decimal places, with optional leading zero, thousands separator, and dot after integer. Args: A table with the following keys: num: (required) The number to be formatted
Lathe Job	

	<p>numDecimalPlaces: The number of decimal places to round to. Default is rounded to 4 decimal places.</p> <p>multiply: (Optional) A multiplier number to be applied to the number before formatting. Default is 1.</p> <p>add: (Optional) A number to be added to the number before formatting. Default is 0.</p> <p>subtract: (Optional) A number to be subtracted from the number before formatting. Default is 0.</p> <p>divide: (Optional) A number to be divided by the number before formatting. Default is 1.</p> <p>includeLeadingZero: (Optional) (true or false) Whether to include a leading zero for numbers less than 1. Default is true.</p> <p>useThousandsSeparator: (Optional) (true or false) Whether to include a thousands separator. Default is false.</p> <p>includeDotAfterInt: (Optional) (true or false) Whether to include a dot after the integer part if the number is a whole number. Default is true.</p> <p>prefix: (Optional) A string of the prefix to be added to the formatted number. (Primarily used for BobCAD API functions)</p>
Mill Turn Job	<p>Returns: The formatted number as a string</p>
<p>formatNumber is a very versatile function that allows you to format just about any value you can think of in a BobCAD-CAM Post Processor.</p> <p>Using a Table (eg. myTable = { arg1 = 1, arg2 = false }) as an input argument allows you to explicitly define the parameters you want to change. If not explicitly defined, the function will use the default state.</p> <p>Example: There are 3 ways you can input a value:</p> <p>Method 1: input any number for the “num” argument</p> <pre>lua_func_formatNumber({num = 24, includeDotAfterInt = false}) // Ouput: 24</pre> <p>Method 2: input a string of a VBScript BobCAD API with no () for the “num” argument (If Lathe Job X Rapid plane is 2.25 (radius))</p> <pre>lua_func_formatNumber({num = "MILL_GetXRapid", prefix = "X", numDecimalPlaces = 1 , includeDotAfterInt = false}) // Outputs: X2.3</pre> <p>Method 3: Use the BcPost.RunVBApi(“VBScript_BobCAD_API”) function to grab any value and use for the “num” argument</p> <pre>lua_func_formatNumber({num = BcPost.RunVBApi("MILL_GetXRapid") , prefix = "X", numDecimalPlaces = 1 , includeDotAfterInt = false}) // Outputs: X2.3</pre> <p>Note: You can use method 3 to obtain the value of any VBScript BobCAD API and use it as an input for any Lua Function if needed.</p>	

lua_func_convertAngle(angle, mode, numDecimalPlaces)	
Mill Job	Convert an angle between degrees and radians. Args: angle: A number of the angle to be converted mode: The conversion mode. Can be "degreesToRadians" or "radiansToDegrees". numDecimalPlaces: (Optional) The number of decimal places to round to. Default is no rounding.
Lathe Job	
Mill Turn Job	
	Returns: The converted angle
Example: lua_func_convertAngle(180, "degreesToRadians") // Outputs: 3.14159265358979 lua_func_convertAngle(180, "degreesToRadians", 4) // Outputs: 3.1416 lua_func_convertAngle(3.1415, "radiansToDegrees", 0) // Outputs: 180 Note: Input args sequentially if args is not a table. (eg. lua_func_convertAngle(3.1415, 0) is invalid)	

includeDotAfterNum(num, includeDotAfterInt)	
Mill Job	Include a dot after the integer numbers. Ideally used in lua blocks 2701 -2799. Args: num: The number to be formatted includeDotAfterInt: (true or false) Whether to include a dot after the integer part of the number
Lathe Job	
Mill Turn Job	
	Returns: The number with a dot after if it is an integer and if includeDotAfterInt is true
Example: (In Lua Block 2701 - 2799) local dwell = includeDotAfterNum(dwell, includeDotAfterInt)	

GetValueFromOperation("operation_value")	
Mill Job	Get a value from the current operation based on a search key. Use lua_func_ShowOperationData to figure out the "operation_value". Ideally used in lua blocks 2701 -2799. Args: "operation_value": A string of the key to search for in the operation's parameters.
Lathe Job	
Mill Turn Job	
	Returns: The value associated with the search key, or nil if the key is not found.
Example: -- Get the thread pitch from the current operation local threadPitch = GetValueFromOperation("thread_pitch") -- Outputs: The value of thread_pitch, or nil if not found	

General Functions

lua_func_UnitsComment	
Mill Job	Outputs a comment in the NC file with the units of the job.
Lathe Job	
Mill Turn Job	
	Returns: Outputs a comment in the NC file with the units of the job.
Used for Post Blocks: Used for start of file blocks, but could also be used in tool change blocks as well 630 and 631: Adjust these post questions to set the comment syntax	
Example: (Posted out in the NC File) (Units: inch)	

lua_func_IfDwellOutput(prefix, includeDotAfterInt)	
Mill Job	Check if a dwell exists and output with a prefix if it does. This function is used for Peck Drilling cycles since they do not have a separate dwell post block.
Lathe Job	
Mill Turn Job	Args: prefix: A string of the prefix to be used in the dwell value includeDotAfterInt: (true or false) Whether to include a dot after the integer part of the value Returns: The dwell value with a prefix if dwell exists, otherwise nil.
Used for Post Blocks: Mill: 73. High speed peck drill canned cycle - Fast peck 83. Peck drill canned cycle Any other post block that uses a 'dwell' post variable Lathe: 1126. Peck drill canned cycle 1121. High speed peck drill canned cycle Any other post block that uses a 'dwell' post variable	
Example: 1126. Peck drill canned cycle n,g_canned_cycle,x_f,drill_depth,reference_plane,peck_drill_increment,lua_func_IfDwellOutput("P",true),canned_feed_rate // Output: P3. If 3 set for dwell on Tool Page	

Lathe Functions

lua_func_ThreadsPerInch(prefix, numDecimalPlaces, includeDotAfterInt)	
Lathe Job	Convert a pitch value to threads per inch for the Lathe Thread Operation. Args: prefix: A string of the prefix to be used in the threads per inch value numDecimalPlaces: (Optional) The number of decimal places to round the threads per
Mill Turn Job	

	inch value to. Default is 4. includeDotAfterInt: (Optional) (true or false) Whether to include a dot after the integer part of the value
	Returns: The threads per inch value with a prefix rounded to the nearest whole number.
Used for Post Blocks: 1087 (Start of thread (G76) cycle)	
Example: 1087. Start of thread (G76) cycle n,'G76',thread_x2,thread_z2,taper_height,thread_first_cut, lua_func_ThreadsPerInch("U"),thread_angle_in	
Note: Input args sequentially if args is not a table. (eg. lua_func_ThreadsPerInch("U", true) is invalid)	

lua_func_RadiusIArcMoveBlock1025	
Lathe Job	Outputs the Lathe arc move post block with I values converted from diameter to radius. I and K values rounded to the nearest 4 decimals.
Mill Turn Job	Args: none
	Returns: The whole post block for the Lathe Arc Move (Post Block: 1025) with I values converted from diameter to radius. Outputs: n,g_arc_move,x_f,z_f,""..arc_i_value.."",""..arc_k_value.."",feed_rate
Used for Post Blocks: 1025 (Arc move (Lathe))	
Example: 1025. Arc move lua_func_RadiusIArcMoveBlock1025 // Output: The whole post block rounded to 4 decimal places	

lua_func_ArcCenterXToRadius(prefixI, prefixK, numDecimalPlaces)	
Lathe Job	Outputs the arc center I and K (Or other specified prefix) values for the Lathe Arc Move post block.
Mill Turn Job	Args: prefixI: A string of the prefix to be used in the I value prefixK: A string of the prefix to be used in the K value numDecimalPlaces: (Optional) The number of decimal places to round the I and K values to. Default is 4.
	Returns: The I and K (Or other specified prefix) values for the Lathe Arc Move post block.
Used for Post Blocks: 1025 (Arc move (Lathe))	
Example: Replace arc_center with lua_func_ArcCenterXToRadius("I", "K", 4) Example Post Block Line: n,g_arc_move,x_f,z_f,lua_func_ArcCenterXToRadius("I", "K", 4),feed_rate	

Note: Input args sequentially if args is not a table. (eg. lua_func_ArcCenterXToRadius("I", 4) is invalid)

BC_Adv_Posting_Page.lua

** Use **lua_func_** if calling from a standard Post Block. If used in Lua Blocks 2701 – 2799, remove this.

The following functions allow you to define an Adv Posting Page directly in the Post Processor without having to create the adv posting custom file manually.

It is REQUIRED to have the **lua_func_FinalizeAdvPostingPage** function at the end of the Create functions to create the Adv Posting Custom File.

View the Advanced Posting with Custom Files link [HERE](#) for more info about the Adv Posting Page

Example Initialization of the Advanced Posting Page in the “Current Settings” page of a Job:

0. File Header

```
// Initialize the Adv Posting Page

lua_func_CreateCheckBox({setPosition = 1, assignCheckBoxLabel = "Use Tool Changer",
setDefaultToOnOff = 1})


lua_func_CreateComboBox({setPosition = 1, assignComboBoxLabel = "ComboBox Label 1",
setDefaultSelection = 1, assignChoiceLabels = {"Choice 1", "Choice 2", "Choice 3"}})

lua_func_CreateIntegerEditBox({setPosition = 5, assignEditBoxLabel = "Integer Edit Box",
setDefaultIntegerNumber = 10})


lua_func_CreateRealEditBox({setPosition = 2, assignEditBoxLabel = "Real Edit Box",
setDefaultDecimalNumber = 1.23})

lua_func_CreateStringEditBox({setPosition = 3, assignEditBoxLabel = "String Edit Box",
setDefaultStringText = "Default Text"})

lua_func_FinalizeAdvPostingPage({postProcessorName =
"BC_Single_Line_TESTING_LUA_FUNCS", extension = "CustomSettings", jobType = "Lathe"})
```

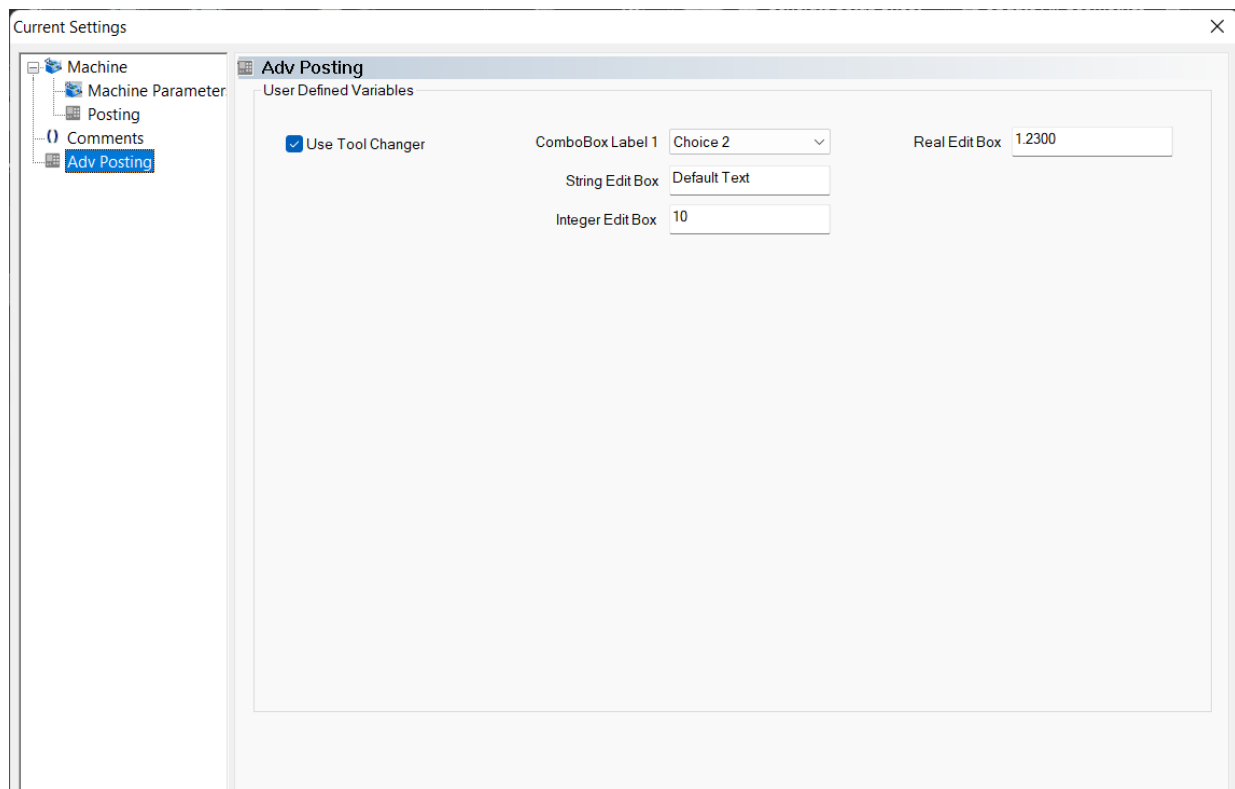Below is an image of all the possible combinations of the Adv Posting page:


Adv Posting

User Defined Variables

<input checked="" type="checkbox"/> Check Box 1	Combo/Edit Box 1	Combo/Edit Box 2
<input checked="" type="checkbox"/> Check Box 2	Combo/Edit Box 3	Combo/Edit Box 4
<input checked="" type="checkbox"/> Check Box 3	Combo/Edit Box 5	Combo/Edit Box 6
<input checked="" type="checkbox"/> Check Box 4	Combo/Edit Box 7	Combo/Edit Box 8
<input checked="" type="checkbox"/> Check Box 5	Combo/Edit Box 9	Combo/Edit Box 10
<input checked="" type="checkbox"/> Check Box 6	Combo/Edit Box 11	Combo/Edit Box 12
<input checked="" type="checkbox"/> Check Box 7	Combo/Edit Box 13	Combo/Edit Box 14
<input checked="" type="checkbox"/> Check Box 8	Combo/Edit Box 15	Combo/Edit Box 16
<input checked="" type="checkbox"/> Check Box 9	Combo/Edit Box 17	Combo/Edit Box 18
	Combo/Edit Box 19	Combo/Edit Box 20
	Combo/Edit Box 21	
	Combo/Edit Box 22	
	Combo/Edit Box 23	
	Combo/Edit Box 24	
	Combo/Edit Box 25	

lua_func_FinalizeAdvPostingPage (args)

Mill Job

Takes the string text of the Create functions defined and creates an Advanced Posting Custom File in the specified C:\BobCAD-CAM Data\BobCAD-CAM V36\Posts folder.

IMPORTANT: This function is required for all post processors that utilize the Adv Posting Lua Functions. Place it at the bottom of all the Create Adv Posting lua functions.

Lathe Job

Args: A table with the following keys:

postProcessorName: A string of the exact name of the post processor minus the extension.


extension: A string of the extension for the Advanced Posting Custom file. Click this [LINK](#) to view the different extensions used.

jobType: A string of the post processor's job type.

Use: "mill", "lathe", or "millturn"


Mill Turn Job	Returns: An Advanced Posting Custom File placed in the BobCAD-CAM Data folder. View the “Adv Posting” page in the software once you “Post” out the current job at least once.
Used for Post Blocks: Ideally, use in the 0. File Header	
Example FinalizeAdvPostingPage: lua_func_FinalizeAdvPostingPage({postProcessorName = "BC_Single_Line_TESTING_LUA_FUNCS", extension = "CustomSettings", jobType = "Lathe"})	

lua_func_CreateCheckBox (args)	
Mill Job	Creates a Check Box on the Adv Posting Page set to a default value.
Lathe Job	Args: A table with the following keys: setPosition: An integer number that sets the location of the check box on the Adv Posting page. Starting at Position 1 through 9 assignCheckBoxLabel: A string of the name given to the check box to distinguish what the check box is used for. setDefaultToOnOff: An integer number that sets the default value of the check box. (0 = Off, 1 = On)
Mill Turn Job	
Used for Post Blocks: Ideally, use in the 0. File Header	
Example CreateCheckBox: lua_func_CreateCheckBox({setPosition = 1, assignCheckBoxLabel = "Use Tool Changer", setDefaultToOnOff = 1})	

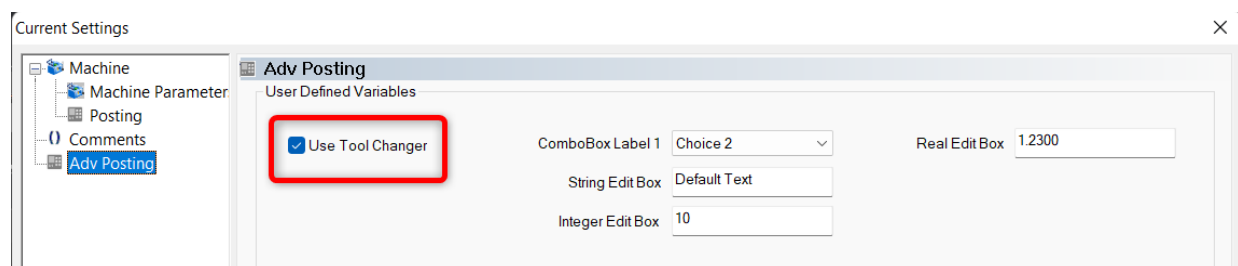


lua_func_CreateComboBox (args)	
Mill Job	Creates a Combo Box on the Adv Posting Page set to a default value.
Lathe Job	Args: A table with the following keys: setPosition: An integer number that sets the location of the check box on the Adv Posting page. Starting at Position 1 through 25. Positions 21 – 25 are wider. assignComboBoxLabel: A string of the name given to the combo box to distinguish what the combo box is used for.

	<p>setDefaultSelection: An integer number that sets the default choice of the combo box. Starting at an index of 0 through the number of choice labels setup. (eg. Choice 1 = 0, Choice 3 = 2)</p> <p>assignChoiceLabels: a table of choices for selection in the combo box. eg. assignChoiceLabels = {"Choice 1", "Choice 2", "Choice 3"}</p>
Mill Turn Job	
Used for Post Blocks: Ideally, use in the 0. File Header	
Example CreateComboBox: lua_func_CreateComboBox({setPosition = 1, assignComboBoxLabel = "ComboBox Label 1", setDefaultSelection = 1, assignChoiceLabels = {"Choice 1", "Choice 2", "Choice 3"}})	

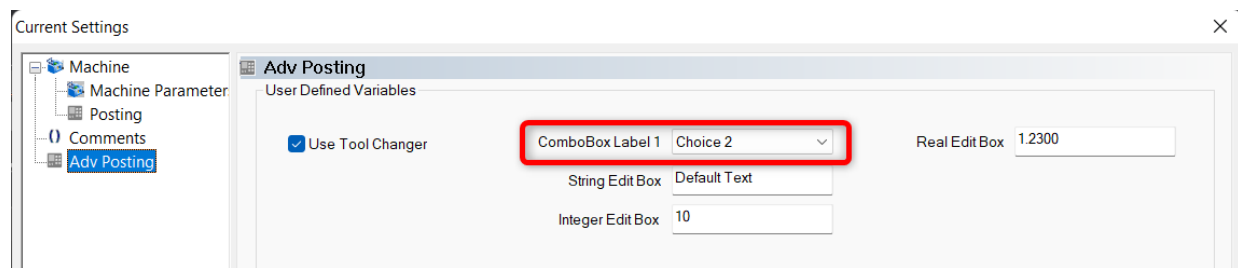

lua_func_CreateIntegerEditBox (args)	
Mill Job	Creates an Integer Edit Box on the Adv Posting Page set to a default value.
Lathe Job	Args: A table with the following keys: setPosition: An integer number that sets the location of the check box on the Adv Posting page. Starting at Position 1 through 25. Positions 21 – 25 are wider. assignEditBoxLabel: A string of the name given to the integer edit box to distinguish what the edit box is used for. setDefaultIntegerNumber: An integer number that sets the default edit box value.
Mill Turn Job	
Used for Post Blocks: Ideally use in the 0. File Header	
Example CreateIntegerEditBox: lua_func_CreateIntegerEditBox({setPosition = 5, assignEditBoxLabel = "Integer Edit Box", setDefaultIntegerNumber = 10})	

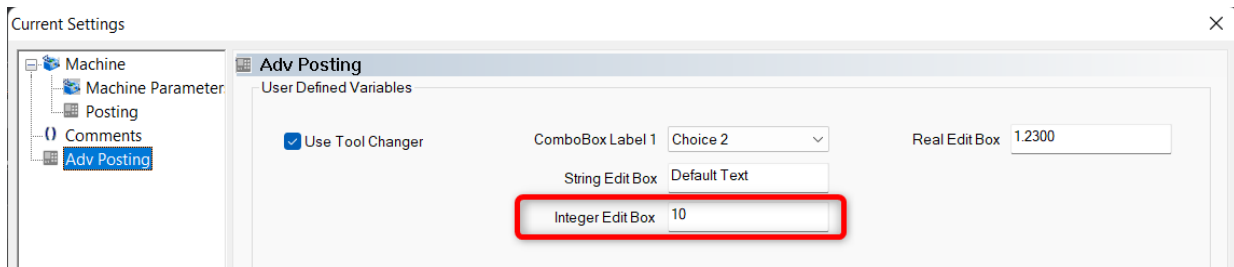

lua_func_CreateRealEditBox(args)


Mill Job	<p>Creates a Real Edit Box on the Adv Posting Page set to a default value.</p> <p>Args: A table with the following keys:</p> <ul style="list-style-type: none"> setPosition: An integer number that sets the location of the check box on the Adv Posting page. Starting at Position 1 through 25. Positions 21 – 25 are wider. assignEditBoxLabel: A string of the name given to the real edit box to distinguish what the edit box is used for. setDefaultDecimalNumber: A decimal number that sets the default edit box value.
Lathe Job	
Mill Turn Job	

Used for Post Blocks:

Ideally, use in the 0. File Header

Example CreateRealEditBox:


```
lua_func_CreateRealEditBox({setPosition = 2, assignEditBoxLabel = "Real Edit Box",
setDefaultDecimalNumber = 1.23})
```

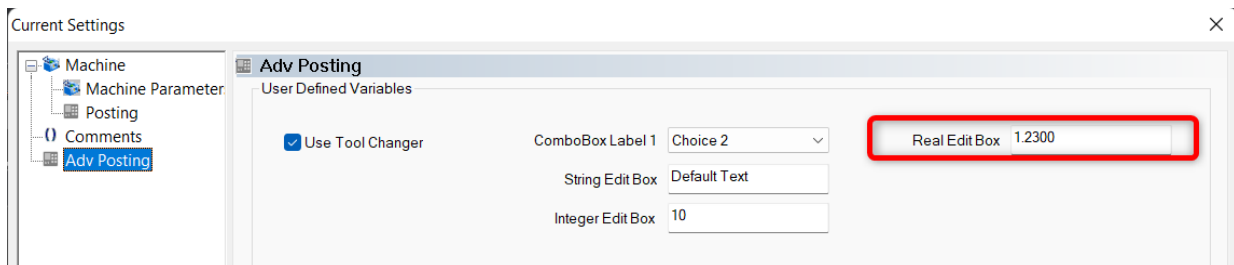

lua_func_CreateStringEditBox(args)

Mill Job	<p>Creates a Real Edit Box on the Adv Posting Page set to a default value.</p> <p>Args: A table with the following keys:</p> <ul style="list-style-type: none"> setPosition: An integer number that sets the location of the check box on the Adv Posting page. Starting at Position 1 through 25. Positions 21 – 25 are wider. assignEditBoxLabel: A string of the name given to the string edit box to distinguish what the edit box is used for. setDefaultDecimalNumber: A string that sets the default edit box value.
Lathe Job	

Mill Turn Job
Used for Post Blocks: Ideally, use in the 0. File Header
Example CreateStringEditBox: <pre>lua_func_CreateStringEditBox({setPosition = 3, assignEditBoxLabel = "String Edit Box", setDefaultStringText = "Default Text"})</pre>

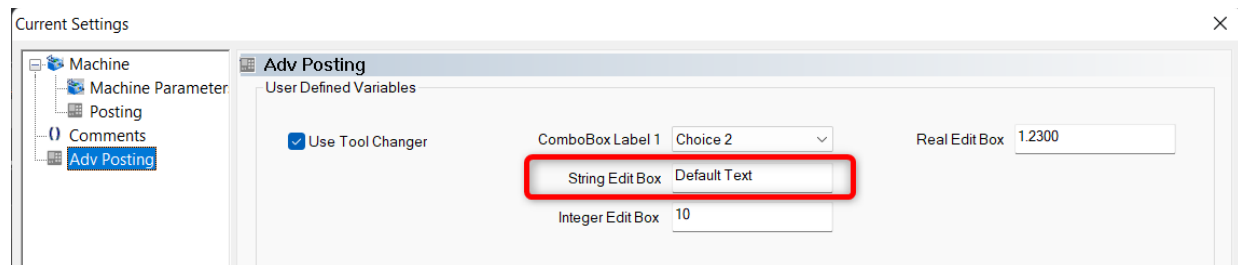

BobCAD Lua APIs – Post Processing

** These lua APIs are used in Post Blocks 2701 - 2799

BcPost.RunVBApi ("VBScriptAPIName")	
Mill Job	This function can be utilized for calling an existing VB API call from the posting engine. Please refer to the Posting Variable and API Reference in the help system of the BobCAD-CAM product you are working with for a complete list of the VB APIs. IMPORTANT: This function exists to fully support all of our VB API functions and will be the primary always working method. With that being said it is also important to note that any VB API that we created prior to BobCAD-CAM V32 you can also simply just use BcPost.vbAPIName().
Lathe Job	
Mill Turn Job	
Parameters: <ul style="list-style-type: none">• vbApiName – any existing VB function name as a string that has been implemented to work in the BobCAD posting engine.• vbInputParas - the input value to the VB function. For almost all BobCAD posting API's they all only have a single input parameter. For the few instances where the VB API requires multiple input parameters (eg. MILL_SetIntMemoryLocation(index, integer)) this parameter should be a table containing the various inputs.	
Example: -- Get the string from memory location 10 BcPost.RunVBApi("MILL_GetStringMemoryLoc", 10) -- Using a table for the second input to pass both parameters to a memory location BcPost.RunVBApi("MILL_SetStringMemoryLoc", {10,"Save Me"})	

BcPost.OutputText ("text")	
Mill Job	This function is utilized to output a string of text inside the NC program.
Lathe Job	
Mill Turn Job	
Parameters: <ul style="list-style-type: none">• text – string value of the text to output in the NC program	
Example: -- Output the following text BcPost.OutputText("HERE IS SOME TEXT IN YOUR CODE")	

BcPost.ProcessPostLine ("postString")	
Mill Job	This function is utilized to process a line of standard BobCAD posting variables. Input must be a string formatted exactly as a posting line using system posting variables. (Example: "n, rapid_move, xr, yr, 'M08'"). The system post processes these variables as it would by using the posting engine and outputs the posted string to the posted NC file.
Lathe Job	
Mill Turn Job	
Parameters: <ul style="list-style-type: none">• postString – string value of the text to output in the NC program	
Example: -- Output the NC code for the following post variables BcPost.ProcessPostLine("n, rapid_move, xr, yr, 'M08'") -- Show an example using a Lua variable to show proper concatenation -- Remember that concatenation is done with .. operator in Lua local xVal = 1.0 local yVal = 2.0 BcPost.ProcessPostLine("n,rapid_move_forced, 'X"..xVal.."','Y"..yVal.."")	

BcPost.RunPostLine ("postString")	
Mill Job	This function is utilized to process a line of standard BobCAD posting variables. Input must be a string formatted exactly as a posting line using system posting variables. The system post processes these variables as it would by using the posting engine and outputs the posted string to the posted NC file. A newline character will be added to the end of the output code.
Lathe Job	
Mill Turn Job	
Parameters: <ul style="list-style-type: none">• postString – string value of the text to output in the NC program	
Example: -- Output the NC code for the following post variables BcPost.RunPostLine("\n, rapid move, xr, yr, 'M08'")	

BcPost.RunBlock (blockNum)	
Mill Job	<p>This function is utilized to process a line of standard BobCAD posting variables. Input must be a string formatted exactly as a posting line using system posting variables. (Example: “n, rapid_move, xr, yr, ‘M08’”).</p> <p>The system post processes these variables as it would by using the posting engine and outputs the posted string to the posted NC file.</p>
Lathe Job	
Mill Turn Job	
<p>Parameters:</p> <ul style="list-style-type: none">• blockNum – integer value of the posting block that should be called	
<p>Example:</p> <p>-- Call block 12. Cutter compensation left to output cutter comp on</p> <p>BcPost.RunBlock(12)</p>	

BcPost.RunPostVariables ("postString")	
Mill Job	This function is utilized to process a line of standard BobCAD posting variables. Input must be a string formatted exactly as a posting line using system posting variables. The system post processes these variables as it would by using the posting engine and outputs the posted string to the posted NC file.
Lathe Job	
Mill Turn Job	
Parameters: <ul style="list-style-type: none">postString – string value of the text to output in the NC program	
Example: -- Output the NC code for the following post variables BcPost.RunPostLine("xr, yr")	

BcPost.RunVBScript (code)	
Mill Job	This function allows you to pass VB scripting code via the Lua engine. Because our posting engine has always had the VB Scripting for applications engine in it for many years, we implemented this call just in case any existing code would want to be reused. IMPORTANT: The syntax handling for this is important, as it is actually Lua parsing by passing a string and then VB all from our C++ code base, you must be a little stringent on your characters specifically when dealing with quotes and new line characters. Please review the examples below to understand more!
Lathe Job	
Mill Turn Job	
Parameters: <ul style="list-style-type: none">code – string containing the VBScript code that should be run	
Return: <p>Will return the output of the VBScript code in a string format when using the MILL_SetReturnString() function that exists in our VB scripting language.</p>	
Example: <p>-- This example shows how to format the quote characters as the input to the function is a string itself -- The message box being displayed is the VB message box BcPost.RunVBScript("MsgBox(\"Hi from VB Lua\")")</p>	


```
-- This small example shows the need for the \n newline characters and how to return a value
test = BcPost.RunVBScript("a=17 \n b=12 \n c=a+b \n CALL MILL_SetReturnString(c)")

Bcc.ShowMessageBox(test, {Title = "Lua calling VB"})
```

BcPost.GetValueOfDataBlock (blockNumber)

Mill Job	This is function is utilized to get the value defined for a Post Question from the post processor.
Lathe Job	
Mill Turn Job	
	At the time of this writing we currently know that post questions in blocks 750-999 do not return any value. This is planned to be addressed.

Parameters:

- **blockNumber** – integer value of the block number you wish to retrieve the data from

Return:

The value of the requested posting variable which can be various types depending on the block number requested.

BcPost.SetValueOfDataBlock (blockNumber, value)

Mill Job	This function is utilized to set the value defined for a Post Question from the post processor.
Lathe Job	
Mill Turn Job	

Parameters:

- **blockNumber** – string value of the BobCAD posting variable name
- **value** - the value to assign to the post question

Note: For the boolean post blocks which use y / n as the item in the post processor, you must use true or false in this function.

BcPost.GetValueOfPostVariable (postVariable)

Mill Job	This function is utilized get the current value of existing native posting engine variable at the current time this function is called. This API does not currently support all of the BobCAD posting engine variables, and a list of the supported variables can be found in the Post Variables Supported topic .
Lathe Job	
Mill Turn Job	
	Please refer to the Posting Variable and API Reference in the help system of the BobCAD-CAM product you are working with for a complete description of the posting variables and VB APIs.

Parameters:

- **postVariable** – string value of the BobCAD posting variable name

Return:

The value of the requested posting variable

Example:

```
-- Get the current and previous X Y Z positions
x = BcPost.GetValueOfPostVariable("x_f")
```

```

y = BcPost.GetValueOfPostVariable("y_f")
z = BcPost.GetValueOfPostVariable("z_f")
xPrev = BcPost.GetValueOfPostVariable("prev_x")
yPrev = BcPost.GetValueOfPostVariable("prev_y")
zPrev = BcPost.GetValueOfPostVariable("prev_z")

```

BcPost.GetValueOfOperation(paramName)

Mill Job	This function is utilized get operation data such as the names, types, and custom posting information.
Lathe Job	
Mill Turn Job	

Parameters:

- paramName** – this function has a fixed set of parameter strings that you can pass to get different information related to the machining operation that is currently posting.

Return:

The value of the requested piece of operation data.

Example:

```

-- Get the current operations type value in the CAM Tree
value = BcPost.GetValueOfOperation("Type")
Bcc.ShowMessageBox("Operation Type: "..value, {Title="Operation Type"})

-- Get the current operations job name in the CAM Tree
value = BcPost.GetValueOfOperation("JobName")
Bcc.ShowMessageBox("Job Name: "..value, {Title="Job Name"})

-- Get the current operations feature name in the CAM Tree
value = BcPost.GetValueOfOperation("FeatureName")
Bcc.ShowMessageBox("Feature Name: "..value, {Title="Feature Name"})

-- Get the current operations name in the CAM Tree
value = BcPost.GetValueOfOperation("OperationName")
Bcc.ShowMessageBox("Operation Name: "..value, {Title="Operation Name"})

```

The list of possible inputs for **paramName** are shown below:

paramName	Description
ID	Get the unique ID of the operation within the document. It is important to note that the ID value can even change after closing and reopening the document.
Type	Get a distinct operation type integer which can be utilized for specifically handling a single type of operation. The definitions for the type table are located in the Operation Type Reference topic
JobName	Get the name of the machining job that this operation is contained in the CAM Tree

FeatureName	Get the name of the feature which this operation is contained in the CAM Tree
OperationName	Get the name of the operation contained in the CAM Tree
UserCheckBoxVariables	Get a table returned containing the values of all the Advanced Posting pages checkbox variables
UserEditIntegerVariables	Get a table returned containing the values of all the Advanced Posting pages integer text fields
UserEditRealVariables	Get a table returned containing the values of all the Advanced Posting pages double / real text fields
UserSelectComboVariables	Get a table containing the indexes of all the Advanced Posting pages comboboxes
UserEditStringVariables	Get a table containing all the string values of all the Advanced Posting pages string text fields