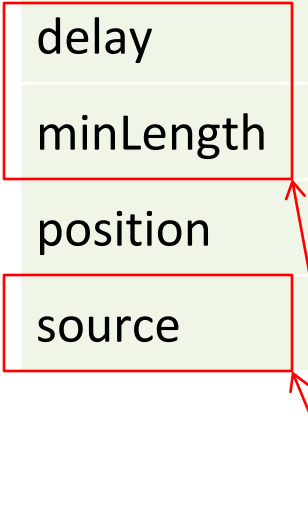

COMP 4021
Internet Computing

More on Autocomplete

Dik Lun Lee

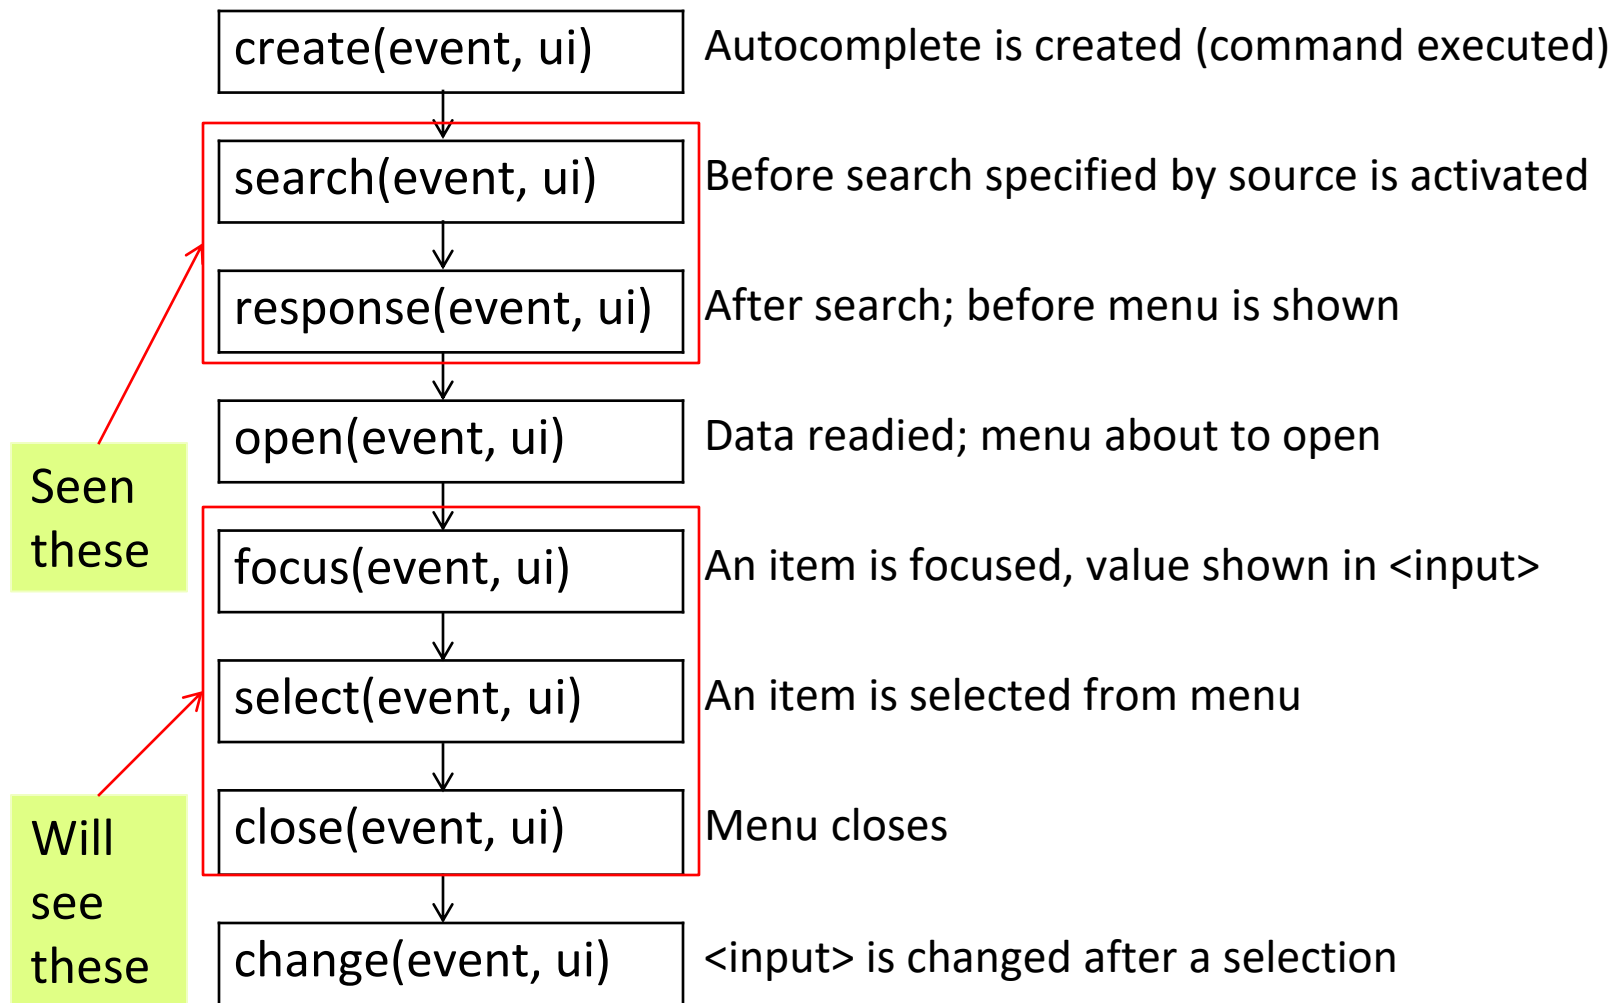
Autocomplete() Options For Reference Only

appendTo	Append an element to the menu
delay	Delay (msec) before updating suggestions
minLength	Number of characters entered before updating suggestions
position	Position of menu relative to associated input element.
source	Methods to obtain suggestions from input and dictionary



We have seen these in previous examples

Autocomplete Events and Flow



select(event, ui) Event

```
var items = [ { label: "Bianche Classic", value: " Bianche Classical Bicycle",  
               price: "HKD 1000" }, ... ]
```

```
$( "#searchBox" ).autocomplete( {  
  source: items;
```


```
  select: function( event, ui ) {
```

```
    var itemDesc = ui.item.value + ui.item.price;
```


```
    $( "#searchBox" ).val(itemDesc);
```

```
    return false; }  })
```

Executed after an item
(suggestion) is **selected**



value and price fields of
the **selected item**



- ❑ function(event, ui) defines the “select” event handler, which is executed after an item in menu is selected
- ❑ Note: In addition to label and value, we can add other fields too
- ❑ focus(event, ui) is triggered when mouse hovers over a suggestion in the menu but before clicking

_renderItem(ul, item) Event

- ❑ Customize how items are displayed in menu window
- ❑ Menu is a `...` element

```
var items = [ { label: "Bianche Classic", desc: " Bianche Classical Bicycle",  
               price: "HKD 1000" }, ... ]  
  
$( "#searchBox" ).autocomplete({  
  source: items,  
  }).data("ui-autocomplete")._renderItem = function( ul, item ) {  
    return $( "<li>" ).append( "<a>" + item.label + "<br>" + item.desc + "</a>" )  
      .appendTo( ul );  
  };  
};
```

(3) (1) (2) appendTo() append() Text content: <a> ...

(1) create a `` node in DOM

(2) append the string content `"<a> ... "` to the `` node

(3) appendTo the `` node to the `` node passed into the function

Notes about the Customization

- ❑ The `` elements have to be created (i.e., they are not pre-existing)
- ❑ “`<a>`” is optional; it is just to create the grey background as user hovers over the items
- ❑ `.data()` is a method to expose the menu, including the `_renderitem` method, for customization

_renderItem(ul, item) as a Property

- ❑ An **item** object is appended to as
 - **item**.label : string to display in menu
 - **item**.value : value to be inserted when item is selected

```
$( "#searchBox" ).autocomplete({  
  source: items,  
  _renderItem: function( ul, item ) {  
    return $( "<li></li>" )  
      .attr( "data-value", item.value )  
      .append( item.label )  
      .appendTo( ul );  
  }  
});
```

Or use:
 .data("data-value", item.value)

- ❑ Produce: <li data-value="Bianche Classical Bicycle">Bianche Classic
- ❑ You can process item.label to bold the suggestion

Other Extensions For reference only

<code>_renderItem(ul, item)</code>	Creation of each item in the menu. Creates a new <code></code> element, appends it to the menu and return it
<code>_renderMenu(ul, items)</code>	Building the menu
<code>_resizeMenu()</code>	Size of the menu before it is displayed. <code>this.menu.element</code> contains the Menu elements

Source Data from Server

- ❑ So far we assumed “source” is prepared on client side :
 - Source is an array variable preloaded with data, or
 - Computed with **source: function (request, response)**
- ❑ Now learn about fetching data from server:
 - When the server needs to compile source data in real time (e.g., most frequent queries in the last 5 minutes)

```
$( "#searchBox" ).autocomplete({  
  source: "language.js"  
});
```

- ❑ The source parameter is a URL; "language.js" points to the data file stored in the same directory as the accessed page
- ❑ language.js contains =>

```
[  
  { "label" : "java", "value" : "JAVA" },  
  { "label" : "javascript", "value" : "JAVASCRIPT" },  
]
```

Source Data from Server: Attention!

- ❑ Autocomplete **does not do filtering** when “url” is used in source; all items from server will be displayed as suggestions
 - Server must produce the right data in language.js according to application requirement
- ❑ The data must be in **JavaScript array format** to be acceptable by the "source" parameter
 - The format is called JSON (JavaScript Object Notation)

Server Program to Generate Data

- ❑ Autocomplete "source" parameter invokes a server-side program (e.g., PHP) and passes request.item to it
- ❑ Server program uses request.item to get matching suggestions and passes the filtered data back to the client as json data

```
$(function() {  
    $( "#searchBox" ).autocomplete( {  
        source: "search.php",  
        minLength: 1  
    });  
});
```

Server-Side PHP Code

```
<?
$term = $_GET[ "term" ];
$languages = array(
    array( "label" => "java", "value" => "Good for applications" ),
    array( "label" => "javascript", "value" => "Good for browsers" ),
);
$result = array();
foreach ( $languages as $language ) {
    $languageLabel = $language[ "label" ];
    if ( strpos( strtoupper($languageLabel), strtoupper($term) ) !== false ) {
        array_push( $result, $language );
    }
}
echo json_encode( $result );
?>
```

- ❑ We have not covered PHP but you can read it and imagine what can be done
- ❑ Suggestions are obtained by the program
- ❑ Other languages besides PHP can be used

The Rest of Autocomplete

- ❑ Try out examples in course homepage
- ❑ Search and read the numerous tutorials on web

COMP 4021
Internet Computing

More on CSS Selectors

Dik Lun Lee

More Selectors: Class

```
<p class="important"></p>
```

```
<p></p>
```

```
<p class="warning"></p>
```

```
<p class="important warning"></p>
```

<p> belongs to two classes: «important» and «warning»

`$(‘p.important, p.warning’)` returns which <p> tags?

\$("ancestor descendant")

<form>

<label>Child:**</label>****<input** name="name" **/>**

<fieldset>

<label>Address:**</label>****<input** name="address" **/>****
**

<label>Age:**</label>****<input** name="age" **/>**

</fieldset>

</form>

Sibling to form: **<input** name="none" **/>**

<script>\$("#form input").**css**("border", "2px dotted red");**</script>**

"<input>" tag with ancestor <form>

Child:

Address:

Age:

Sibling to form:

Child Selector: >

<ul class="topnav">

Item 1

Item 2

Nested item 1

Nested item 2

Nested item 3

Item 3

- Item 1
- Item 2
 - Nested item 1
 - Nested item 2
 - Nested item 3
- Item 3

** tag with parent which has class "topnav"**

<script>\$("ul.topnav > li").css("border", "1px double red");</script>

Immediate Sibling Selector: +

<input> immediately preceded by <label>

`<script>$("label + input").css({"border":"2px dotted red",
"color":"blue"}).val("Enter value"); </script>`

`<form>`

`<label>Name:</label><input name="name" />`

`<fieldset>`

`<label>Address:</label><input name="address" />
`

`<label>Age:</label><input name="age" /></fieldset></form>`

`<input name="none" />`

Name:

Address:

Age:

What about:

`<script>$("form input").css("color",
"blue").val("Enter value")</script>`

Next Sibling Selector: ~

`$("label ~ input")`

- ❑ `<label>` does not have to be immediately preceding `<input>`
- ❑ But sibling means `<label>` and `<input>` belong to the same parent

Combining Several Selectors

- **`$("div > ul a")`** reads:
 - ▣ All `<a>` elements which are **descendants** of `` elements which are **direct children** of `<div>` elements

```
<div>
  <ul><li> This is a sublist:
    <ul>
      <li> <a href=...>Click here</a></li>
    </ul>
  </li>
</ul>
<a href=...>Click here</a>
</div>
```

Which `<a>` would be selected?

Select and Action Example

- Select all elements within element with ID=orderedlist, and add the class "blue"

```
$(document).ready(function() {  
    $("#orderedlist > li").addClass("blue");  
});
```

```
<ol id="orderedlist">  
    <li class="blue">... </li>
```

```
$("#orderedlist > li").removeClass("blue");
```

```
<ol id="orderedlist">  
    <li >... </li>
```

For another example see: <https://jsfiddle.net/qb2n7h5L/2/>

Some Useful Selectors (For Reference Only)

❑	<code>\$('#id')</code>	element with the specified ID
❑	<code>\$('p')</code>	all elements with the specified name
❑	<code>\$('.class')</code>	all elements with the specified class
❑	<code>\$('*')</code>	all elements
❑	<code>\$('p.class')</code>	<p> elements having the CSS class
❑	<code>\$('p:first')</code>	<code>\$('p:last')</code> / <code>\$('p:odd')</code> / <code>\$('p:even')</code>
❑	<code>\$('p')[1]</code>	gets the 2 nd <p> element (0 is first)
❑	<code>\$('p a')</code>	<a> elements, descended from a <p>
❑	<code>\$('p>a')</code>	<a> elements, direct child of a <p>
❑	<code>\$('p+a')</code>	<a> elements, preceded by a <p> (next sibling)
❑	<code>\$('div, p, a')</code>	<div>, <p> and <a> elements
❑	<code>\$('li:has(ul)')</code>	 elements that have at least one descendent
❑	<code>\$(':not(p)')</code>	all elements but <p> elements
❑	<code>\$('p:hidden')</code>	only <p> elements that are hidden
❑	<code>\$('p:empty')</code>	<p> elements that have no child elements

Useful Selectors (Cont.) (For Reference Only)

E[a]	all E elements with attribute 'a' of any value
E[a=v]	all E elements with attribute 'a' exactly 'v'
E[a^=v]	all E elements with attribute 'a' starting with 'v'
E[a\$=v]	all E elements with attribute 'a' ending with 'v'
E[a*=v]	all E elements with attribute 'a' containing 'v'

□ \$('img'[alt])	 elements having an alt attribute
□ \$('a'[href^=http://])	<a> elements with href starting with 'http://'
□ \$('a'[href\$=.pdf])	<a> elements with href ending with '.pdf'
□ \$('a'[href*=hkust])	<a> elements with href containing 'hkust'

jQuery Functions for Formatting

❑ <code>\$("p").css(property, value)</code>	Set property to value
❑ <code>\$("p").html()</code> ❑ <code>\$("p").html(htmlString)</code>	Get the content of the first <code><p>...</p></code> Set the html contents of each <code><p>...</p></code>
❑ <code>\$("input").val()</code>	For form <code><input></code>
❑ <code>\$("p").addClass('class')</code>	Add <code>class="class"</code> property to all <code><p></code>
❑ <code>\$("p").removeClass('class')</code>	Remove <code>class="class"</code> property from all <code><p></code>

Add Page Elements

- ❑ `$('#target').before('<p>Inserted before #target</p>');`
- ❑ `$('#target').after('<p>This is added after #target</p>');`
- ❑ `$('#target').append('<p>Goes inside #target, at end</p>');`
- ❑ `$('#target').wrap('<div></div>');`

Take Home Message

- ❑ CSS-like selectors are like a query language to the DOM to retrieve elements matching some fairly sophisticated conditions
- ❑ There are still many jQuery and autocomplete functions not covered
- ❑ Will cover jQuery ajax and server side programming (PHP) later in this course