

# ECLIPSE PTP

## BASIC USER MANUAL


This manual has instructions on installing Eclipse PTP on Linux operating systems and using Eclipse PTP for developing and running parallel applications on K and FX10 supercomputers. Installation procedures for OS X and Windows OS are similar to the one described here but may differ. Please, refer to the online manual at [https://wiki.eclipse.org/PTP/release-notes/9.0#Install\\_PTP](https://wiki.eclipse.org/PTP/release-notes/9.0#Install_PTP).

This manual describes Eclipse PTP usage with Fujitsu supercomputers FX10 and K, but can be useful for other supercomputers too.

Symbol ▶ shows mouse click point.



理化学研究所  
計算科学研究機構  
RIKEN Advanced Institute for Computational Science



# Contents


<b>1. Installation and configuration</b>	3
1.1 Download and install Eclipse PTP	3
1.2 Install LML driver scripts	4
1.3 Start Eclipse PTP	5
1.4 Add SSH keys	5
1.5 Add a Remote system connection	6
1.6 Add a synchronization connection	7
<b>2. Create synchronized project</b>	8
2.1 From code on remote location	8
2.2 From local code	8
2.2.1. Import Fortran code	8
2.2.2. Convert local project to synchronized	10
2.3 Create synchronized project from git repository	11
<b>3. Synchronization</b>	13
<b>4. Remote terminal</b>	14
<b>5. Build a project</b>	15
5.1 Build Configurations	15
<b>6. Run a project</b>	16
6.1 Run Configurations	16
6.1.1. Import Target System Configurations	16
6.1.2. Create Run Configuration	17
6.2 Submitting a job with a custom job script	19
<b>7. Monitoring</b>	20
7.1 Monitoring	20
7.2 Job control	20
<b>8. Performance analysis of MPI applications</b>	21
8.1 TAU installation on local computer	21
8.1.1. Install Eclipse PTP TAU extensions	21
8.1.2. Setup local Database for profiles	22
8.2 TAU instrumentation	23
8.2.1. Compiler Based instrumentation	24
8.2.2. Source Based instrumentation	24
8.3 Running instrumented binary	24
8.3.1. Profile Configurations	24
8.5.1. Profiling with custom job script	26
8.3.2. Submit profiling or tracing job	26
8.4 View TAU pofiles	27
8.5 View TAU traces	28

# 1. Installation and configuration

## 1.1 Download and install Eclipse PTP

Download Eclipse PTP distribution. We recommend using Luna version as it is more stable.

Go to <http://www.eclipse.org/downloads/packages/release/luna/sr2>, scroll down to Eclipse for Parallel Application Developers and select your platform:

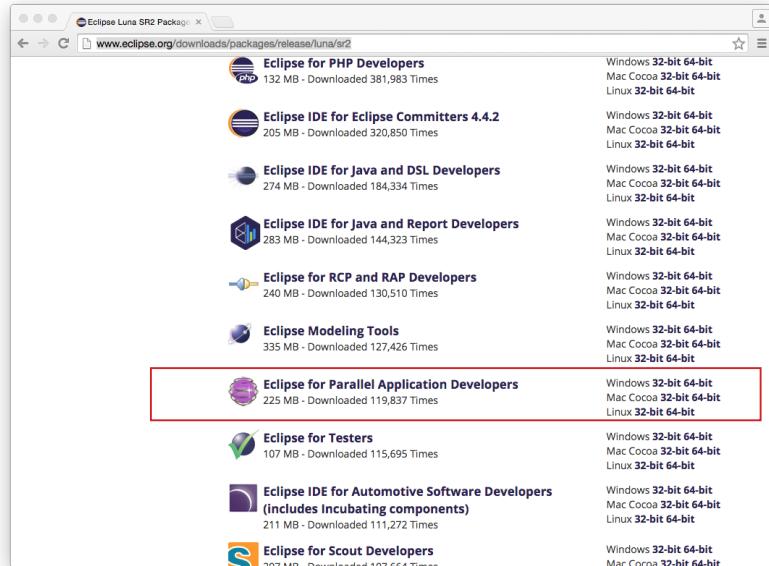

### Download archive and extract

```
$ tar -zvxf eclipse-parallel-luna-SR1a-linux-gtk-x86_64.tar.gz
$ sudo mv eclipse /opt
```

### Create Link to Eclipse PTP executable

```
ln -s /opt/eclipse/eclipse /usr/sbin/eclipse
```

### Install Java and git

```
$ sudo apt-get install default-jre
$ sudo apt-get install git
$ git config --global user.name "Eclipse User"
$ git config --global user.email "user@eclipse.ptp"
$ git config -l
user.name=Eclipse User
user.email=user@eclipse.ptp
```

Enter your name and e-mail address here

## 1.2 Install LML driver scripts

Monitoring in Eclipse PTP requires installation of LML DA driver on remote (super)computer. You need to install it into .eclipsesettings directory in your home directory on remote computer.

For the "K" computer execute the following in your home directory:

```
> mkdir .eclipsesettings  
> cd .eclipsesettings  
> git clone https://github.com/pyotr777/eclipse_on_K.git --branch K .
```

(don't forget the last dot ".")

For FX10 computer replace "--branch K" with "--branch fx10".

You may need to set execution permissions for some files.


Use `runlml` script to check that monitoring works.

## 1.3 Start Eclipse PTP

Start Eclipse PTP from extracted directory.

Set Workspace directory.

Eclipse window will show up.

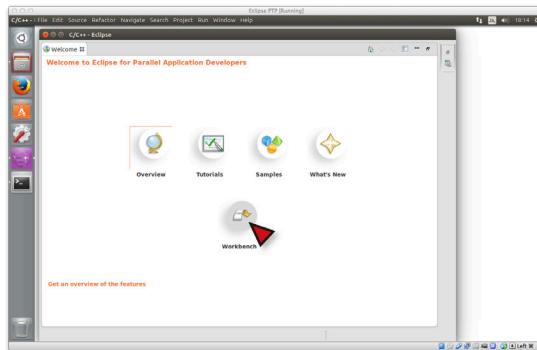


## 1.4 Add SSH keys

To be able to connect to remote computers with SSH and private keys, you need to tell Eclipse which SSH key files can be used.

Open Eclipse Preferences window.

Unfold General / Network connection, select SSH2.


Click Add Private Key and select a file with SSH key.

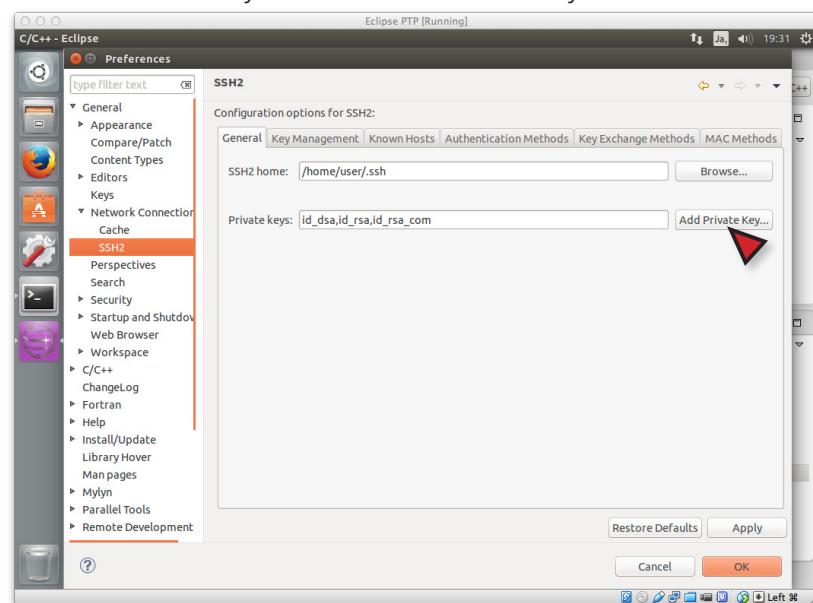


## 1.5 Add a Remote system connection

To browse remote files, login with SSH and execute remote command in Terminal you need a Remote System connection.


To create new Remote System connection open Remote Systems view:  
Window / Show View / Other,

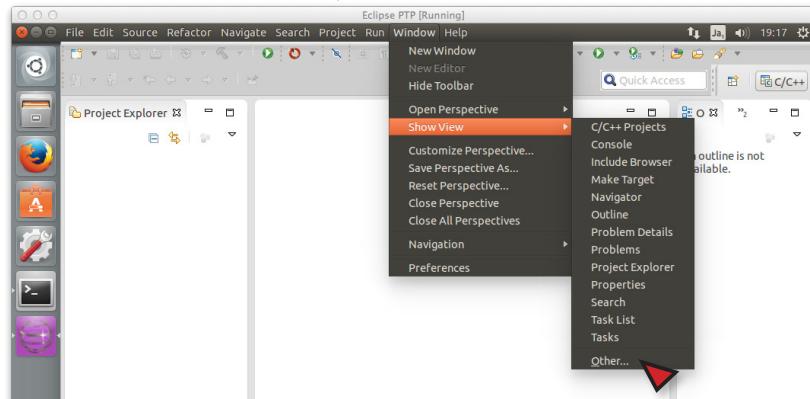


Remote Systems / Remote systems.

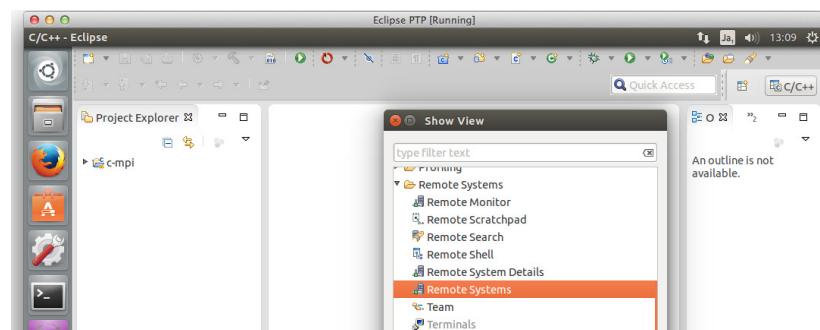

In Remote Systems window click on button to add a new connection to a remote system.

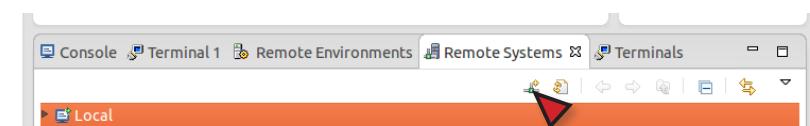


Select SSH Only.

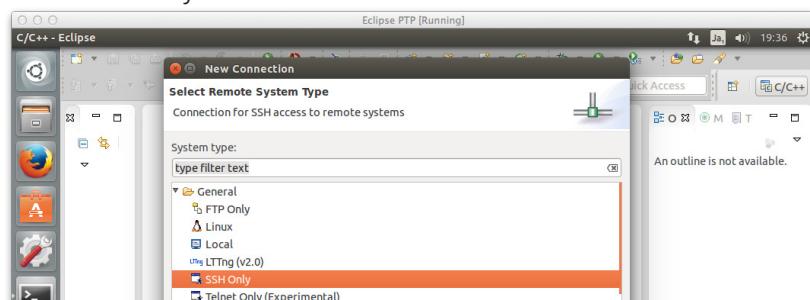

Enter Host name, Connection name and Description. Click "Finish".

To see available connections open Preferences window, unfold Remote Development and select Remote Connections.

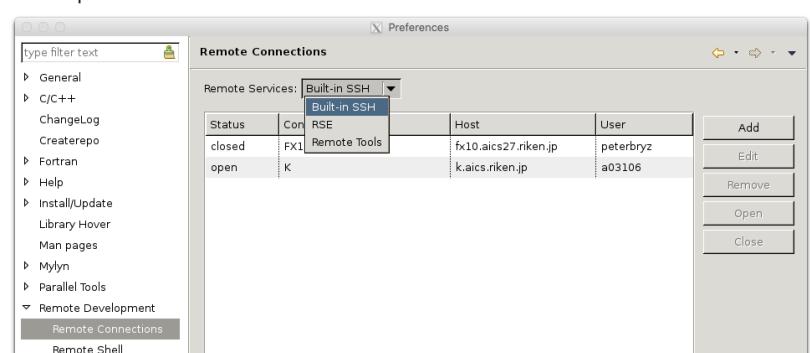


## Eclipse PTP basic user manual

New Connection for Remote System Explorer (RSE)

Using “Remote Services” drop-down menu you can select connections type. Remote system connection that you have created should be visible in “RSE” Remote Services.

You can also create new connection here in Preferences window. Select “RSE”, click “Add”, select “SSH only”, click “Next”.

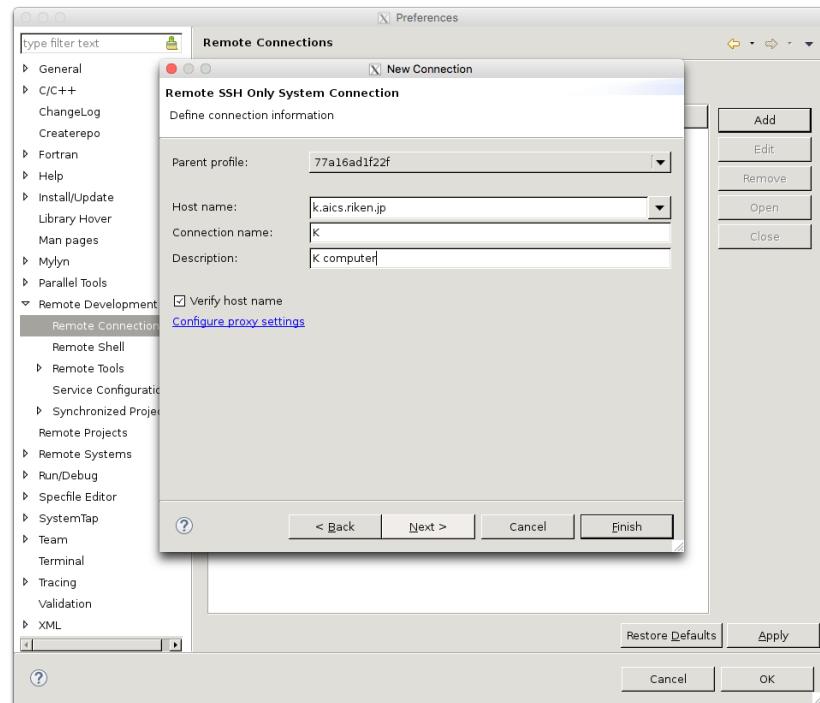


Another type of connection is used for synchronization, building and execution of synchronized and remote projects.

## 1.6 Add a synchronization connection

For projects synchronization Built-in SSH connections are used. To create a new Built-in SSH connection select “Built-in SSH” in the “Remote Services” drop-down menu of Eclipse Preference window and click “Add” button.

Fill in Host, User and select “Public key based authentication”.

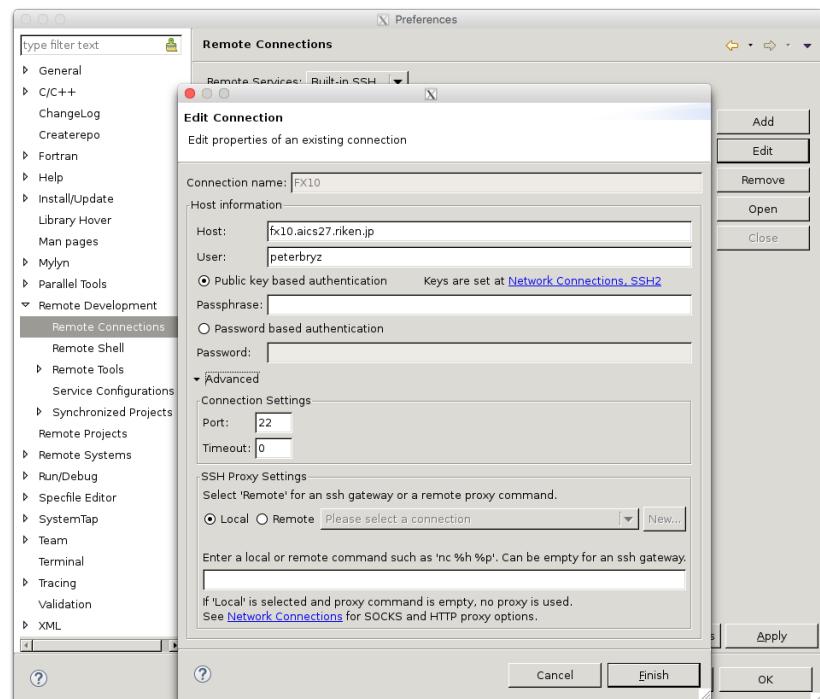


Click “Finish”.

## 2. Create synchronized project


### 2.1 From code on remote location

In the Project Explorer, right-click on empty space, select New > Synchronized C/C++ Project or Synchronized Fortran project.

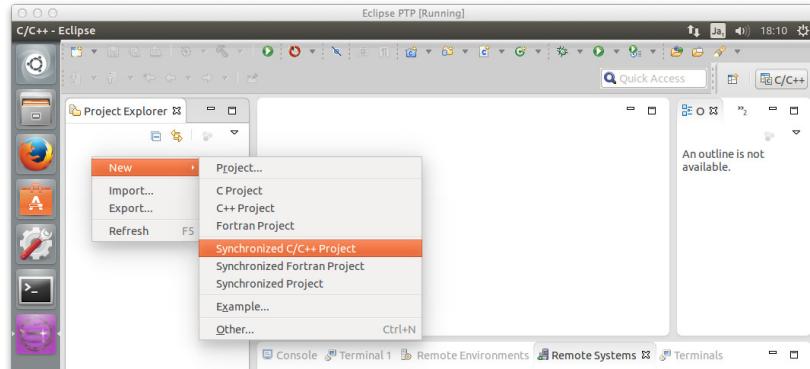

Enter Project name. Select Connection name (create new one if necessary). Set Remote directory, Project Type: Makefile project/Empty Project. Click Finish.

New Synchronized Project wizard window

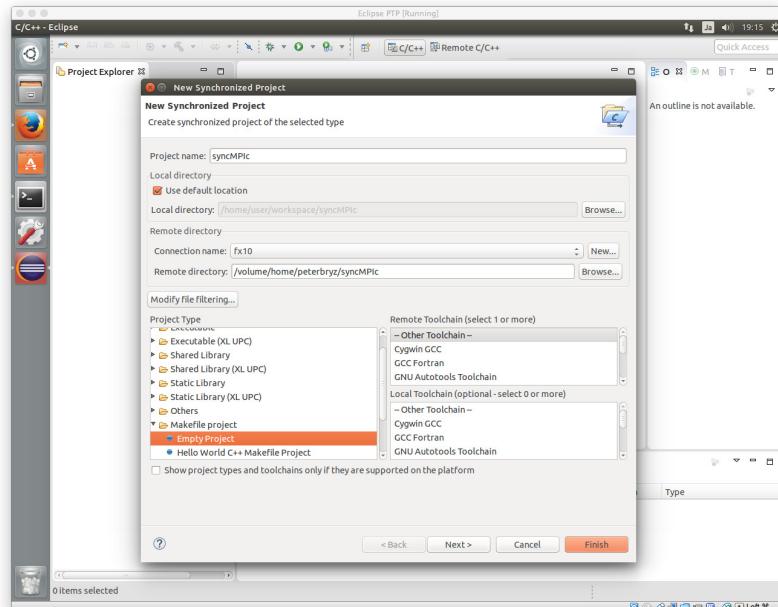

Your new project will appear in Project Explorer.

Note your project icon. Synchronized project icon has a bidirectional arrow sign:


### 2.2 From local code

#### 2.2.1. Import Fortran code

Local code is any C/C++/Fortran program source code that is not part of any Eclipse project.

To convert local source code to Eclipse project right-click on empty space in Project Explorer and select Import...


Unfold C/C++ and select Existing Code as Makefile Projects.

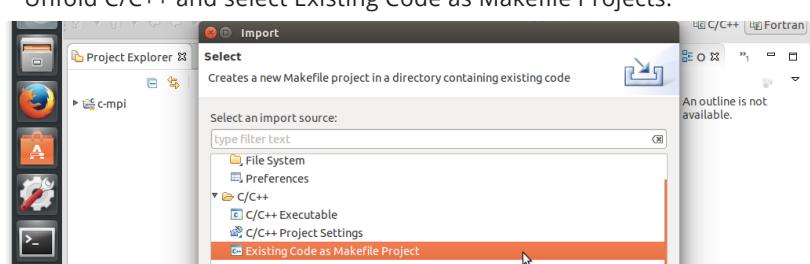


## Eclipse PTP basic user manual

Click Next.

Give your project a name, select directory with your code, and select Toolchain.

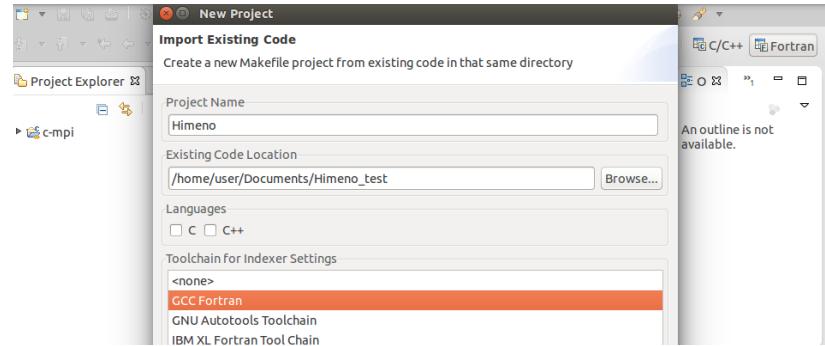


Click Finish.

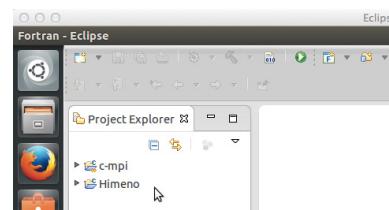

Now you have a new project in Eclipse, but the project is not synchronized and marked as a C project.


Convert it into a Fortran project. Right-click on the project in Project Explorer and select Convert to Fortran project.

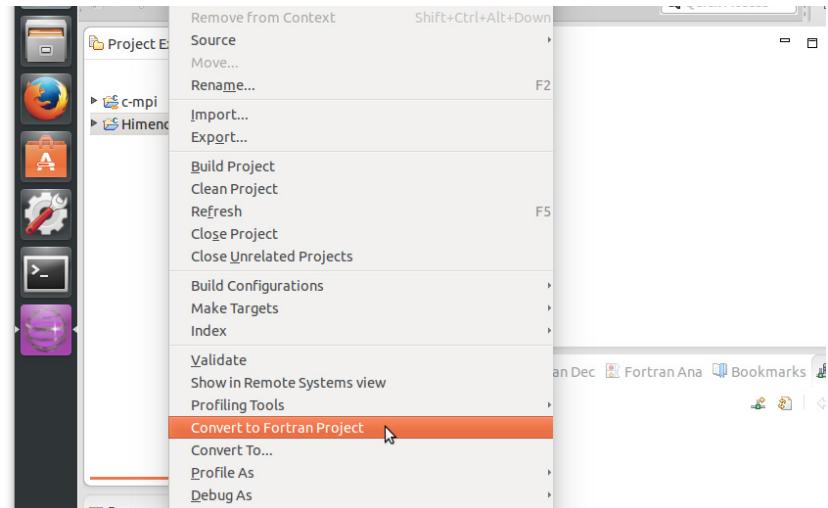


Make sure, the project folder icon changed to . There is no arrow, because the project is not synchronized (local).

## 2.2.2. Convert local project to synchronized

To convert project to synchronized, go to top menu, select File > New > Other ...

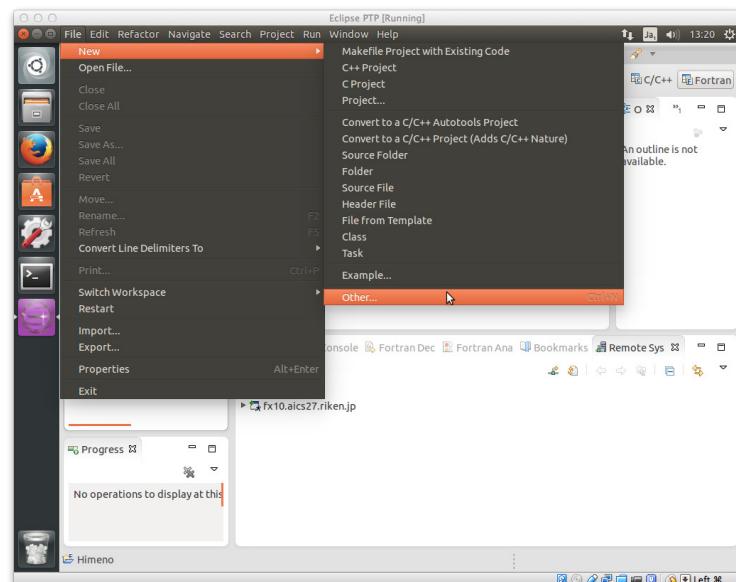


Unfold "Remote" and select "Convert to Synchronized project".

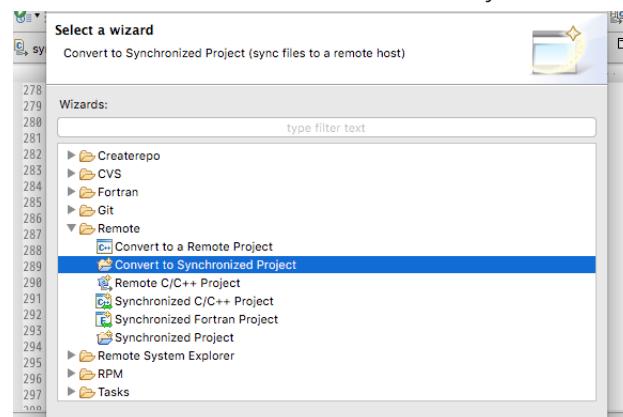

Click "Next".

Select your project in Project Name, select connection and remote directory. Change filtering settings if necessary.

Click Finish.

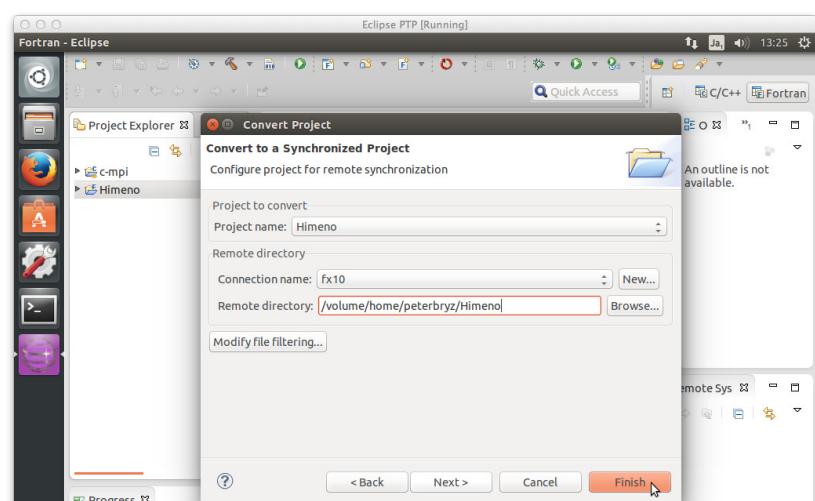


Note, that project icon changed to .


## 2.3 Create synchronized project from git repository

To create a new synchronized project from existing remote git repository:


Open git perspective from top menu: Window > Open perspective > Other and select Git.

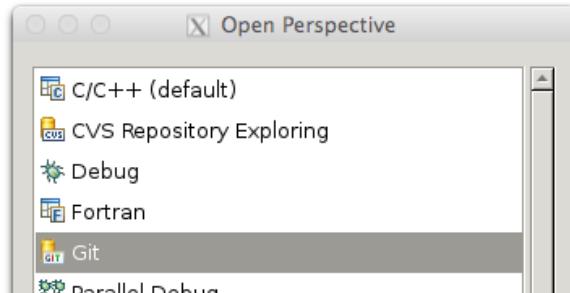


In Git perspective select Clone a Git repository.

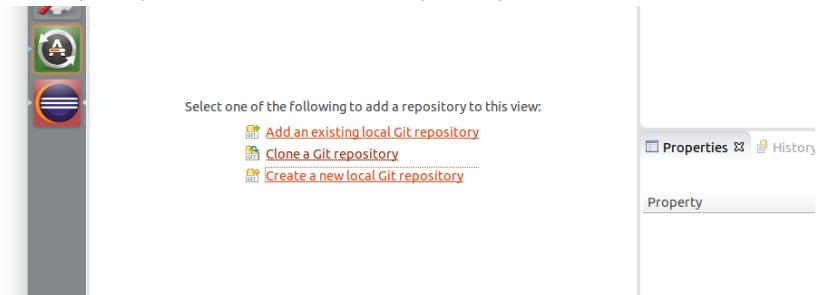

Fill in repository URI and other fields (some fields will be filled automatically after you fill URI). Click Next.

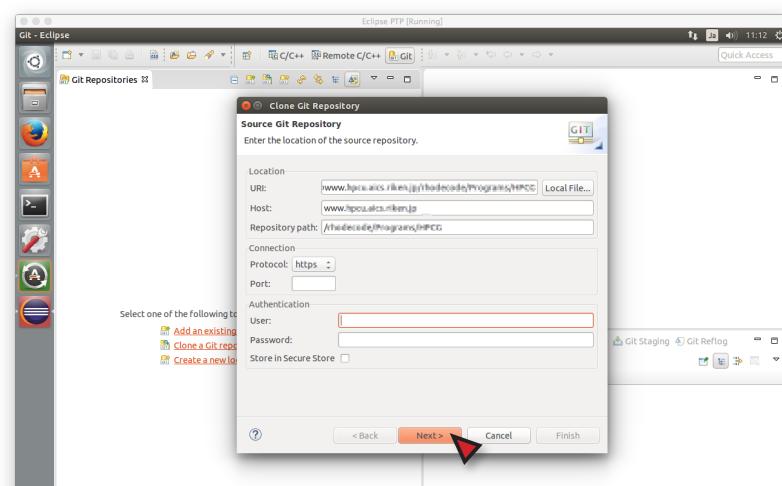

Select git branch and click Next.

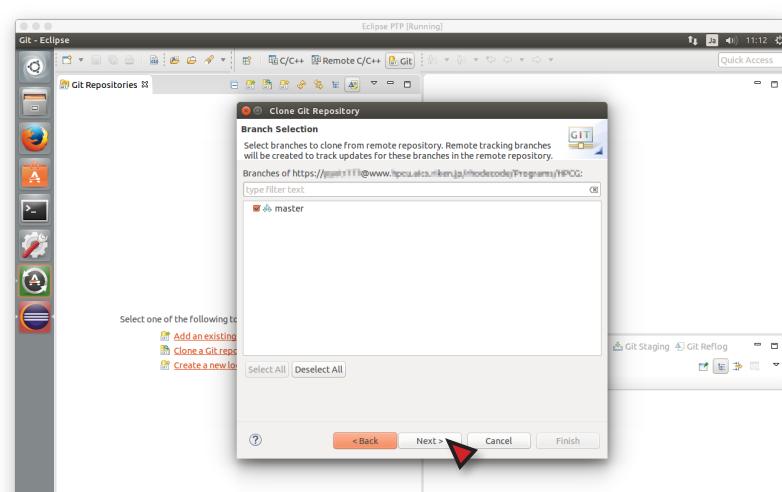


**Note!** It is not recommended to make git repositories from Eclipse projects and clone them on another machine. Project settings from one machine are likely to cause problems on another.

## Eclipse PTP basic user manual

Select Destination Directory. This will be the directory of your project, so we recommend to select one inside Eclipse workspace folder. Also note, that directory name will be the project name.


Remember Destination Directory. Click Finish.

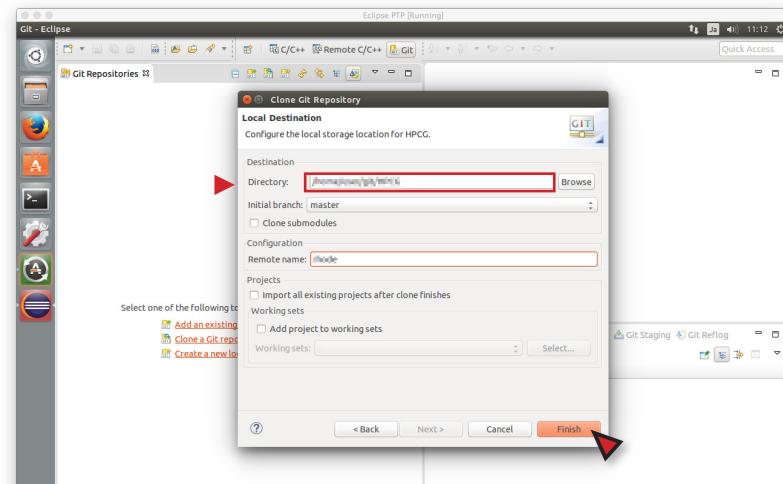


*Remeber this path, you will need it later*

### Importing new project from git repository


Repository is cloned.  
Open git perspective and right-click Working Directory of your new repository. Select Import Projects...

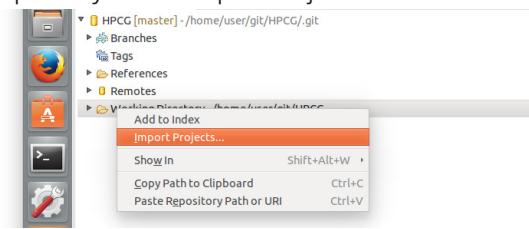

Select Use the New Project wizard and click Finish.

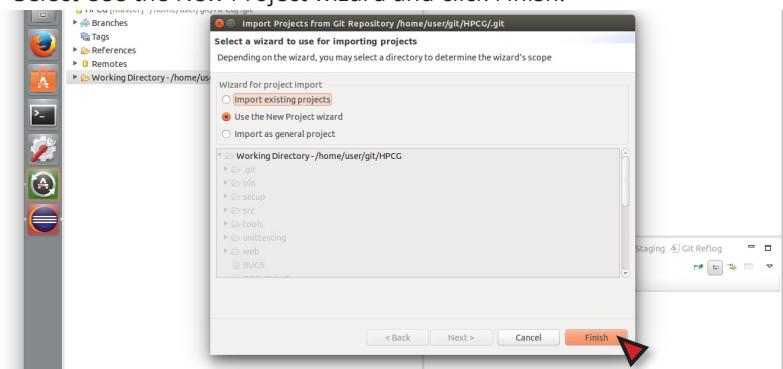

In case of C project select Synchronized C/C++ Project in Remote section. For Fortran select Synchronized Fortran Project. Click Next.

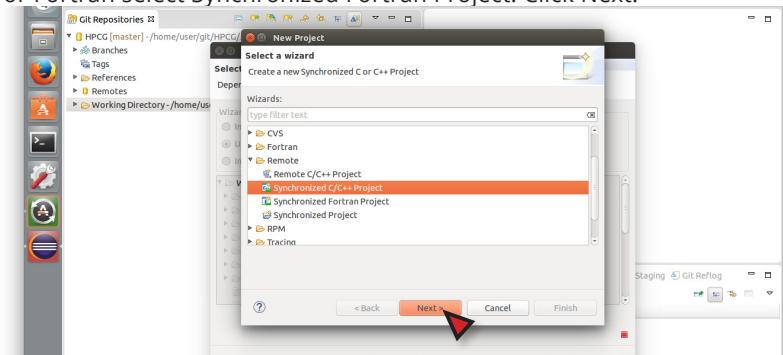

## Eclipse PTP basic user manual


Uncheck Use default location. Select local repository location instead.

Set the project name to the directory name. For example, if you cloned repository into /home/user/workspace/my\_project directory, you project name will be "my\_project".

Select connection. Remote location should be filled automatically now. You can change it to whatever remote path you like.

Select project type (for example Empty Project). Click Finish.

New synchronized project wizard

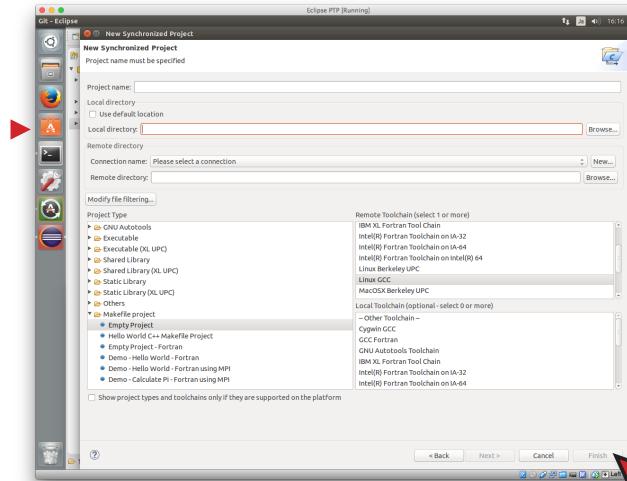


Your new project now should be visible in Project Explorer (C/C++ or Remote C/C++ perspective).

In the same way **Synchronized Fortran Project** can also be created.

## 3. Synchronization

Files in local and remote locations of synchronized projects are automatically synchronized after project is built on remote location. After project execution on remote computer files are not always synchronized.


To manually synchronize files in local and remote locations of a synchronized project right click on the project in Project Explorer, select "Synchronize" and "Sync Active Now".

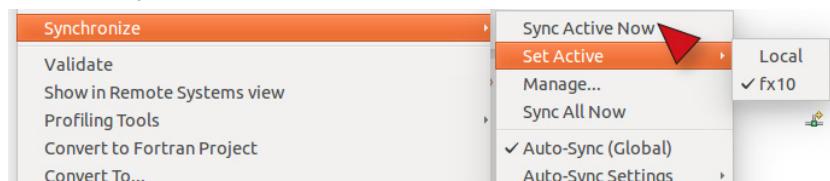

You can also select a project and press synchronization button on the toolbar.


Current active synchronization connection will be used.

To change connection used for synchronization use menu under "Set Active" item of the right-click menu as shown above or click on a little black triangle next to synchronization button on the toolbar.

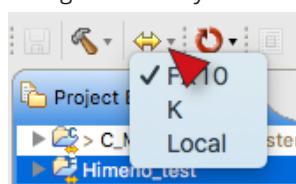


## 4. Remote terminal

With remote terminal you can login to remote system with SSH. Open Terminal window from menu Window / Show view / Other ... Terminal / Terminal.

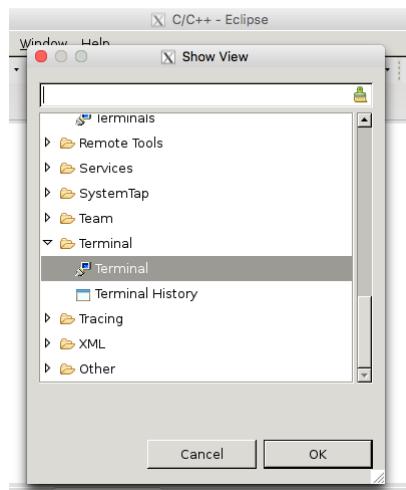


In Terminal window click "New Terminal Connection" button .

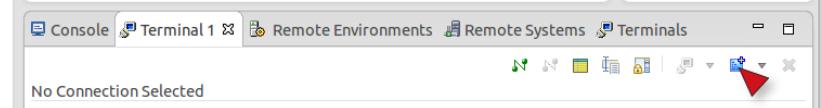

and select connection you created before or create a new connection.

### Selecting a remote connection for Terminal

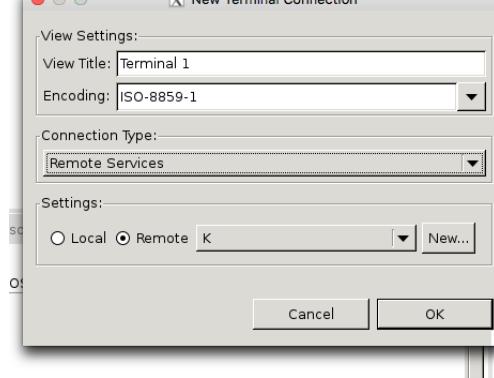

After you selected a connection click OK button.

Back in Terminal window click "Connect" button , and you will see a



command prompt in your home directory on remote computer.

### Terminal to a remote system



## 5. Build a project

To build a project you need to set build command, compiler options, environment variables and other compilation parameters in a Build Configuration.

Projects can be *Makefile based* or *Managed*.


Makefile based project contains its own build command – a makefile or build script. For Managed projects Eclipse manages build process, no makefile required.

A Build configuration provides the necessary information for building the project. Build configuration information is specified in the project properties. Projects can have multiple build configurations.

### 5.1 Build Configurations

Open project properties by right-clicking on the project name in the Project Explorer view and selecting Properties. Or you can select the project from menu File / Properties.

*Note: Fortran projects are a superset of C/C++ projects, so they also have properties of C projects.*

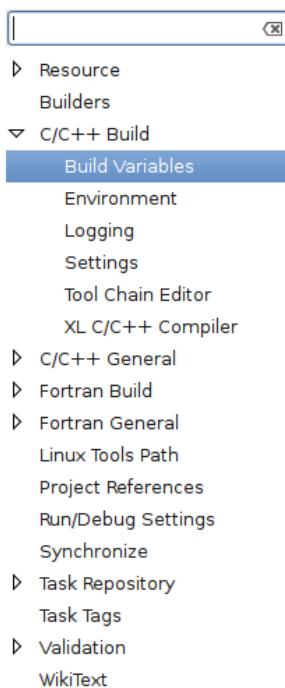

On the left you can see Project Properties menu.

#### C/C++ Build

Main properties page. Configure the build command.

#### Build Variables

Create/manage variables that can be used in other build configuration pages.

#### Environment

Modify/add environment variables passed to build.

#### Logging

Enable/disable build logging.

#### Settings

Binary parser selection (used to display binaries in Project Explorer).

Error parser selection (used to parse the output from compiler commands)

Tool Chain settings (managed projects only).

#### Tool Chain Editor

Allows the tools in a particular tool chain to be modified.

#### XL C/C++ Compiler

Compiler settings for XL C/C++ compilers (if installed).

#### C/C++ General/Preprocessor Include Paths...

Set include paths here.

Active build configuration will be used when the build button is clicked. The “Build Configurations” project context menu can be used to change the active configuration. Right click on project, then select the build configuration from the Build Configurations / Set Active menu.



# 6. Run a project

## 6.1 Run Configurations


### 6.1.1. Import Target System Configurations

To run a project you need to set up at least one Run configuration. Run Configurations are used to define various parameters of running a Synchronized project as a parallel application on a remote system.


Run configurations depend on the target system. For K, FX10 and other systems with Fujitsu “Parallelnavi” job scheduler you can use PJM-\* Target System Configurations (TSC) created by HPC Usability Research Team of AICS RIKEN. See below for instructions on how to install these TSCs.

To use PJM-\* (and other custom) Target System Configurations you need to create “targetConfigurations” project in the following way:


1. Right-click empty space of Project Explorer window and select Import, or select File / Import menu.

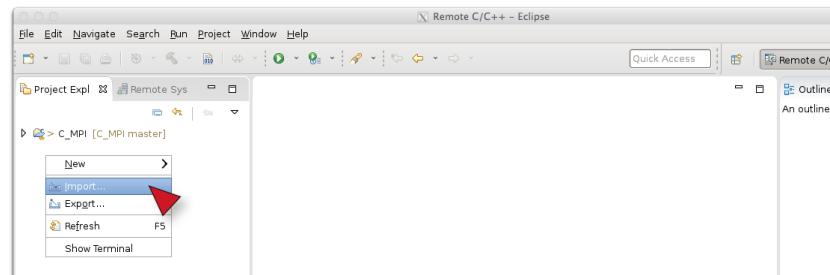

2. Select Target System Configurations / Target Configuration from Plug-in.

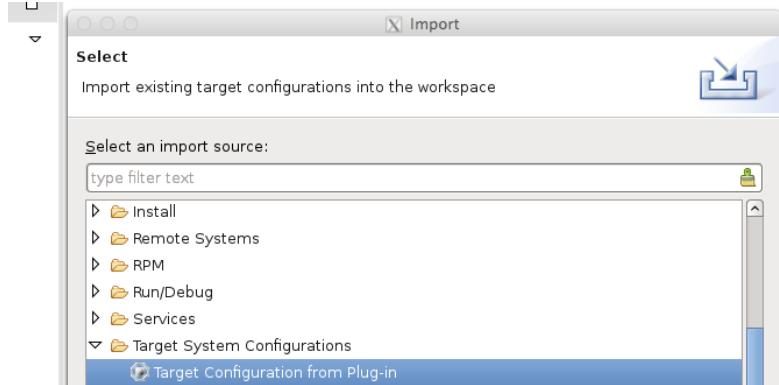

3. Click Next and select any configuration from the list. Click Finish.

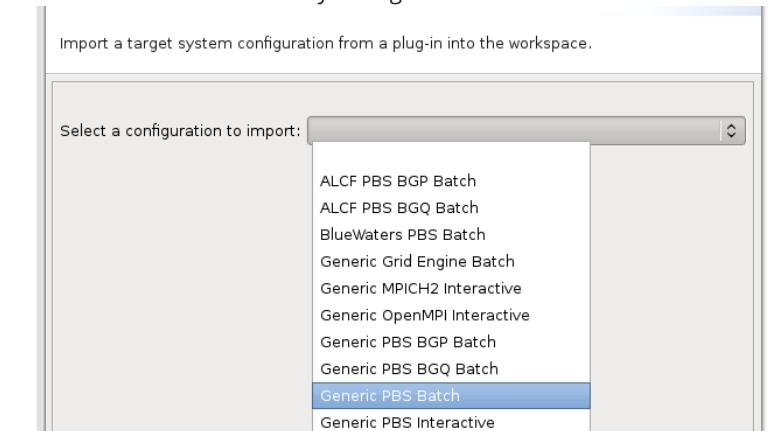

4. In dialog press “Yes” and you will see a new project in Project Explorer.


5. Find directory of targetConfigurations project in your Eclipse workspace directory on your disk. Download Target System Configuration for the K computer “PJM-Generic-MPI” into this directory with the following command:

```
> wget https://github.com/pyotr777/EclipsePTP_Parallelnavi_TSC/raw/master/PJM-Generic-MPI.xml
```

For FX10 use another TSC:

```
> wget https://github.com/pyotr777/EclipsePTP_Parallelnavi_TSC/raw/master/PJM-Generic-MPI-FX10.xml
```


6. Return to Eclipse, right-click targetConfigurations in Project Explorer and select Refresh.

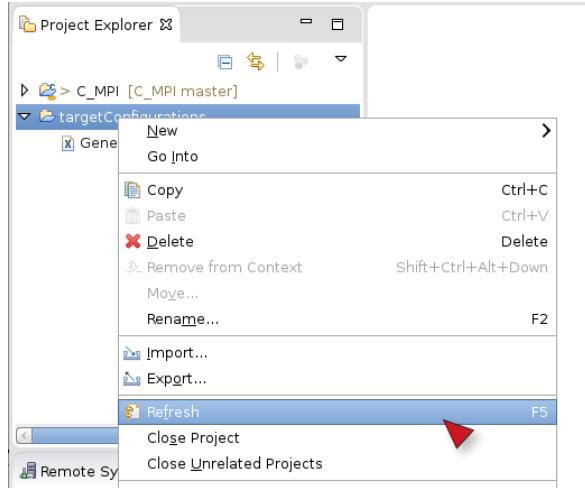


Now in Project Explorer you should be able to see PJM-\* files in targetConfigurations project.

## 6.1.2. Create Run Configuration


1. Select your project in Project Explorer and select Run / Run Configurations... menu

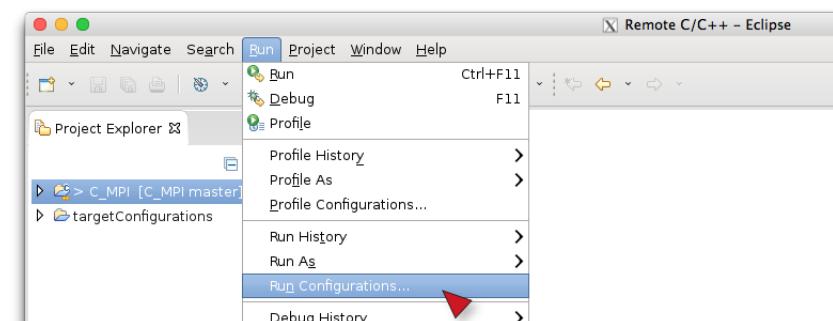

or click the downward black arrow next to the Run button on the toolbar.

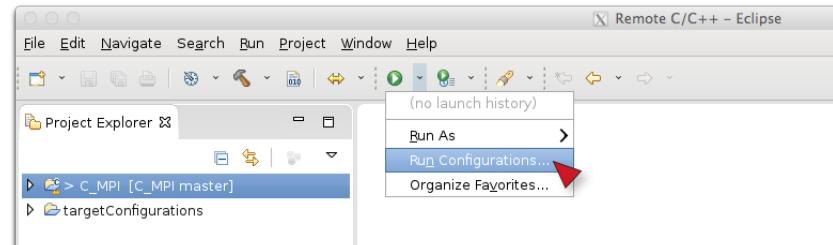

2. Select Parallel Application and click New button.

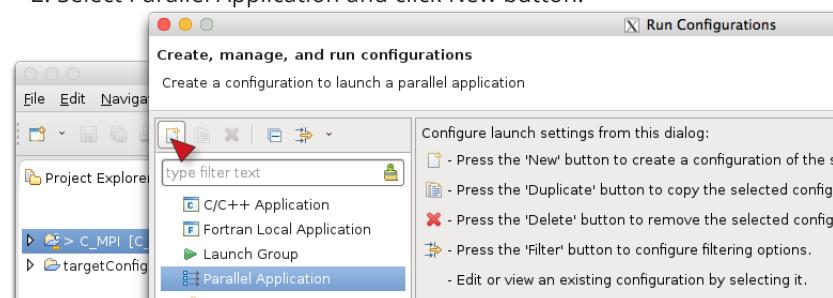


3. Give your new configuration a name, select Target System Configuration, Connection to your Remote system (the one you created at 2.1) or

## Eclipse PTP basic user manual

create a new connection.

On Basic Settings tab select Queue, number of nodes, estimated job run time (Wallclock time), and select executable file from your project.

**Note!** Executable field should not include absolute path.

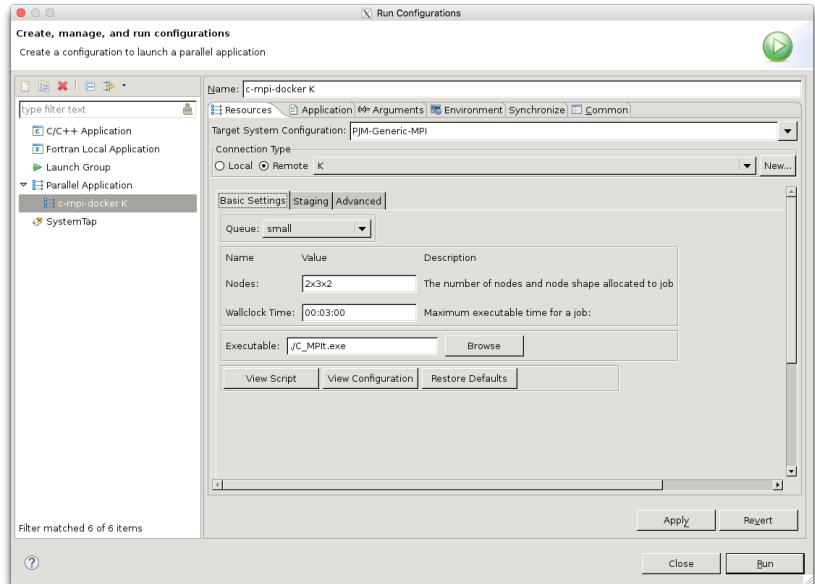

You can add staging commands to your job script using the Staging tab of PJM-\* Target System Configurations.

On Advanced tab you can write any text strings in provided text fields. These text strings will be included in your job script without modifications.

4. On Application tab set Application program to /usr/bin/pjsub.
5. On Arguments tab set Working directory to the absolute path of your project on remote system with Browse button.
6. Define program arguments on this tab and environment variables on Environment tabs, if necessary.
7. Click Apply button to save Run Configuration.

You can view your job script before submitting it by pressing "View Script" button.

Job scripts by default will not produce statistics reports on the "K" and FX10 computers. To create statistics reports add #PJM -s command to your job script using the advanced tab of Run Configurations.

To run program on remote computer press Run button of Run Configuration window or select previously saved Run Configuration from Run menu. Run menu can be accessed by pressing downward black arrow next to the Run button on the toolbar.

After your job is submitted for execution on the remote system a dialog will appear asking if you want to switch to Monitoring view.

## 6.2 Submitting a job with a custom job script

Sometimes job script can be generated automatically by your project, not by Eclipse. In such cases, when you do not want Eclipse to generate a job script, you can submit your job manually.

After job script is generated, make sure project is synchronized.

Login to remote computer using Terminal window.

See Chapters 3 and 4 for synchronization and Terminal login instructions.

Change directory to the directory with your custom job script and submit a job with pbsub command. For example

```
> pbsub run.sh
```

After your job finishes execution you have to synchronize your project manually once again.

Now you should be able to see new files in your project in Project Explorer window.


**Note!** Jobs submitted manually are not recognized by Eclipse. This means, in particular, that your project is not synchronized by Eclipse and you cannot control your job in Eclipse “System Monitoring” perspective (see 7.3).

## 7. Monitoring

Monitoring view displays a graphical representation of compute nodes and a list of running and waiting jobs. On FX10 all jobs are visible, where as on the "K" computer only user's own jobs will be displayed. Beware, that on K computer it takes about **two minutes** before compute nodes chart will be rendered in Monitoring view.

The compute nodes chart and Active Jobs list will be updated every 1.5-2 minutes for the "K" computer. Pressing "Refresh" button in Monitors window will not make updates faster.

*Sample monitoring screen for the "K" computer*

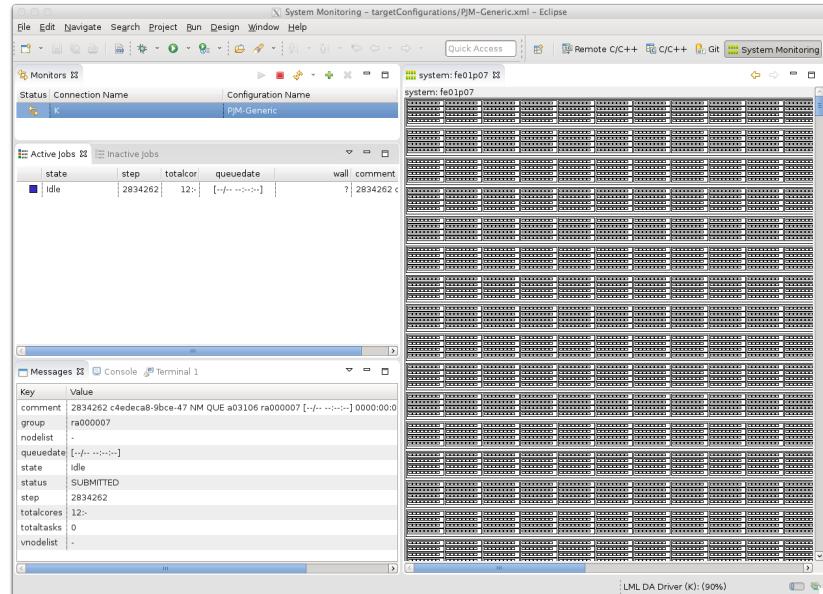

### 7.1 Monitoring


Monitoring scripts run at remote computer at predefined intervals (about 1-2 minutes) collecting information about compute nodes and active jobs. These scripts will continue running even if you switch to another perspective in Eclipse PTP and Monitoring view will be hidden.

To stop monitoring scripts select running connection in the Monitors window and click on the red square above. Click on the green triangle to start monitoring again.

Clicking on a running job in Active Jobs window will display nodes used by that job on the compute nodes chart.

### 7.2 Job control

You can cancel your jobs from Active Jobs window. Right-click on your job and select Cancel Job from the pop-up menu.



## 8. Performance analysis of MPI applications

To analyse parallel program performance Eclipse PTP can use TAU (Tuning and Analysis Utilities)

<https://www.cs.uoregon.edu/research/tau/home.php>

### 8.1 TAU installation on local computer

To use TAU with Eclipse PTP we recommend to install TAU on your local computer. It will let you store TAU profiles in a DB for easy access, and open profiles and traces locally.

Latest TAU distributions can be downloaded from  
<https://www.cs.uoregon.edu/research/tau/downloads.php>

For Linux OS follow these steps. This will install the latest version of TAU (2.25) in \$HOME/TAU/tau-2.25 directory.

```
mkdir -p $HOME/TAU
cd TAU
wget http://tau.uoregon.edu/tau.tgz
tar -xzvf tau.tgz
cd tau-2.25
./configure
make
make install
```


For OS X install TAU from the package: <http://tau.uoregon.edu/tau.dmg>

Add the following directory to \$PATH variable:

\$HOME/TAU/tau-2.25/x86\_64/bin

#### 8.1.1. Install Eclipse PTP TAU extensions

In Eclipse PTP open menu Help / Install New Software.

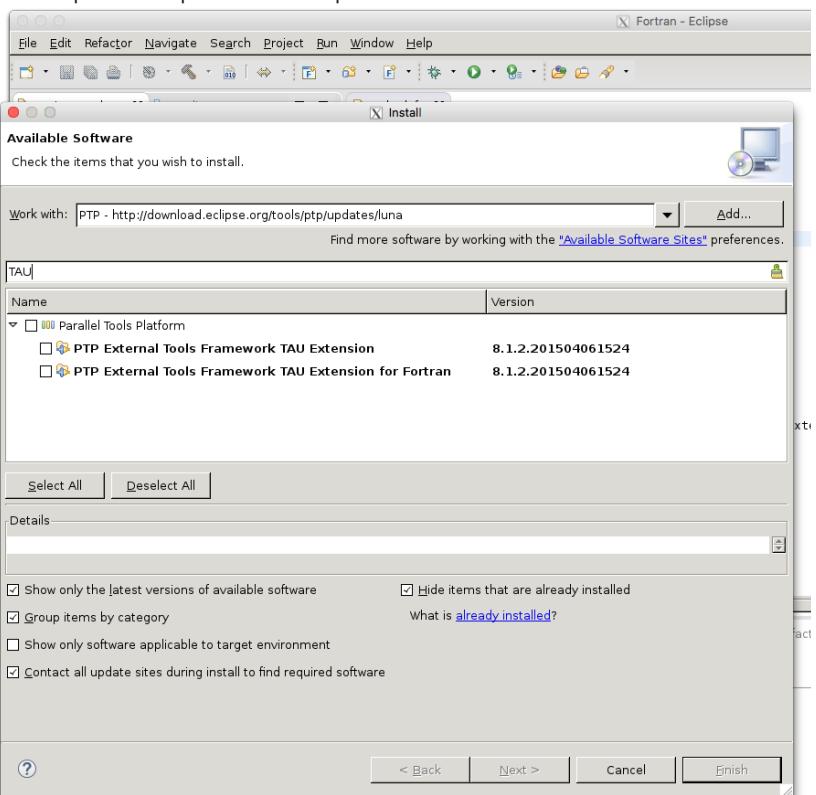

Select TAU Extensions and click Finish button. Restart Eclipse.

## 8.1.2. Setup local Database for profiles

*Profiles Database configuration in Paraprof*


To store TAU profiles in local DB:

Run paraprof (you need to setup \$PATH as instructed above):

> paraprof

In Paraprof select menu File / Database configuration.


Here is a sample configuration:

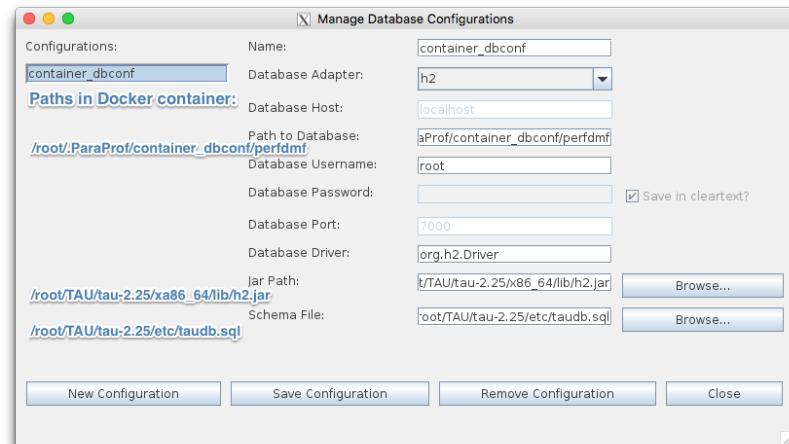

You can use any Name and Username. For the database port any number of unused port greater than 1024 will do.

Save configuration.

If you successfully created DB, you will see it in Paraprof:

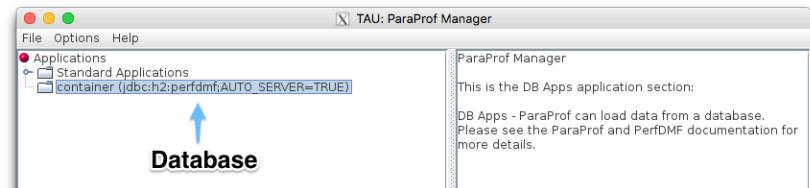

Please note that traces cannot be stored in a database.

## 8.2 TAU instrumentation

TAU (version 2.24.1) is installed on the "K" computer in /opt/aics/TAU/ directory. TAU allows two basic options for performance analysis: *profiling* and *tracing*. Application profiles show the exclusive and inclusive time spent in each function, how many times each function was called, how many profiled functions did each function invoke, and what the mean inclusive time per call was. Application traces show when and where event occurred in terms of the process that executed it and the location in the source code.

More information on profiling and tracing with TAU can be found in TAU documentation:

<https://www.cs.uoregon.edu/research/tau/docs.php>

For profiling and tracing user application must be recompiled with TAU instrumentation. There are two instrumentation methods available on K computer:

- Compiler Based Instrumentation,
- Source Based Instrumentation.

**Table 1. Different instrumentation methods**


Method	Requires recompiling	Requires PDT	Shows MPI events	Routine-level event	Low level events (loops, phases, etc...)	Throttling to reduce overhead	Ability to exclude file from instrumentation	Ability to exclude other regions of code
Compiler	Yes		Yes	Yes		Yes	Yes	
Source	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Source instrumentation requires PDT and produces larger profiles and traces, so it is recommended to start with Compiler instrumentation and use Source instrumentation if more features are needed.

To use TAU instrumentation you will need to initialise environment variables on the remote (supercomputer) side. For that purpose we provide an environment initialisation script file for K computer located at /opt/aics/TAU/env.sh. We recommend you insert this script into your .bashrc on the K computer like this:

```
source /opt/aics/TAU/env.sh
```

Also you need to add TAU\_MAKEFILE variable to your project C/C++ Build or Fortran Build / Environment:

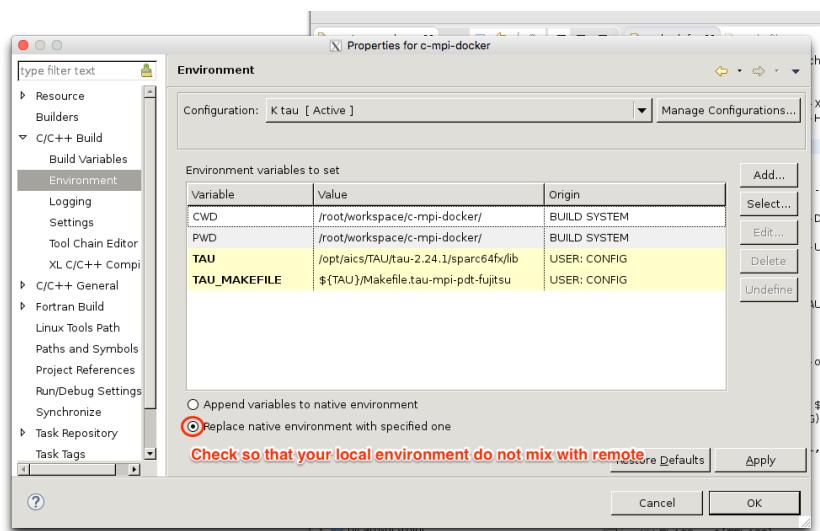

On FX10 you have to install TAU and optionally PDT in your home directory and edit environment initialisation script to point to your TAU installation.

You need to recompile your source code and produce instrumented binary. To do that use the following scripts instead of compilers:

**Table 2. TAU instrumentation scripts**

TAU script	use for
tau_f90.sh	Fortran
tau_cc.sh	C
tau_cxx.sh	C++

## 8.2.1. Compiler Based instrumentation

To use Compiler based instrumentation you need to set up yet another environment variable in your Build Environment:

TAU\_OPTIONS=-optComInst

You can also use options with the instrumentation scripts:

> tau\_cc.sh -tau\_makefile=/opt/aics/TAU/tau-2.24.1/sparc64fx/lib/Makefile.tau-mpi-pdt-fujitsu -tau\_options=-optCompInst sampleprogram.c

## 8.2.2. Source Based instrumentation

Source based instrumented binary can be produced in exactly the same manner as compiler based instrumentation. The only difference is that you do not need to add -optComInst option (or environment variable) for TAU instrumentation script.

> tau\_cc.sh -tau\_makefile=/opt/aics/TAU/tau-2.24.1/sparc64fx/lib/Makefile.tau-mpi-pdt-fujitsu sampleprogram.c

## 8.3 Running instrumented binary

Instrumented binary can be run on compute nodes. By default it will produce profile.N.0.0 files (by the number of MPI ranks) in the same directory with your job script. You need to add **staging out instructions** for these files to your job script. See 8.3.1 for sample instructions.

There are some environment variables you can set on compute nodes with your job script to control TAU profiling and tracing on compute nodes.

**Table 3. TAU configuration variables**

Environment variable	Effect
TAU_PROFILE	Set to 1 to enable profiling, to 0 to disable.
TAU_TRACE	1 to enable tracing, 0 to disable
TAU_PROFILE_FORMAT	When set to snapshot TAU will generate condensed snapshot profiles (they merge together different metrics so there is only one file per node) instead of the default kind. When set to merged, TAU will pre-compute mean and std. dev. at the end of execution.
PROFILEDIR	Set to relative path to directory where to save profiles. The directory needs to exist.
TRACEDIR	Specifies the directory where trace files are to be stored.

For more variables see:

<https://www.cs.uoregon.edu/research/tau/docs/old/apa.html>

## 8.3.1. Profile Configurations

Similar to Run Configurations, Eclipse PTP has Profile Configurations that can generate a job script and submit a job.

To run a profiling or tracing job you need to create a new Profile Configuration in Eclipse PTP. To create a new Profile Configuration, find this button  on the toolbar of Eclipse PTP and click on the small black triangle next to the button.



## Eclipse PTP basic user manual

From a pop-up menu select "Profile Configurations...".

You will be asked if you want to connect to K or FX10. Click "Yes". A Profile Configuration window will open.

You can name your configuration as you like. Configurations are supposed to be used with particular project for a particular run configuration, so we recommend to include your project name, target supercomputer and short job description in the name.


For a Target System Configuration select "PJM-Generic-MPI" for K computer and "PJM-Generic-MPI-FX10" for FX10.

Select a desired Connection or create a new one.

Fill in basic job parameters in Basic Settings tab.

Here is a Profile Configuration for running a job on 12 nodes of K computer with expected run time of 10 minutes :


*Sample Profile Configuration window*

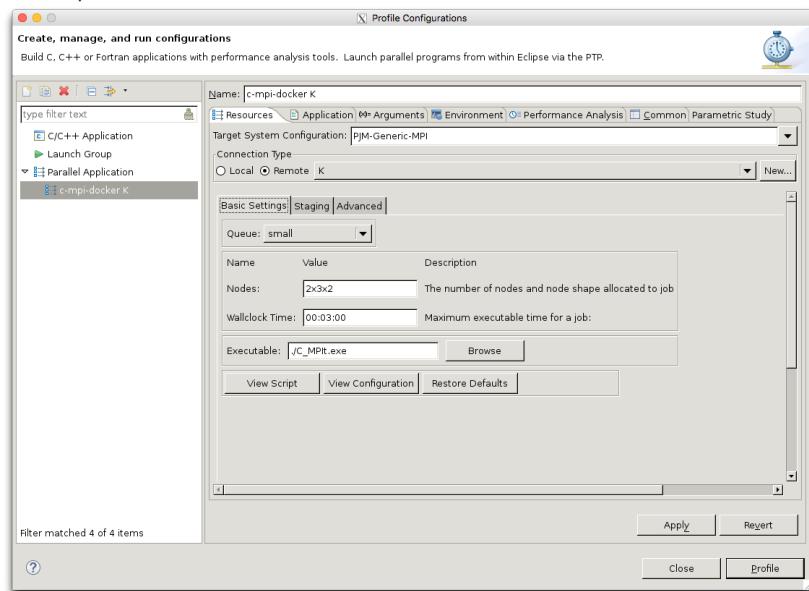

Be sure to set **Executable** to the relative path to a binary file instrumented with TAU.

You have to take care about staging out profiles and traces from compute nodes to login node. In Staging tab add rules for staging out. For example here is a rule for staging out **TAU profiles**:

*Staging out rule for TAU profiles*

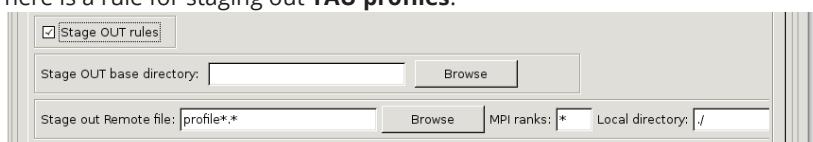


**TAU traces** consist of two sets: evens.N.edf files and tautrace.N.0.0.trc files. N is a number from 0 to the number of MPI ranks -1. You need to stage out all of these files.

## Eclipse PTP basic user manual

Configure TAU behaviour on compute nodes

On Performance Analysis tab select TAU from drop-down list on top.

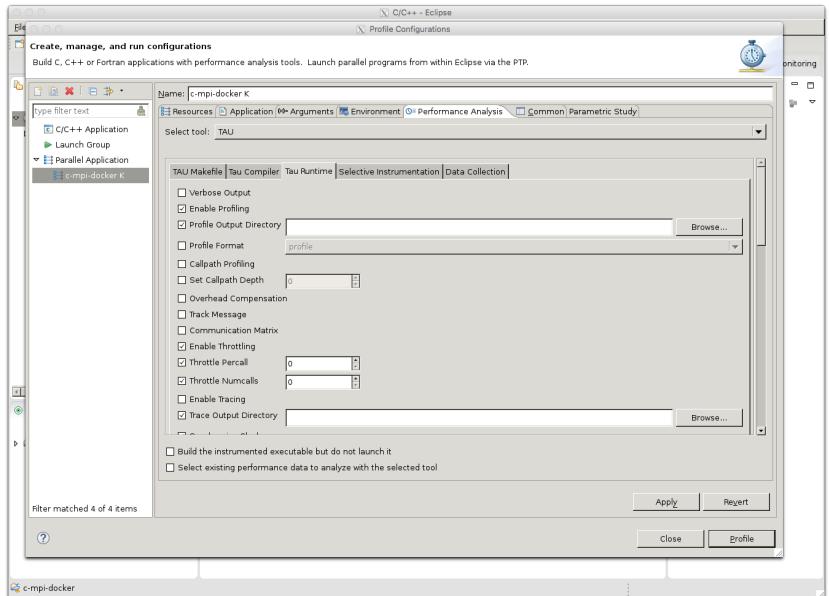


### 8.5.1. Profiling with custom job script

On Runtime tab of Performance Analysis you have to take care of Profile and Trace Output Directory.

If you set staging out rule for profiles as indicated above, you have to set Profile Output Directory path to be empty. Do not just uncheck it!

If you chose to use a special directory for storing traces or profiles, you need to enter the path to that directory here. The directory need to be created on computing nodes before job starts. You can use Advanced tab of PJM-Generic-MPI on Resorces tab for adding a command for creating the directory.

Configure profiles collection

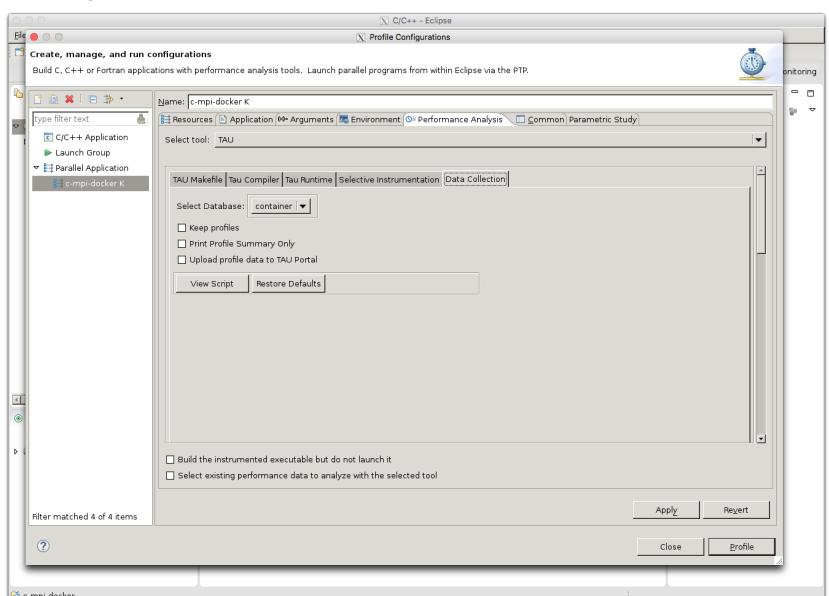

On Data Collection tab select Database to store profiles. See 6.2.2 for instructions on DB setup.

You can press View Script button any time to see what your job script will look like.

### 8.3.2. Submit profiling or tracing job

When you are ready to submit the job press Profile button in bottom right corner of Profile Configuration window. Your job will be submitted and the settings will be saved in Profile configuration, so you can easily submit same job later.

After you submit a job you will be asked to switch to Monitor view.

## Eclipse PTP basic user manual

After your job is finished profiles should be stored in a DB automatically. Profiles stored in a DB can be opened in Paraprof by clicking on them.

Profiles that are not stored in a DB can be found in Profiles subdirectory of your project. To open profiles not stored in a DB you need to open Paraprof and select profiles from the menu File / Open, or right-click on a profile in Project Explorer view, select Open With and then select Paraprof.

Traces will be in the directory you set with staging out rules. If you set an empty path for Trace Output Directory, traces will be in your project folder.

Traces can be viewed in Jumphost application.

See below for instructions on viewing traces.

When you have to use a particular job script you cannot use Eclipse profiling features and have to submit your job manually.

Submit your custom job script for execution as described in 6.1.3, but use an instrumented binary. By default TAU will profile your application. You can control TAU behaviour by setting environment variables on compute nodes as described in 8.3 using your job script.


Do not forget to set staging out rules for profiles or traces in your job script.

After a job finished execution you have to manually synchronised your project in Eclipse to see profiles and traces in Project Explorer.


## 8.4 View TAU profiles

TAU profiles can be viewed in **Paraprof**.

If you have set up a profile DB, you can launch Paraprof from Eclipse PTP "Performance Data Manager" view by clicking on a profile or on the "Launch ParaProf" button.

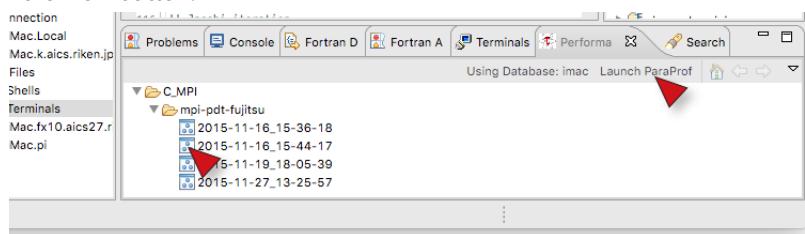

Otherwise you can unfold Profiles directory of your project in Project Explorer, right-click on any profile and select Open With / Other... menu, then click on the "Browse" button and find paraprof in TAU bin directory.

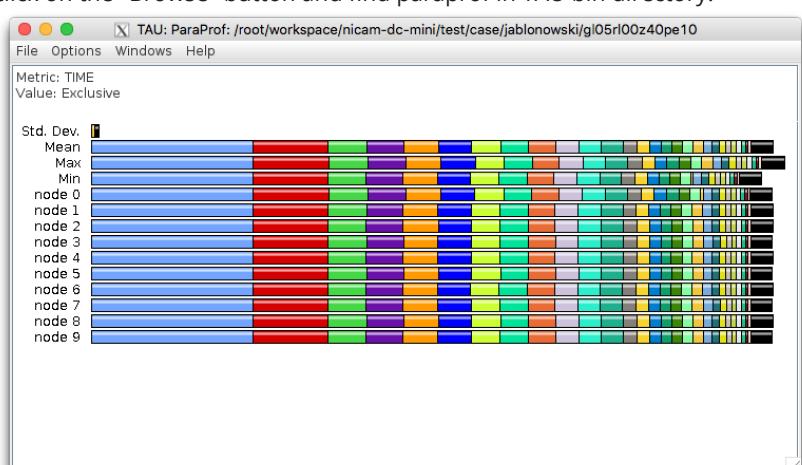

For Paraprof usage details see TAU documentation web site:  
<https://www.cs.uoregon.edu/research/tau/docs.php>

## 8.5 View TAU traces

TAU traces need to be merged and converted to SLOG2 format before you can open them in **Jumpshot** trace viewer.

TAU tracing job produces two sets of files with .trc and .edf extention. Number of files in each set is the number of MPI ranks that your application has used.

To merge trace files trautrace.\*.trc and events.\*.edf run


```
> tau_treemerge.pl
```

in the directory with trace files. This command will produce two files: tau.edf and tau.trc.

To convert these files to SLOG2 format run in the same directory

```
> traceconv.sh tau
```

To open trace file in Jumpshot right-click on the SLOG2 file in Project Explorer, select Open With / Other... menu, then click on the "Browse" button and find jumpshot in TAU bin directory.

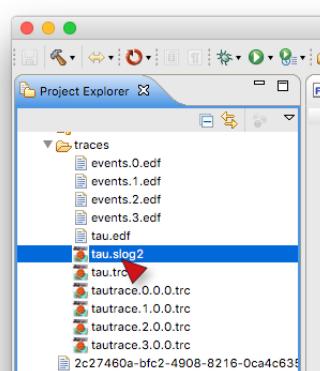

Jumpshot users guide can be found here:

<http://www.mcs.anl.gov/research/projects/perfvis/software/viewers/jumpshot-4/usersguide.html>

*Jumpshot window with timeline.*

*Yellow lines show groups of MPI communication events between ranks.*

