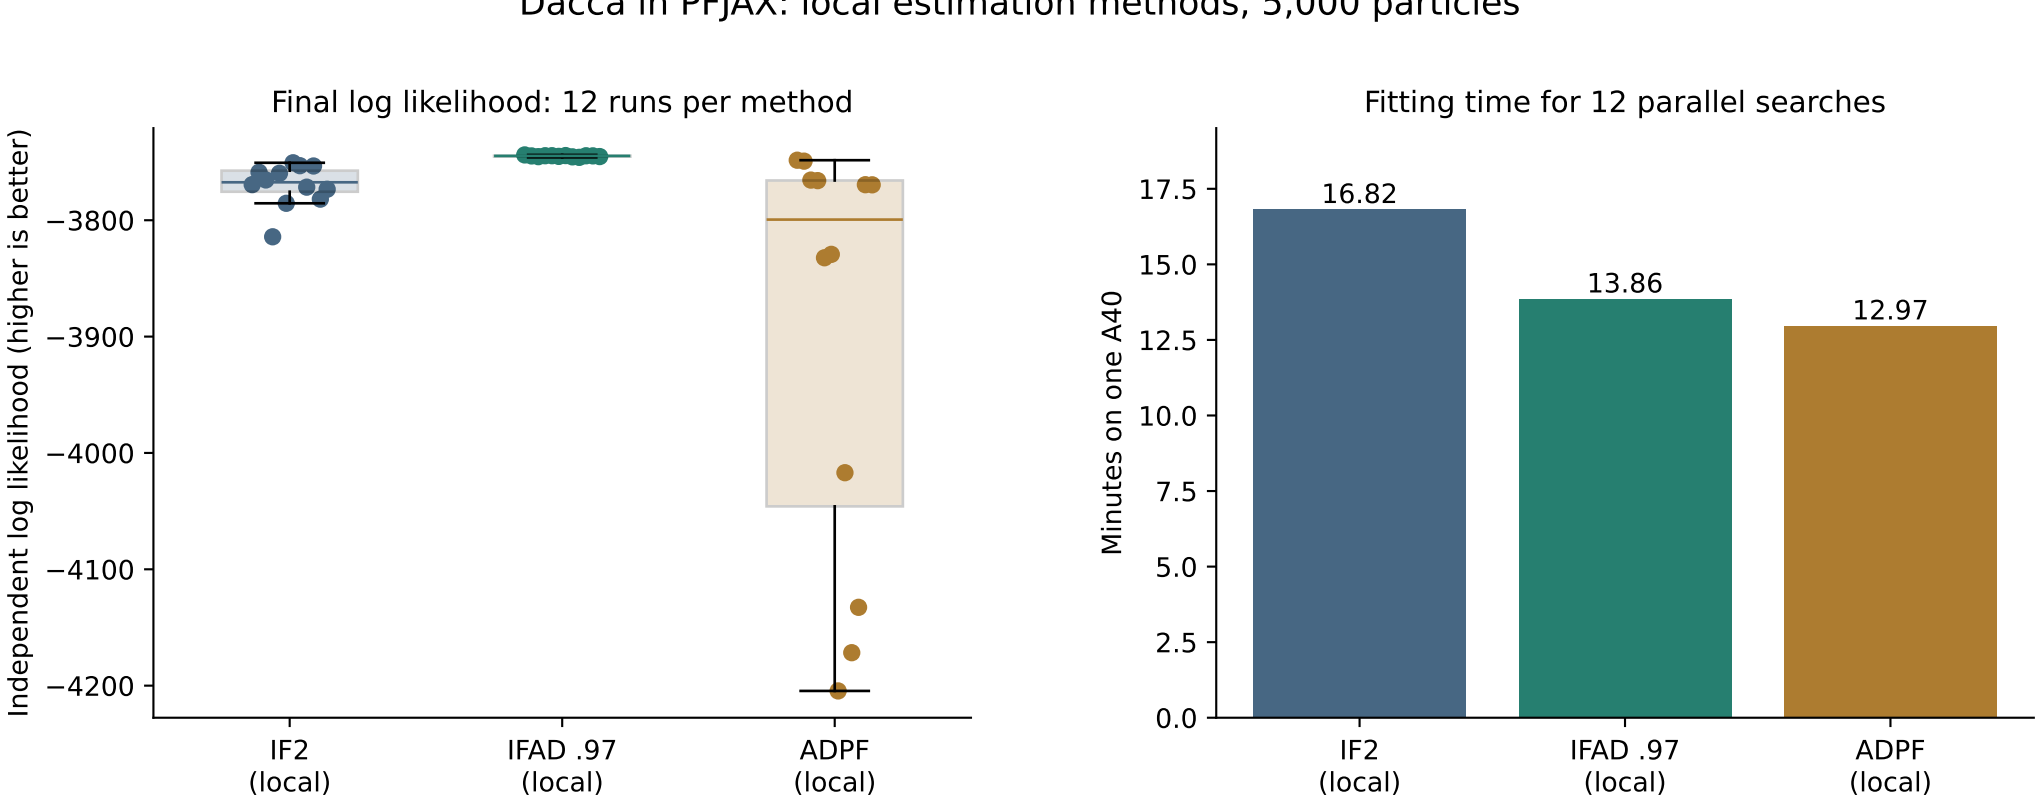
Dacca in PFJAX: local estimation methods, 5,000 particles
Final log likelihood: 12 runs per method
Independent log likelihood (higher is better)
−3800
−3900
−4000
−4100
−4200
IF2
(local)
IFAD .97
(local)
ADPF
(local)
Fitting time for 12 parallel searches
Minutes on one A40
17.5
15.0
12.5
10.0
7.5
5.0
2.5
0.0
16.82
13.86
12.97
IF2
(local)
IFAD .97
(local)
ADPF
(local)
Fit times include IF2 initialization; compilation and scoring are excluded.
All three methods are local extensions. The native OT gradient failed prechecks.