

STRATEGIC PLAN

SalesForecast

```
-salesForecast : SalesForecast
+public SalesForecast salesForecast { get; set; }
```

OPERATIONS

```
-salesPlan : SalesPlan
-salesForecast : SalesForecast
-salesCollections :SalesCollections
+public SalesPlan salesPlan { get; set; }
+public SalesForecast salesForecast { get; set; }
+public SalesCollections salesCollections { get; set; }
```

SALES_PLAN

```
-proforma : Proforma
-production: Production
-merchandise : Merchandise
+public Proforma proforma { get; set; }
+public Production production { get; set; }
+public Merchandise merchandise { get; set; }
```

An Item can have Multiple Pro Forma,
but only One can Exist per Customer.

SalesCollections

```
-items : Item[]
+public Item[] items { get; set; }
```

PRODUCTION_PLAN

```
-volume : Volume
-customerMerchandise: User_Merchandise
-program : Agreement
-proforma : Proforma
+public Agreement program { get; set; }
+public Volume volume { get; set; }
+public Customer merchandise {get;set;}
+public Proforma proforma { get; set; }
```

Proforma

```
-items : Item[]
-proforma_id
-fillOrder : long
-retailPrice : long
-costOfGoodsSold : long
-unitsPerDoor : long
-totalRetailVolume : long
-costOfGoodsSoldPlus : long
-quantityCal : Volume
-customer : Member
-customerCal : Customer
-itemCost : Agreement_Drivers
+Proforma(v1 : Item, v2 : LTB_Customer)
+public Item[] items {get;set;}
+public User customer {get;set;}
+public long[] quantityCal {get;set;}
+public long[] customerCal {get;set;}
+public Agreement_Drivers itemCost {get;}
+public long[] costCal {get;set;}

```

Customer

```
-invoice : double
-margin : double
-volume : Volume
-customerCalculation : Object<string, double>[]
+Customer(vol : Volume)
+public double invoice { get; set; }
+public double margin { get; set; }
+public double customerCal {get; set;}
+public long totalInvoice {get; set;}
+public long unitsPerDoor {get; set;}
+public long totalRetailInvoice{get; set;}
```

Volume

```
-fillUnit : int
-doors : long
-annualQuantity : long
-quantityCalculation:Object<string, long>
+public int fillUnit {get; set;}
+public long doors { get; set; }
+public long annualQuantity {get;set;}
+public long[] quantityCal{get; set;}
```

Agreement

```
-term : int
-agreementNo : long
-customer : User
-termsDates : Date[2]
-directImport : boolean
-programDrivers : Agreement_Drivers
+Agreement()
+public User customer{get; set;}
+public int term { get; set; }
+public long agreementNo {get; set;}
+public Date[2] termsDates {get; set;}
+public boolean directImport {get; set;}
+public Agreement_Drivers pDrivers{get; set;}
```

Agreement_Drivers

```
-royalty : double
-commission : double
-pickNpack : double
-preTicketing : double
-location : string
-landedCost : double
-programDrivers: Object<string,double>[]
-allDrivers : Set_Drivers
-customerCal : Customer
+Program_Drivers(v:Customer)
+public double royalty { get; set; }
+public double commission { get; set; }
+public double pickNpack { get; set; }
+public double preTicketing { get; set; }
+public string location { get; set; }
+public double landCost { get; set; }
+public Object pDrivers {get;add; delete}
+public Set_Drivers allDrivers {get;}
```

Set_Drivers

```
-default_accruals : Driver[]
-default_nonAccruals: Driver[]
-others_Accruals : Driver[]
-others_NonAccruals : Driver[]
+drivers()
+set_Drivers()
+public Driver default_accruals {get;add;delete}
+public Driver default_nonaccruals {get;add;delete}
+public Driver other_accruals {get;add;delete}
+public Driver other_nonaccruals {get;add;delete}
+public Driver drivers {get;add;delete}
```

Drivers are added by a user with **given** permissions. Default accruals and non-accruals are set/modify by users with "**Finance**" permissions & some, modify by users with "**Sales**" permissions. Users with "Finance" and "Sales" permissions can add/modify Non-Default drivers.

DRIVERS

Driver

```
-SAP_Code : char[]
-name : string
-value : double
-label : string
-description : string
+Driver(name : string, value : double, code : char[])
+public string name {get;set}
+public double value {get;set}
+public char[] SAP_Code {get;set}
+public string label {get;set}
+public string description {get;set}
```

Collections

```
-archived : Collection[]
-myCollections ; Collection[]
-shared : Collection[]
-events : Event[]
+Collections()
+public Collection[] archived {get; set;}
+public Collection[] myCollections { get; set; }
+public Collection[] shared {get; set;}
+public Object[] events {get; set;}
```

COLLECTION

```
-items : Item[]
-customer : User
+Collection()
+public Item[] items {get; set;}
+public User customer {get; set;}
```

EVENT

```
-items : Item[]
-customer : User
-eventInfo : Object[]
+Collection()
+public User customer {get; set;}
+public Item[] items {get; set;}
+public Object[] eventInfo {get; set;}
```

SCHEDULE

```
-schedule : Calendar[]
-items : Item[]
-events : Event[]
-reminders : Object[]
-shipmentReq : Object[]
+Scheduling()
+public Event[] events { get; set; }
+public Object[] reminders {get; set;}
+public Item[] items {get; set;}
+public Object[] shipmentReq {get; set;}
```

OPERATIONS

Challenges

```
-challenges : Object[]
-brand : Object<long, string>
-product : Item
-volume : Object
-date : Date[]
+Challenges()
+public Object[] challenges {get; set;}
+public Object brand {get; set;}
+public Item product {get; set;}
+public Object volume {get; set;}
+public Date[] date {get; set;}
```

STRATEGIC PLAN

OPERATIONS PLAN

FINANCIAL PLAN

SALES

PRODUCTION PLAN

SALES COLLECTIONS

SALES FORECAST

VARIABLE COSTS

FIXED COSTS

SALES PLAN

CONTRIBUTION MARGIN

PURCHASE & PAYMENTS

ITEM COST IS MAINLY
DRIVEN BY A CUSTOMER'S
AGREEMENT OR COMPANY'S
GLOBAL DRIVERS

COST OF GOODS
SOLD PLAN

SELLING EXPENSE
PLAN


CASH BUDGET

PRO FORMA
INCOME STATEMENT

PRO FORMA
BALANCE SHEET




PERMISSIONS BASED MODEL & STRATEGY PLAN MODEL SYSTEM

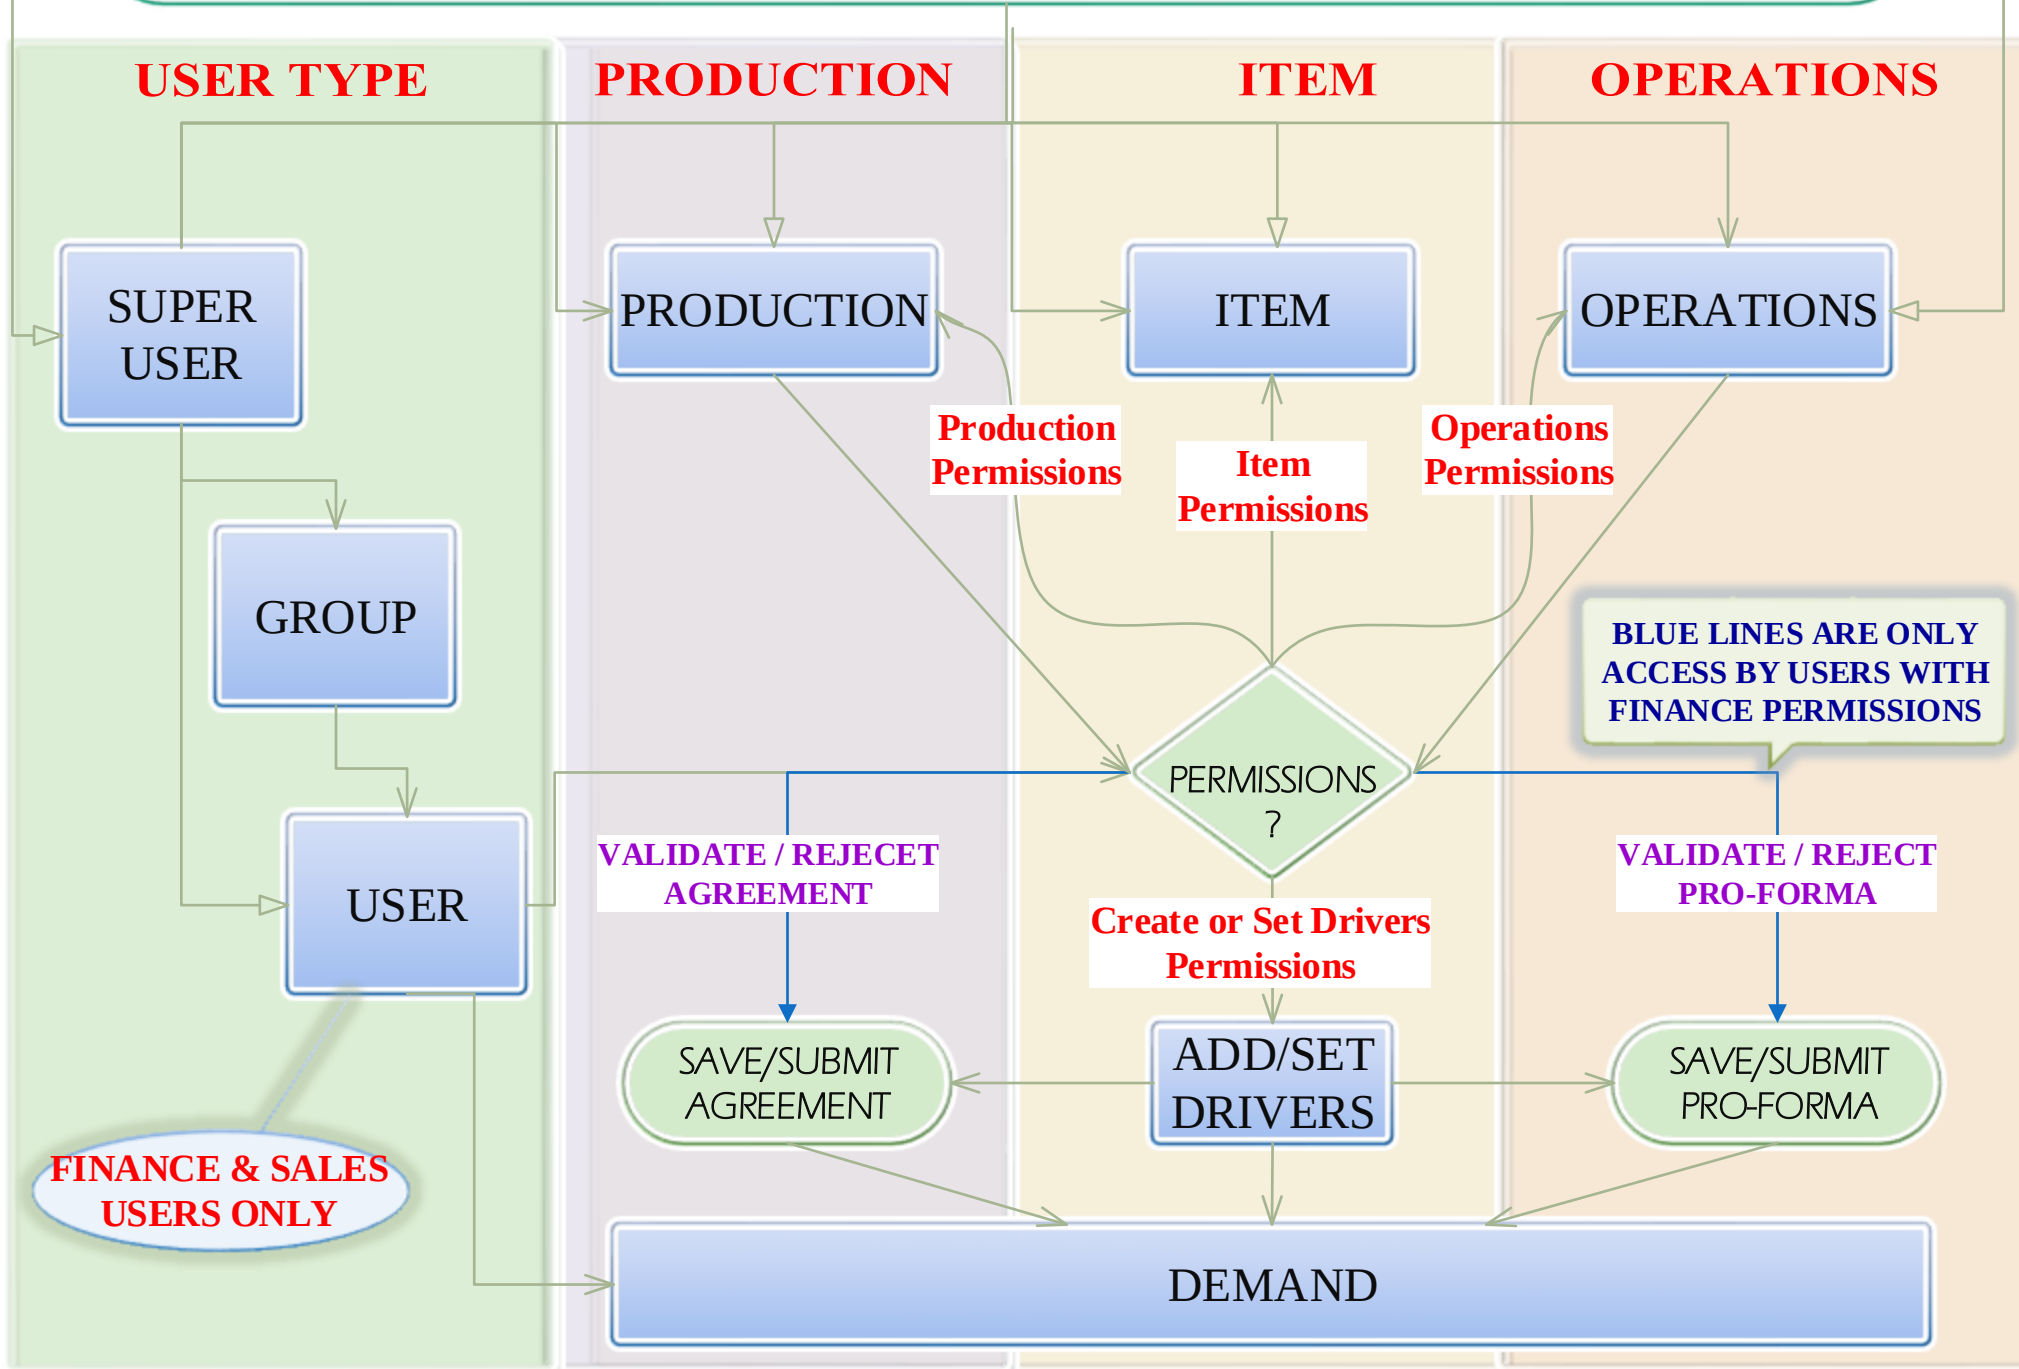


INHERITED OPERATIONS WITH PERMISSIONS


FUCNTION ACCESS BASED ON PERMISSIONS

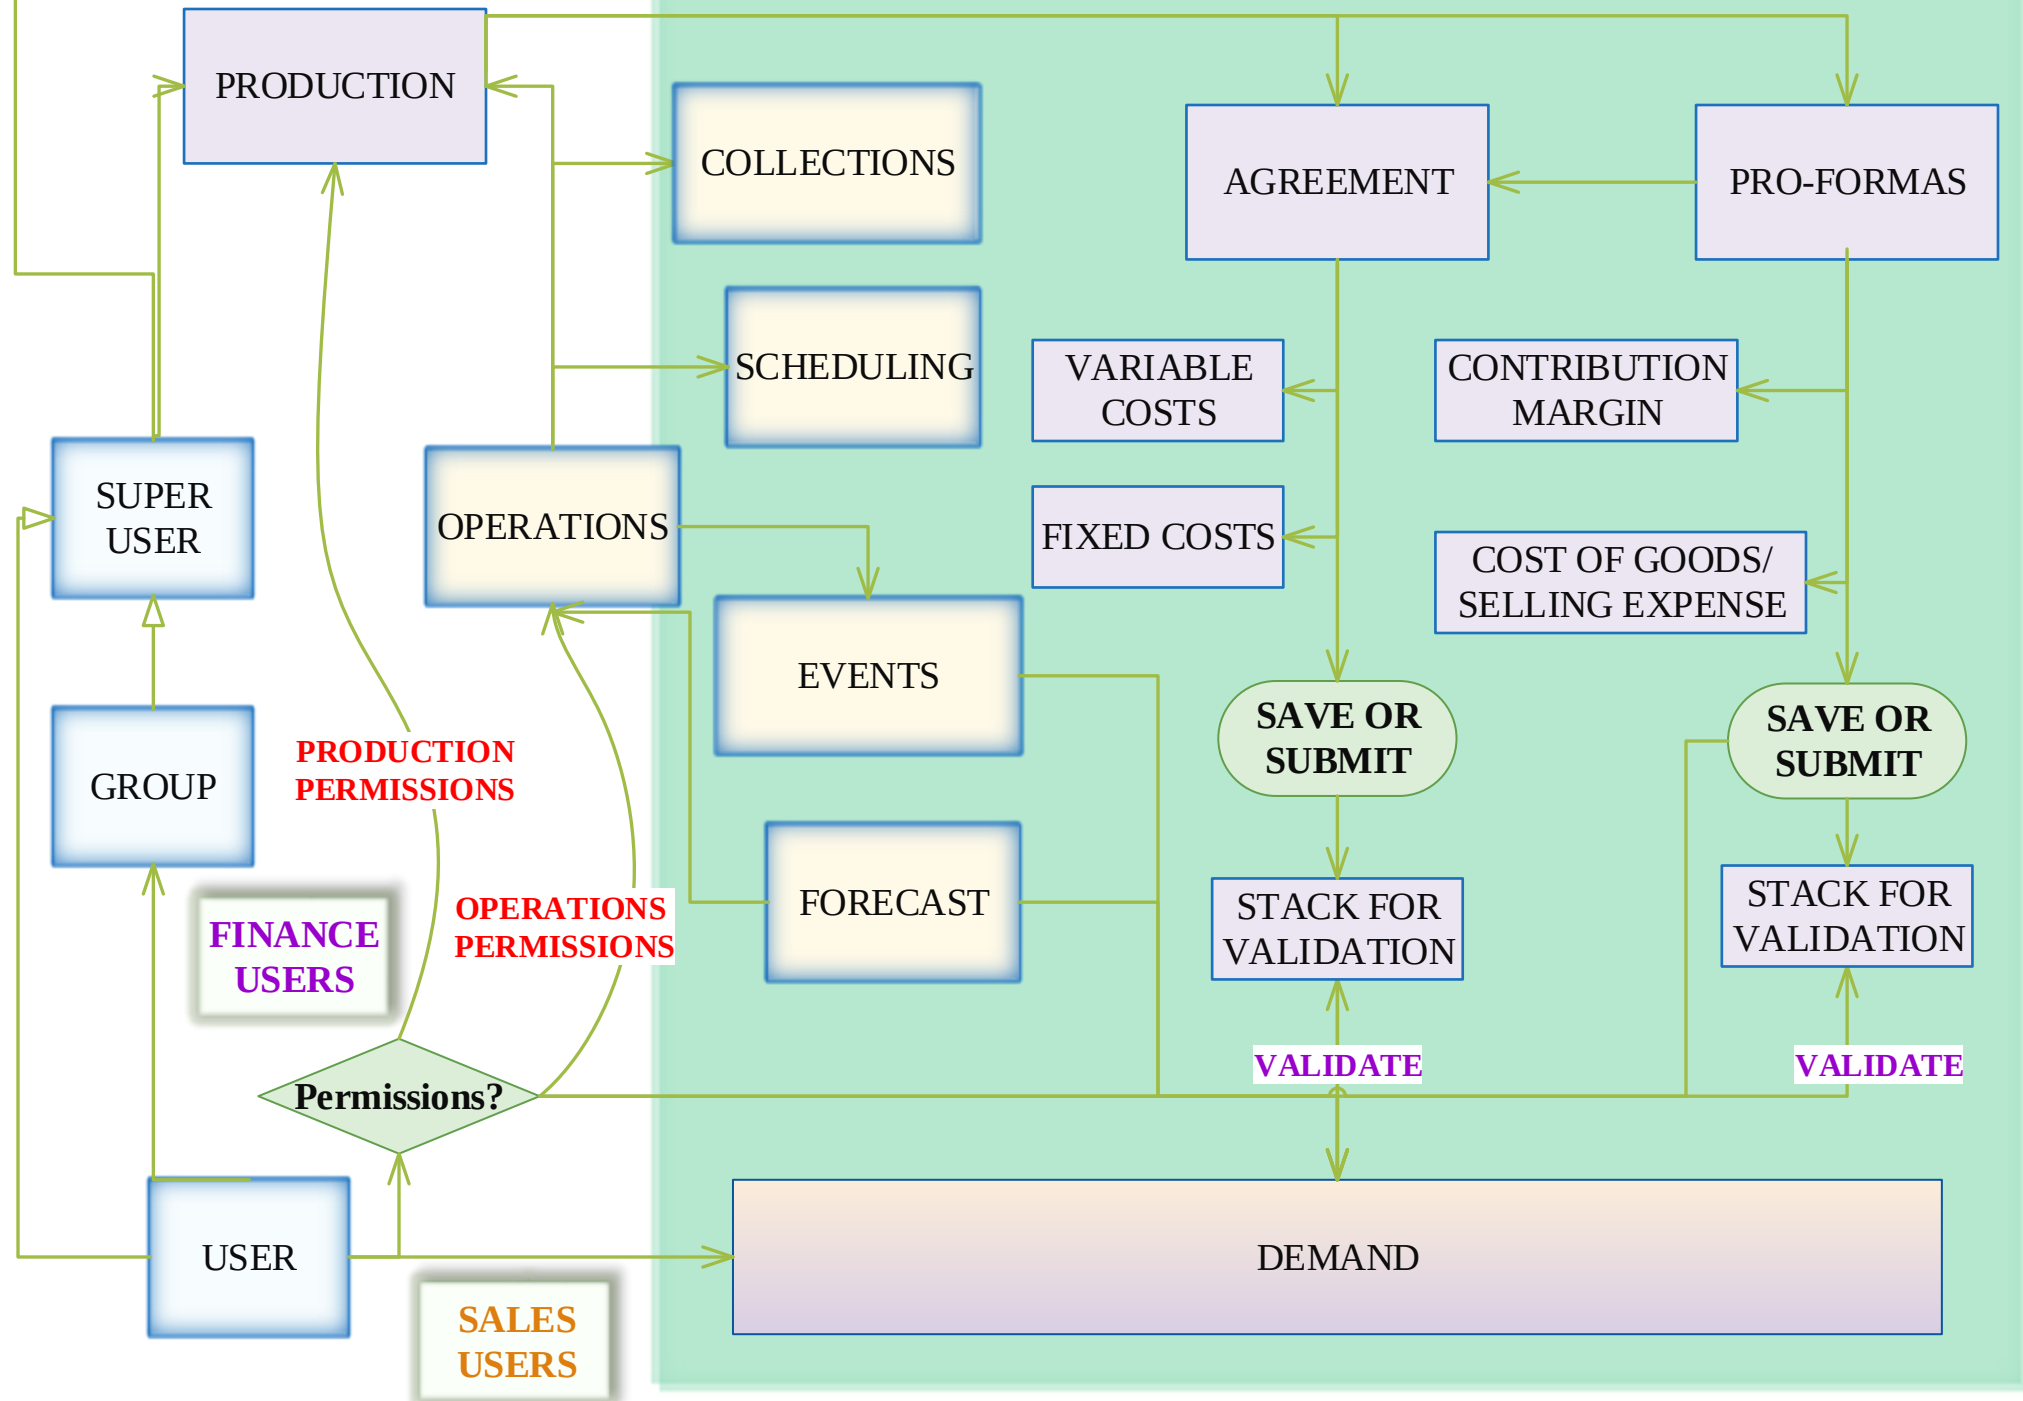


INHERITED OPERATIONS WITH PERMISSIONS

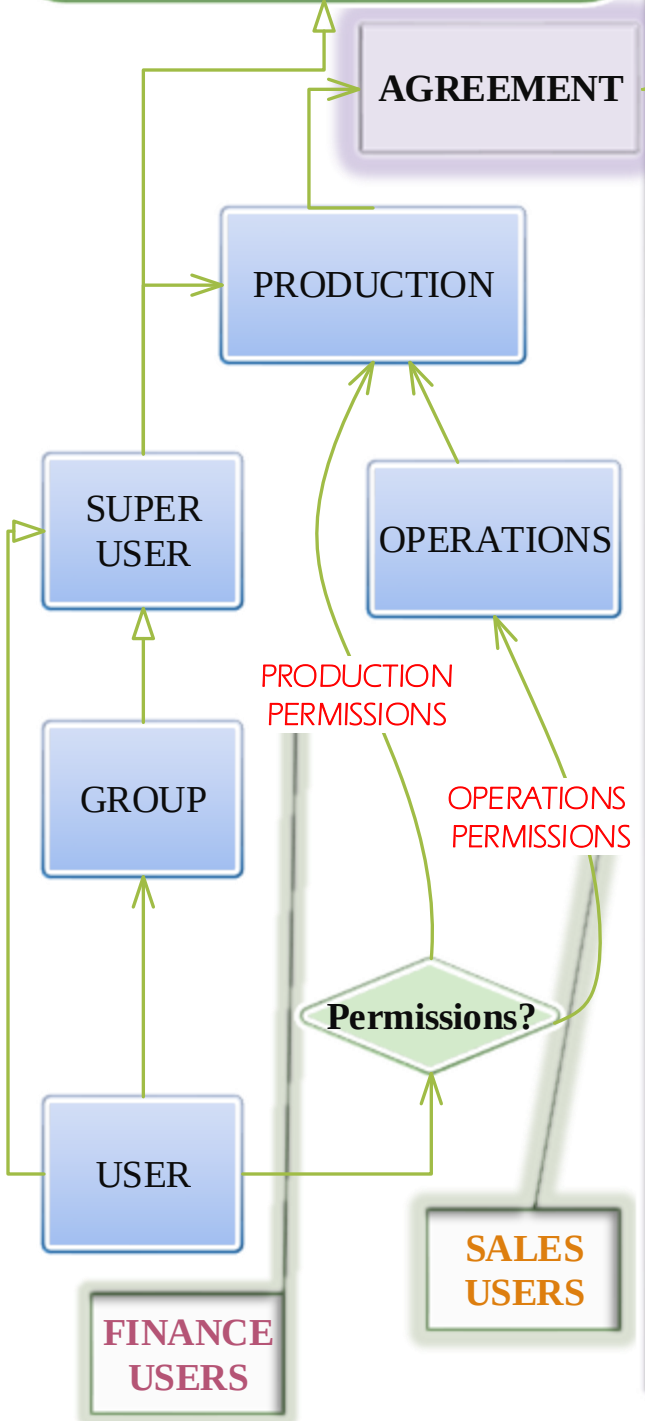


FUCNTION ACCESS BASED ON PERMISSIONS

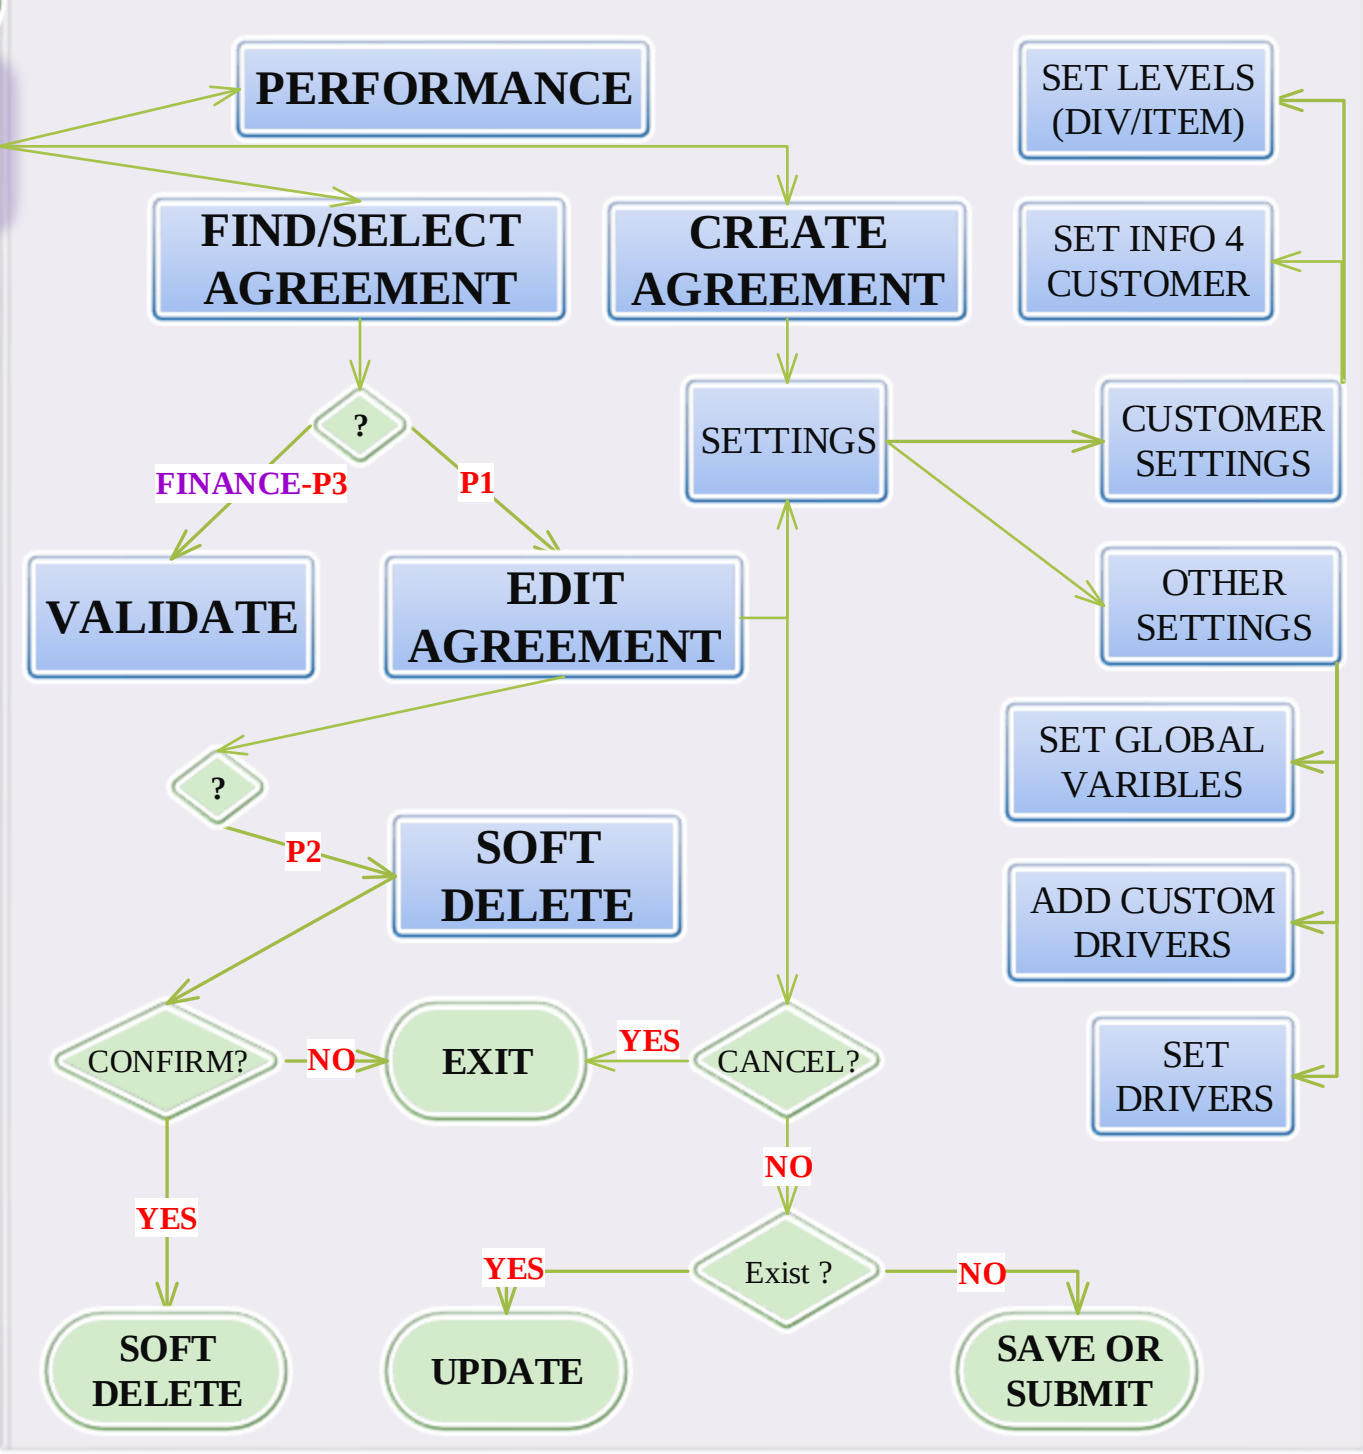


INHERITED OPERATIONS WITH PERMISSIONS

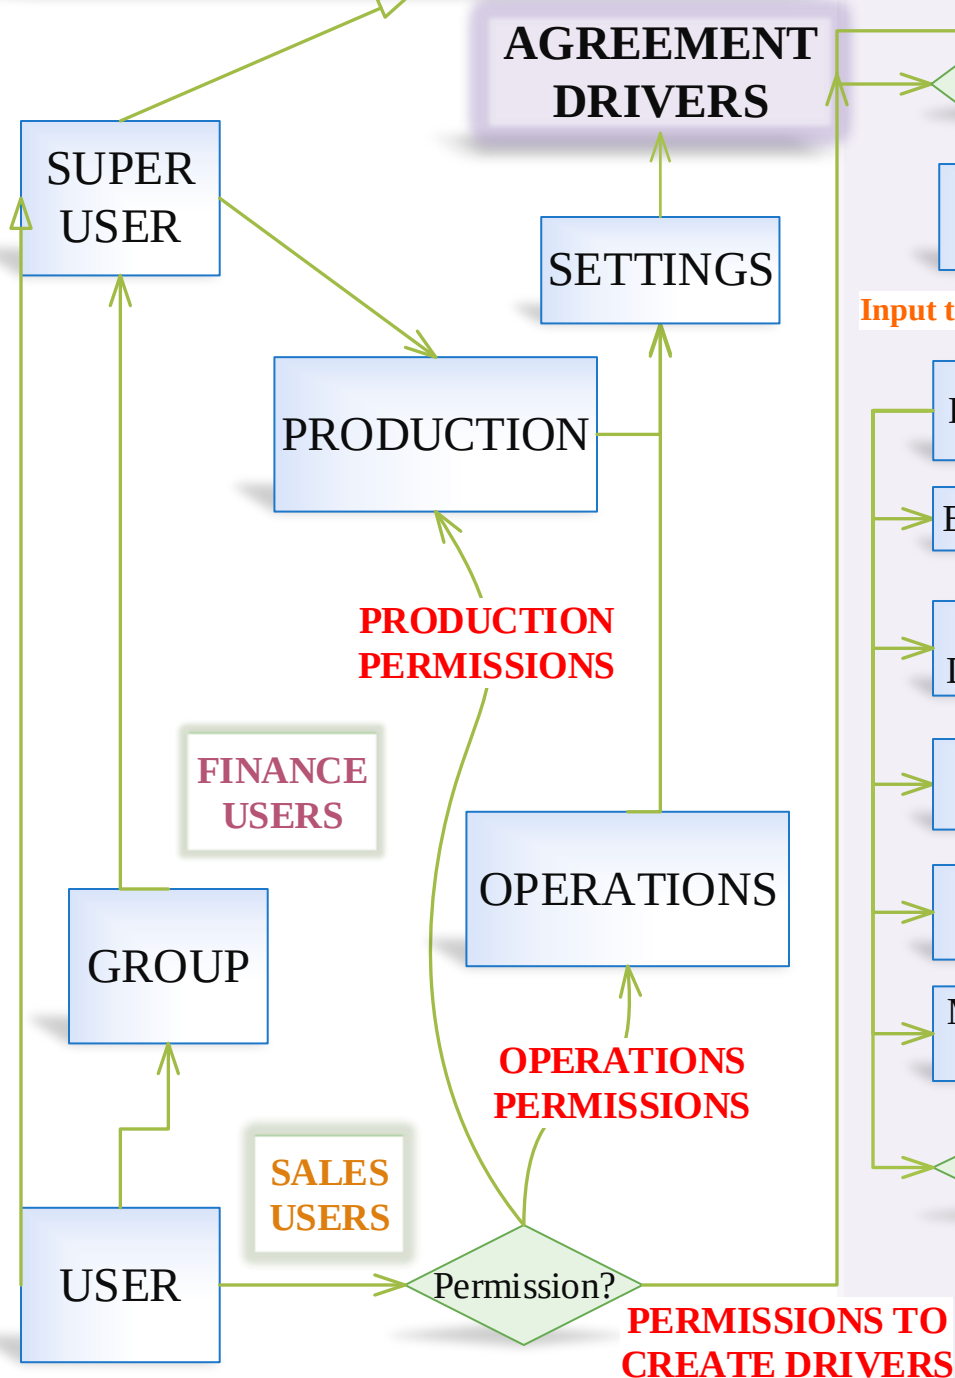


FUNCTIONS ACCESS BASED ON PERMISSION

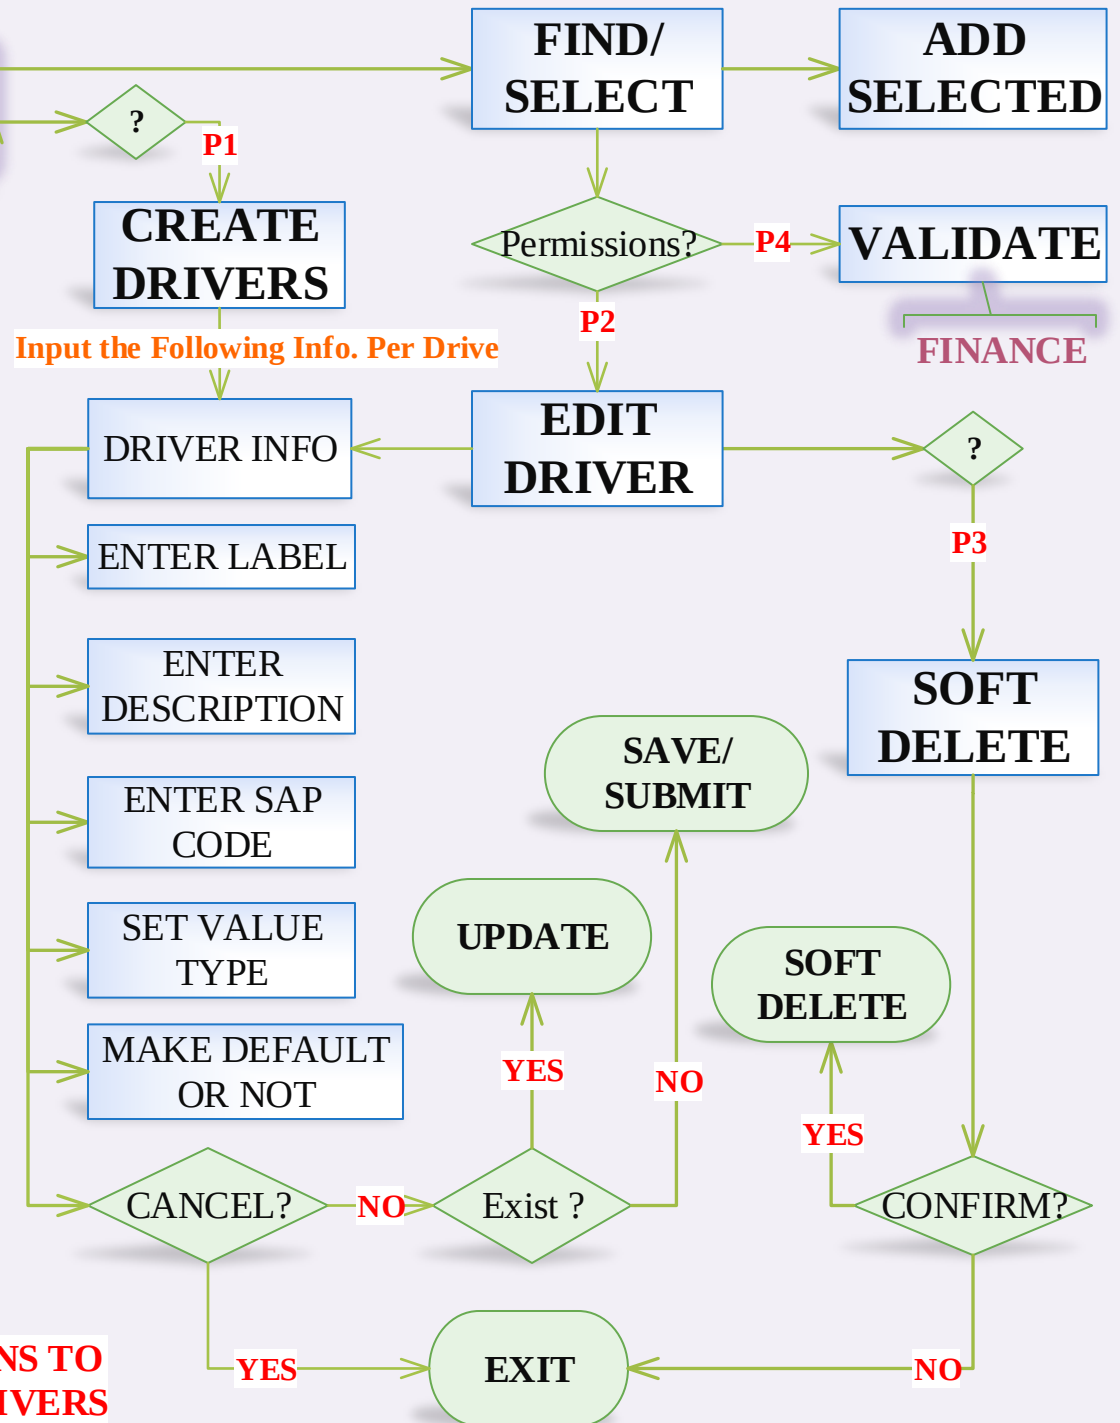

INHERITED OPERATIONS WITH PERMISSIONS

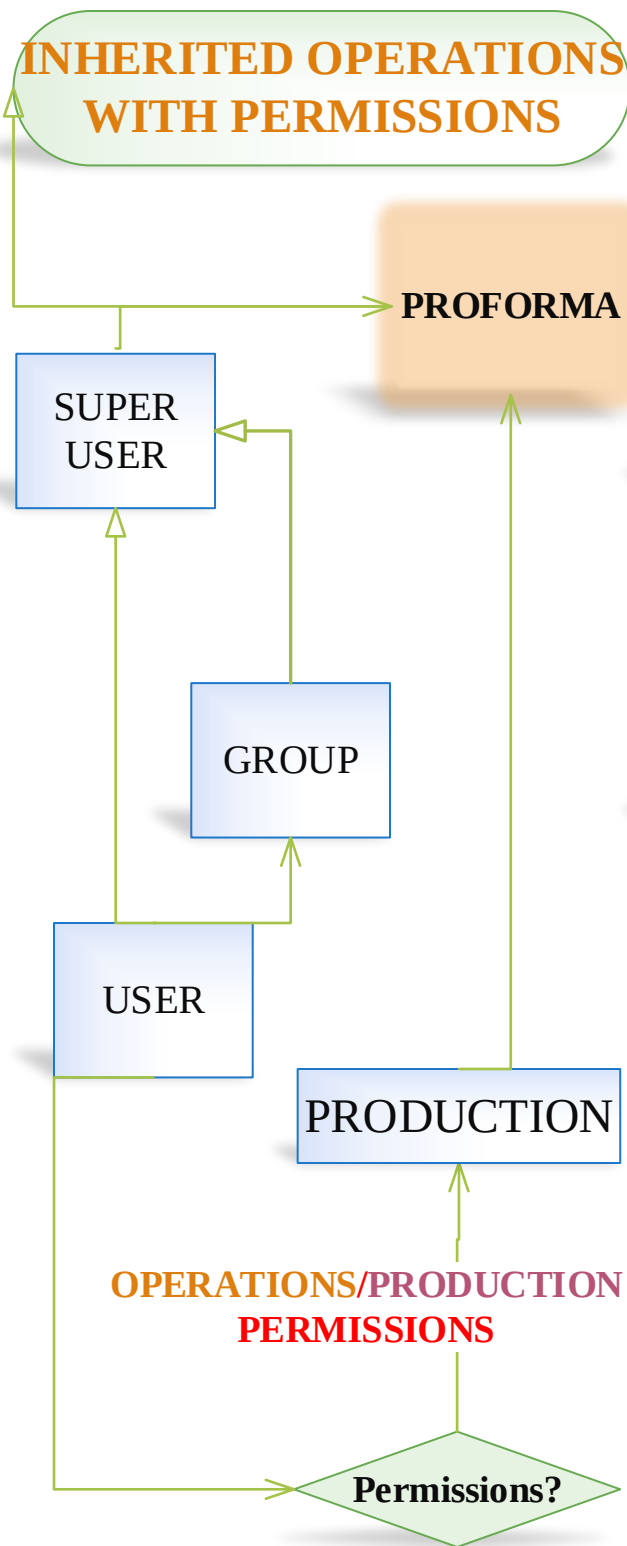


FUNCTIONS ACCESS BASED ON PERMISSIONS

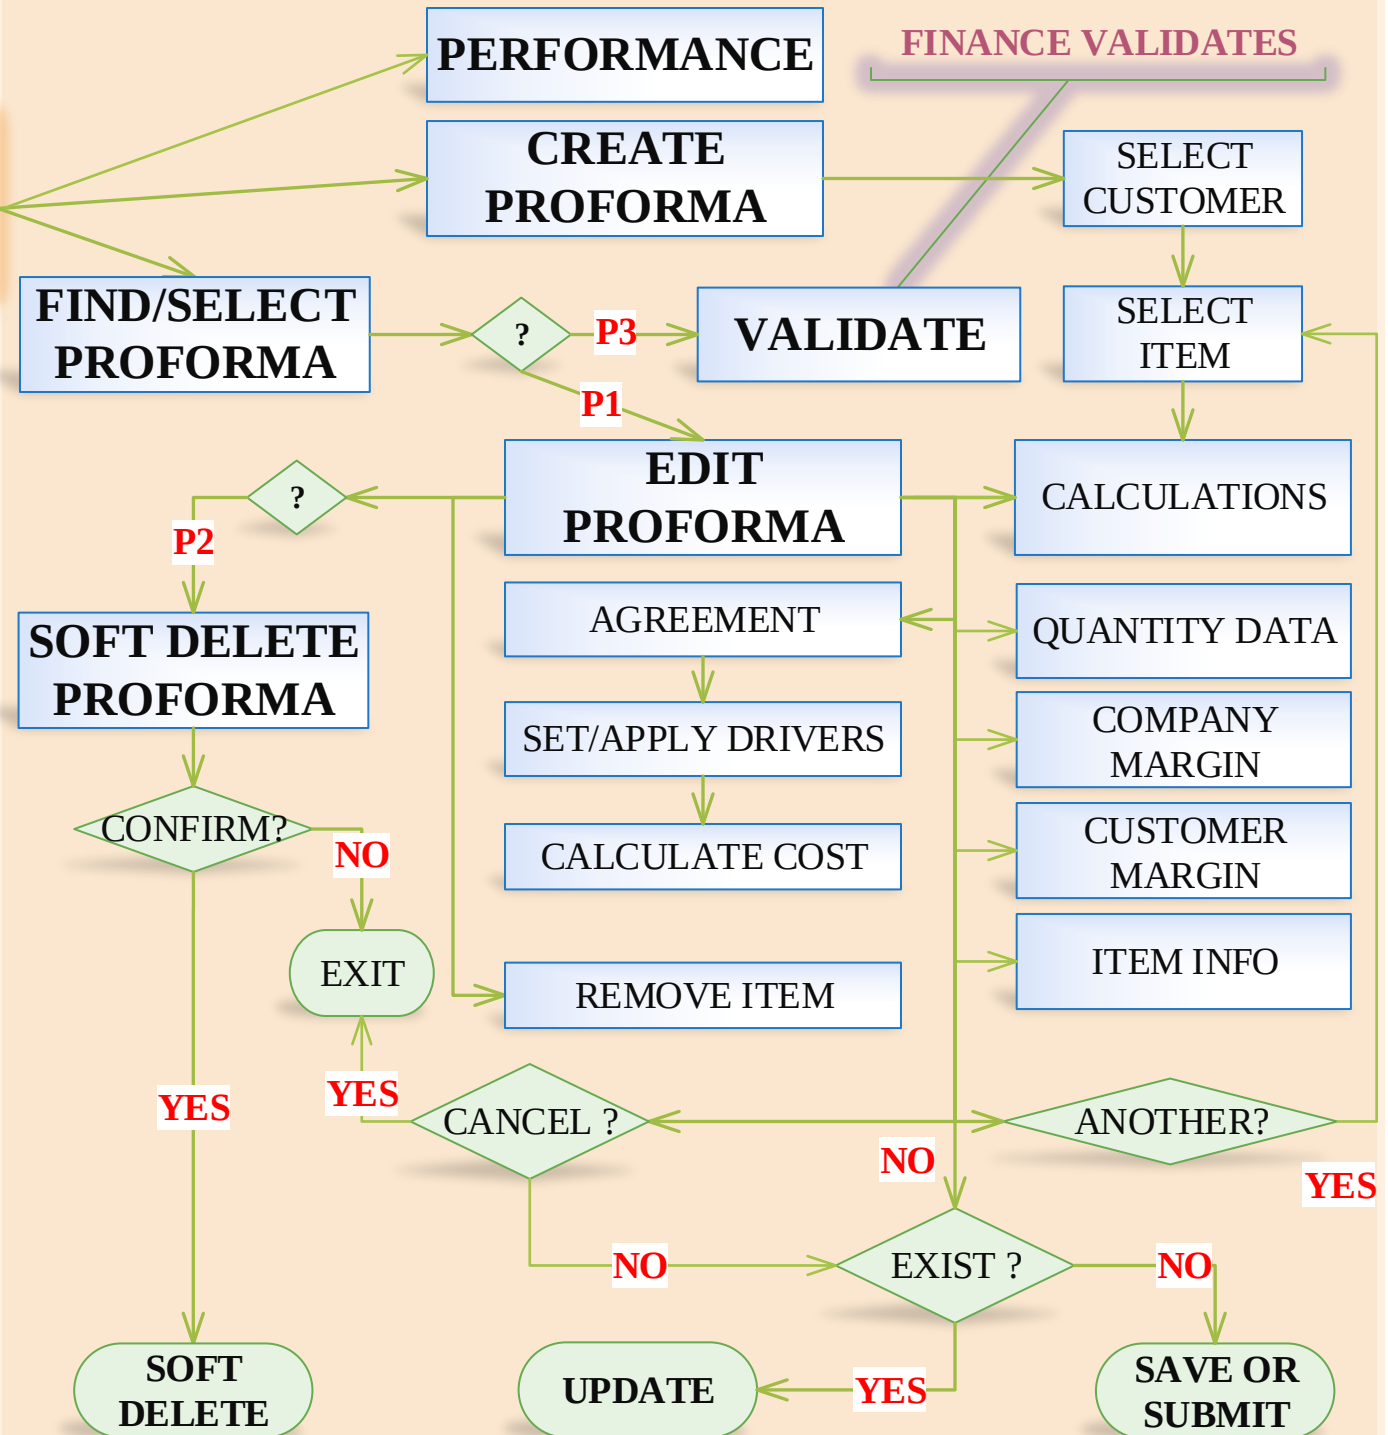


INHERITED OPERATIONS WITH PERMISSIONS

FUNCTIONS ACCESS BASED ON PERMISSIONS

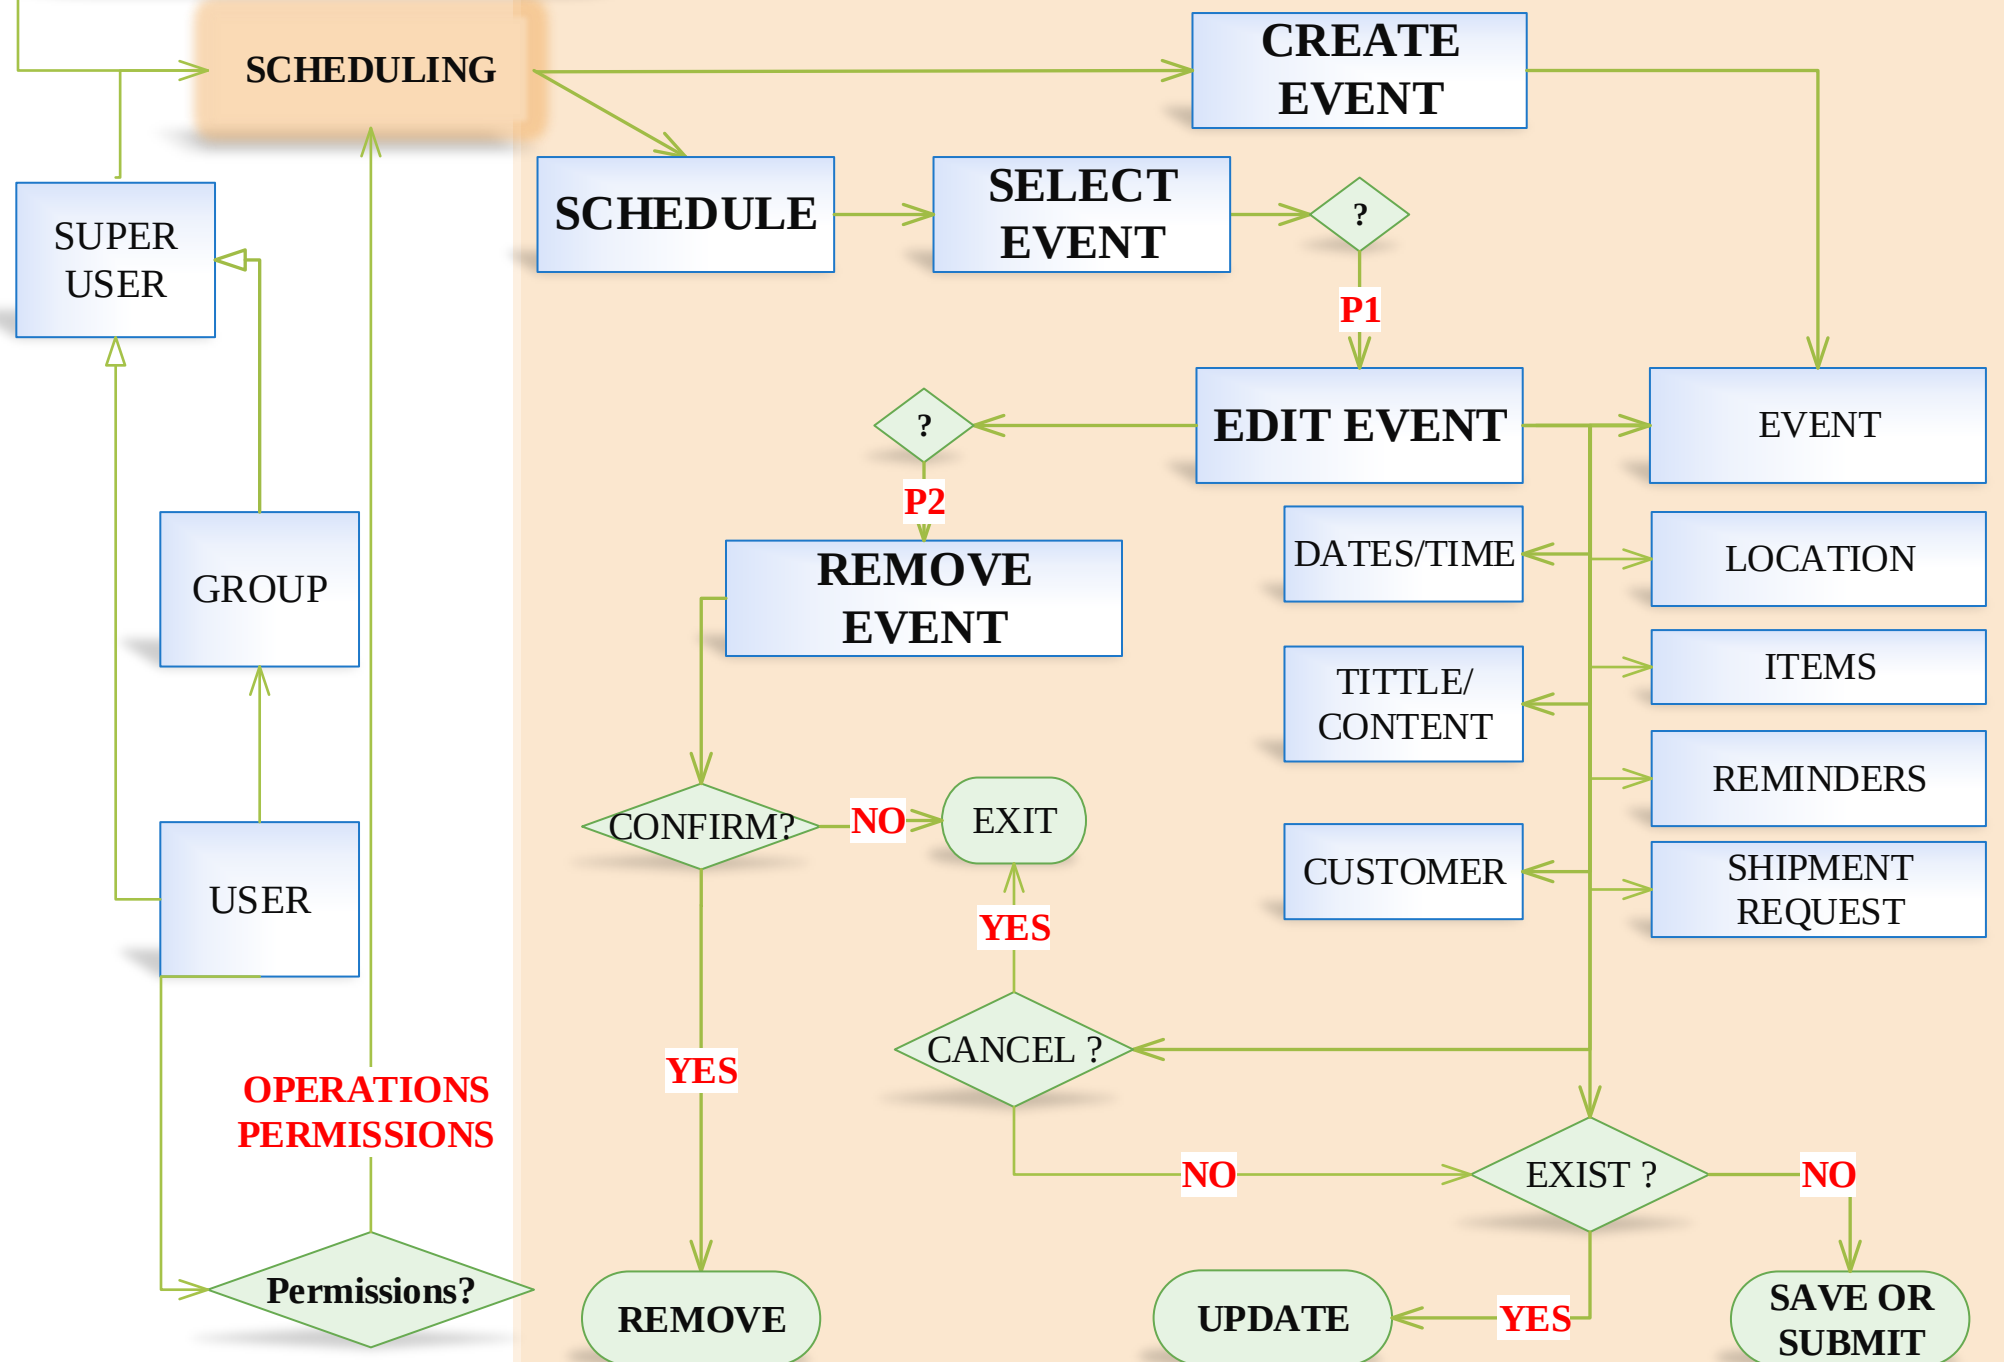


INHERITED OPERATIONS WITH PERMISSIONS


FUNCTIONS ACCESS BASED ON PERMISSIONS

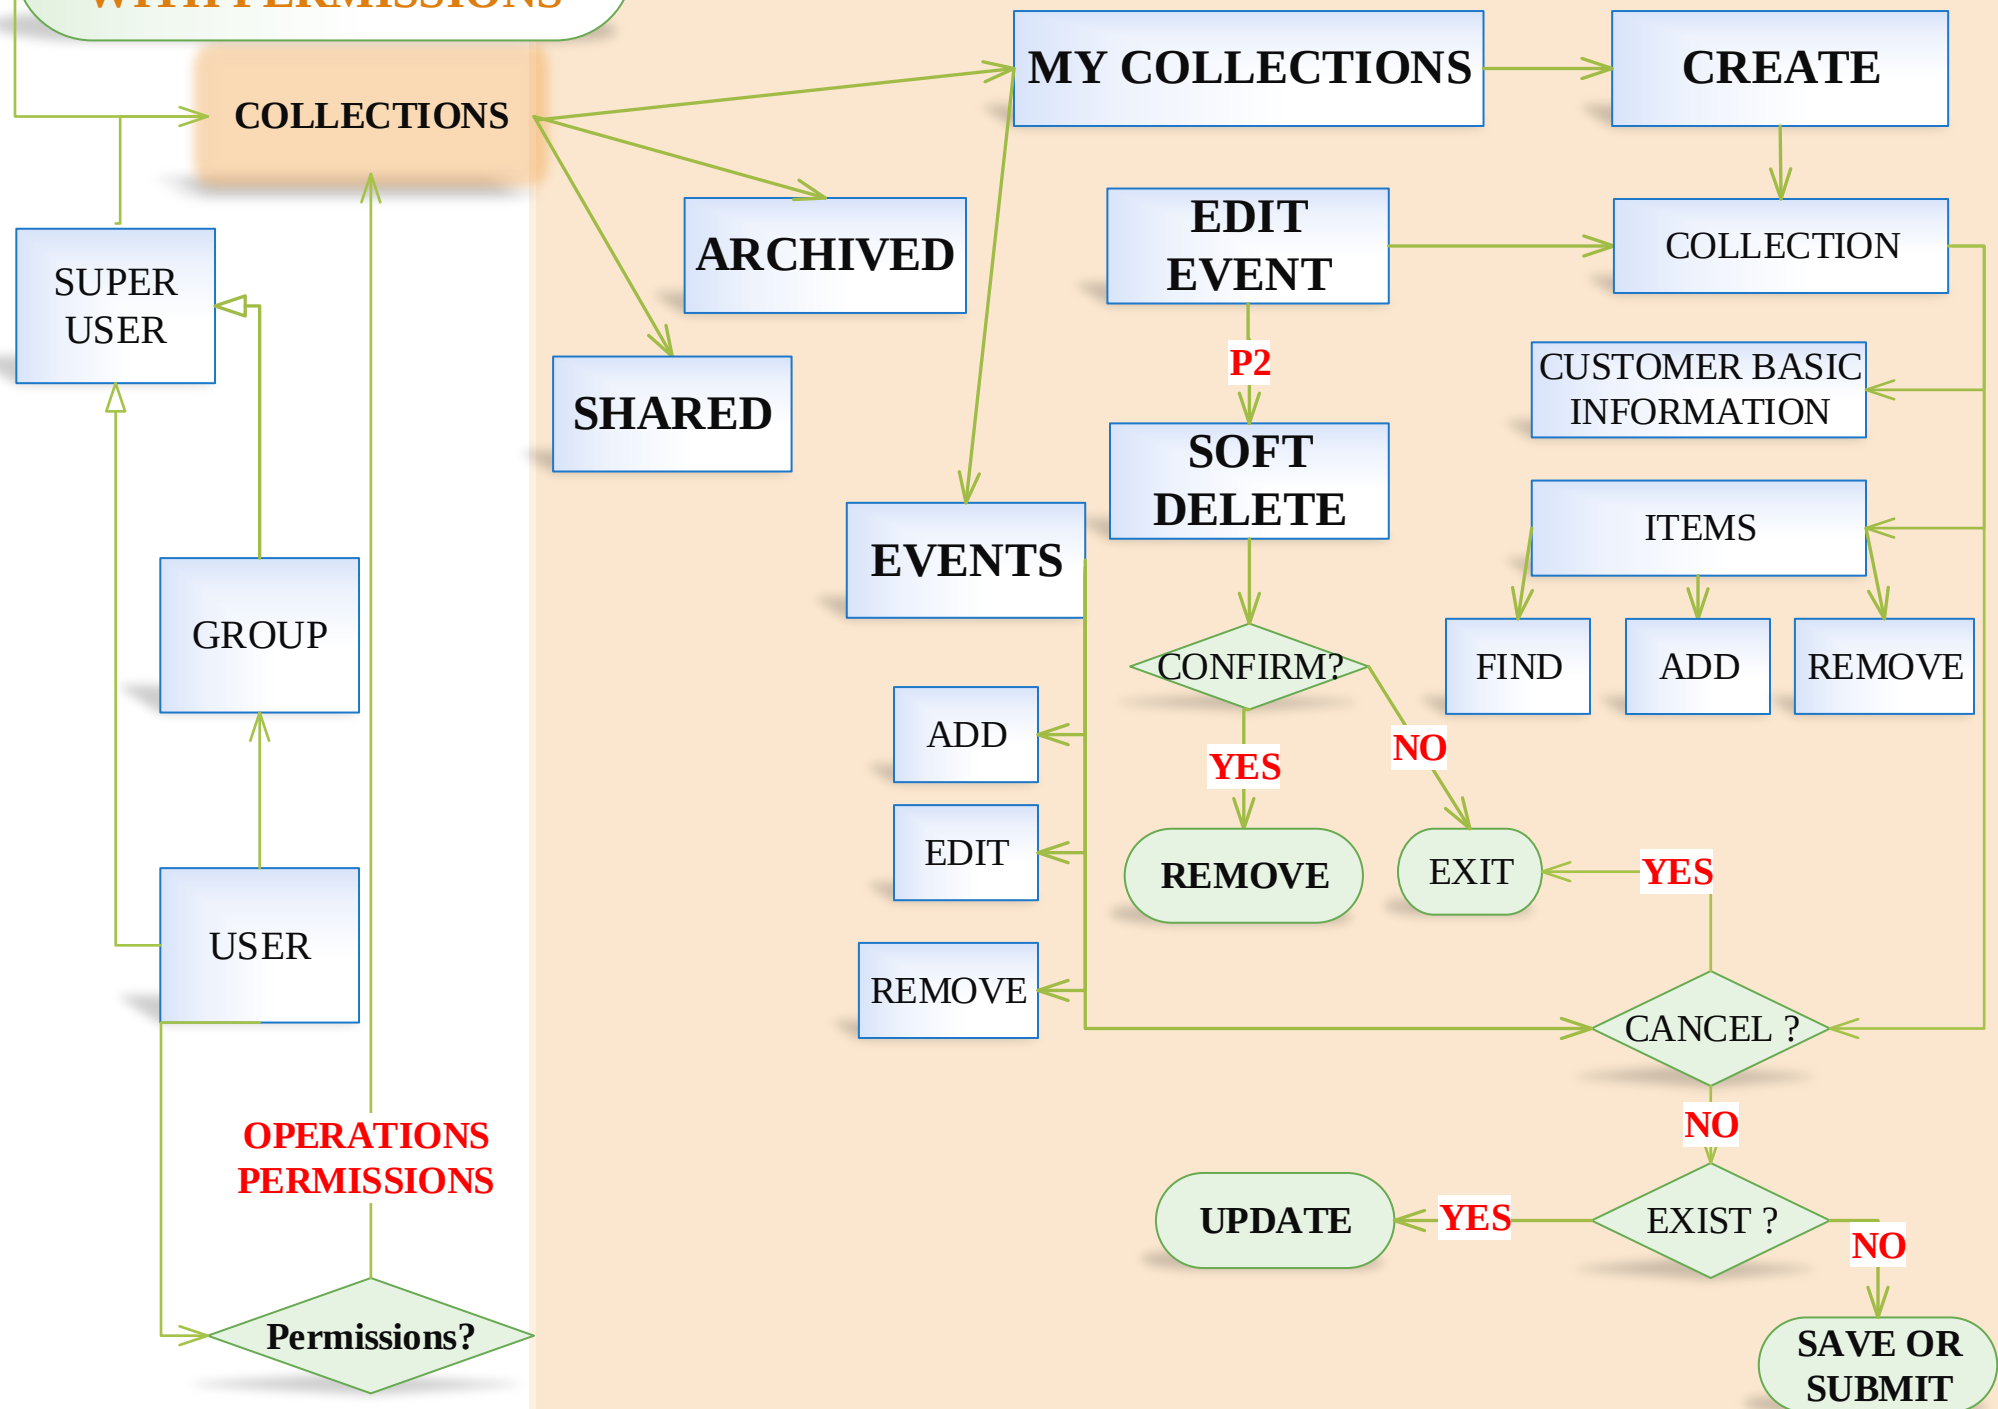

INHERITED OPERATIONS WITH PERMISSIONS

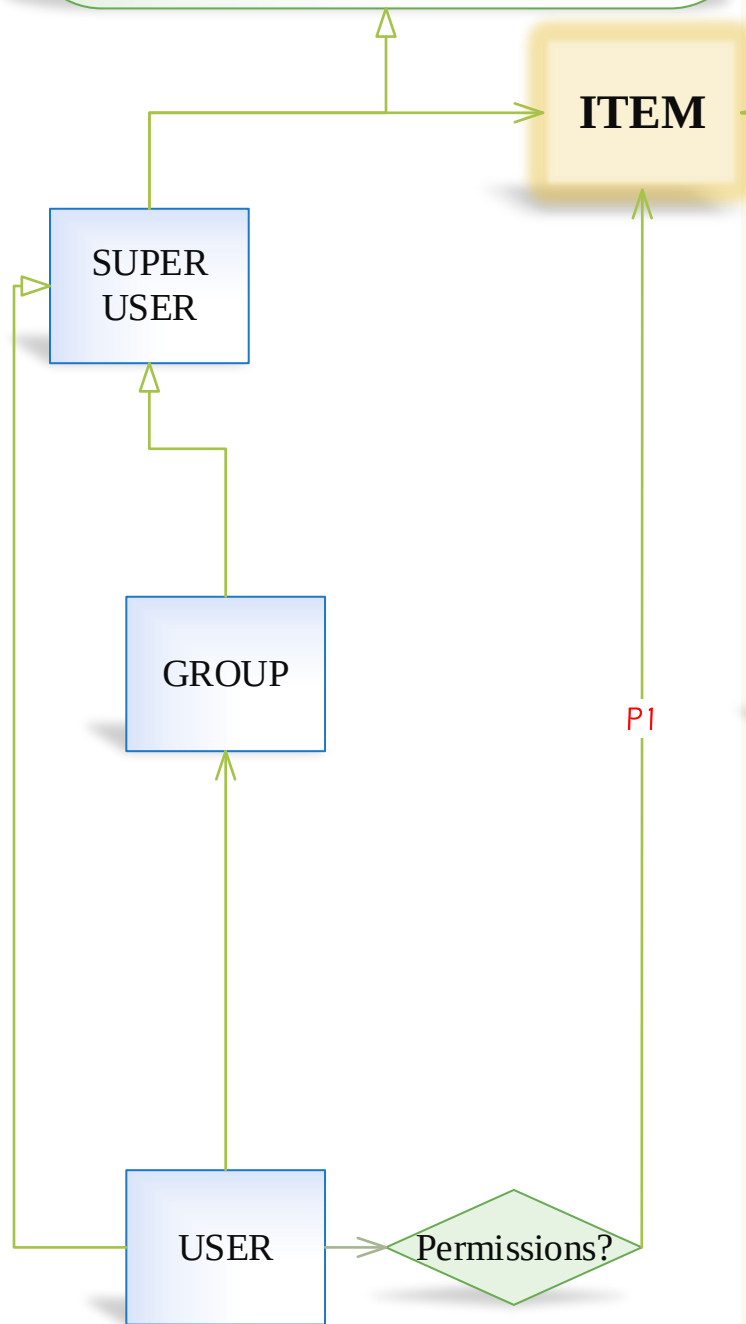


FUCNTION ACCESS BASED ON PERMISSIONS

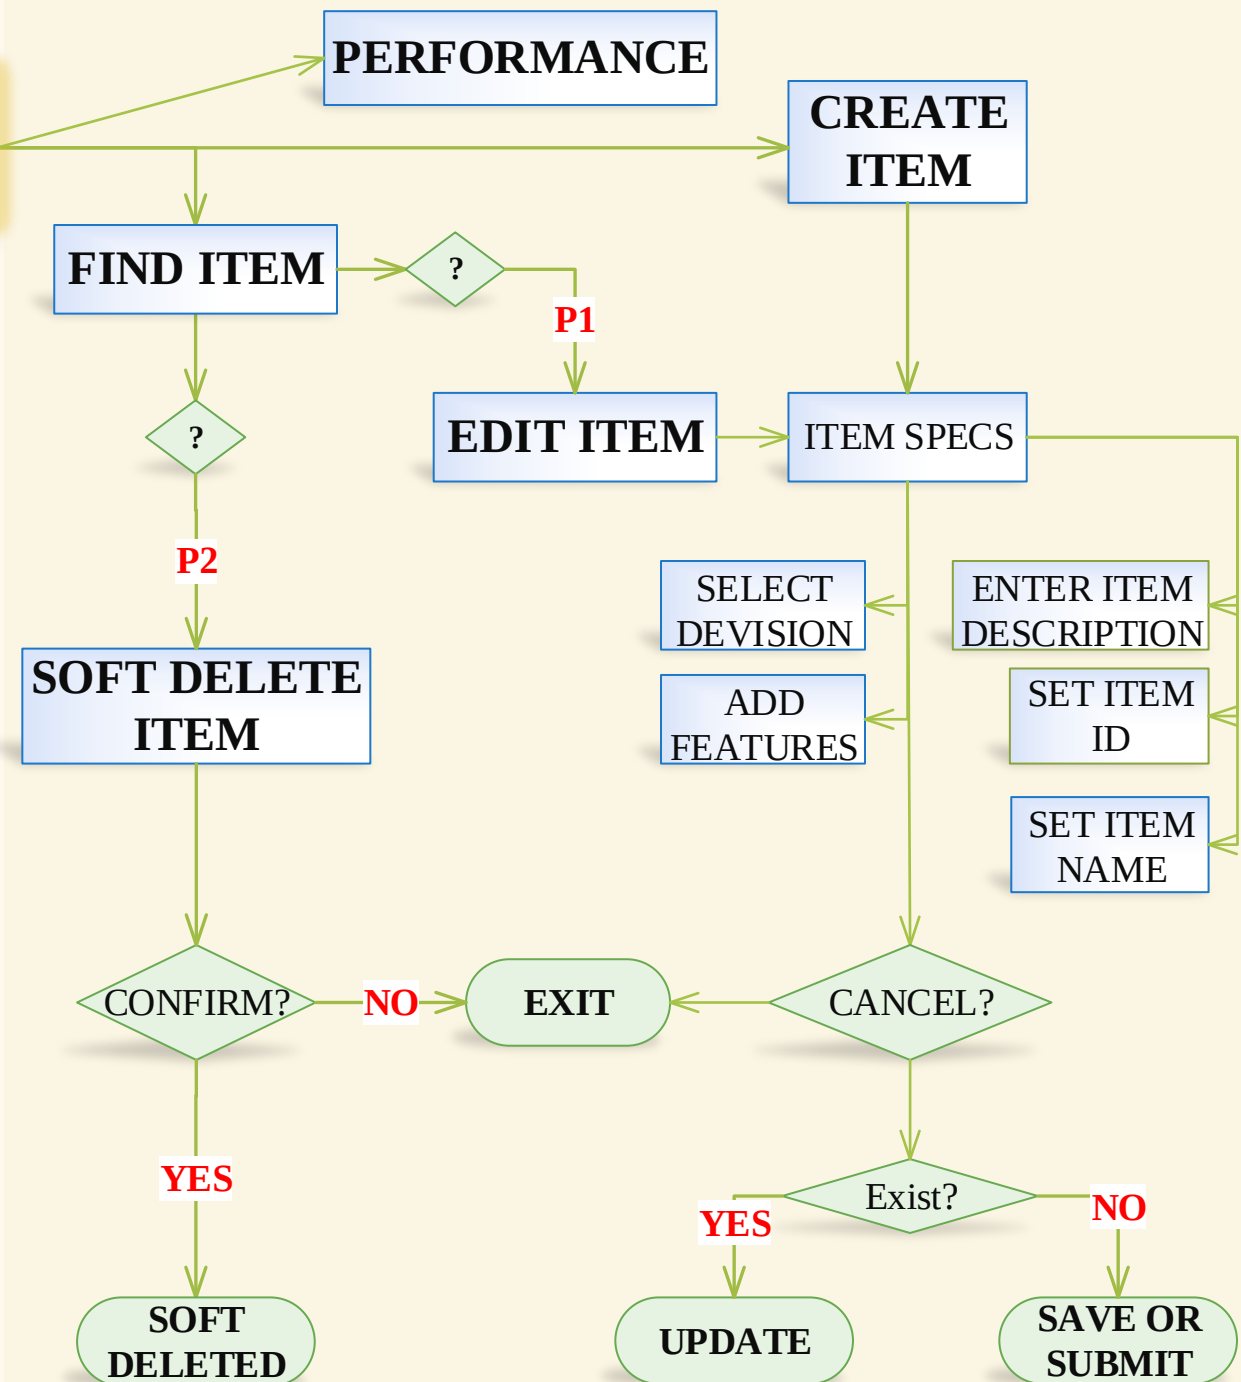

INHERITED OPERATIONS WITH PERMISSIONS

FUCNTION ACCESS BASED ON PERMISSIONS

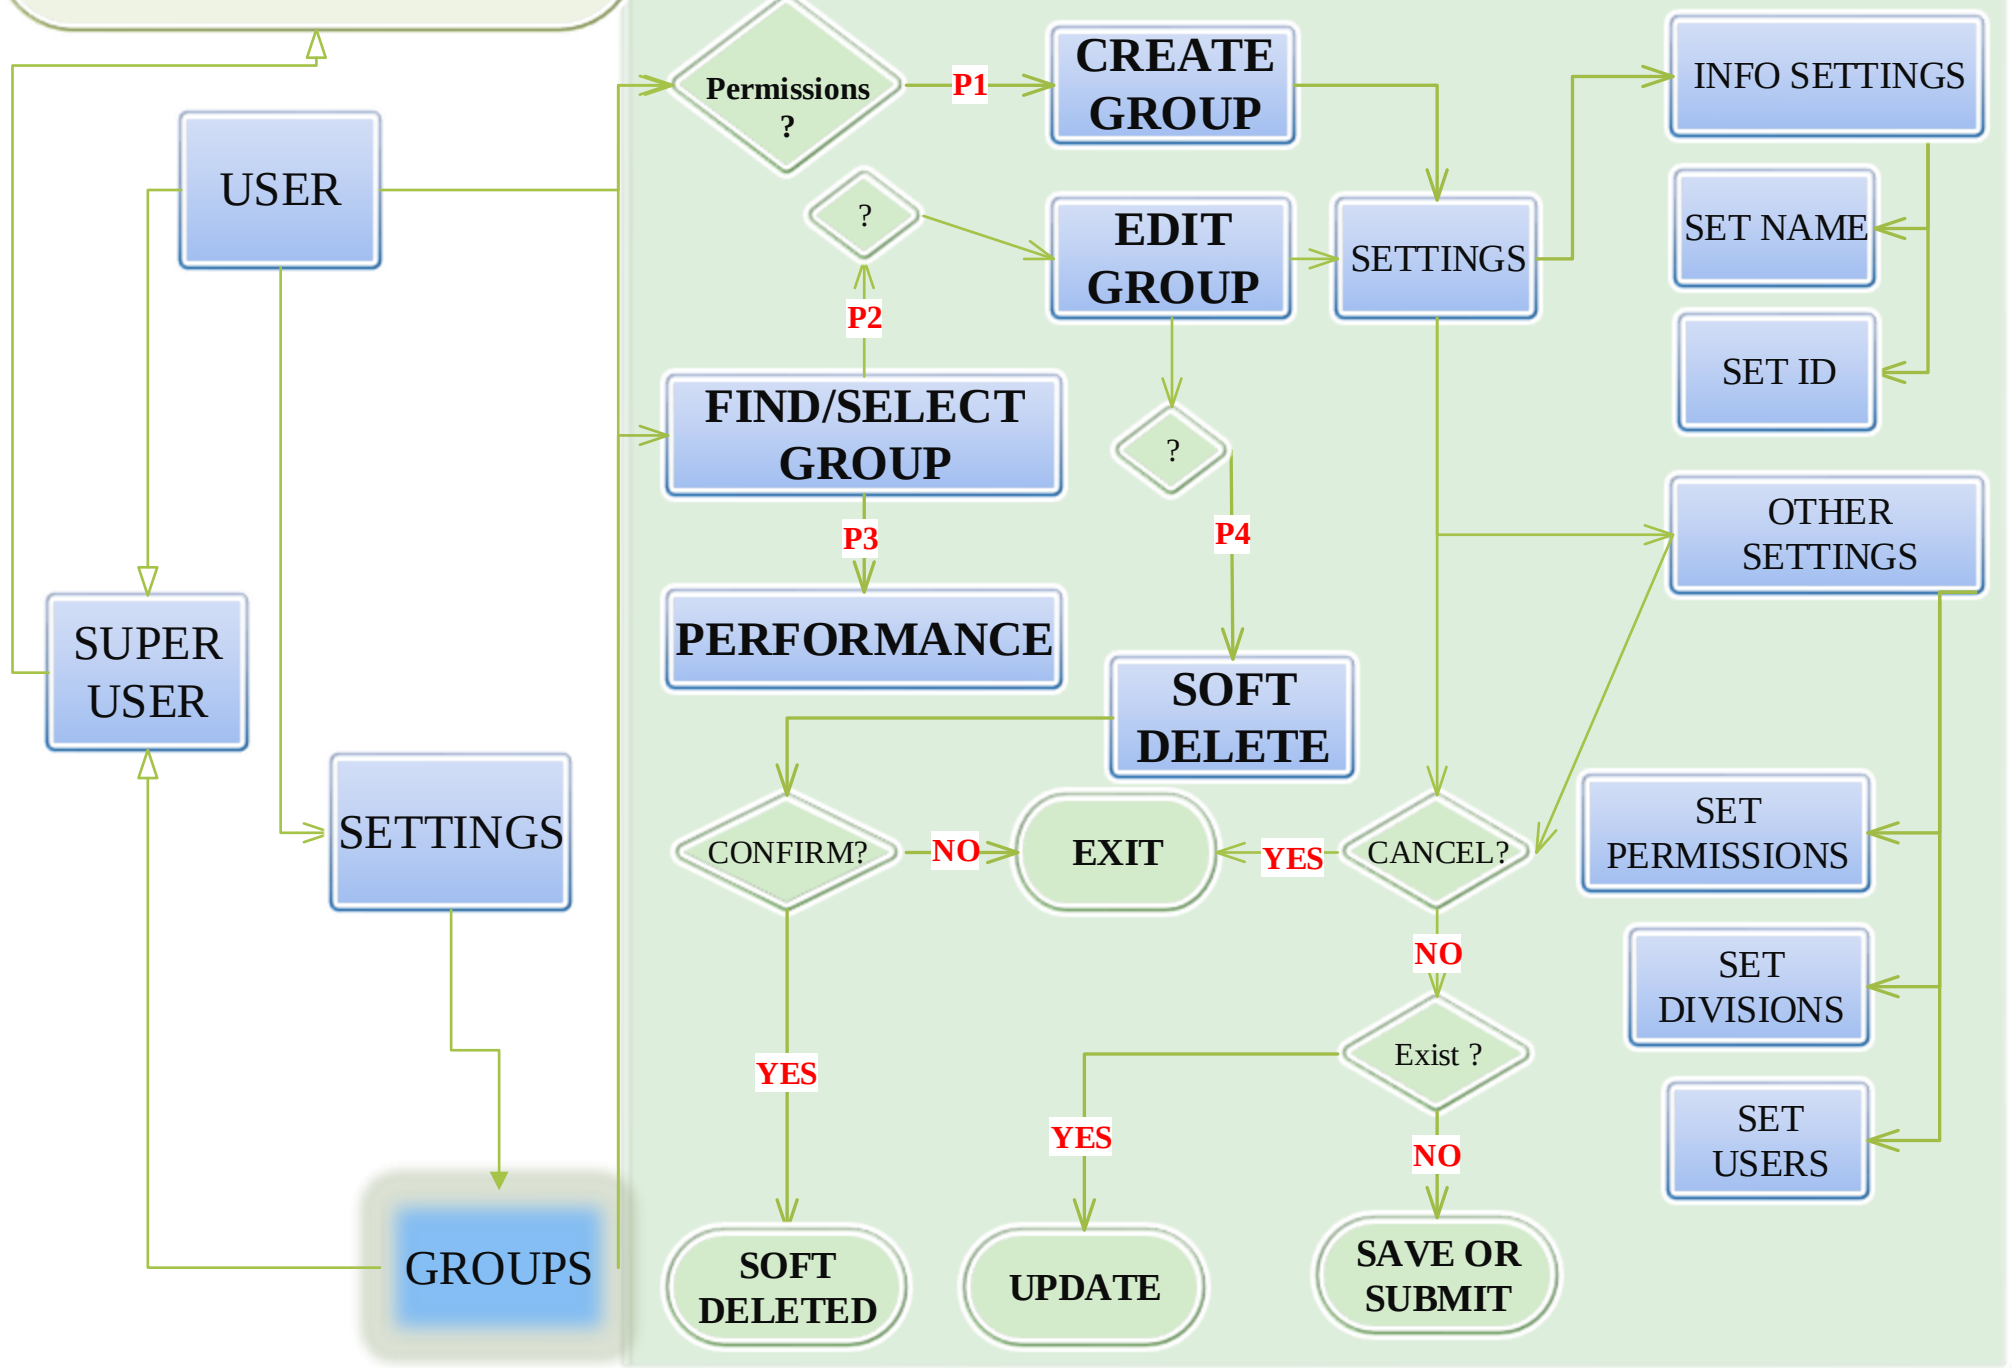

INHERITED OPERATIONS
WITH PERMISSIONS

FUCNTION ACCESS BASED ON PERMISSIONS

SUPER
USER

USER

SETTINGS

USERS

Permissions
?

P1

CREATE
USER

SETTINGS

INFO
SETTINGS

SET ID

SET NAME

SET PHONE

SET EMAIL

SET
ADDRESS

OTHER
SETTINGS

FIND A
USER

?

P4

SOFT
DELETE

CONFIRM
?

PERFORMANCE

EDIT
USER

P2

?

P3

CANCEL?

YES

NO

Exist ?

NO

SET
PERMISSIONS

SET DIVISIONS

SOFT
DELETED

UPDATE

SAVE OR
SUBMIT

P1

P2

P3

P4

YES

NO

Exist ?

NO

YES

YES

Permissions

CREATE
USER

SETTINGS

INFO
SETTINGS

SET ID

SET NAME

SET PHONE

SET EMAIL

SET
ADDRESS

OTHER
SETTINGS

FIND A
USER

?

P4

SOFT
DELETE

CONFIRM
?

PERFORMANCE

EDIT
USER

P2

?

P3

CANCEL?

YES

NO

Exist ?

NO

SET
PERMISSIONS

SET DIVISIONS


SOFT
DELETED

UPDATE

SAVE OR
SUBMIT

INHERITED OPERATIONS WITH PERMISSIONS

FUNCTION ACCESS BASED ON PERMISSIONS

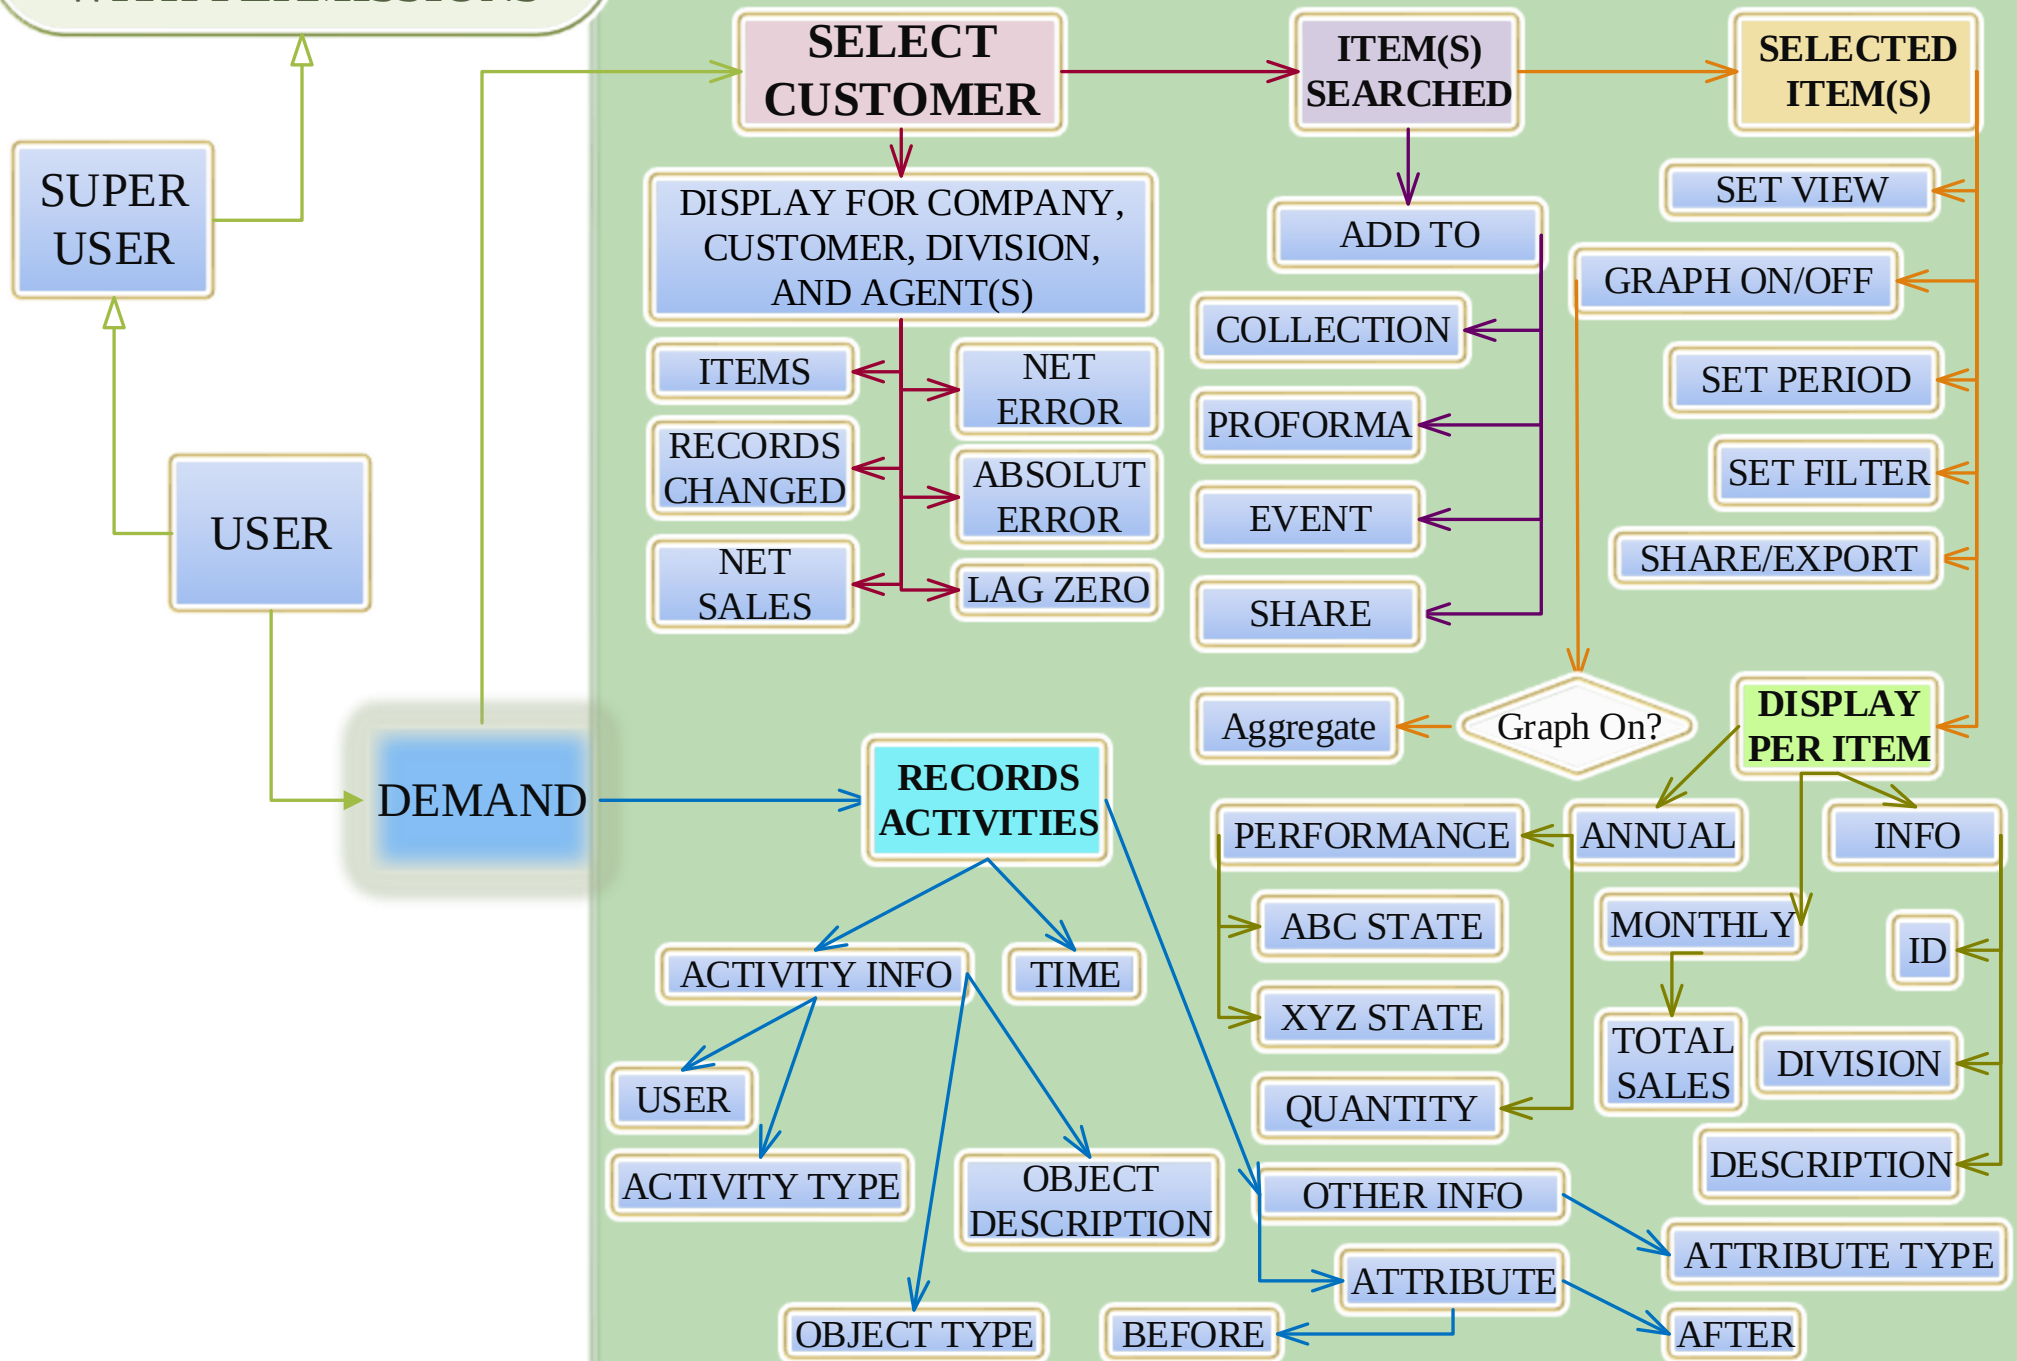

INHERITED OPERATIONS WITH PERMISSIONS

FUNCTIONS ACCESS BASED ON PERMISSIONS

