



Top-down parser

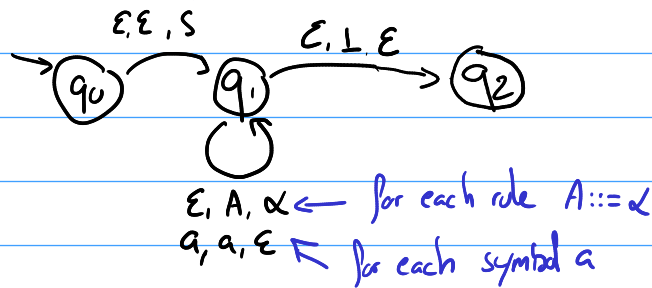


"bottom of the stack" symbol: $\perp$
(initial symbol)

Bottom-up parser

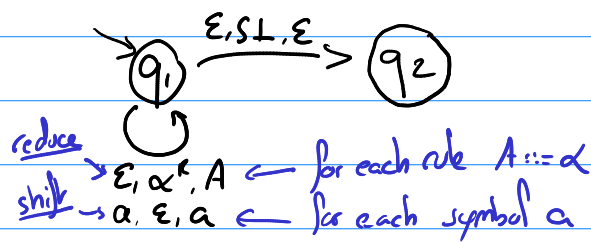


(α reversed)
we have α^R because if we
for example have $\alpha = abc$, our
stack will contain: $\perp \dots abc$

Notation:

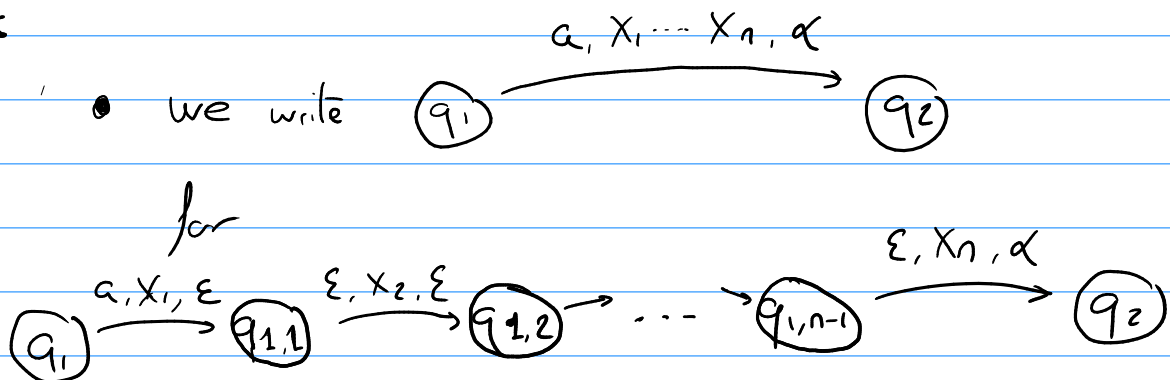

- we write $q_1 \xrightarrow{a, \epsilon, a} q_2$, where the top stack symbol is here " ϵ ", to indicate that we don't want to pop the top element from the stack. Formally, this would be written as

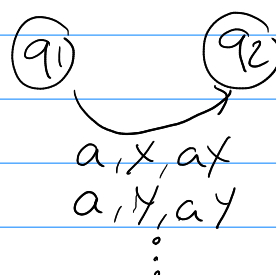

and this for every stack symbol ($X, Y, \dots$)