

S01 - DOM to Selenium Code-HW (Used this for Playwright)

GenAI-March-Home Work > S01 - DOM to Selenium Code-HW Copy

POST https://api.groq.com/openai/v1/chat/completions

Send

Docs Params Authorization Headers 10 Body Scripts Tests Settings Cookies

raw JSON Schema Beautify

```
4  "role": "user",
5  "content": "Write Playwright JavaScript code for a login module to log into
              Facebook. \n\nCredentials:\nUsername: Niraj.kumar@test.com\nPassword:
              abc123\n\nRequirements:\n- Include 2 positive test cases (valid login
              scenarios)\n- Include 1 negative test case (invalid login scenario)\n- Use
              Playwright Test framework\n- Include proper setup, selectors, and
              assertions\n- Code should be clean, well-commented, and
              runnable\n\nInstructions: Provide only JavaScript code and no explanations."
6  },
7  {
8    "role": "system",
9    "content": "As an AI Assistant give me a Playwright java script code"
10  },
11  {
12    "role": "assistant",
13    "content": "only Playwright java script code"
14  }
15 ],
16 "model": "meta-llama/llama-4-scout-17b-16e-instruct",
17 "temperature": 0.1
18
```

Body 200 OK • 1.03 s • 1.54 KB • Save Response

Build faster with Agent Mode
Use Agent Mode to transform the way you work with APIs.

Get your API working
Fix configurations, scripts, or anything else to get your request working.

Document
Describe what type of documentation you'd like, and watch Agent Mode do the rest.

Explore
Let Agent Mode configure requests and identify use-cases.

And much more!
Use Agent Mode across Flows, Monitors, Mocks, and more!

You can enable Agent Mode for your team. Access can be revoked in the product access page.

Enable Postman Agent

Globals Vault Tools

20:19 09-04-2026

OutPut :

Body v ↻ 200 OK • 1.03 s • 1.54 KB • e.g. Save Response

{ } JSON v Preview Visualize

```
8      index: 0,
9      "message": {
10        "role": "assistant",
11        "content": " \n```\njavascript\n// playwright.config.js\nmodule.\n  exports = {\n    testDir: './',\n    /* Shared settings for all the\n    browsers */\n    use: {\n      browserName: 'chromium',\n      headless: false,\n      viewportSize: { width: 1280, height: 720 },\n    },\n  },\n};\n\n// facebook.spec.js\nconst { test, expect } =\n  require('@playwright/test');\n\ntest.beforeEach(async ({ page })\n=> {\n  await page.goto('https://www.facebook.com/');\n});\n\ntest.describe('Facebook Login', () => {\n  test('Valid login\n  with correct credentials', async ({ page }) => {\n    await page.\n    fill('input[name=\"email\"]', 'Niraj.kumar@test.com');\n    await page.fill('input[name=\"pass\"]', 'abc123');\n    await\n    page.click('button[type=\"submit\"]');\n    await expect(page).\n    toHaveURL(/facebook.com/);\n  });\n});
```

Plain Text format :



 JavaScript 

```
    await page.goto('https://www.facebook.com/');
  });


  test.describe('Facebook Login', () => {
    test('Valid login with correct credentials', async ({ page }) => {
      await page.fill('input[name="email"]', 'Niraj.kumar@test.com');
      await page.fill('input[name="pass"]', 'abc123');
      await page.click('button[type="submit"]');
      await expect(page).toContainText('Niraj');
    });

    test('Valid login with correct credentials and checking profile link', async ({ page }) => {
      await page.fill('input[name="email"]', 'Niraj.kumar@test.com');
      await page.fill('input[name="pass"]', 'abc123');
      await page.click('button[type="submit"]');
      await page.click('a[aria-label="Home"]');
      await expect(page).toContainText('Recent');
    });
  });
```

S02 - TextFromImage-Url-HW

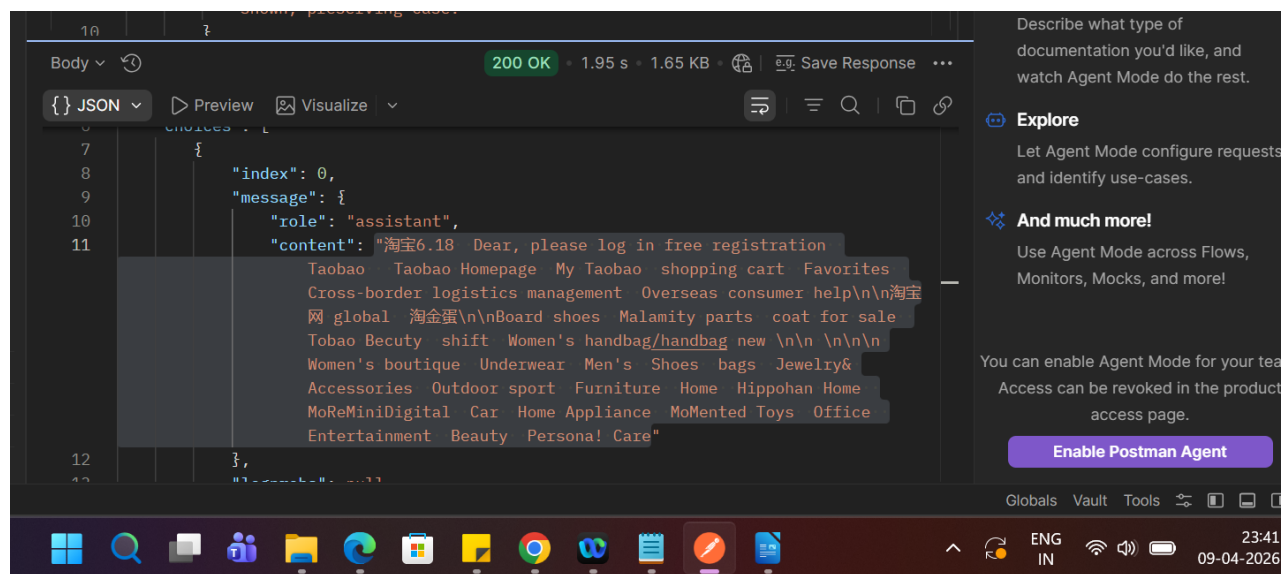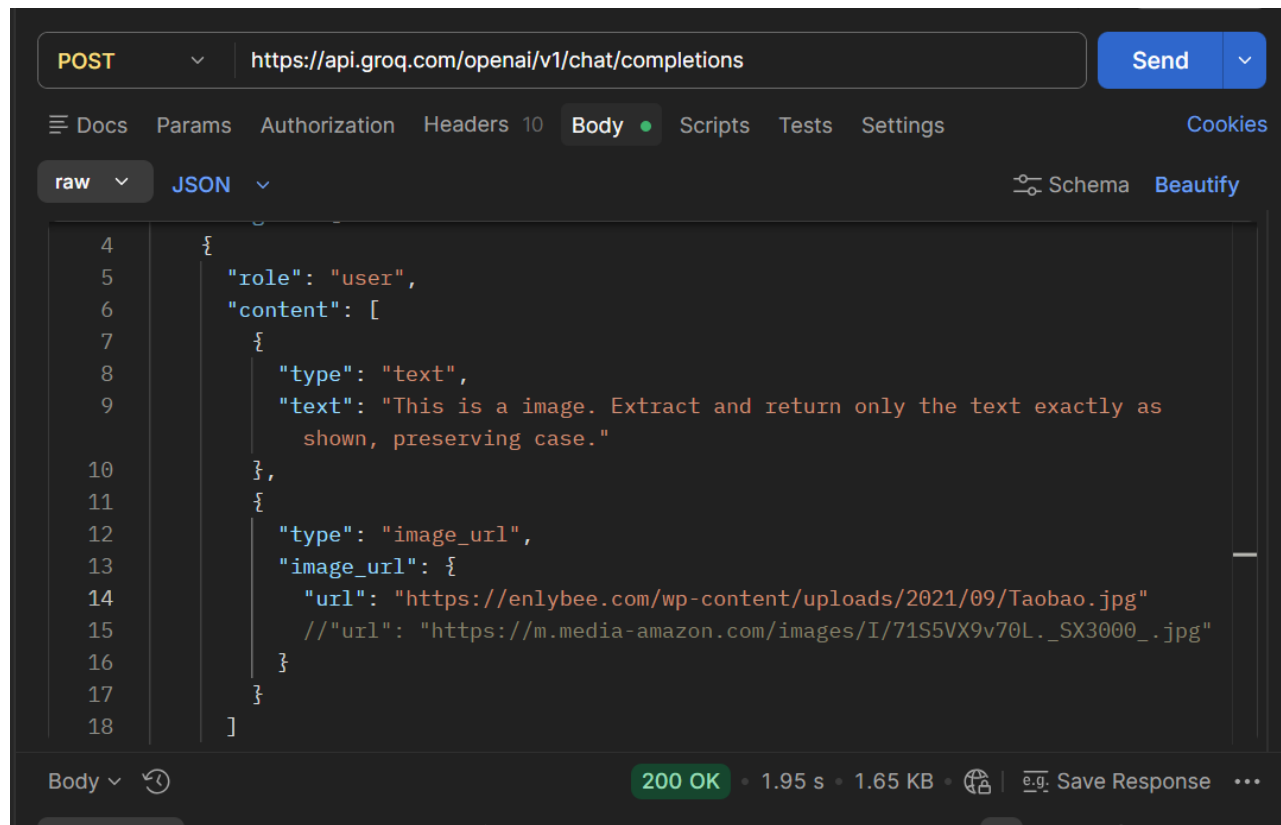

Plain text :

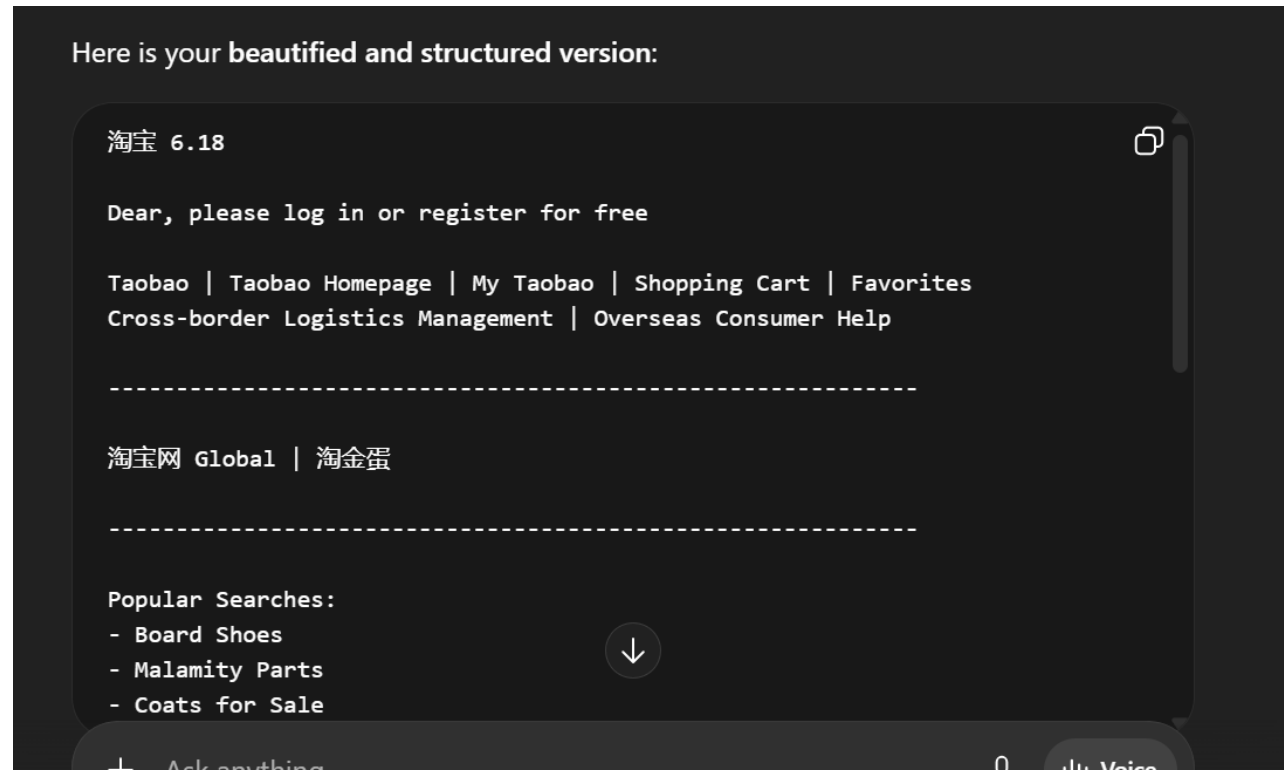

S03-WebSearch-HW

GenAI-March-Home Work > S03-WebSearch-HW

POST

https://api.groq.com/openai/v1/chat/completions

Send

DocsParamsAuthorizationHeaders 10BodyScriptsTestsSettingsCookies

raw

JSON

Schema

Beautify

4

5

6

{

"role": "user",

"content": "weather in Gurgaon for jan 11 2026 --Only the temperate for the date asked no probability or text and source from web with link no extrat text or markdown Give accuratelv with Web search no Halluciantion "

Body

200 OK • 5.52 s • 4.46 KB • Save Response

{}

JSON

Preview

Visualize

4

5

6

7

8

9

10

11

12

"created": 1775758416,

"model": "groq/compound-mini",

"choices": [

{

"index": 0,

"message": {

"role": "assistant",

"content": "59°F [https://world-weather.info/forecast/india/gurgaon/11-january/](\"https://world-weather.info/forecast/india/gurgaon/11-january/\"),

"reasoning": "<tool>search(Gurgaon temperature Jan 11 2026)</tool>\n<output>Title: Weather Gurgaon in January 2027: Temperature & Climate\nURL: [https://en.climate-data.org/asia/india/haryana/gurgaon-967597/t/january-1/](\"https://en.climate-data.org/asia/india/haryana/gurgaon-967597/t/january-1/\")\nContent: In the early part of the month, average high temperatures are 19.9°C | 67.8°F and lows are about 7.5°C | 45.5°F. Between days 11 and 20

Build faster with Agent Mode

Use Agent Mode to transform the way you work with APIs.

Get your API working

Fix configurations, scripts, or anything else to get your request working.

Document

Describe what type of documentation you'd like, and watch Agent Mode do the rest.

Explore

Let Agent Mode configure requests and identify use-cases.

And much more!

Use Agent Mode across Flows, Monitors, Mocks, and more!

You can enable Agent Mode for your team. Access can be revoked in the product access page.

Enable Postman Agent

GlobalsVaultTools

Windows Taskbar

23:45 09-04-2026

text:

Temperature: 59°F

Source: <https://world-weather.info/forecast/india/gurgaon/11-january/>



Reasoning:

`<tool> search("Gurgaon temperature Jan 11 2026") </tool>`

Search Results:

1. Title: Weather Gurgaon in January 2027: Temperature & Climate

URL: <https://en.climate-data.org/asia/india/haryana/gurgaon-967597/t/j>

Insight:

- Average high: 19.9°C (67.8°F)

- Average low: 7.5°C (45.5°F)



S05- MultiLingual-HW:

POST

https://api.groq.com/openai/v1/chat/completions

Send

Docs Params Authorization Headers 10 Body Scripts Tests Settings Cookies

raw JSON Schema Beautify

```
1 {
2   "model": "llama-3.3-70b-versatile",
3   "messages": [
4     {"role": "system", "content": "You are an API Specialist. Always respond in the
      same language as the user."},
5     {"role": "user", "content": "缺陷生命周期 (或 错误生命周期) "}
6   ]
7 }
```

Body 200 OK 1.40 s 1.71 KB Save Response

JSON Preview Visualize

```
12 },
13   "logprobs": null,
14   "finish_reason": "stop"
15 }
```

Use Agent Mode to transform the way you work with APIs.

Get your API working

Fix configurations, scripts, or anything else to get your request working.

Document

Describe what type of documentation you'd like, and watch Agent Mode do the rest.

Explore

Let Agent Mode configure requests and identify use-cases.

And much more!

Use Agent Mode across Flows, Monitors, Mocks, and more!

You can enable Agent Mode for your team

Access can be revoked in the product access page.

Enable Postman Agent

Globals Vault Tools

ENG IN 23:54 09-04-2026

text output :

8

缺陷生命周期（或错误生命周期）

缺陷生命周期是软件测试和质量保证中的一个重要概念。它描述了缺陷（或错误）从发现到修复的整个过程。

以下是缺陷生命周期的各个阶段：

1. 发现 (Discovery)

测试人员或用户发现一个缺陷或错误。

2. 报告 (Reporting)

测试人员或用户将缺陷或错误报告给开发团队或质量保证团队。

3. 验证 (Verification)

开发团队或质量保证团队验证报告的缺陷或错误，以确认它确实是一个缺陷或错误。

4. 分配 (Assignment)

缺陷或错误被分配给特定的开发人员或团队进行修复。

5. 修复 (Fixing)

开发人员修复缺陷或错误。

+ Ask anything



Voice

ChatGPT can make mistakes. Check important info. See [Cookie Preferences](#).