


Commands :

```
1981 sudo docker build -t q2 .  
1982 sudo docker-compose up  
1983 sudo docker ps -a  
1984 history
```

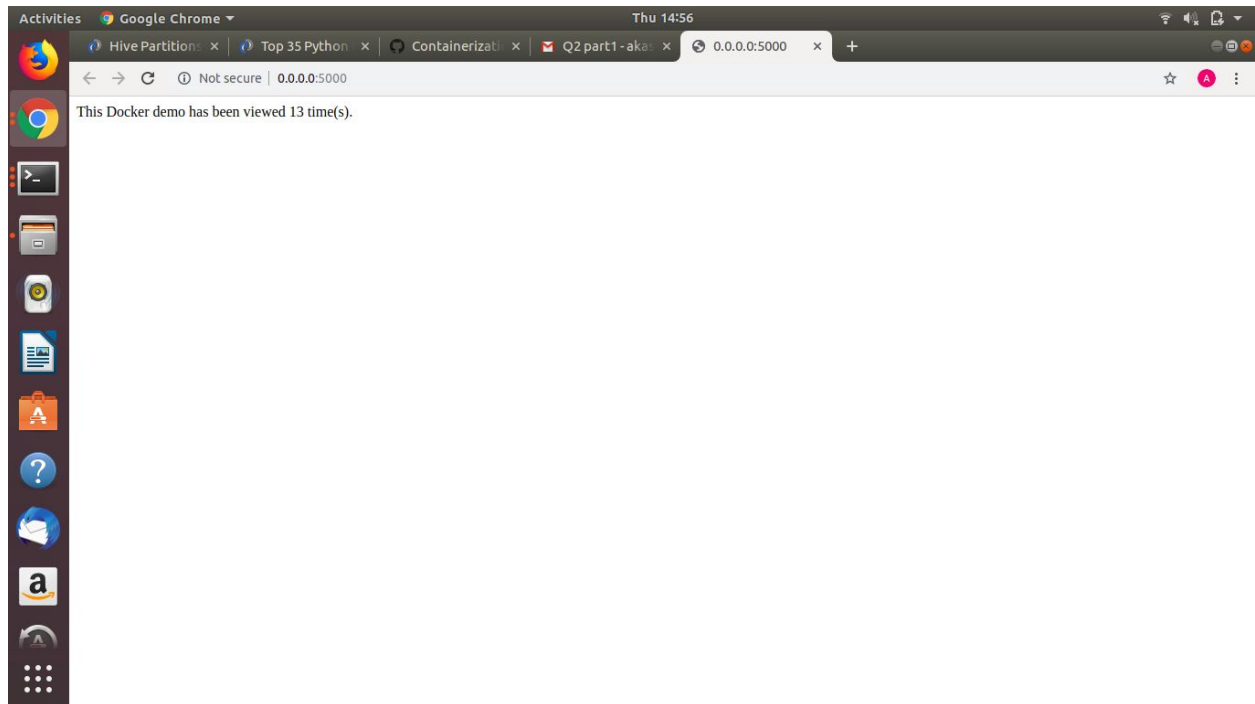

The volume is mounted in /code directory

So even if any changes are made to the code, no need to build the image again.

Only thing we have to do

sudo docker-compose up after stopping it.