

Received 12 November 2025, accepted 29 December 2025, date of publication 12 January 2026, date of current version 22 January 2026.

Digital Object Identifier 10.1109/ACCESS.2026.3652006

## TOPICAL REVIEW

# MCQs Generation With Large Language Models: A Survey of Methodologies, Evolution, and Open Research Issues

MUHAMMAD RAHEEL ANWAR<sup>1</sup>, SHAH KHALID<sup>1</sup>, SAIED ALSHAHRANI<sup>2</sup>,  
HAFIZ SYED MUHAMMAD BILAL<sup>1</sup>, AND MOHAMMED ALDAWSARI<sup>3</sup>

<sup>1</sup>School of Electrical Engineering and Computer Science, National University of Sciences and Technology, Islamabad 44000, Pakistan

<sup>2</sup>Department of Computer Science and Artificial Intelligence, College of Computing and Information Technology, University of Bisha, Bisha 61922, Saudi Arabia

<sup>3</sup>Department of Computer Engineering and Information, College of Engineering in Wadi Alldawasir, Prince Sattam Bin Abdulaziz University, Al-Kharj 16273, Saudi Arabia

Corresponding author: Shah Khalid (shah.khalid@seecs.edu.pk)

This work was supported by the Fast-Track Research Support Program managed by the Deanship of Graduate Studies and Scientific Research at the University of Bisha.

**ABSTRACT** In recent years, there has been growing interest in the automatic generation of Multiple Choice Questions (MCQs), mainly to reduce the effort and time involved in manual question construction. Many researchers and practitioners have tried different methods to produce accurate and good-quality MCQs automatically. The progress in this area has been steady but also diverse, which makes it difficult to identify which approaches work best in practice. The research trend has moved gradually from early rule-based methods to more advanced systems based on Large Language Models (LLMs). Although several review papers and surveys have summarized earlier work, most of them give limited discussion on how the field has evolved over time or what key problems remain to be solved. This paper aims to fill that gap by reviewing important studies on MCQs generation and providing a structured overview of the main question types, their essential components, and the processes involved in automated generation. It also discusses the essential stages in a general system architecture, including preprocessing, key selection, and distractor generation. In addition, the review summarizes the most frequently used datasets and evaluation measures for assessing question quality and highlights important applications and research challenges. In doing so, it outlines possible future directions to advance the use of automated MCQs generation in education, training, and professional assessment.

**INDEX TERMS** Assessments, multiple choice questions (MCQs), large language models (LLMs), automatic MCQs generation, generative AI in education, educational assessment.

## I. INTRODUCTION

Assessment is a vital part of the learning process, and among the different forms of assessment, the MCQs remains one of the most commonly used because of its simplicity, efficiency, and objectivity [1], [2], [3], [8], [9], [10], [18]. A typical MCQs item consists of a question stem, one correct option known as the key, and several distractors that are incorrect yet plausible enough to challenge a learner's understanding.

The associate editor coordinating the review of this manuscript and approving it for publication was Mostafa M. Fouda<sup>1</sup>.

Due to their clear structure and ease of use at scale, MCQs are extensively applied in educational testing, Massive Open Online Courses (MOOCs), and various professional certification programs [6], [48]. Their objective nature and suitability for computer-based systems has led to widespread adoption in standardized testing (e.g., Scholastic Assessment Test (SAT), Graduate Record Examination (GRE)) and across several domains and languages [4], [34], [97], [131], [151], [158]. However, the manual creation of high-quality MCQs is a significant challenge for test creators, as it is laborious, time-consuming and requires strong domain and

**TABLE 1.** Comparison with various relevant review papers.

| Paper             | Focus                                                        | No. of Studies | Search Strategy                                      | Key Finding                                                                                                                                      |
|-------------------|--------------------------------------------------------------|----------------|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| [1]               | Automatic MCQs generation from text                          | 86             | Journal articles, criteria-based selection           | Generic 6-phase workflow, techniques per phase, identified challenges                                                                            |
| [2]               | Automated medical case-based MCQs generation                 | 98             | PubMed, Scopus, Web of Science                       | Methodologies, applications, evaluation techniques, and future research directions for medical case-based MCQs generation are discussed.         |
| [8]               | Techniques for development of MCQs generation from text      | 83             | Sequential and random search strategy                | Discusses precise methods at different stages of MCQs generation and suggests areas for improvement in quality                                   |
| [9]               | Automatic question generation (AQG) for educational purposes | 72             | 5 databases, AIED venues, snowballing                | Articulates trends, advances, and changes in AQG, Suggests areas for improvement and future possibilities.                                       |
| [10]              | LLMs for generating medical MCQs                             | 8              | MEDLINE                                              | LLMs can produce competent questions and validity evidence varies across studies                                                                 |
| [101]             | Medical case-based MCQs generation                           | 38             | Examining the development of medical case-based MCQs | Discusses history, design ideas, methods, challenges validity, reliability.                                                                      |
| [185]             | ChatGPT prompts for medical MCQs generation and validity     | 23             | PubMed and Web of Science                            | Prompts for ChatGPT varied, validity evidence for Artificial Intelligence (AI)-generated MCQs is unclear, highlighting need for further research |
| <b>This Paper</b> | Automatic MCQs generation across fields                      | 106            | Detailed survey methodology, mentions queries        | Discusses evolution from rule-based to LLMs classification, generic architecture, evaluation methods, applications and future work               |

pedagogical expertise to ensure accuracy, relevance, and balanced difficulty while avoiding ambiguity and bias [1], [49], [69].

The laborious nature of manual creation was the core reason behind the research towards the process to automate the generation of MCQs [1], [8], [9], [18]. At the beginning, foundation was laid in 1997 when David Conium developed a rule-based system that relied on predefined templates. However, the system shows limitations with reference to its ability to generate contextually relevant and linguistically complex questions [65]. The development of the Transformer architecture in 2017 marked a paradigm shift, which catalysed the development of powerful LLMs such as Bidirectional Encoder Representations from Transformers (BERT), Bidirectional and Auto-Regressive Transformers (BART), Generative Pre-trained Transformer (GPT), and Text-to-Text Transfer Transformer (T5) [7], [42], [54], [58], [67], [172]. These huge models transformed natural language generation by taking advantage of massive datasets to reveal complex linguistic patterns. As a result, the approach can now produce high-quality, diverse, and contextually aware MCQs with minimal human intervention [4], [18], [43], [66], [186].

Evaluating the quality of automatically generated questions is not straightforward and needs more than one type of assessment. In most studies, automatic measures such as Bilingual Evaluation Understudy (BLEU), Recall-Oriented Understudy for Gisting Evaluation (ROUGE), Recall-Oriented Understudy for Gisting Evaluation-Longest Common Subsequence (ROUGE-L), and Item Discrimination (ID) are used to check how close a generated question is to a human-written one [18], [66]. These measures give some numerical idea of similarity, but they do not really tell whether a question is educationally useful or conceptually sound. For that reason, human evaluation is still necessary, especially to see if the stem is clear, the key is correct, and the distractors

make sense [4], [66], [186]. In some recent works, it is also shown that the systems can be adapted to specific fields by using domain data or by adding Retrieval-Augmented Generation (RAG) techniques. This type of adaptation has proved to be more effective in specialized areas such as medicine and engineering, where correctness and precision are very important [10], [48], [66], [67], [101], [139], [176], [181].

Earlier surveys have given a general view of progress in this area and discussed how different methods have developed over time, as summarized in Table 1. The first group of reviews mostly described basic, multi-step workflows for AQG from text [1], [8], [9]. Later studies started focusing on specific domains, for example, generating medical case questions or using LLMs models such as ChatGPT [2], [10], [101], [185]. These reviews have shown that AI-based systems can perform well, but they also point out that there is still no clear agreement on how to measure the quality and reliability of the generated questions [181].

This paper attempts to address this gap by providing a new and complete review of how question generation has evolved from the early rule-based methods to the latest LLMs-based ones by covering different application areas. The goal is to combine the existing work into one consistent overview and reflect the fast development in this field.

To guide the study, we consider the following questions:

- 1) How have MCQs generation methods developed from simple rule-based systems to modern LLMs-based techniques?
- 2) What are the main strategies used by LLMs systems to generate good-quality MCQs automatically?
- 3) What open problems and opportunities remain in this area of LLMs-based MCQs generation?

By answering these questions, this paper organizes the available literature, identifies gaps in current work, and suggests possible research directions. The discussion follows

an evolutionary view, showing how automated question generation has moved from basic rule-driven designs to advanced LLMs-powered systems.

The main contributions of this survey can be summarized as:

- Describing the development of MCQs generation systems, from early rule-based models to modern LLMs-based approaches.
- Explaining the theoretical background and structure of MCQs, and their use in different domains.
- Providing a simple classification of existing techniques, such as rule-based, template-driven, ontology-based, Machine Learning (ML)/Deep Learning (DL), and LLMs approaches.
- Presenting a common framework that includes the main stages of MCQs generation, including pre-processing, key selection, and Distractor Generation (DG).
- Reviewing different evaluation approaches, from automatic metrics to human and psychometric analysis, with their respective advantages and weaknesses.
- Listing key datasets used for training and fine-tuning, with details about their size, coverage, and availability.
- Discussing how MCQs are applied in various fields such as education, language learning, medicine, and professional testing.
- Highlighting the strengths and weaknesses of LLMs-based systems, including issues like bias, distractor quality, and scalability.
- Pointing out future challenges and opportunities, such as adaptive learning, multi-modal question generation, ethical considerations, and hybrid human-AI collaboration.

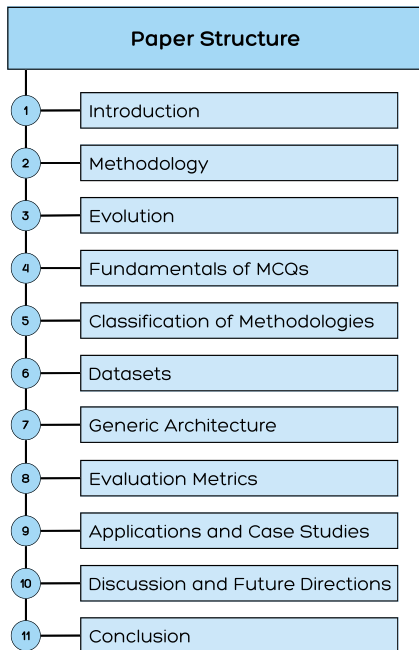


FIGURE 1. Paper structure – overview of the main contents of this survey.

Figure 1 gives a short view of how the paper is organized. Section I introduces the motivation behind automated MCQs

generation. Section II explains the process used for literature selection and analysis. Section III outlines the historical development of assessment and question generation methods, from early rule-based designs to the present LLMs-based stage. Section IV briefly introduces the basic parts of an MCQs. Section V describes different generation methods, followed by Section VI, which summarizes key datasets used for training and testing. Section VII presents a common system architecture, while Section VIII discusses the evaluation metrics. Section IX focuses on major applications, and Section X discusses the key challenges and research directions. Finally, Section XI concludes the paper with a short summary.

## II. METHODOLOGY

This survey employed a systematic literature review methodology to identify, screen, and analyze the literature on automatic MCQs generation. The process, illustrated in Figure 2, was designed to provide a comprehensive and unbiased overview of the field’s evolution, dominant techniques, and open challenges.

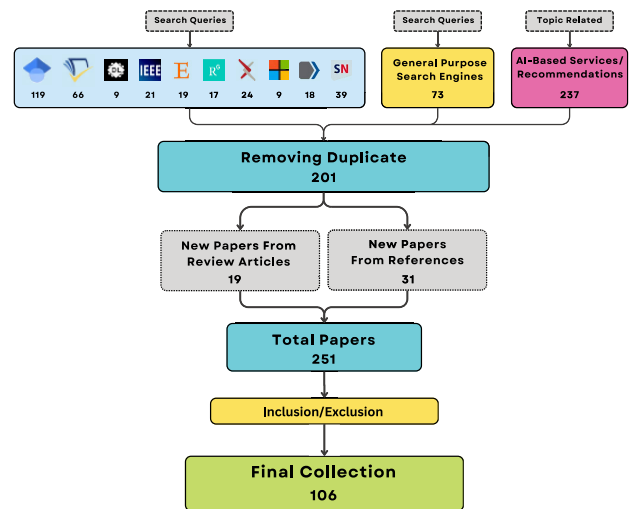


FIGURE 2. Survey methodology: A visual flow of applied methodology for paper collection of MCQs generation approaches.

### A. SEARCH AND SELECTION OF STUDIES

We conducted a systematic search of major academic libraries, including ACM Digital Library, IEEE Xplore, Google Scholar, Scopus, and Semantic Scholar, for studies published between 1997 and 2025. The search query was constructed using keywords and their synonyms across three main categories:

- **Primary Concept:** (“automatic question generation”, “MCQs generation”, “multiple choice question generation”, “assessment item generation”)
- **Technology/Method:** (“LLM”, “large language model”, “transformer”, “BERT”, “GPT”, “neural network”, “rule-based”, “ontology”)

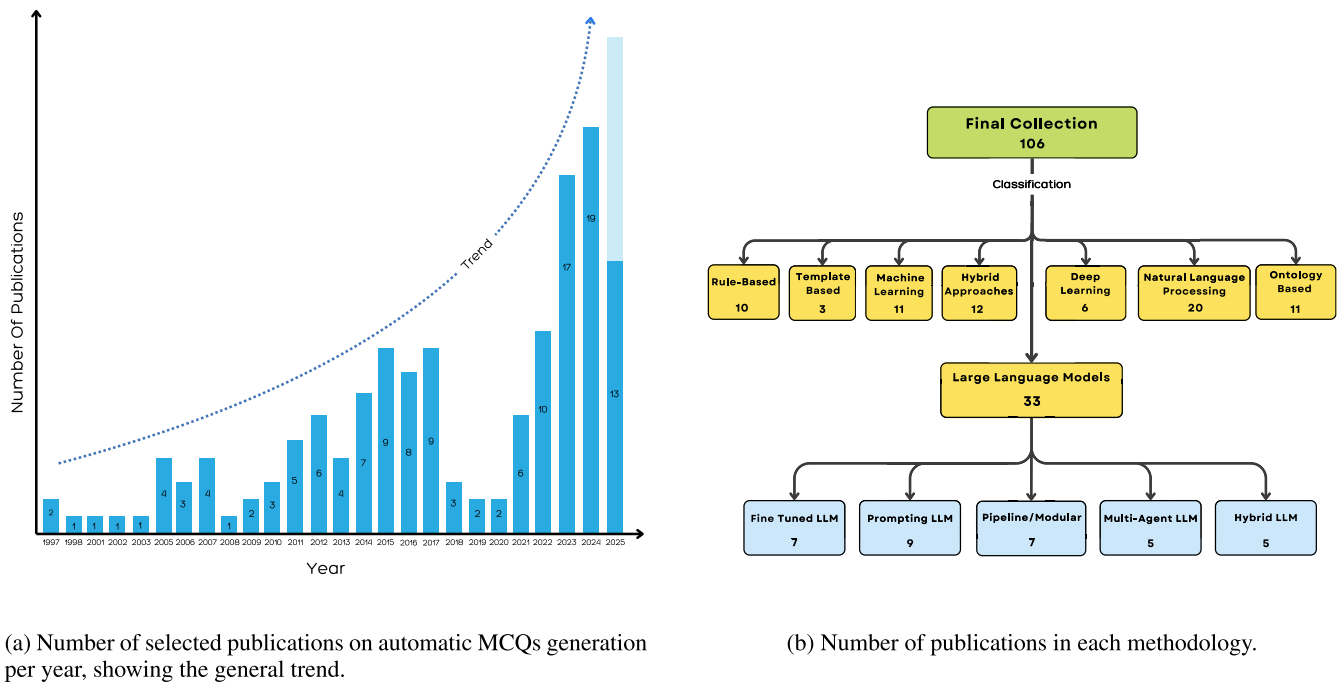


FIGURE 3. Publication statistics: (a) yearly trends and (b) classification based on methodology.

- **Application Domain:** (“education”, “e-learning”, “automated assessment”, “pedagogy”)

These keywords were blended using Boolean operators (AND, OR) to form broad search strings, such as (“automatic question generation” OR “MCQs generation”) AND (“LLM” OR “GPT”), to capture literature encompassing from foundational rule-based systems to modern LLMs-based approaches. In order to make sure a wide-ranging coverage, this primary search was supplemented with a two-stage citation analysis (backward and forward search) [178] and recommendations from platforms like ResearchGate, Semantic Scholar and AI-Based systems.

The final collection of studies were then passed through a filtration process using a strict inclusion and exclusion criteria illustrated in Table 2, which underscore peer-reviewed, empirically evaluated using multiple available metrics, and novel contributions published in English. A total of 580 studies were selected from a top-level inspection that included only the title of the paper and the keywords used. These papers then underwent a careful process of scrutiny based on their abstracts. This process created a filter that facilitated the selection process, where from the initial pool of 580 studies collected from different sources, 201 duplicates were removed after carefully analyzing their context. After evaluating the remaining 379 articles by reviewing abstract, introduction, and methodology section with meticulous content skimming, a final set of 106 publications was chosen for comprehensive analysis.

TABLE 2. Inclusion and exclusion criteria for study selection.

| Inclusion Criteria                  | Exclusion Criteria                      |
|-------------------------------------|-----------------------------------------|
| Studies from 1997 to 2025.          | Only manual creation of MCQs.           |
| Published in English.               | Publications in other languages.        |
| Focus on automated MCQs generation. | General assessment techniques.          |
| From top peer-reviewed venues.      | Inaccessible or not peer-reviewed.      |
| Effectiveness empirically shown.    | Duplicated or overlapping studies.      |
| Introducing novel methods.          | Lacking novelty or strong contribution. |

B. DATA EXTRACTION AND THEMATIC ANALYSIS

We performed a highly optimized systematic data extraction process for each paper in order to gather key information, including the methodologies used, application domains, evaluation methods, key findings of the developed system, and limitations reported in the study. The data extracted from these papers was then verified again to remove factual errors and context mismatch. After verification process, all the extracted data was synthesized using Thematic Analysis and Categorization Schema [179] to identify major trends, patterns, and research gaps.

A statistical analysis was carried out to visualize the field’s advancement from initial publication to the current status. This includes the annual publication volume of selected studies on automatic MCQs generation as shown in Figure 3a and the frequency of different methodological approaches which can be seen in Figure 3b. Table 3 provides a high-level overview of these approaches. This



**TABLE 3. Key approaches for MCQs generation.**

| Approach                                        | Description                                                             |
|-------------------------------------------------|-------------------------------------------------------------------------|
| Rule-Based Systems                              | Generates questions using predefined rules.                             |
| Template-Based Systems                          | Uses fixed or customized question structures.                           |
| Statistical & ML Models                         | Analyzes data to generate questions based on patterns.                  |
| Ontology-Based Systems                          | Uses structured knowledge for complex concepts.                         |
| DL Models                                       | Creates complex questions using models trained on large text.           |
| Natural Language Processing (NLP)-Based Systems | Extracts content for Question Generation (QG) using NLP.                |
| LLMs                                            | Generates high-quality, contextual questions (e.g., GPT, BERT, Gemini). |
| Hybrid Approaches                               | Combines multiple techniques for better quality.                        |

multidimensional analysis provides a comprehensive view of the research landscape, from its historical context to emerging directions in automatic MCQs generation.

### C. LIMITATIONS OF THE SURVEY

This survey has extracted a wide range of methodologies, but still has a number of limitations. Firstly, the search strategy employed may not have captured all relevant publications, specifically non-English studies or those in less accessible journals. Secondly, the classification of papers into individual methodologies involves some sort of subjectivity, as many studies use hybrid approaches. Finally, the LLMs-based MCQs generation approach is evolving at an exceptionally rapid speed. This review provides a snapshot of the current landscape, but new advancements will quickly emerge.

## III. EVOLUTION

The history of educational assessment has seen a gradual transition from subjective, essay-based evaluations to objective, scalable formats. Early written and oral tests were criticized for not being fair and for having scores that were not always match up. In response, teachers used MCQs as a more reliable and fair way to test students.

The foundation for modern objective testing was laid in the early 20th century. Thorndike and others researchers came up with new substitutes to ask questions, and Yerkes's Army Alpha and Beta tests showed that MCQs could be used in tests during World War I [3], [174]. McCall and Ruch are one of those researchers who further cultivated objective testing approaches by highlighting the importance for a clear question construction [31]. Thurstone introduced scaling methods for the first time in 1925, giving test analysis a psychometric basis and making MCQs an important part of standardized tests like the SAT, GRE, and GMAT [69], [177].

With the advent of computer age in the late 1980s, assessment methods were transformed with the arrival of Computer-Based Testing (CBT) systems and Computerized Adaptive Test (CAT) systems for assessment [177]. On the

one hand, these technologies simplified the completion of tests and allowed the use of adaptive difficulty, but on the other hand, they created an unprecedented need to have high-quality and large banks of questions. Manual generation of MCQs was a major bottleneck, which highlighted the necessity for an automated system to generate quality MCQs.

### A. THE EVOLUTION OF AUTOMATED GENERATION


David Coniam in 1997 became the first author to introduce a dedicated system for automatic generation of MCQs using a rule-based approach to build vocabulary cloze tests on textual content [65]. Early systems of this sort relied heavily on the predetermined linguistic rules and template structures. Such systems, though offering some degree of controllability, were often fragile, difficult to scale, and had enormous problems in the area of scalability and adapting to new areas of expertise [71], [77].

The development of NLP in the early 2000s meant the implementation of statistical methods. Scholars used term extraction and shallow parsing to automate the generation of questions. At the same time, others used domain specific corpora with the item response theory to generate questions that were contextually relevant and had plausible distractors [34]. Later studies adopted different approaches in order to improve the process of question generation. Ontology-based systems took advantage of structured knowledge hierarchies to give rise to conceptually coherent and semantically aligned questions [36], [37], [38]. At the same time, DL models, particularly Recurrent Neural Networks (RNNs) and Long Short Term Memory (LSTM), brought significant improvements in the fluency and simplicity of generated text by learning complex linguistic patterns on a large-scale corpus of textual data [39], [40], [44], [45], [169].

One of the most crucial moments in the development of NLP is that Vaswani introduced the Transformer architecture in 2017 [66]. The self-attention mechanism and concurrent processing ability of the transformer based model enabled the development of strong pretrained models like BERT, GPT and T5 that have significantly enhanced the capability and fine-tuning of automated content generation [54], [58], [67].

### B. THE MODERN ERA OF LARGE LANGUAGE MODELS

The early 2020s marked the beginning of a new era due to the breakthrough in the field of LLMs such as ChatGPT, Pathways Language Model (PaLM), Gemini, and Llama [7], [10], [54], [58], [67], [172]. They have shown state-of-the-art performance in professional and academic exams and are capable of producing high quality, contextually relevant MCQs when presented with a wide variety of sources such as textbooks and video transcripts [14], [180]. Their key applications include identifying important concepts, formulating questions aligned with learning objectives, and creating plausible distractors [42]. Moreover, their multilingual capabilities have increased the availability of automated assessments tools worldwide [180].

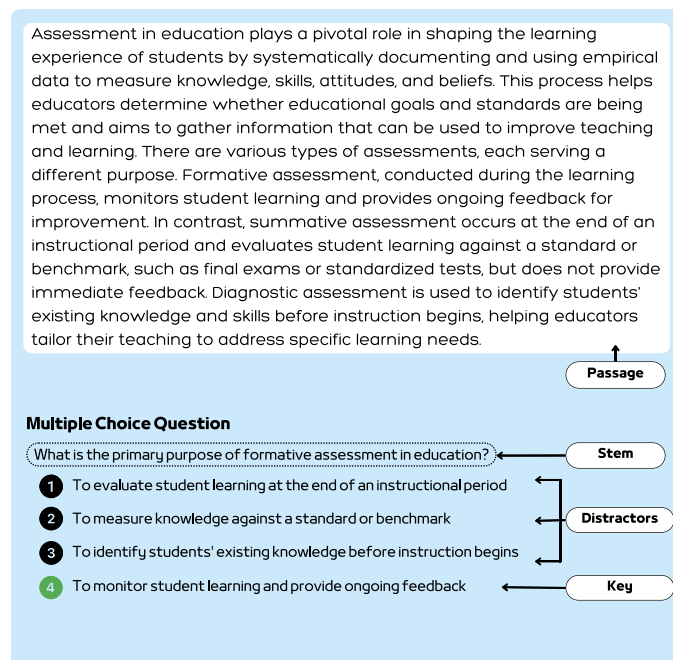

**FIGURE 4. Component of MCQs: A detailed passage, stem, some distractors, and key.**

**TABLE 4. Common question formats in assessment.**

| Question Format               | Description                                                                                                                              | Cognitive Level Focus                                                     |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| MCQs                          | Consist of a stem, correct answer(s), and distractors; widely used in various settings.                                                  | Different cognitive levels.                                               |
| Short-Answer Questions (SAQs) | Require concise answers (1-3 sentences or 30-90 words) to demonstrate understanding; Very Short-Answer Questions (VSAQs) are a sub-type. | Factual recall, direct comprehension (SAQs); Low-level cognition (VSAQs). |
| Fill-in-the-Blank (Cloze)     | Requires completing missing parts of a sentence.                                                                                         | Active recall, language skills, comprehension.                            |
| True/False Questions          | Present a statement with two possible answers (true/false).                                                                              | Basic knowledge, logical reasoning, factual or conceptual understanding.  |
| Matching Questions            | Use a two-column format to assess relational understanding and recognition; conceptually linked items are matched.                       | Relational understanding, recognition.                                    |
| Essay Questions               | Require in-depth responses to assess critical thinking, analysis, and synthesis skills; grading can be inconsistent [68].                | Higher-order critical thinking.                                           |
| Scenario-Based Questions      | Present real-world scenarios requiring application of knowledge in practical contexts.                                                   | Application, analysis, decision-making, problem-solving.                  |

The potential of LLMs extends beyond static QG. Current research is exploring innovative applications such as multi-modal MCQs generated from diagrams and videos, adaptive learning systems that tailor question difficulty to individual student performance [48], and collaborative frameworks where AI-generated content is refined by human experts [16], [42], [50], [176]. These advancements promise to make educational assessments more personalized, engaging, and effective.

#### IV. FUNDAMENTALS OF MCQs

The MCQs format is a cornerstone of objective assessment due to its reliability and efficiency [18], [49], [174]. Its objectivity stems from a structure that minimizes scorer

bias, ensuring consistent evaluation across a large number of respondents. A standard MCQs consists of three core components: a **stem**, which presents the question or problem; a **key**, which is the correct answer; and several **distractors**, which are plausible but incorrect options designed to challenge the respondent [31], [42], [69]. The effectiveness of MCQs hinges on the quality of its distractors. These are not merely incorrect answers, but they are carefully crafted to be attractive to respondents who lack complete understanding, often reflecting common misconceptions, partial knowledge, or logical fallacies. Thus, well-designed distractors are crucial for accurately discriminating between different levels of proficiency [69]. In reading comprehension tasks, a **passage** often provides the context from which the stem, key, and distractors are derived, with distractors representing

**TABLE 5. Common types of MCQs.**

| Type of MCQ                   | Description                                                                           |
|-------------------------------|---------------------------------------------------------------------------------------|
| Single Correct Answer         | One correct answer is provided among several options.                                 |
| Multiple Correct Answers      | More than one answer is correct, and the candidate must select all of them.           |
| True/False MCQs               | The candidate determines whether a given statement is true or false.                  |
| Matching Questions            | The candidate matches items from two provided lists (e.g., terms and definitions).    |
| Fill-in-the-Blank MCQs        | The candidate selects the correct word or phrase from a list to complete a sentence.  |
| Assertion-Reason MCQs         | The candidate evaluates an assertion and a reason to determine if both are correct.   |
| Sequence Ordering MCQs        | The candidate selects the correct order or sequence of events from the given options. |
| Wh-questions                  | A question starting with a wh-word (e.g., who, what, where), with options.            |
| Case-based/Passage-based MCQs | A series of questions are answered based on a provided passage or case study.         |

potential misinterpretations of the text, as illustrated in Figure 4.

While MCQs are one of several common assessment formats, as compared in Table 4, their structured nature makes them an ideal target for the automated generation techniques discussed in the following sections. The versatility of this structure also allows for various types of MCQs, each suited for different assessment goals, as shown in Table 5.

## V. CLASSIFICATION OF METHODOLOGIES

The primary goal of automatic MCQs generation is to mimic the qualities of skillfully crafted manual questions, adhering to established psychometric principles of validity, reliability, and pedagogical utility [69]. A central challenge, highlighted by early research, is the creation of plausible yet incorrect distractors, a task that remains difficult for both manual and automated methods [31], [49]. To address the time-consuming nature of this process, researchers have developed a wide range of computational approaches.

Early methods like rule-based and template-based systems offered high control over question structure but lacked flexibility in handling the complexity of natural language [70], [71]. Subsequent data-driven approaches using statistical models, ML, and NLP improved adaptability by learning from text but often struggled with deep contextual understanding [3], [5]. More recently, the advent of DL models, and particularly LLMs like T5 and ChatGPT, has enabled significant improvement in generating high-quality, contextually relevant MCQs [7], [8], [13]. This section provides a structured classification of these methodologies, tracing their evolution and technical foundations. Each category of methodology is further summarized in a series of structured tables to facilitate comparison and analysis. This tabular format enables a concise yet comprehensive view of the technical approaches, performance measures, and constraints of individual studies, supporting a clearer

understanding of methodological trends and research gaps across the literature.

### A. FOUNDATIONAL APPROACHES

The earliest automated methods for MCQs generation were dominated by rule-based and template-based systems, which rely on explicit, handcrafted instructions to construct questions. These foundational approaches offered a high degree of control and predictability, making them effective for well-defined tasks.

Rule-based systems apply structured linguistic rules, pattern matching, and language-dependent criteria to generate question components from source text as given in Table 6. Common techniques included leveraging corpus word frequency and POS tagging for vocabulary cloze tests [65], using syntactic parsing to identify informative sentences in specific domains like sports [40], [130], and integrating semantic resources like a thesaurus with IRT for language proficiency exams [34]. Some systems advanced this paradigm by incorporating transformer models or SRL to improve distractor quality or outperform early neural methods in specific contexts [70], [76].

Template-based systems, a variation of this approach, use predefined sentence structures that are filled with specific content from a knowledge source as given in Table 7. This method is highly efficient for generating large volumes of structurally consistent questions. For example, a template-based system in medical education was able to generate 1,600 clinical reasoning MCQs in under two seconds [140]. More sophisticated implementations enhanced templates with advanced NLP techniques, such as semantic analysis to create more engaging questions for language learning [161], or integrated knowledge graphs and ML models to predict item difficulty [165].

Despite their utility, these foundational methods share significant limitations. Their reliance on manually crafted rules and templates makes them rigid, difficult to scale, and often domain-specific. Adapting them to new contexts requires substantial effort, and they frequently struggle to capture complex contextual nuances, leading to a limited diversity of generated questions that may require human correction to ensure quality [158].

### B. THE ROLE OF NATURAL LANGUAGE PROCESSING

NLP provides the foundational toolkit for automatically generating MCQs from unstructured text [41], [43]. Systems leverage a broad spectrum of NLP techniques to deconstruct source material and build question components as given in Table 8.

Core methods include syntactic analysis, such as POS tagging and parsing, to extract key terms and understand sentence structure [82], [119]. Statistical techniques, like TF-IDF and statistical question ranking, are used to identify the most salient information within a text to form the basis of a question [135], [145]. More sophisticated approaches

**TABLE 6. Rule-based MCQs generation systems.**

| Ref.  | Method / Model                                                | Domain      | Dataset(s)                   | Evaluation Metrics | Key Results                                                                            | Limitations                                                           |
|-------|---------------------------------------------------------------|-------------|------------------------------|--------------------|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| [34]  | Thesaurus-based, Item Response Theory (IRT).                  | Travel      | ATR's corpus                 | Human              | Correlation with TOEIC scores: (80%)                                                   | 6.5% of questions were flawed.                                        |
| [40]  | Topic modeling, parse similarity                              | Cricket     | Wikipedia & news articles    | Human              | Sentence Selection: (93.21%), Key Selection: (83.03%), Distractor Quality: (91.07%)    | Selects sentences with incomplete facts.                              |
| [65]  | Word class tagging & frequency matching                       | General     | Bank of English (BoE) corpus | Automatic          | nth-word: (38-45%), frequency-based: (44-68%), word class-based: (50-58%)              | Word class tagger has 5% error rate, ignores word sense & meaning.    |
| [70]  | Semantic Role Labeling (SRL)-based rules                      | Open-Domain | Custom corpus                | Human              | Usefulness rate: 71% (Yes/No) & 50% (wh-questions), outperforms neural baseline.       | Struggles with complex sentences & subordinate clauses.               |
| [76]  | Dependency parses, RoBERTa ranker                             | Science     | Wikipedia, SciQ              | Accuracy           | Improves accuracy from (63.4%) to (69.4%)                                              | Relies on dependency parsing accuracy, requires distractor refinement |
| [104] | Pattern, Wikipedia entities                                   | Cricket     | Wikipedia                    | Human              | Accuracy: Key Selection: (79.4%) Question Formation: (72.6%) Distractor Quality: (88%) | formation error: (27.4%), under- or over-informative: (21.2%)         |
| [130] | Parse tree similarity, Named Entity Recognition (NER) filter. | Cricket     | Wikipedia & news articles    | Human              | Sentence selection accuracy: (93.68%)                                                  | Requires a large set MCQs, rules were manually prepared.              |
| [158] | Target word, lexicons                                         | English     | English-Chinese corpus       | Human              | System accuracy: (avg. >4.0/5.0) & convenience                                         | Require human correction, lower satisfaction                          |
| [164] | Syntactic parse trees                                         | Vocabulary  | Custom corpus                | Human              | 73% of generated items were rated as acceptable                                        | Quality depends on large pool of syntactically similar phrases.       |
| [168] | Part-of-speech (POS) tags, frequency & Dice coefficient       | Open-Domain | Wikipedia                    | Human              | Sentence selection accuracy: (92.37%) & answer-key identification: (95.90%)            | Large input corpus required, incorrectly discards useful sentences.   |

**TABLE 7. Template based MCQs generation systems.**

| Ref.  | Method / Model                               | Domain      | Dataset(s)          | Evaluation Metrics | Key Results                                                                                  | Limitations                                                                       |
|-------|----------------------------------------------|-------------|---------------------|--------------------|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| [140] | Cognitive model & item model                 | Medical     | Turkish Report      | Human              | Acceptable: ((10/10)) & assessed clinical reasoning                                          | Small evaluation scale, used static, non-generated distractors.                   |
| [161] | Event/entity co-reference & paraphrases      | Biology     | ProcessBank corpus  | Human              | Inference steps (0.76) with comparable grammar                                               | Relies on expert-annotated text, low distractor quality.                          |
| [165] | Triple-pattern Knowledge Graphs (KG) queries | Open-Domain | Yago2s KG, Jeopardy | Hybrid             | Difficulty classification accuracy: (66.4%), Kendall's Tau: (0.563) & Cohen's Kappa: (0.521) | Difficulty estimation accuracy is limited, requires an external annotated corpus. |

focus on semantic understanding, using unsupervised relation extraction and dependency models to generate questions about the relationships between entities [106]. These diverse techniques have been adapted for numerous languages and domains, including Basque and Chinese, demonstrating the versatility of NLP as the backbone for MCQs generation [43], [131].

### C. DATA-DRIVEN APPROACHES

The capabilities of NLP-based systems were significantly enhanced by the integration of ML and later DL models,

which introduced data-driven learning to automate and improve the generation process. These approaches leverage algorithms to learn patterns directly from text, enabling more flexible and adaptable systems.

Early systems employed classic ML models and NLP techniques to automate different stages of the generation pipeline as given in Table 9. Supervised classifiers and Conditional Random Fields were used for tasks like identifying important sentences for question stems and generating cloze questions [79], [134], [151], [155]. Unsupervised methods, such as clustering, were applied



**TABLE 8.** NLP based MCQs generation systems.

| Ref.        | Method / Model                                                   | Domain          | Dataset(s)                | Evaluation Metrics            | Key Results                                                                         | Limitations                                            |
|-------------|------------------------------------------------------------------|-----------------|---------------------------|-------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------|
| [106]       | Semantic relations, dependency trees, distributional similarity. | Biomedical      | GENIA, BioInfer           | Human                         | Overall usability average (3.08/4.0)                                                | Small-scale evaluation (two experts, 52 MCQs).         |
| [131]       | Linguistic rule transformations                                  | Basque language | Basque corpus             | Human                         | Acceptance rate for error correction (83.26%) & multiple choice (82.71%) questions. | Dependency on NLP tool quality, single expert teacher. |
| [135]       | Inverse Document Frequency (IDF)                                 | Physics         | Wikipedia                 | Human                         | Acceptability rate: (70.66%)                                                        | Cannot handle mathematical formulae or symbols         |
| [137]       | Context Search, WordNet                                          | English         | NYTimes & WordNet         | Human                         | Mistaken: (45%), Rated (3+ of 5) for quality: (59%)                                 | Irrelevant or unnatural distractor quality.            |
| [136]       | WordNet, frequency matching                                      | English         | WordNet & BNC             | Correlation scores            | High correlation: ( $-.61 < r < .85$ )                                              | Limited coverage for words not in WordNet.             |
| [77], [150] | Term extraction, Subject-Verb-Object (SVO) rules                 | Linguistics     | Textbook, WordNet         | Human & Psychometric analysis | Items rated "worthy": (57%), higher Discriminating Power                            | High reliance on human post-editing.                   |
| [74]        | POS-based patterns                                               | English         | Wikipedia & VOA           | Human                         | Acceptability: (77%), Error detection: (80%)                                        | Relies on test patterns for each grammatical rule.     |
| [138]       | LexRank, SuperSense, POS                                         | English         | Transcripts & BNC corpora | Correlation & Human           | Significant correlation: ( $r=0.57$ & $r=0.35$ )                                    | Moderate to low correlation                            |
| [143]       | WordNet                                                          | English         | WordNet                   | Informal testing              | No quantitative results reported.                                                   | Lacks formal evaluation, low quality.                  |
| [144]       | NLP tags, HowNet, & Word embeddings                              | Chinese         | Wikipedia & HowNet        | Human                         | Adequacy: (76%) for MCQs, (85%) for QA pairs, & 91% for questions.                  | Dependent on NLP tool accuracy, sentence segmentation  |
| [145]       | Distributional thesaurus, corpus                                 | English         | UKWaC corpus              | Human                         | Acceptable: (53%), usable: (36%)                                                    | Carrier sentence quality issues.                       |
| [146]       | POS tag counts, NER                                              | General         | Wikipedia & NER dataset   | NA                            | No quantitative results reported.                                                   | Focuses on answer selection.                           |
| [119]       | Term Frequency-Inverse Document Frequency (TF-IDF)               | General         | Lecture notes             | Precision, Recall             | Recall: (average >0.9), Precision: (average 0.36)                                   | No evaluation of final MCQs quality.                   |
| [154]       | T5 & Sense2Vec                                                   | General         | Multiple datasets         | Automatic                     | F1: (46.6%), BLEU-4: (19.59)                                                        | Lacks human evaluation and longer contexts.            |
| [156]       | Paraphrasing, Naive Bayes, Embeddings                            | General         | SQUAD                     | NA                            | No quantitative results reported.                                                   | Lacks evaluation, very basic system                    |
| [157]       | Link Grammar Parser                                              | English         | WordNet                   | NA                            | No quantitative results reported.                                                   | Need large knowledge base, lack evaluation             |
| [84]        | GloVe co-occurrence, N-grams matching                            | General         | ReadWorks.org passages    | Human                         | 5-grams: (74%) fit narrow context vs. (13%) in full context                         | Poor filtering distractors, (12%) were acceptable.     |
| [82]        | SRL/NER tags                                                     | General         | TREC QA                   | Automatic                     | N-gram similarity: 93.6% having at least one good distractor.                       | No human evaluation, tools dependent                   |
| [171]       | Weighted features, similarity                                    | Biology         | Biology text-book         | Human                         | Sentence selection: >79% & key selection: >84%,                                     | Relies only on source text, lack of semantic features  |

to create plausible distractors from a given text [45]. While these methods proved effective for specific tasks and languages, including Chinese and European Portuguese, they were often limited by the need for extensive feature engineering, their reliance on external knowledge bases like WordNet, and the scarcity of high-quality training data [42], [75].

After the emergence of DL models, natural language developed a new level of refinement. One of the core algorithmic program used by these models is their advanced neural architectures to develop the capability of capturing sequential patterns. Some of the most studied models like RNNs, LSTM, and encoder-decoder could capture complex, long-range dependencies in language, leading to the generation of

more fluent and contextually coherent questions as given in Table 10 [39], [42], [147]. This has made it possible for the development of systems in specialized domains such as medicine and pharmacy, where cognitive models were integrated to ensure psychometric validity [142]. These modern systems continue to excel in a broader spectrum of NLP tasks, including POS tagging, NER parsing, and semantic similarity measures. These techniques are mainly used to extract key information, structure questions, and generate plausible distractors [82], [106], [119], [135]. The automation and quality of MCQs have significantly improved by these data-driven advancements, though challenges related to dataset dependency and the need for expert validation persist.



**TABLE 9.** ML based MCQs generation systems.

| Ref.        | Method / Model                             | Domain         | Dataset(s)                | Evaluation Metrics             | Key Results                                                | Limitations                                         |
|-------------|--------------------------------------------|----------------|---------------------------|--------------------------------|------------------------------------------------------------|-----------------------------------------------------|
| [45]        | Keyword extraction, K-means cluster        | Indian History | Web documents             | Human                          | Stem Accuracy: (>93%), distractor accuracy: (71.86%)       | Initial keyword dependent, non-standard evaluation. |
| [57]        | Naive Bayes, Support Vector Machine (SVM)  | Technical      | Textbook                  | Human                          | Quality: (74.38%) & Grammatically correct: (97.24%)        | Time-consuming, limited to question stems and keys. |
| [56], [78]  | Naive Bayes, K-Nearest Neighbors           | English        | BBC articles              | Human                          | 97.6% of blank positions were rated as possible            | Insufficient features, unevaluated random DG.       |
| [75]        | Regression model, mixed features           | Chinese        | Textbooks & HowNet        | Psychometric analysis          | ID: (0.41), Distractor Usefulness: (0.82)                  | Incomplete character coverage in HowNet             |
| [79], [134] | Preference Learning & statistical patterns | English        | TOEIC workbooks           | human                          | Highly ranked: (91.83%), recall: (18.91%)                  | Low recall, struggles with wider context            |
| [120]       | NLP heuristics & parsing                   | General        | Wikipedia articles        | Human, ROC curves              | True Positive: (83%), False Positive: (19%)                | No distractors generation, only gap selection       |
| [151]       | SVM, feature engineering                   | Language       | CETEM-Público             | Precision, Recall, & F-Measure | F-Measure: (75.5%), reduced false positives.               | Stems rejected: (87% ), model/expert mismatch       |
| [155]       | Topic modeling & parse similarity          | Sports         | Wikipedia & news articles | Human                          | Sentence: (93.21%), Key: (83.03%), Distractor: (91.07%)    | Selects sentences with incomplete facts.            |
| [159]       | Discriminative models (SVM)                | English        | Lang-8 Corpus             | Human                          | Distractor reliability (RAD): (98.3%), correlation: (0.76) | Performance impacted by parsing noise in corpus.    |

**TABLE 10.** DL based MCQs generation systems.

| Ref.  | Method / Model              | Domain    | Dataset(s)             | Evaluation Metrics       | Key Results                                                    | Limitations                                               |
|-------|-----------------------------|-----------|------------------------|--------------------------|----------------------------------------------------------------|-----------------------------------------------------------|
| [142] | Cognitive model, item model | Pharmacy  | PEBC, NAPRA, textbooks | Human                    | Generated 15,100 MCQs, satisfied all 8 item-quality guidelines | Focused on nausea/vomiting, no psychometrics yet.         |
| [39]  | Cognitive model, item model | Medical   | Human                  | NA                       | Generated 1248 unique items from one model in 6 hours          | Not validated or generalized, no evaluations.             |
| [147] | Custom model                | Education | RACE                   | Human, Automatic         | Questions BLEU-4: (11.64) Distractors BLEU-4: 4.45             | Performance gap, auto metrics ill-suited for distractors. |
| [152] | T5, sense2vec               | Education | SQUAD1.1, RACE         | BLEU, F1, Exact Match    | T5 on SQUAD: 63.28 F1, 37.24 Exact Match                       | No collaborative platform, no answer justifications.      |
| [17]  | T5, LeNet, TextTiling       | Learning  | Custom dataset         | Accuracy                 | Avg. accuracy for image linking: (70%)                         | Poor transcription & language, unusable questions.        |
| [98]  | doc2vec, SBERT              | Law       | Custom corpora         | Cosine similarity, Human | Usable QA pairs: (57%)                                         | Limited corpus size with old data                         |

#### D. KNOWLEDGE-BASED APPROACHES

Data-driven methods totally depend on the quality and availability of data. Unlike data-driven methods that learn from unstructured text, ontology-based systems leverage formal, structured knowledge representations to generate questions that are conceptually coherent and logically sound. Most of these systems take advantage of domain ontologies, as they are often built with Web Ontology Language (OWL), to model the concepts and relationships within a specific subject area.

This approach enables for a high degree of control over the semantic content of the questions. For instance, the system developed by a group of researcher known as “OntoQue” used semantic web technologies to generate high-quality MCQs, with 90% of its output rated as

“good” by evaluators [35], [80]. Ontologies have been successfully applied in specialized domains like medicine for generating case-based questions [81], and have been used to create specific question types, such as those based on analogies or concept similarity [36], [38]. They have also been shown to improve the quality of distractors by providing semantically related but incorrect concepts from the knowledge structure [160]. However, the primary limitation of this paradigm is its heavy reliance on the existence of high-quality, comprehensive ontologies, which are expensive and labor-intensive to create. Furthermore, while conceptually robust, these systems often struggle to generate syntactically varied and linguistically complex questions without sophisticated natural language generation components [132], [163].

**TABLE 11. Ontology based MCQs generation systems.**

| Ref.         | Method / Model                   | Domain    | Dataset(s)                            | Evaluation Metrics | Key Results                                                                       | Limitations                                          |
|--------------|----------------------------------|-----------|---------------------------------------|--------------------|-----------------------------------------------------------------------------------|------------------------------------------------------|
| [81]         | Ontology-based System (EMCQG)    | Medical   | EMMET-OWL                             | Human              | Appropriate: (79%)                                                                | Ontology lacks specific context, linguistic issues.  |
| [35], [80]   | Ontology-based engine (OntoQue)  | History   | HistOnto, SemQ                        | Precision, Human   | Avg. precision ('Good' items): (90%)                                              | Knowledge/recall level questions.                    |
| [73]         | SimpleNLG                        | Academia  | Eupalineio Tunnel                     | Human              | Rated 'satisfactory for assessment' by experts                                    | Lack syntactic correctness & cognitive skills.       |
| [132], [163] | Node & edge label-set approaches | General   | Harry-Potter, Geographical ontologies | Human              | Difficulty hardness measure: 65% of option sets                                   | Basic syntactic generation, ignores stem complexity. |
| [36]         | Ontology-based analogy generator | General   | Pets, Pizza ontologies                | Solver accuracy    | 88% solver accuracy on Pizza Ontology questions                                   | Low solver accuracy, only class-subclass relations.  |
| [133]        | Pattern-based QG (SAVANT)        | Medical   | SNOMED-CT, ICD9 ontologies            | Automatic          | 80% of mappings validated or corrected                                            | Cannot handle contextual answers.                    |
| [37], [38]   | Similarity measures              | Education | Custom ontology                       | Human              | Usefulness: (63/65); Difficulty prediction: (51/65 agreed with $\geq 1$ reviewer) | Costly, Grammatical errors.                          |
| [160]        | Ontology graph-structure         | Biology   | Biology ontology                      | Human              | Positive ratings: 66% (60/90)                                                     | Relies on correctness & completeness of ontology     |

**TABLE 12. LLMs based MCQs generation systems using fine-tuned models.**

| Ref. | Method / Model                     | Domain    | Dataset(s)                 | Evaluation Metrics   | Key Results                                                                         | Limitations                                                                   |
|------|------------------------------------|-----------|----------------------------|----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| [7]  | T5-based pipeline                  | General   | SQuAD, DG-RACE             | Automatic & Human    | Question quality: (4.28/5.0), BLEU-1:14.80, ROUGE-L: 14.91, Cosine Similarity: 0.71 | Test retention more than comprehension, automatic DG metrics are inadequate.  |
| [86] | Fine-tuned GPT-3                   | General   | EQG-RACE & RACE            | Automatic & Human    | Quality score: (90.5%)                                                              | Metrics are problematic, low distractors quality.                             |
| [97] | mT5-based pipeline                 | Spanish   | SQuAD, SciQ, CosmosQA      | Automatic            | ROUGE-L: (29.86)                                                                    | Machine-translated data & multilingual model.                                 |
| [11] | LLMs (Llama 2, GPT-4)              | Radiology | ABR blueprint, ACR DXIT    | Human, Accuracy      | 100% answer accuracy                                                                | Text-only questions, basic evaluation, single prompt strategy used.           |
| [15] | OpenBioLLM-70B, GPT-4o, Claude 3.5 | Medical   | Semantic Scholar, DailyMed | Human                | GPT-4o outperformed, quality metrics and topic diversity: (89.8%)                   | Requires final human review, text-only questions, evaluated on one specialty. |
| [89] | KB/BERT, GPT-3, SweCTRL-Mini,      | Swedish   | SweQUAD-MC, Quasi, Plugga  | Human                | ChatGPT 'acceptable' MCQs: (63.7%), outperforming other models                      | Small fine-tuning datasets, may lack pedagogical quality.                     |
| [92] | Self-refinement framework          | Medical   | MedQA, USMLE               | Human, Cohen's kappa | 72.5% win rate over baseline GPT-4                                                  | Limited generalizability, LLMs-as-Judge has self-evaluation & position bias.  |

### E. LLM-BASED APPROACHES

The advancement in the field of generative AI and the rapid development in the research of LLMs represents the current state-of-the-art in automated MCQs generation. Currently, researchers are making use of their advanced capabilities in comprehension, summarization, logical reasoning, instruction following and multilingual text generation [67], [186]. As shown in Figure 5, models like GPT-4 and Gemini can produce high-quality, contextually relevant questions that align directly with specific learning objectives [7], [18], [54], [58], [172], [180]. Researchers have developed several

distinct strategies for leveraging these models to their full potential in the respective domain, which are classified in the following sections.

#### 1) FINE-TUNING LANGUAGE MODELS

Fine-tuning adapts a pre-trained LLMs for a specialized task, such as question or DG, with several studies detailed in Table 12. This approach is common for models like T5, which has been fine-tuned on datasets like DG-RACE to improve distractor quality, and for BERT-based encoders used for question formulation [7], [89]. In specialized domains like

**TABLE 13.** LLMs based MCQs generation systems using prompts.

| Ref.  | Method / Model                      | Domain               | Dataset(s)                | Evaluation Metrics    | Key Results                                                               | Limitations                                                              |
|-------|-------------------------------------|----------------------|---------------------------|-----------------------|---------------------------------------------------------------------------|--------------------------------------------------------------------------|
| [139] | Prompt-based GPT-3.5                | Medical              | NA                        | Automatic             | ID: (0.41), correlation: (0.39)                                           | lacked qualitative analysis.                                             |
| [141] | Prompt-based GPT-3.5                | Medical              | N/A                       | N/A                   | Presents a prompt to generate plausible, well-constructed MCQs in seconds | No empirical evaluation, questions quality unverified.                   |
| [85]  | GPT-4 pipeline                      | Software Engineering | Lecture materials         | Human                 | All 6 experts agreed the tool saves time in quiz generation               | Lack versatility, erroneous distractors, small expert evaluation (n=6)   |
| [99]  | GPT-4, JSLM-7B                      | Medical              | Nursing Exams             | Automatic, Human      | Distractor variation (DV): 0.126,                                         | Failed to capture creativity, performance disparity between model sizes. |
| [16]  | GPT-4 & Human-LLM tool (HEDGE)      | Maths                | Math Data                 | Human                 | Validity: (70% ), distractors validity: (37%)                             | Limited in generating distractors based on common student errors.        |
| [19]  | Prompt-based LLMs (GPT-3, GPT-4)    | Computing            | Canterbury Question Bank  | Accuracy, correlation | Correct answer for 78.5% of MCQs                                          | Did not evaluate distractor quality, limited prompt engineering.         |
| [149] | Prompt engineering (GPT-3.5, GPT-4) | STEM                 | SME-developed Q&A pairs   | Human, Cohen's kappa  | Answer accuracy: (1.85/2.0)                                               | Limited to 3 STEM subjects.                                              |
| [91]  | Customized ChatGPT, RAG             | Medical              | Past Exams                | Human, Accuracy       | Answer accuracy: (100%), quality ratings: (6.7-9.8/10)                    | Subjective evaluation, not tested on students.                           |
| [95]  | Multi-Stage Prompting, GPT models   | Multi-lingual        | SQuAD, GermanQuAD, HiQuAD | Automatic, Human      | Outperforms single-stage baseline in automatic and human evaluations      | Lower performance on low-resource languages, limited human evaluation.   |

**TABLE 14.** LLMs based MCQs generation systems using pipeline and modular approaches.

| Ref.  | Method / Model                                      | Domain             | Dataset(s)            | Evaluation Metrics           | Key Results                                                       | Limitations                                                         |
|-------|-----------------------------------------------------|--------------------|-----------------------|------------------------------|-------------------------------------------------------------------|---------------------------------------------------------------------|
| [47]  | GPT-4, RAG, self-refine                             | Computer Science   | Custom Data & MCQs    | Human & LLMs expert          | High expert ratings for Grammatical Fluidity and Relevance        | Small sample size, limited to one domain (Computer).                |
| [96]  | LLMs (GPT-4-Turbo, Llama-2)                         | Education          | Turkish-Quiz-Instruct | Human & Automated            | GPT-4-Turbo: 85% of MCQs rated 'useful' by humans                 | Generates factually incorrect short-answer questions.               |
| [88]  | Personalized Cloze Test Generation (PCGL) Framework | Education          | CLOTH                 | GPT-4, difficulty adjustment | Outperformed baseline in difficulty-adjusted sentence & DG        | Room for improvement, some experimental results not ideal.          |
| [175] | GPT-3.5, RoBERTa                                    | Chemistry, Biology | OpenStax textbooks    | Automatic, Human             | 80% machine alignment for "Evaluation" level                      | Misalignment, ambiguity and lower quality                           |
| [90]  | Llama 3 & GPT-variant                               | General            | Custom resolutions    | Human, Automatic             | 94.4% valid questions                                             | Non multi-hop questions, LLMs shared biases.                        |
| [94]  | T5, TextTiling, LeNet                               | E-learning         | Custom video lectures | Accuracy, Human              | Avg. accuracy: (70%)                                              | Poor transcription and conversational language.                     |
| [20]  | Systematic method, GPT-4o                           | Materials Science  | Scholars Databases    | Accuracy, Human              | 7k dataset for benchmarking LLMs, Accuracy scores: (0.76 - 0.777) | Performance varies across LLMs, safety judgment remain challenging. |

medicine, this technique allows cost-effective Bio-LLMs to achieve high-quality results in complex pipelines [11], [15]. Despite its power, fine-tuning does not inherently solve persistent issues like knowledge cutoffs, factual hallucinations, or limited ID, which require ongoing research into better evaluation frameworks [92].


## 2) PROMPTING LLMs

As an alternative to fine-tuning, prompting leverages the in-context learning capabilities of large-scale models like GPT-4 through carefully engineered instructions, as shown

in the Table 13. Recent work has moved beyond simple zero-shot prompts to more sophisticated strategies. Techniques like RAG ground the model in external knowledge to improve factual accuracy, while Chain-of-Thought (CoT) prompting and self-refinement encourage more logical reasoning, leading to better adaptive quizzes [47]. Multi-stage prompting has also been shown to improve distractor quality across multiple languages [95], while prompting accelerates development in fields like computing, education and nursing [85], [99]. Studies demonstrate that performance varies by model and prompt design, and human-in-the-loop

**TABLE 15. LLMs based MCQs generation systems using multi-agents.**

| Ref.  | Method / Model                           | Domain           | Dataset(s)          | Evaluation Metrics | Key Results                                                               | Limitations                                                       |
|-------|------------------------------------------|------------------|---------------------|--------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------|
| [53]  | Langchain, GPT-4o                        | Mathematics      | NA                  | Human              | Over 90% of generated questions rated 'useful' by experts                 | Specific to maths.                                                |
| [12]  | Multi-agent system (UsmleGPT), Prompting | Medical          | NBME framework      | Human              | Generates USMLE Step 1 items through a simulated NBME workflow            | Potential for systematic biases in LLMs, cost considerations.     |
| [184] | Langchain, GPT4,                         | AI Literacy      | Learning objectives | Human              | 84.2% of questions rated as suitable for classroom use by experts         | Rephrasing issues, Bloom's level and grade level appropriateness. |
| [183] | AutoConverter                            | Model Evaluation | VMCBench            | Human              | Vision models showed similar or lower accuracy on AutoConverter questions | Relies on the quality of initial open-ended VQA datasets.         |
| [182] | Langchain, Gemini AI                     | Education        | User files          | Human              | Automated MCQs and evaluation from various file formats                   | Quality depends on input, English only                            |

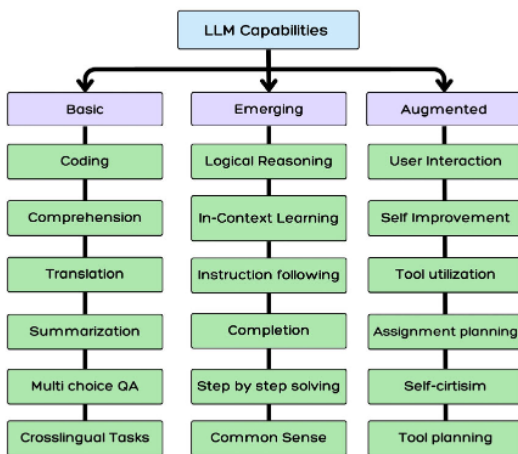
**FIGURE 5. LLMs capabilities. Courtesy by [180].**

validation remains essential to address domain-specific errors and generate challenging, error-based distractors [16], [19], [139], [141], [149].

### 3) PIPELINE AND MODULAR APPROACHES

Many systems, such as those listed in Table 14, adopt a pipeline architecture, breaking the complex task of MCQs generation into sequential stages. This modularity allows for the integration of different models or techniques at each step. For example, a pipeline might use a RoBERTa model to enforce alignment with Bloom's Taxonomy before passing the output to GPT-3.5 for generation [175]. Such architectures have been applied in diverse domains, from generating Turkish quizzes to legal and materials science questions [20], [90], [96]. While these systems can produce highly contextualized questions, especially when enhanced with RAG and CoT reasoning [47], they underscore the need for better dynamic difficulty calibration and more robust evaluation metrics that capture cognitive depth [94].

### 4) MULTI-AGENT SYSTEM APPROACHES

A more recent innovation involves multi-agent systems, where different LLMs agents collaborate in roles such as

“generator,” “critic,” and “evaluator” to refine the final output as given in Table 15. This approach simulates an expert human workflow and is particularly useful for high-stakes assessments. For instance, systems combining models like GPT, Claude, and Llama with CoT-SC and Tree-of-Thought (TOT) mechanisms have been used to emulate the National Board of Medical Examiners (NBME) item-development process [12]. Similarly, LangChain-powered agents have been orchestrated to generate contextualized mathematics questions that outperform single-model prompts [53] and to automate end-to-end quiz creation using Gemini [182]. While promising, these systems face challenges related to computational cost, potential for bias, and the need for real-world validation [183], [184].

### 5) HYBRID LARGE LANGUAGE MODELS APPROACHES

Hybrid methods, showcased in Table 16, combine the generative power of LLMs with other techniques to enhance accuracy and contextual relevance. This often involves integrating LLMs with rule-based components, lexical databases like WordNet, or structured knowledge from ontologies. For example, a pipeline might combine T5 with traditional NLP methods like POS tagging to produce better semantic distractors [102]. In other cases, RAG systems are compared with fine-tuned models like Llama to determine the optimal approach for a given task, revealing that specialized fine-tuning can yield superior distractor quality [46]. Multi-task learning with models such as BART and ProphetNet has also been shown to boost student engagement by jointly training on generation and evaluation objectives [148]. These hybrid strategies highlight a pragmatic trend of combining the “best of all worlds” to overcome the limitations of any single approach [14], [153].

### F. HYBRID APPROACHES FOR MCQs GENERATION

Hybrid approaches combine ideas from different methodologies in an effort to make the best use of what each does well while compensating for their individual shortcomings. Table 17 gives an overview of some representative systems. The idea itself is simple but effective: instead of relying on one technique, these systems bring together complementary

**TABLE 16.** LLMs based MCQs generation systems using hybrid approaches.

| Ref.  | Method / Model                               | Domain    | Dataset(s)            | Evaluation Metrics            | Key Results                                                                     | Limitations                                                   |
|-------|----------------------------------------------|-----------|-----------------------|-------------------------------|---------------------------------------------------------------------------------|---------------------------------------------------------------|
| [102] | T5, sense2vec, POS Tagger                    | Education | SQUAD, CBSE Textbooks | F1, Human                     | Fluency: (5/5), grammar (5/5), answerability (4/5), relevance (4/5), F1: 48.58  | Not able to handle answer phrases of varying length.          |
| [14]  | Macaw+, Bing Chat                            | Education | Science text-book     | Human                         | LLMs performance similar to human on 6 of 7 metrics                             | Structure issues in answers and options                       |
| [148] | Multi-task approaches (T5, BART, ProphetNet) | Education | Custom & SQUAD        | Automatic, Human              | T5 performed best, QA pairs improved student performance.                       | Limited to computer science, only evaluated three LLMs.       |
| [46]  | LLMs-based agents, RAG, Fine-Tuned LLMs)     | Education | Custom courses        | Human, Mixed-effects modeling | Provides a framework for aligning AI-generated content with learning objectives | Bias and contextual limitations.                              |
| [153] | GPT-3.5-based pipeline (VocaTT)              | English   | Academic word list    | Human                         | 75% well-formed sentences, 66.85% suitable word options                         | Needs improved POS tagging, sentence validation, and prompts. |

**TABLE 17.** Hybrid based MCQs generation systems.

| Ref.         | Method / Model                                   | Domain           | Dataset(s)                        | Evaluation Metrics | Key Results                                                                       | Limitations                                                                            |
|--------------|--------------------------------------------------|------------------|-----------------------------------|--------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| [83]         | TF-IDF, Jaccard similarity, K-means, BERT        | Computer Science | Books                             | Human              | Overall MCQs accuracy: (80%)                                                      | Need further improvement, domains specific                                             |
| [44]         | WordNet, neural embeddings & Jaccard similarity  | Education        | NCERT text-books                  | Human & Automatic  | 'worthy': (95.1%), 'utilizable': (94.5%), distractor closeness: (99.07%)          | Simple sentences, no multi-line facts or non-text content.                             |
| [93]         | Zero-shot pipeline, T5 & BERT                    | Skill Assessment | CoNLL-2003 & Quora datasets       | Human & Automatic  | Semantic similarity (4.33/5) & fluency (4.34/5), precision (97.7%)                | Application specific, low precision for questions                                      |
| [100], [162] | Topic Models, SVM Classifier, word2vec           | Education        | Wikipedia, Amazon Mechanical Turk | Human & Automatic  | Gap selection accuracy: (81.0%), distractors as good/fair: (94%)                  | Sentences aren't independent, Low inter-annotator for distractors                      |
| [105]        | Dynamic Ontology (QG-SKI), TF-IDF                | E-Learning       | LOD Cloud, Wikipedia              | Accuracy           | Accuracy: (98.15%), outperforms baseline models                                   | Not specified                                                                          |
| [87]         | POS tagging, Linear Regression, WordNet          | Education        | ORCHID corpus, WordNet            | Human              | Acceptability: (81.32%), $\geq 1$ acceptable distractor: (49.32%)                 | Low distractor quality: (49.32%), errors in processing                                 |
| [170]        | Sentence splitting, Parsing                      | English          | Project Gutenberg                 | Human              | Overall acceptability: (53%), answer accuracy: (70%), passage accuracy: (97%)     | Acceptability (53%) is low, high error rate in correct answer                          |
| [169]        | Production rules, LSTM Model, NLP                | Education        | Custom quiz & Wikipedia           | Human              | Difficult to differentiate between automatic & manual questions                   | Difficulty in connecting sentences, technical distractor, "Wh"-question classification |
| [103]        | Preference learning, Hypernym/Hyponym similarity | E-assessment     | Web corpus, Wikipedia             | Accuracy           | Summariser accuracy: (72%), blank accuracy: (77.6%), distractor accuracy: (78.8%) | No pronouns, no co-reference resolution, limited analogy questions                     |
| [50]         | NLP, BART, PEGASUS                               | Education        | CNN-DailyMail, Wiki-FactCheck     | Human              | High usability & satisfaction, adoption: (59%), strong preference                 | Small sample size, no student evaluation, difficult DG.                                |
| [51]         | Template-based, Custom GPT                       | Medical          | GPT Builder                       | Time               | Time reduction: (5 hours to <10 mins), AI generated plausible models              | Proof-of-concept, no empirical validation, simple templates only                       |

tools to get more reliable and flexible results. For example, statistical models are often used for fast keyword extraction, NLP methods help maintain grammatical accuracy, and deep learning (DL) models add a layer of semantic understanding that traditional methods lack.

In recent work, researchers have often paired classical statistical techniques such as TF-IDF with newer neural models like BERT to improve question generation in specific

areas, including computer science [83], [105]. Others have taken a more layered approach by linking a sequence of NLP tasks, such as entity recognition, parsing, semantic analysis with neural components to produce questions that read more naturally and make better sense contextually [44]. A slightly different but related line of work focuses on human-AI collaboration, where automated tools handle the heavy lifting and educators refine the output. This approach,



TABLE 18. Comparison of MCQs generation methodologies.

| Methodology    | Core Idea               | Requires            | Flexibility | Control          | Strength            | Weakness               | Output                   |
|----------------|-------------------------|---------------------|-------------|------------------|---------------------|------------------------|--------------------------|
| Rule-Based     | Explicit rules          | Hand-made rules     | Low         | High             | Predictable         | Brittle, scale         | Follows rules            |
| Template-Based | Fill patterns           | Templates           | Low         | High (structure) | Speed, consistent   | Repetitive             | Consistent               |
| Statistical/ML | Find data patterns      | Training data       | Moderate    | Low              | Hidden patterns     | Needs data             | Reflects data            |
| Ontology-Based | Structured knowledge    | Knowledge maps      | Moderate    | Medium           | Conceptual accuracy | Needs good maps        | Logically sound          |
| Deep Learning  | Learn complex patterns  | Large datasets      | High        | Low              | Context, fluency    | Needs data, errors     | Fluent (mostly)          |
| NLP Techniques | Specific language tools | Text, tools         | Moderate    | Medium           | Specific tasks      | Complex pipelines      | Varies by tools          |
| LLMs           | Massive models          | Huge data, compute  | High        | Medium           | Fluency, context    | Mistakes, check needed | Very fluent, needs check |
| Hybrid         | Combine approaches      | Multiple components | Varies      | Varies           | Best of worlds      | Complex build          | Varies                   |

TABLE 19. Comparison of LLMs-based vs. Classical methods for MCQs generation.

| Aspect            | Classical Methods                                               | LLM-Based Methods                                      |
|-------------------|-----------------------------------------------------------------|--------------------------------------------------------|
| Fluency           | Rigid, template-bound output [65], [70].                        | Fluent, human-like sentence variety [7], [18].         |
| Context           | Limited to predefined patterns [158], [160].                    | Strong contextual awareness [47], [149].               |
| Distractors       | Semantically grounded via ontologies/WordNet [36], [38], [137]. | Often superficial, word-level associations [16], [19]. |
| Accuracy          | High from verified sources [81], [133].                         | Prone to hallucinations [10], [141].                   |
| Scalability       | Low, manual rule/ontology creation needed [71], [77].           | High; adapts via prompting [95], [96].                 |
| Adaptation        | Time-intensive new rule sets required [81], [140].              | Prompt engineering or fine-tuning [15], [47].          |
| Cognitive Control | Explicit via Bloom’s-aligned templates [1], [69].               | Inconsistent level targeting [175], [186].             |
| Oversight         | Moderate; predictable, systematic errors [158].                 | High; unpredictable errors [49], [181].                |
| Explainability    | Transparent, traceable process [35], [80].                      | Opaque generation.                                     |
| Speed             | Fast after setup; setup is slow [140].                          | Fast with minimal setup [51], [91].                    |

which has gained traction in domains like medicine, helps maintain quality while still saving time [50], [51]. Even with these advances, hybrid systems are not without problems. Models tuned for one subject or language often fail to generalize, and distractor quality can vary widely across new contexts [87], [100].

To offer a broader perspective, Table 18 summarizes key characteristics, advantages, and weaknesses of the main methodological families. Rule-based and template-driven systems allow close control over structure but tend to be rigid. Statistical and machine learning (ML) approaches detect meaningful patterns but may overlook contextual nuance. Ontology-based systems rely on structured domain knowledge and thus provide conceptual coherence, though they are limited by the completeness of available ontologies. More recently, methods rooted in NLP, deep learning, and LLMs have achieved impressive results in generating fluent and contextually appropriate questions. Yet even these sophisticated systems still face well-known challenges, such as maintaining factual accuracy, producing balanced distractors, and incorporating sufficient human oversight.

Hybrid frameworks can be seen as a natural response to these trade-offs. By combining complementary strengths, they aim to create systems that are not only technically robust but also educationally meaningful. From a broader perspective, each methodological tradition, whether rule-based, statistical, or neural, contributes valuable insights to this

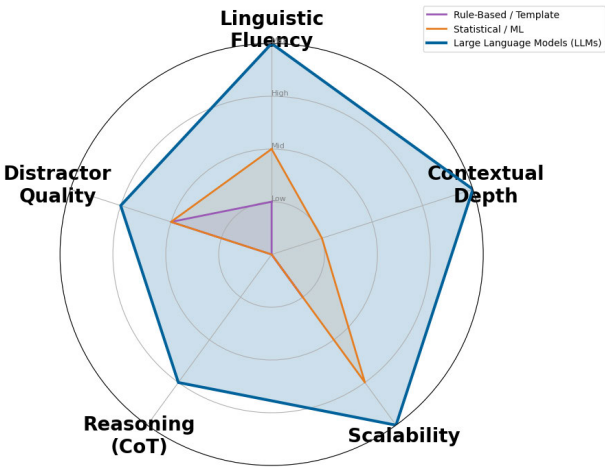


FIGURE 6. Radar chart comparing MCQs generation methodologies across five key dimensions.

evolving area of research. The gradual blending of these ideas shows both how far the field has come and how much room there still is for improvement.

To provide additional clarity regarding the trade-offs between traditional and modern approaches, Figure 6 provides a visual summary of how each methodology family performs across five key dimensions. LLMs-based

**TABLE 20.** Popular datasets used in MCQs generation. This table lists datasets with features including: Domain (topic area), Q (number or type of questions), Q-Type (format of questions), A-Type (answer structure), Q-Source (origin of questions), A-Source (source of answers), MR (machine reading comprehension support), and CS (commonsense reasoning requirements).

| Dataset           | Domain            | Q    | Q-Type         | A-Type           | Q-Source         | A-Source          | MR  | CS  |
|-------------------|-------------------|------|----------------|------------------|------------------|-------------------|-----|-----|
| BoolQ [22]        | Wikipedia         | 16k  | Yes/No         | Boolean          | Search Query     | Wikipedia         | Yes | Yes |
| CLOTH [113]       | English Exams     | 99k  | Cloze          | MCQs             | Teachers         | Exam passages     | Yes | Yes |
| CELA [112]        | English Cloze     | 3k   | Cloze          | Binary, 3-class  | Human, Automatic | English Exams     | No  | Yes |
| CQA [55]          | Common sense      | 12k  | MCQs           | Single word      | Crowd workers    | conceptnet        | Yes | Yes |
| COSMOS QA [26]    | Common sense      | 35k  | MCQs           | Single word      | Crowd workers    | Webblogs          | Yes | Yes |
| DGen [114]        | Open-domain       | 2.9k | MCQs           | Single word      | -                | Multi-Sources     | Yes | Yes |
| DREAM [109]       | Dialogue          | 10k  | MCQs           | Free-form text   | Teachers         | Dialogues         | Yes | Yes |
| EduQG [24]        | Education         | 3.4k | MCQ, Cloze     | Single word      | Educators        | Textbook          | Yes | Yes |
| HEAD-QA [128]     | Healthcare        | 6.5k | MCQs           | Single word      | -                | Publications      | Yes | No  |
| HotpotQA [64]     | Wikipedia         | 113k | Multi-hop      | Single word/list | Crowd workers    | Wikipedia         | Yes | Yes |
| LearningQ [32]    | Education         | 230k | MCQs           | Single word      | Instructors      | Online Courses    | Yes | Yes |
| MCTest [28]       | Fictional stories | 2k   | Comprehension  | MCQs             | Crowd workers    | Fictional stories | Yes | -   |
| MedMCQA [23]      | Medical           | 194k | MCQs           | Word or list     | PG Exams         | -                 | Yes | Yes |
| MovieQA [116]     | Movie             | 15k  | MCQs           | Single word      | Human            | Scripts           | Yes | Yes |
| MS MARCO [63]     | Web               | 1M   | Factoid        | Human-generated  | Search Query     | Bing Search       | Yes | Yes |
| MythQA [59]       | Twitter           | 522  | Open-domain    | Multiple, Tweets | Human annotators | Twitter           | Yes | Yes |
| NarrativeQA [129] | Stories           | 47k  | QA             | Free-form text   | Crowd workers    | Scripts           | Yes | -   |
| NQs [61]          | Wikipedia         | 307k | QA             | Long/Short       | Search Queries   | Wikipedia         | Yes | Yes |
| NewsQA [126]      | News              | 100k | Factoid        | Text span        | Crowd workers    | CNN               | Yes | No  |
| NewsQuizQA [33]   | News              | 20k  | MCQs           | Single word      | Human writers    | News Summaries    | Yes | Yes |
| OpenBookQA [127]  | Textbook          | 10k  | Open-book      | MCQs             | Textbook         | Textbook          | Yes | Yes |
| QuAIL [108]       | Multi-domain      | 15k  | Comprehension  | Multiple         | Expert writers   | News & Articles   | Yes | Yes |
| QUASAR [27]       | Open-domain       | 80k  | Cloze & Trivia | Text span        | Internet         | Internet          | Yes | Yes |
| Quasi [25]        | Swedish           | 436  | Comprehension  | Multiple         | GPT-3            | Swedish Exam      | Yes | Yes |
| QASC [110]        | Science           | 10k  | Multi-hop      | Multiple         | Crowd workers    | Text Corpus       | Yes | Yes |
| RACE [30]         | English           | 100k | MCQs           | Single word      | Instructors      | Written text      | Yes | Yes |
| ReClor [107]      | Reasoning         | 6k   | MCQs           | Single word      | Exams            | -                 | Yes | Yes |
| ReCoRD [122]      | News              | 121k | Comprehension  | Cloze            | News articles    | News articles     | Yes | Yes |
| RecipeQA [123]    | Recipes           | 37k  | Multi-modal    | MCQs             | Recipes          | Recipes           | Yes | Yes |
| ROCStories        | Common sense      | 50k  | Stories        | Sentence         | Crowd workers    | -                 | Yes | Yes |
| SCDE [111]        | Sentence Cloze    | 30k  | Sentence Cloze | Candidates       | English Teachers | Exam passages     | Yes | Yes |
| SciQ [29]         | Science           | 14k  | MCQs           | Single word      | Crowd workers    | Science textbooks | Yes | Yes |
| SQuAD [60]        | Wikipedia         | 108k | Factoid        | Text span        | Crowd workers    | Wikipedia         | Yes | No  |
| SocialQA [124]    | Social            | 38k  | QA             | Multiple         | Crowd workers    | Social events     | Yes | Yes |
| SQs [173]         | Freebase          | 108k | Factoid        | Object           | Freebase KB      | Freebase KB       | No  | No  |
| SWAG [121]        | Common sense      | 113k | MCQs           | Sentence         | -                | Video captions    | Yes | Yes |
| TriviaQA [62]     | Open-domain       | 95k  | QA             | Free-form text   | Trivia fans      | Web               | Yes | Yes |
| TQA [117]         | Textbook          | 26k  | Multi-modal    | MCQs             | Textbook         | Textbook          | Yes | Yes |
| TabMCQs [21]      | Science           | 9k   | MCQs           | Single word      | Crowd workers    | Knowledge Tables  | Yes | Yes |
| WikiQA [127]      | Wikipedia         | 3.8k | QA             | Free-form text   | Wiki             | Wikipedia         | Yes | Yes |

approaches excel in linguistic fluency, contextual understanding, and scalability, while classical methods show relatively stronger performance in distractor quality. Table 19 presents a more detailed side-by-side comparison across ten aspects. Classical methods including rule-based, template-driven, and ontology-based systems offer predictable outputs and strong control over question structure, but they require substantial upfront effort and do not adapt easily to new domains. On the other hand, LLMs-based methods excel in fluency, scalability, and contextual understanding, yet they come with their own set of challenges. For example, factual accuracy is harder to guarantee, distractors may lack pedagogical grounding, and the generation process is largely opaque. Neither family of methods is strictly better as the choice depends on the specific requirements of the assessment task at hand.

## VI. DATASETS

The development of robust automatic MCQs generation systems relies on a wide range of publicly available datasets for training, fine-tuning, and evaluation. Table 20 provides a comprehensive summary of key datasets used in the field,

detailing their domain, size, question-and-answer formats, and the cognitive capabilities they are designed to test, such as machine reading comprehension (MR) and commonsense (CS) reasoning.

From a technical standpoint, these datasets exhibit significant diversity in their structure and complexity, which directly influences the design of generation models. Many datasets, such as SQuAD [60], NQs [61], and TriviaQA [62], originate from question-answering (QA) tasks and thus require models to first formulate a question-answer pair before transforming it into an MCQs format. In contrast, datasets like CLOTH [113] and RACE [30] provide a more direct training setup, with native cloze and multiple-choice formats, respectively. The variety in answer types ranging from single words and text spans to free-form sentences also introduces different levels of complexity, particularly for the challenging task of DG. Furthermore, the scale and nature of these datasets present distinct opportunities. The large size of datasets like MS MARCO [63] and LearningQ [32] enables the training of robust DL models, while the inclusion of complex reasoning requirements in datasets such as HotpotQA [64] and OpenBookQA [127] drives the development

of models with advanced inference capabilities. The diverse sources, from Wikipedia and textbooks to crowd-sourced annotations, introduce potential biases and stylistic variations that models must learn to navigate.

## VII. GENERIC ARCHITECTURE

The design of most automatic MCQs generation systems is inspired by the manual authoring process, following a multi-phase pipeline to transform unstructured text into a valid assessment item. While specific methodologies vary, a generic workflow can be abstracted into three core phases: content identification, item construction, and quality assurance, as illustrated in Figure 7.

### A. CONTENT IDENTIFICATION AND SELECTION PHASE

The initial phase focuses on preparing the source text and identifying the core information that will form the basis of a question. This involves three main steps:

#### 1) PRE-PROCESSING

The raw input text is cleaned, normalized, and structured. This includes tasks such as sentence simplification [65], [78], [106], [150], lexical analysis, and syntactic analysis using POS tagging and parsing [34], [65], [77], [131], [150], [171], [177]. Ambiguities are often resolved through techniques like co-reference resolution and Word Sense Disambiguation (WSD) [77], [150], [161].

#### 2) SENTENCE SELECTION

From the processed text, candidate sentences are selected based on their suitability for generating a question. Criteria often include sentence length, syntactic simplicity, and the presence of strong grammatical structures like SVO patterns [34], [40], [151], [171], [177]. ML and DL models are frequently used to classify and rank sentences based on these features [73], [78], [79], [134], [151].

#### 3) KEY SELECTION

Within a chosen sentence, the “key” is identified. This is typically a key term, noun phrase, or verb that represents a central idea. Common selection techniques include frequency-based metrics like TF-IDF [65], [77], [150], [171], syntactic cues from POS and parse information [34], [72], [131], [150], and ML models trained to predict the most likely answer phrase [78], [79], [134].

### B. ITEM CONSTRUCTION PHASE

Once the core content is identified, the system constructs the components of the MCQs.

#### 1) QUESTION GENERATION

The selected sentence is transformed into a question stem. This is commonly done by converting the declarative sentence into an interrogative one, often by replacing the key with an appropriate wh-word (e.g., “who,” “what,”

“where”) based on its semantic type [40]. Syntactic transformations using dependency patterns or SVO structure are also employed to rephrase the sentence into a natural-sounding question [77], [106].

#### 2) DISTRACTOR GENERATION

This critical step involves creating plausible yet incorrect answer choices. As summarized in Table 21, a variety of techniques are used, including leveraging lexical resources like WordNet to find synonyms [34], [77], [79], [134], [150], using domain ontologies for conceptually related terms [73], applying the distributional hypothesis to find words that appear in similar contexts [72], [106], and ensuring grammatical consistency with the key using POS information [65], [77], [79], [134].

### C. QUALITY ASSURANCE AND REFINEMENT PHASE

The final phase focuses on ensuring that the generated MCQs are not only grammatically sound but also accurate, relevant, and suitable for practical use in an educational environment.

#### 1) VERIFICATION


At this stage, each generated question goes through a series of automated and, at times, semi-automated quality checks. These typically include grammar and syntax validation [150], along with methods that assess semantic consistency, such as NER and semantic role labeling [2], [65], [77], [131], [150]. To evaluate the plausibility of distractors, similarity metrics are commonly applied, while predictive models may help estimate how difficult each question is likely to be for learners [93], [170]. Although these automated tools are useful, their results often require manual confirmation to ensure that subtle conceptual errors are not overlooked.

#### 2) POST-PROCESSING

Once the verification results are available, the generated MCQs are refined and improved. This refinement process may involve rewording vague or awkwardly phrased stems, enhancing distractor quality, and discarding items that fail to meet clarity or validity standards [34], [131], [150], [164]. In most systems, this stage concludes with a human review by subject experts who assess the educational soundness and factual correctness of each question. After this review, questions are often arranged by difficulty level, formatted for delivery, and sometimes pilot-tested with a small group of learners to gather feedback before final deployment [2], [49]. Such a layered quality assurance process helps strike a balance between automation efficiency and the pedagogical rigor expected in real-world assessment settings.

## VIII. EVALUATION METRICS

Evaluating automatically generated MCQs is not as simple as it may seem. It usually involves several complementary layers of review, some of which rely on algorithms and others that require human expertise. Researchers often focus on a few recurring factors: whether a question is relevant to the

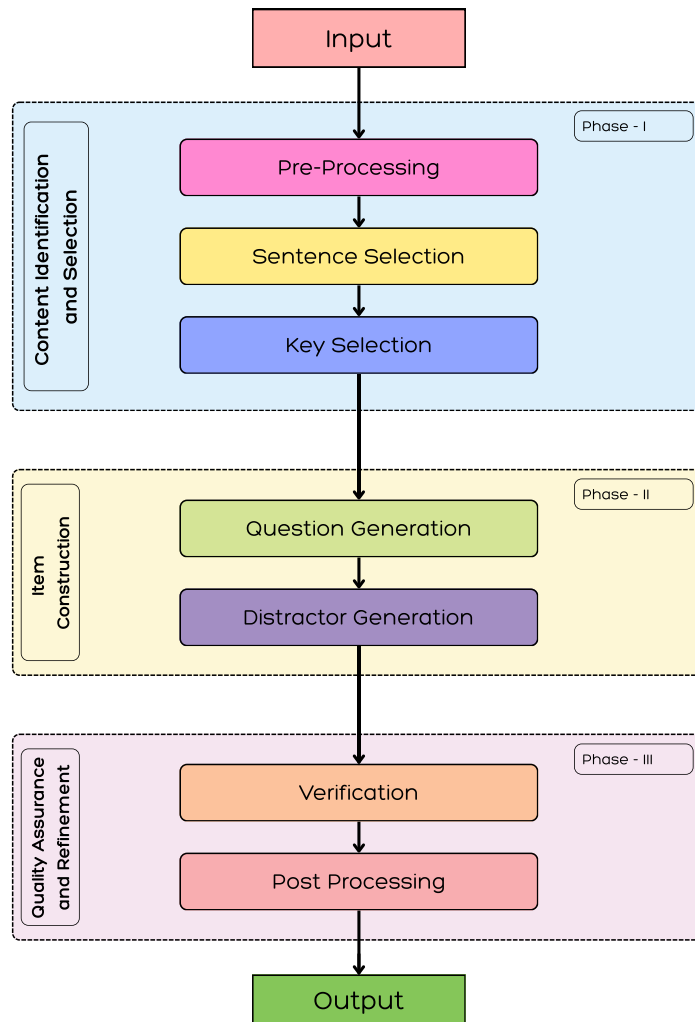

**FIGURE 7.** A generic architecture of MCQs generation process.

intended concept, how challenging it is for different learners, how convincing the distractors are, and whether the overall phrasing sounds natural and error-free. Table 22 provides a concise overview of the major approaches reported in the literature. Each method has its strengths but also certain drawbacks, depending on the learning context and the type of data used.

#### A. AUTOMATIC EVALUATION

Automatic evaluation focuses on measurable indicators that make large-scale assessment more practical. Instead of relying entirely on human raters, these methods compare generated questions or distractors with reference materials using similarity metrics. For instance, measures such as ROUGE-L or cosine similarity can be applied to gauge how closely the generated question aligns with the source text [96]. Precision-based measures like P@k [35] are also used to assess distractor quality, while some studies adopt

information retrieval frameworks such as Retrieval-based Accuracy Differential (RAD) to evaluate the discriminative power of the generated items.

However, purely automated metrics often miss deeper educational value. A question may score high on textual similarity yet fail pedagogically by being too simple, ambiguous, or disconnected from the intended learning outcome [10], [18].

#### B. HUMAN EVALUATION

Human evaluation remains a cornerstone for assessing qualities that automated systems cannot capture well. Subject matter experts typically use rubrics, Likert scales, or qualitative commentary to assess fluency, instructional relevance, and distractor plausibility [106]. When paired with student response data, expert feedback can also help estimate item difficulty and discrimination. Yet, this process is labor-intensive, time-consuming, and occasionally



**TABLE 21. Techniques for distractor generation.**

| Technique                        | How It Works                                                                                  | Example                                                                |
|----------------------------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| <b>Parts-of-Speech</b>           | Distractors must be the same grammatical type (e.g., all <b>nouns</b> ).                      | "Respiration", "transpiration" (all nouns).                            |
| <b>Frequency Matching</b>        | Uses distractors with a similar usage <b>frequency</b> to the correct answer.                 | "Meiosis", "mitosis" (commonly used terms).                            |
| <b>WordNet/Semantic</b>          | Generates <b>synonyms</b> or words with related meaning.                                      | "Chemosynthesis", "autotrophy" (related biological processes).         |
| <b>Domain Ontology</b>           | Uses a <b>domain knowledge base</b> for highly specific, related terms.                       | "Chlorophyll" or a specific type of "cellular respiration".            |
| <b>Distributional Hypothesis</b> | Identifies words that appear in the <b>same context</b> .                                     | "Cellular respiration" or "glucose production" (contextually related). |
| <b>Semantic Analysis</b>         | Creates related but <b>contextually inappropriate</b> options (often a common misconception). | "Respiration" (a distinct process).                                    |

inconsistent, as inter-rater agreement can vary despite clear guidelines [100].

### C. PSYCHOMETRIC ANALYSIS

Psychometric analysis offers a quantitative perspective on question quality, particularly when learner response data is available. Using frameworks such as Classical Test Theory (CTT) or IRT, researchers can estimate item difficulty and discrimination indices and analyze distractor performance [104], [139]. These insights help determine whether a question behaves as expected in real testing scenarios. The downside is that psychometric validation requires responses from a sizable and representative learner population, which is rarely available during system design stages [132].

Across existing studies, there is still no universally accepted standard for evaluating MCQs generation. The selection of metrics often depends on the task, subject area, and language. A technique that works well for factual English questions may not suit reasoning-oriented or multilingual datasets [75], [96]. Consequently, many researchers recommend hybrid evaluation strategies that combine the scalability of automated methods with the contextual awareness of human reviewers and the empirical rigor of psychometric analysis. Such an integrative approach provides a more balanced and credible assessment of automatically generated questions.

### IX. APPLICATIONS AND CASE STUDIES

In real-world applications where assessments play a key role in evaluations, MCQs have been used as a primary source due to their objective nature and ease of grading. Educational domains involve a lot to do with evaluations, and they are not the only domain that has adopted this method, but many industries are also using MCQs for skill assessments, hiring evaluations, and feedback gathering. We will discuss some of the most prominent applications in this section in order

to find out how these systems are providing assistance in strengthening assessment and learning.

#### A. EDUCATION

One of the widely used fields where MCQs are the primary source for evaluation is education. In higher education, automated systems are used to generate questions for entrance assessment tests and even for classroom quizzes. Additionally, online learning platforms such as MOOCs have also integrated tools that are able to conduct short quizzes for each lecture. The primary benefit of these systems is the ability to provide feedback in a short period of time and help instructors supervise student progress at a massive scale, which would not be possible with manual work [6], [17], [42], [135], [174]. A recent example can be seen in some institutes where LLMs like GPT-4 have been used to create personalized questions in computer science courses that are adaptive to different learning styles [13], [47]. This allows evaluators to assess students' skills and learning abilities in a multi-dimensional way, providing a more in-depth analysis. Besides this, multi-stage prompting techniques have also been used to produce language-agnostic MCQs that broaden the reach of these tools in international education [95].

In the same way, MCQs are extensively employed in K-12 classrooms in order to measure the performance of students in a number of subjects such as mathematics, science, language, and arts [49], [53]. Many institutes are immediately adopting the tools that can automate the generation process in view of the fact that they hold the strength to enable the creation of personalized questions that directly aligned with curriculum standards [47], [88]. For example, some studies have discussed the implementation of certain tools like RevUP to evaluate the potential of automated MCQs generation systems, which have the ability to generate self-assessment questions in biology to reinforce student learning [100], [162]. Some case studies have reported the use of certain systems that produce MCQs directly from middle school textbooks to minimize the creation time for quizzes [44].

The domain of medical and healthcare depends greatly on MCQs to evaluate for high-stakes exams such as the United States Medical Licensing Examination (USMLE) [2], [10], [101], [181]. Clinical knowledge, diagnostic reasoning, and preparedness are some major areas where evaluations are required to get insights regarding students. These steps are required to help in making decisions with respect to curriculum design and difficulty adjustment for students. Recent efforts include using ChatGPT to generate pharmacotherapy questions with high-quality distractors [139] and employing AI to improve question quality for nursing education, enhancing the educational value of assessments [99].

#### B. PROFESSIONAL TRAINING AND LANGUAGE LEARNING

Over the last two decades, there has been a strong trend toward certifications in professional and corporate training programs. It can be observed in various fields comprising



**TABLE 22.** Summary of MCQs evaluation methods.

| Evaluation Method                         | Type      | Focus                                           | Metrics                                             | Strength                                                | Limitations                                             |
|-------------------------------------------|-----------|-------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|
| Human/Expert Review [9], [36]–[38], [148] | Human     | Overall quality, flawlessness, correctness      | Rubrics, Likert scales, Binary (Accept/Reject)      | Gold standard; Captures nuance.                         | Subjective, slow, expensive, unscalable.                |
| Linguistic Review [1], [174]              | Human     | Grammatical correctness, fluency                | Revision scales, Binary ratings                     | Validates text quality; Removes grammatical clues.      | Highly dependent on rater expertise.                    |
| Semantic Review [57], [185]               | Human     | Clarity, coherence, contextual relevance        | Likert scales, Binary relevance                     | Ensures grounding in source; Aligns with LOs.           | Subjective; Can reflect underlying KB errors.           |
| Inter-rater Agreement [92], [149], [165]  | Human     | Consistency of human ratings                    | Gwet's AC1, Fleiss' K, Cohen's Kappa                | Quantifies reliability of human judgment.               | Some metrics (Fleiss' K) weak with dominant labels.     |
| Psychometric Analysis [75], [77], [150]   | Hybrid    | Item difficulty (ID), discriminating power (DP) | ID (Rasch), DP (Point-biserial), Distractor stats   | Empirical proof of assessment value from real students. | Requires a student cohort; Not for real-time filtering. |
| LLMs Error Analysis [2], [10], [185]      | Hybrid    | LLMs failure modes (repetition, hallucination)  | Exact match, Frequency counts, Beta regression      | Pinpoints model weaknesses for targeted refinement.     | Requires extensive calibration and complex stats.       |
| N-gram Overlap [4], [82]                  | Automatic | Lexical/Syntactic similarity to references      | BLEU, ROUGE-N, ROUGE-QAG                            | Automated, cheap, scalable, standard benchmark.         | Poor correlation with semantic correctness.             |
| Semantic Similarity [93], [105]           | Automatic | Conceptual closeness, distractor plausibility   | Cosine Sim (Embeddings), BERTScore, WMD             | Measures meaning beyond word overlap.                   | Dependent on underlying embedding model quality.        |
| Extractive Span Eval [152]                | Automatic | Accuracy of extracted answer spans              | Exact Match (EM), F1, Partial Match (PM)            | Objective correctness measure for QA components.        | EM is overly strict; penalizes minor phrasing variants. |
| Paraphrasing Metrics [10], [11], [185]    | Automatic | Syntactic divergence from source text           | METEOR, ROUGE-L, CIDER                              | Assesses novelty beyond exact word match.               | Inverse interpretation needed for divergence tasks.     |
| Complexity Classification [1], [18]       | Automatic | Cognitive difficulty level (easy, medium, hard) | Probability distribution over difficulty classes    | Automated difficulty scoring for adaptive testing.      | Requires human-annotated training data.                 |
| Diversity Metrics                         | Automatic | Variety and non-redundancy of questions         | Entropy (H(Q)), Self-BLEU                           | Quantifies the breadth of generated questions.          | Relies on predefined question type categories.          |
| Auxiliary Task Eval [18]                  | Hybrid    | Answerability, groundedness, reasoning          | Joint-EM, Joint-F1, Answerability uncertainty score | Validates question is answerable from context.          | Conflates QG failure with comprehension failure.        |
| Retrieval Ranking [59], [165]             | Automatic | Relevance of retrieved context/passages         | AUC-ROC, NDCG, MRR, P@k                             | Measures effectiveness of the underlying IR system.     | Evaluates retrieval, not final MCQs quality.            |
| Indistinguishability Test [2]             | Human     | Perceived human-likeness of questions           | Binary (Human/Machine), Likert scale                | Assesses naturalness and fluency of output.             | Highly subjective and perception-based.                 |
| Internal Classifier Acc. [3], [8]         | Automatic | Efficacy of pipeline components (e.g., filters) | Precision, Recall, Accuracy                         | Validates specific stages in the QG pipeline.           | Dependent on the classifier's training data.            |
| Affective State Assess. [9], [10]         | Hybrid    | Learner confusion/confidence via behavior       | Correctness, time-per-Q, option changes             | Captures behavioral signals beyond accuracy.            | Requires specialized e-learning data collection.        |

of IT, finance, and healthcare, where MCQs are a standard assessment tool [83]. Automated systems can streamline the creation of relevant and challenging items. For instance, the AGenT Zero system uses zero-shot learning to generate skill assessment questions with minimal domain-specific input. This allows the system to support the integrity of certification processes [93].

Similarly, in language learning domain, it is a common practice to evaluate students in multiple aspects, such as grammar, vocabulary, and reading comprehension [72], [143], [145], [159], [174]. MCQs are frequently used as a primary question format which supports the idea of language learning using assessments. Automated MCQs generation systems can immediately provide targeted exercises to meet specific learning goals. Examples include a system that

leverages GPT-3.5 Turbo to generate vocabulary-focused questions [153], and another that creates coherent quizzes from Turkish educational texts, demonstrating adaptability across languages [96].

### C. ADAPTIVE LEARNING SYSTEMS

At the beginning, learning platforms were static in nature, which led toward repetition of questions making it easy for a student to pass the exam in multiple attempts. Adaptive learning platforms emerged as a groundbreaking solution to create dynamic and adaptive questions based on students' past performance [48], [88], [174]. These systems make use of the capabilities of automated MCQs generation systems to alter the parameters of assessments as a means to add

variations. Recently, researchers put forward a streamlined cloze test framework that dynamically adjusts the difficulty of each question and generate questions according to learner proficiency [88], [174]. By continuously monitoring performance, these systems adapt in real time to ensure that learners remain appropriately challenged, promoting individualized pacing and more effective learning.

## X. DISCUSSION AND FUTURE DIRECTIONS

Over time, automated MCQs generation has developed progressively by utilizing various techniques introduced by researchers. Tasks that previously required extensive manual work can now be accomplished with improved efficiency and on a much larger scale. Recent advancement in generative AI has boosted the development of these systems by taking advantage of the competencies of state-of-the-art LLMs. Modern LLMs-based systems are capable of producing grammatically correct and contextually relevant questions [13], [77], [149], [181]. Despite the progress achieved so far, there is still room for improvement in areas that call for closer examination, particularly when it comes to maintaining educational depth, ensuring consistency, and addressing ethical concerns. The following discussion considers these issues and explores directions for future improvement.

### A. PEDAGOGICAL QUALITY AND COGNITIVE DEPTH

While LLMs have greatly improved the fluency and readability of generated question stems [18], [149], they still struggle to test genuine understanding. The generated questions largely focus on recall and do not capture the technical aspects of learning that support reasoning and problem-solving competencies [186]. Besides, factual inaccuracies remain a common challenge for researchers while generating questions for technical subjects where precision is crucial [2], [10], [18], [49], [141], [181].

Improving factual reliability and ensuring that questions align with clear learning objectives should therefore be a central goal. One promising direction is to combine LLMs with external knowledge bases or lightweight fact-checking modules to minimize such errors [13], [26]. At the same time, enhancing the ability of NLP models to handle complex ideas and multi-step reasoning is equally important. Doing so would help generate questions that reflect a deeper, more conceptual level of understanding [4], [6].

### B. CHALLENGE OF DISTRACTOR GENERATION

Designing meaningful distractors remains a difficult task. Although LLMs can generate grammatically sound options, they often miss the subtle misconceptions that learners commonly have [16], [18], [19]. One possible way forward is to involve teachers directly in the process, allowing models to learn from examples of real student mistakes [1], [16]. Future research might also focus on improved ranking or selection mechanisms that identify distractors that are not only plausible but also pedagogically useful [6].

### C. STANDARDIZED EVALUATION AND BENCHMARKING

A consistent evaluation framework for automatically generated MCQs is still missing [90], [148]. Current evaluation relies either on automatic text-based metrics like ROUGE, which do not reflect learning value, or on human judgments, which are subjective and time-consuming. There is a clear need for shared benchmark datasets and transparent evaluation protocols [1]. Such frameworks should assess not only textual similarity but also the question's difficulty, cognitive level, and educational relevance [2], [4], [13], [46], [91]. Establishing reporting standards would also make it easier to compare findings and track real progress across studies.

### D. ETHICAL CONSIDERATIONS AND MITIGATING BIAS

Given the fact that large language models (LLMs) are trained on large amounts of web-based text data, they are sometimes prone to reproduce social or cultural biases [186]. Such biases may lead to content that is misleading or inequitable, which is a particular problem in the educational domain. Inadequately constructed distractors can also confuse learners or distort the results of the assessment. As such, to address these concerns, it is necessary to have transparent auditing procedures and strong strategies to mitigate bias [10], [176]. Establishing clear ethical principles for deploying AI in educational settings will help ensure fairness, accountability, and trust.

In order to illustrate how these ethical issues play out in practice, one might look at a few cases. In standardized medical licensing examinations, case vignettes developed using LLMs have been noted to have over-representation of certain demographic characteristics and under-representation of others, which may be prejudicial towards certain groups of students during assessment [10], [176]. On another front, educational platforms that accumulate student response data to increase the efficiency of question generators must work through data protection laws including the Family Educational Rights and Privacy Act (FERPA) and General Data Protection Regulation (GDPR) and raise important questions about consent, data retention, and limitation of use.

Furthermore, there is the problem of academic integrity: the availability of practice questions generated by LLM-based generators will become so widespread that students can create similar questions to the real ones in the examination, undermining the validity and security of high-stakes examinations. Empirical evidence further suggests that even though a large proportion of LLM-generated multiple-choice questions are explicitly prompted for higher-order thinking questions consistent with Bloom's Taxonomy, a large proportion of LLM-generated questions are for lower levels of cognition (knowledge and comprehension) rather than analysis or evaluation [175], [186]. These observations serve to highlight the need for rigorous systems for reviewing the use of such tools before deploying them into actual educational settings. These examples highlight the need for stringent validation procedures and human oversight before

LLM-generated assessments can be widely implemented in real educational contexts.

#### E. HUMAN-AI COLLABORATION

Even with the growing level of automation, the knowledge of educators still plays an indispensable role [46], [91], [181]. AI tools should be conceived as assistance systems instead of replacement systems. Human supervision remains crucial for ensuring accuracy, clarity, and pedagogical validity [49]. Future research could thus concentrate on creating platforms with interactive features in supporting teachers to refine and validate AI-generated content [1] in order to combine human insight and computational efficiency.

#### F. CRITICAL GAPS IN LLM-BASED METHODS

While the preceding sections have characterized general challenges, it is necessary to consider critically the limitations of specific approaches based on LLMs that make the present ones different from the previous methods. First, the topic of factual reliability stands out because in opposition to rule-based systems which manage to generate content only from verified resources, LLMs are usually inclined to present plausible statements but erroneous factually, which is especially harmful in areas such as medicine, law, and engineering, where accuracy is non-negotiable [10], [49], [141]. Second, in terms of creating distractors, LLMs will tend to choose options based on surface-level word associations and not based on genuine learner misconceptions, whereas the classical approaches, which use ontologies or learner error databases, can provide more pedagogically meaningful alternatives [16], [19]. Third, difficulty control is unreliable even with explicit prompting there is unpredictable variance in the cognitive level of the items generated, which makes it difficult to create balanced assessments [88], [175]. Fourth, while rule-based and ontology-based systems have transparency in question generation, LLMs are opaque and it is hard for educators to understand the reasoning behind an individual question or systematically improve the output.

Finally, there is a disconnect between current evaluation metrics and pedagogical goals. Automatic evaluation metrics like BLEU and ROUGE evaluate textual similarity but not the effectiveness of instruction, meaning it is possible for a system to achieve a high score on evaluation benchmarks while scoring low on teaching effectiveness [90], [148]. Acknowledging these gaps is essential in helping to guide future research efforts towards creating solutions that strike a balance between the generative abilities of LLMs and the reliability and precision of previous methodologies. It is important to recognize these gaps to inform future research and development, aiming to combine the generative capabilities of LLMs with the reliability and precision of past methodologies.

#### G. EMERGING RESEARCH FRONTIERS

Looking ahead, there are several directions worth exploring. One is to design systems that perform well across

multiple subjects and educational levels without needing heavy domain-specific data [14], [23], [96], [102]. Another is adaptive learning, where the system adjusts question difficulty to match a learner's progress [5], [6], [8]. Work on prompt design for complex STEM disciplines is also essential [17], [18]. Finally, instead of generating isolated questions, researchers should aim to create cohesive assessments or multi-step problems that better reflect how real understanding develops [13].

#### XI. CONCLUSION

The field of automated MCQs generation has evolved substantially over the years by taking advantage of state-of-the-art research technologies. In the past, these systems relied on fixed, rule-based templates, but recent advancement in AI and the availability of strong LLMs have totally changed the landscape substantially. They are capable of generating high quality text from simple prompting techniques and are able to produce questions that sound more natural looking and reflect context with improved accuracy. In this survey, we explored how the field has evolved from basic template-matching techniques, outlined a general framework, and discussed the main datasets and evaluation practices that have guided current research.

Despite these improvement particularly in question generation, there are a number of key challenges that still remain in this domain. While LLMs can create fluent and contextually relevant questions, they frequently fall short in capturing true educational depth or aligning closely with specific learning goals. Some recent studies have shown that many of the questions generated by these systems have mainly focused on simple recall rather than deeper reasoning or critical thinking. Another persistent issue is generating multiple options designed to distract test takers so that these options feel convincing and reflect genuine student misconceptions.

In order to improve this field, it is necessary to address these existing challenges. Researchers should focus their future work on improving domain-specific adaptability and developing more effective techniques for distractor generation. Similarly, consistent and reliable evaluation standards are equally important for assessing not only language quality but also educational value. Overall, the goal should be to move beyond simple automation and towards systems that genuinely assist teachers and learners. By combining the strengths of AI with educational insight, we can work towards assessments that are not only efficient to create but also meaningful and sound in how they measure learning.

#### ACKNOWLEDGMENT

The authors are thankful to the Deanship of Graduate Studies and Scientific Research at the University of Bisha for supporting this work through the Fast-Track Research Support Program. Additionally, they acknowledge the assistance of AI language tools, including Gemini and ChatGPT, which were used to help refine sentence structure and improve

grammar throughout the manuscript. All intellectual contributions, analysis, and conclusions remain solely those of the authors.

## LIST OF ABBREVIATIONS

|         |                                                                               |
|---------|-------------------------------------------------------------------------------|
| AI      | Artificial Intelligence.                                                      |
| AQG     | Automatic question generation.                                                |
| BART    | Bidirectional and Auto-Regressive Transformers.                               |
| BERT    | Bidirectional Encoder Representations from Transformers.                      |
| BLEU    | Bilingual Evaluation Understudy.                                              |
| CAT     | Computerized Adaptive Test.                                                   |
| CoT     | Chain-of-Thought.                                                             |
| CTT     | Classical Test Theory.                                                        |
| DG      | Distractor Generation.                                                        |
| DL      | Deep Learning.                                                                |
| GPT     | Generative Pre-trained Transformer.                                           |
| GRE     | Graduate Record Examination.                                                  |
| ID      | Item Discrimination.                                                          |
| IDF     | Inverse Document Frequency.                                                   |
| IRT     | Item Response Theory.                                                         |
| LLMs    | Large Language Models.                                                        |
| LSTM    | Long Short Term Memory.                                                       |
| MCQs    | Multiple Choice Questions.                                                    |
| ML      | Machine Learning.                                                             |
| MOOCs   | Massive Open Online Courses.                                                  |
| NBME    | National Board of Medical Examiners.                                          |
| NER     | Named Entity Recognition.                                                     |
| NLP     | Natural Language Processing.                                                  |
| OWL     | Web Ontology Language.                                                        |
| PaLM    | Pathways Language Model.                                                      |
| POS     | Part-of-speech.                                                               |
| QG      | Question Generation.                                                          |
| RAD     | Retrieval-based Accuracy Differential.                                        |
| RAG     | Retrieval-Augmented Generation.                                               |
| RNNs    | Recurrent Neural Networks.                                                    |
| ROUGE   | Recall-Oriented Understudy for Gisting Evaluation.                            |
| ROUGE-L | Recall-Oriented Understudy for Gisting Evaluation-Longest Common Subsequence. |
| SAQs    | Short-Answer Questions.                                                       |
| SAT     | Scholastic Assessment Test.                                                   |
| SRL     | Semantic Role Labeling.                                                       |
| SVM     | Support Vector Machine.                                                       |
| SVO     | Subject-Verb-Object.                                                          |
| T5      | Text-to-Text Transfer Transformer.                                            |
| TF-IDF  | Term Frequency-Inverse Document Frequency.                                    |
| TOT     | Tree-of-Thought.                                                              |
| USMLE   | United States Medical Licensing Examination.                                  |
| VSAQs   | Very Short-Answer Questions.                                                  |
| WSD     | Word Sense Disambiguation.                                                    |

## REFERENCES

- [1] D. R. Ch and S. K. Saha, "Automatic multiple choice question generation from text: A survey," *IEEE Trans. Learn. Technol.*, vol. 13, no. 1, pp. 14–25, Jan. 2020.
- [2] S. A. Shuraiqi, A. A. Abdulsalam, K. Masters, H. Zidoum, and A. AlZaabi, "Automatic generation of medical case-based multiple-choice questions (MCQs): A review of methodologies, applications, evaluation, and future directions," *Big Data Cognit. Comput.*, vol. 8, no. 10, p. 139, Oct. 2024.
- [3] M. A. Calijorne Soares and F. S. Parreiras, "A literature review on question answering techniques, paradigms and systems," *J. King Saud Univ. Comput. Inf. Sci.*, vol. 32, no. 6, pp. 635–646, Jul. 2020.
- [4] A. C. Butler, "Multiple-choice testing in education: Are the best practices for assessment also good for learning?" *J. Appl. Res. Memory Cognition*, vol. 7, no. 3, pp. 323–331, Sep. 2018.
- [5] P. Thotad, S. Kallur, and S. Amminabhavi, "Automatic question generator using natural language processing," *J. Pharmaceutical Negative Results*, vol. 3, no. 10, pp. 2759–2764, 2022, doi: [10.47750/pnr.2022.13.S10.330](https://doi.org/10.47750/pnr.2022.13.S10.330).
- [6] A. Singh, C. Brooks, Y. Lin, and W. Li, "What's in it for the learners? Evidence from a randomized field experiment on learnersourcing questions in a MOOC," in *Proc. 8th ACM Conf. Learn. @ Scale*, Jun. 2021, pp. 221–233.
- [7] R. Rodríguez-Torrealba, E. Garcia-Lopez, and A. Garcia-Cabot, "End-to-end generation of multiple-choice questions using text-to-text transfer transformer models," *Expert Syst. Appl.*, vol. 208, Dec. 2022, Art. no. 118258.
- [8] V. R. Madri and S. Meruva, "A comprehensive review on MCQ generation from text," *Multimedia Tools Appl.*, vol. 82, no. 25, pp. 39415–39434, Oct. 2023.
- [9] G. Kurdi, J. Leo, B. Parsia, U. Sattler, and S. Al-Emari, "A systematic review of automatic question generation for educational purposes," *Int. J. Artif. Intell. Educ.*, vol. 30, no. 1, pp. 121–204, Mar. 2020.
- [10] Y. Artsi, V. Sorin, E. Konen, B. S. Glicksberg, G. Nadkarni, and E. Klang, "Large language models for generating medical examinations: Systematic review," *BMC Med. Educ.*, vol. 24, no. 1, p. 354, Mar. 2024.
- [11] N. P. Mistry, H. Saeed, S. Rafique, T. Le, H. Obaid, and S. J. Adams, "Large language models as tools to generate radiology board-style multiple-choice questions," *Academic Radiol.*, vol. 31, no. 9, pp. 3872–3878, Sep. 2024.
- [12] Z. Jiang and S. Feng, "UsmleGPT: An AI application for developing MCQs via multi-agent system," *Softw. Impacts*, vol. 23, Mar. 2025, Art. no. 100742.
- [13] J. Doughty, Z. Wan, A. Bompelli, J. Qayum, T. Wang, J. Zhang, Y. Zheng, A. Doyle, P. Sridhar, A. Agarwal, C. Bogart, E. Keylor, C. Kultur, J. Savelka, and M. Sakr, "A comparative study of AI-generated (GPT-4) and human-crafted MCQs in programming education," in *Proc. 26th Australas. Comput. Educ. Conf.*, Jan. 2024, pp. 114–123.
- [14] A. M. Olney, "Generating multiple choice questions from a textbook: LLMS match human performance on most metrics," in *Proc. LLM@AIED*, 2023, pp. 111–128.
- [15] J. Uhm, M. M. v. Haelst, and P. Jansen, "AI-powered test question generation in medical education: The DailyMed approach," *medRxiv*, pp. 11–2024, 2024. [Online]. Available: <https://doi.org/10.1101/2024.11.11.24317087>
- [16] J. Lee, D. Smith, S. Woodhead, and A. Lan, "Math multiple choice question generation via human-large language model collaboration," 2024, *arXiv:2405.00864*.
- [17] R. Gala, R. Vijayaraghavan, V. Nikam, and A. Kiwelekar, "Real-time cognitive evaluation of online learners through automatically generated questions," in *Proc. IEEE 20th Int. Conf. Cognit. Informat. Cognit. Comput. (ICCI\*CC)*, Oct. 2021, pp. 53–58.
- [18] M. M. Rao, N. Bharath, R. Reddy, S. Raviteja, and V. Ankitha, "Review paper on automatic Q&A generator using LLM (large language model)," *Tech. Rep.*, 2024.
- [19] A. Tran, K. Angelikas, E. Rama, C. Okechukwu, D. H. Smith, and S. MacNeil, "Generating multiple choice questions for computing courses using large language models," in *Proc. IEEE Frontiers Educ. Conf. (FIE)*, Oct. 2023, pp. 1–8.
- [20] S. Luo, Y. Tang, M. Jiang, K. Feng, Q. Zhang, and K. Ding, "Generating multiple choice questions from scientific literature via large language models," in *Proc. IEEE Int. Conf. Knowl. Graph (ICKG)*, Dec. 2024, pp. 219–226.



- [21] S. Kumar Jauhar, P. Turney, and E. Hovy, "TabMCQ: A dataset of general knowledge tables and multiple-choice questions," 2016, *arXiv:1602.03960*.
- [22] C. Clark, K. Lee, M.-W. Chang, T. Kwiatkowski, M. Collins, and K. Toutanova, "BoolQ: Exploring the surprising difficulty of natural Yes/No questions," 2019, *arXiv:1905.10044*.
- [23] A. Pal, L. K. Umapathi, and M. Sankarasubbu, "MedMCQA: A large-scale multi-subject multi-choice dataset for medical domain question answering," in *Proc. Conf. Health, Inference, Learn.*, 2022, pp. 248–260.
- [24] A. Hadifar, S. K. Bitew, J. Deleu, C. Devellder, and T. Demeester, "EduQG: A multi-format multiple-choice dataset for the educational domain," *IEEE Access*, vol. 11, pp. 20885–20896, 2023.
- [25] D. Kalpakchi and J. Boye, "Quasi: A synthetic question-answering dataset in Swedish using GPT-3 and zero-shot learning," in *Proc. 24th Nordic Conf. Comput. Linguistics (NoDaLiDa)*, 2023, pp. 477–491.
- [26] L. Huang, R. Le Bras, B. Bhagavatula, and Y. Choi, "Cosmos QA: Machine reading comprehension with contextual commonsense reasoning," 2019, *arXiv:1909.00277*.
- [27] B. Dhingra, K. Mazaitis, and W. W. Cohen, "Quasar: Datasets for question answering by search and reading," 2017, *arXiv:1707.03904*.
- [28] M. Richardson, C. J. C. Burges, and E. Renshaw, "MCTest: A challenge dataset for the open-domain machine comprehension of text," in *Proc. Conf. Empirical Methods Natural Lang. Process.*, 2013, pp. 193–203.
- [29] J. Welbl, N. F. Liu, and M. Gardner, "Crowdsourcing multiple choice science questions," 2017, *arXiv:1707.06209*.
- [30] G. Lai, Q. Xie, H. Liu, Y. Yang, and E. Hovy, "RACE: Large-scale ReAding comprehension dataset from examinations," 2017, *arXiv:1704.04683*.
- [31] G. M. Ruch, *The Improvement of the Written Examination*. Northbrook, IL, USA: Scott Foresman, 1924.
- [32] G. Chen, J. Yang, C. Hauff, and G.-J. Houben, "LearningQ: A large-scale dataset for educational question generation," in *Proc. Int. AAAI Conf. Web Social Media*, 2018, vol. 12, no. 1, pp. 481–490.
- [33] A. D. Leikes, V. Q. Tran, and C. Yu, "Quiz-style question generation for news stories," in *Proc. Web Conf.*, Apr. 2021, pp. 2501–2511.
- [34] E. Sumita, F. Sugaya, and S. Yamamoto, "Measuring non-native speakers' proficiency of English by using a test with automatically-generated fill-in-the-blank questions," in *Proc. 2nd workshop Building Educ. Appl. Using NLP EdAppsNLP*, 2005, pp. 61–68.
- [35] M. Al-Yahya, "OntoQue: A question generation engine for educational assesment based on domain ontologies," in *Proc. IEEE 11th Int. Conf. Adv. Learn. Technol.*, Jul. 2011, pp. 393–395.
- [36] T. Alsubait, B. Parsia, and U. Sattler, "Automatic generation of analogy questions for student assessment: An ontology-based approach," *Res. Learn. Technol.*, vol. 20, no. sup1, p. 19198, Aug. 2012.
- [37] T. Alsubait, B. Parsia, and U. Sattler, "Generating multiple choice questions from ontologies: Lessons learnt," in *Proc. OWLED*, 2014, pp. 73–84.
- [38] T. Alsubait, B. Parsia, and U. Sattler, "Ontology-based multiple choice question generation," *KI-Künstliche Intelligenz*, vol. 30, pp. 183–188, Jun. 2016.
- [39] M. J. Gierl, H. Lai, and S. R. Turner, "Using automatic item generation to create multiple-choice test items," *Med. Educ.*, vol. 46, no. 8, pp. 757–765, Aug. 2012.
- [40] M. Majumder and S. K. Saha, "A system for generating multiple choice questions: With a novel approach for sentence selection," in *Proc. 2nd Workshop Natural Lang. Process. Techn. Educ. Appl.*, 2015, pp. 64–72.
- [41] N. I. Priyadarsini, S. Yenumula, and K. V. Reddy, "MCQ generation using NLP techniques," in *Proc. ITM Web Conf.*, vol. 74, 2025, p. 01016, doi: 10.1051/itmconf/20257401016.
- [42] W. Zheng, S. Lu, Z. Cai, R. Wang, L. Wang, and L. Yin, "PAL-BERT: An improved question answering model," *Comput. Model. Eng. Sci.*, vol. 139, no. 3, pp. 2729–2745, 2024. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S1526149224001073>
- [43] A. Azzi, F. Erdős, R. Németh, V. Varadarajan, and S. Afrifa, "Comparative analysis of NLP-driven MCQ generators from text sources," *Comput. Educ., Artif. Intell.*, vol. 9, Dec. 2025, Art. no. 100440. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S2666920X25000803>
- [44] D. R. Ch and S. K. Saha, "Generation of multiple-choice questions from textbook contents of school-level subjects," *IEEE Trans. Learn. Technol.*, vol. 16, no. 1, pp. 40–52, Feb. 2023.
- [45] B. Das, M. Majumder, S. Phadikar, and A. A. Sekh, "Multiple-choice question generation with auto-generated distractors for computer-assisted educational assessment," *Multimedia Tools Appl.*, vol. 80, nos. 21–23, pp. 31907–31925, Sep. 2021.
- [46] V. Nikolovski, D. Trajanov, and I. Chorbev, "Advancing AI in higher education: A comparative study of large language model-based agents for exam question generation, improvement, and evaluation," *Algorithms*, vol. 18, no. 3, p. 144, Mar. 2025.
- [47] C. N. Hang, C. Wei Tan, and P.-D. Yu, "MCQGen: A large language model-driven MCQ generator for personalized learning," *IEEE Access*, vol. 12, pp. 102261–102273, 2024.
- [48] B.-C. Kuo, F. T. Chang, and Z.-E. Bai, "Leveraging LLMs for adaptive testing and learning in Taiwan adaptive learning platform (TALP)," in *Proc. LLM@ AIED*, 2023, pp. 101–110.
- [49] G. Biancini, A. Ferrato, and C. Limongelli, "Multiple-choice question generation using large language models: Methodology and educator insights," in *Proc. 32nd ACM Conf. User Model., Adaptation Personalization*, Jun. 2024, pp. 584–590, doi: 10.1145/3631700.3665233.
- [50] X. Lu, S. Fan, J. Houghton, L. Wang, and X. Wang, "ReadingQuizMaker: A human-NLP collaborative system that supports instructors to design high-quality reading quiz questions," in *Proc. CHI Conf. Human Factors Comput. Syst.*, 2023, pp. 1–18.
- [51] Y. S. Kiyak and A. A. Kononowicz, "Using a hybrid of artificial intelligence and template-based method in automatic item generation to create multiple-choice questions in medical education: Hybrid AIG," *medRxiv*, vol. 9, p. 7, Apr. 2024.
- [52] B. Zhao, T. Cheng, Y. Zhang, Y. Cheng, R. Feng, and X. Zhang, "CT 2 C-QA: Multimodal question answering over Chinese text, table and chart," in *Proc. 32nd ACM Int. Conf. Multimedia*, Oct. 2024, pp. 3897–3906.
- [53] R. Li, Y. Wang, C. Zheng, Y.-H. Jiang, and B. Jiang, "Generating contextualized mathematics multiple-choice questions utilizing large language models," in *Proc. Int. Conf. Artif. Intell. Educ.*, 2024, pp. 494–501.
- [54] A. Radford, "Improving language understanding by generative pre-training," 2018. [Online]. Available: <https://gwern.net/doc/www/s3-us-west-2.amazonaws.com/d73fdc5ffa8627bce44dcda2fc012da638ffb158.pdf>
- [55] A. Talmor, J. Herzig, N. Lourie, and J. Berant, "CommonsenseQA: A question answering challenge targeting commonsense knowledge," 2018, *arXiv:1811.00937*.
- [56] A. Hoshino and H. Nakagawa, "WebExperimenter for multiple-choice question generation," in *Proc. HLT/EMNLP Interact. Demonstrations*, 2005, pp. 18–19.
- [57] A. P. Kumar, A. Nayak, M. S. K. Chaitanya, and K. Ghosh, "A novel framework for the generation of multiple choice question stems using semantic and machine-learning techniques," *Int. J. Artif. Intell. Educ.*, vol. 34, no. 2, pp. 332–375, Jun. 2024.
- [58] G. Team et al., "Gemini: A family of highly capable multimodal models," 2023, *arXiv:2312.11805*.
- [59] Y. Bai, A. Colas, and D. Z. Wang, "MythQA: Query-based large-scale check-worthy claim detection through multi-answer open-domain question answering," in *Proc. 46th Int. ACM SIGIR Conf. Res. Develop. Inf. Retr.*, Jul. 2023, pp. 3017–3026.
- [60] P. Rajpurkar, J. Zhang, K. Lopyrev, and P. Liang, "SQuAD: 100,000+ questions for machine comprehension of text," 2016, *arXiv:1606.05250*.
- [61] T. Kwiatkowski, J. Palomaki, O. Redfield, M. Collins, A. Parikh, C. Alberti, D. Epstein, I. Polosukhin, J. Devlin, K. Lee, K. Toutanova, L. Jones, M. Kelcey, M.-W. Chang, A. M. Dai, J. Uszkoreit, Q. Le, and S. Petrov, "Natural questions: A benchmark for question answering research," *Trans. Assoc. Comput. Linguistics*, vol. 7, pp. 453–466, Nov. 2019.
- [62] M. Joshi, E. Choi, D. S. Weld, and L. Zettlemoyer, "TriviaQA: A large scale distant supervised challenge dataset for reading comprehension," 2017, *arXiv:1705.03551*.
- [63] P. Bajaj, D. Campos, N. Craswell, L. Deng, J. Gao, X. Liu, R. Majumder, A. McNamara, B. Mitra, T. Nguyen, M. Rosenberg, X. Song, A. Stoica, S. Tiwary, and T. Wang, "MS MARCO: A human generated machine reading comprehension dataset," 2016, *arXiv:1611.09268*.
- [64] Z. Yang, P. Qi, S. Zhang, Y. Bengio, W. W. Cohen, R. Salakhutdinov, and C. D. Manning, "HotpotQA: A dataset for diverse, explainable multi-hop question answering," 2018, *arXiv:1809.09600*.



- [65] D. Coniam, "A preliminary inquiry into using corpus word frequency data in the automatic generation of English language cloze tests," *CALICO J.*, vol. 14, nos. 2–4, pp. 15–33, Jan. 1996.
- [66] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin, "Attention is all you need," in *Proc. Adv. Neural Inf. Process. Syst.*, vol. 30, 2025, pp. 5998–6008.
- [67] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, "BERT: Pre-training of deep bidirectional transformers for language understanding," 2018, *arXiv:1810.04805*.
- [68] R. Ashburn, "An experiment in the essay-type question," *J. Experim. Educ.*, vol. 7, no. 1, pp. 1–3, Sep. 1938.
- [69] B. R. Rush, D. C. Rankin, and B. J. White, "The impact of item-writing flaws and item complexity on examination item difficulty and discrimination value," *BMC Med. Educ.*, vol. 16, no. 1, pp. 1–10, Dec. 2016.
- [70] M. Flor and B. Riordan, "A semantic role-based approach to open-domain automatic question generation," in *Proc. 13th Workshop Innov. Use NLP Building Educ. Appl.*, 2018, pp. 254–263.
- [71] O. Keklik, T. Tuglular, and S. Tekir, "Rule-based automatic question generation using semantic role labeling," *IEICE Trans. Inf. Syst.*, vol. E102.D, no. 7, pp. 1362–1373, 2019.
- [72] J. Lee and S. Seneff, "Automatic generation of cloze items for prepositions," in *Proc. Interspeech*, Aug. 2007, pp. 2173–2176.
- [73] A. Papasalouros, K. Kanaris, and K. Kotis, "Automatic generation of multiple choice questions from domain ontologies," *e-Learning*, vol. 16, no. 1, pp. 427–434, 2008.
- [74] C.-Y. Chen, H.-C. Liou, and J. S. Chang, "FAST: An automatic generation system for grammar tests," in *Proc. COLING/ACL Interact. Presentation Sessions*, 2006, pp. 1–4.
- [75] M. Liu, V. Rus, and L. Liu, "Automatic Chinese multiple choice question generation using mixed similarity strategy," *IEEE Trans. Learn. Technol.*, vol. 11, no. 2, pp. 193–202, Apr. 2018.
- [76] G. Le Berre, C. Cerisara, P. Langlais, and G. Lapalme, "Unsupervised multiple-choice question generation for out-of-domain Q&A fine-tuning," in *Proc. 60th Annu. Meeting Assoc. Comput. Linguistics*, 2022, pp. 732–738.
- [77] R. Mitkov and L. A. Ha, "Computer-aided generation of multiple-choice tests," in *Proc. HLT-NAACL workshop Building Educ. Appl. Using Natural Lang. Process.*, vol. 2, 2003, pp. 17–22.
- [78] A. Hoshino and H. Nakagawa, "A real-time multiple-choice question generation for language testing: A preliminary study," in *Proc. 2nd workshop Building Educ. Appl. Using NLP EdAppsNLP*, 2005, pp. 17–20.
- [79] T. Goto, T. Kojiri, T. Watanabe, T. Iwata, and T. Yamada, "Automatic generation system of multiple-choice cloze questions and its evaluation," *Knowl. Manage. E-Learning*, vol. 2, no. 3, pp. 210–224, 2010.
- [80] M. Al-Yahya, "Ontology-based multiple choice question generation," *Sci. World J.*, vol. 2014, no. 1, 2014, Art. no. 274949.
- [81] J. Leo, G. Kurdi, N. Matentzoglou, B. Parsia, U. Sattler, S. Forge, G. Donato, and W. Dowling, "Ontology-based generation of medical, multi-term MCQs," *Int. J. Artif. Intell. Educ.*, vol. 29, no. 2, pp. 145–188, May 2019.
- [82] I. E. Fattoh, "Automatic multiple choice question generation system for semantic attributes using string similarity measures," *Comput. Eng. Intell. Syst.*, vol. 5, no. 8, pp. 66–73, 2014.
- [83] F. Maheen, M. Asif, H. Ahmad, S. Ahmad, F. Alturise, O. Asiry, and Y. Y. Ghadi, "Automatic computer science domain multiple-choice questions generation based on informative sentences," *PeerJ Comput. Sci.*, vol. 8, p. e1010, Aug. 2022.
- [84] J. Hill and R. Simha, "Automatic generation of context-based fill-in-the-blank exercises using co-occurrence likelihoods and Google N-grams," in *Proc. 11th Workshop Innov. Use NLP Building Educ. Appl.*, 2016, pp. 23–30.
- [85] N. Meißner, S. Speth, J. Kieslinger, and S. Becker, "Evalquiz-LLM-based automated generation of self-assessment quizzes in software engineering education," "Evalquiz-LLM-based automated generation of self-assessment quizzes in software engineering education," in *Software Engineering Im Unterricht Der Hochschulen*. USA: Gesellschaft für Informatik eV, 2024, pp. 53–64.
- [86] Q. Zhu, X. Zhang, and J. Luo, "Biologically inspired design concept generation using generative pre-trained transformers," *J. Mech. Design*, vol. 145, no. 4, pp. 4–17, Apr. 2023.
- [87] C. Kwankajornkiet, A. Suchato, and P. Punyabukkana, "Automatic multiple-choice question generation from Thai text," in *Proc. 13th Int. Joint Conf. Comput. Sci. Softw. Eng. (JCSSE)*, Jul. 2016, pp. 1–6.
- [88] C.-H. Shen, Y.-L. Kuo, and Y.-C. Fan, "Personalized cloze test generation with large language models: Streamlining MCQ development and enhancing adaptive learning," in *Proc. 17th Int. Natural Lang. Gener. Conf.*, 2024, pp. 314–319.
- [89] D. Kalpakchi and J. Boye, "Generation and evaluation of multiple-choice reading comprehension questions for Swedish," *Northern Eur. J. Lang. Technol.*, vol. 10, no. 1, pp. 86–105, Nov. 2024.
- [90] S. S. Mucciaccia, T. M. Paixão, F. W. Mutz, C. S. Badue, A. F. de Souza, and T. Oliveira-Santos, "Automatic multiple-choice question generation and evaluation systems based on LLM: A study case with university resolutions," in *Proc. 31st Int. Conf. Comput. Linguistics*, 2025, pp. 2246–2260.
- [91] S. Sawamura, K. Kohiyama, T. Takenaka, T. Sera, T. Inoue, and T. Nagai, "Potential of large language models in generating multiple-choice questions for the Japanese national licensure examination for physical therapists," *Cureus*, vol. 17, no. 2, Feb. 2025.
- [92] Z. Yao, A. Parashar, H. Zhou, W. Seok Jang, F. Ouyang, Z. Yang, and H. Yu, "MCQG-SRefine: Multiple choice question generation and evaluation with iterative self-critique, correction, and comparison feedback," 2024, *arXiv:2410.13191*.
- [93] E. Li, J. Su, H. Sheng, and L. Wai, "AGeNT zero: Zero-shot automatic multiple-choice question generation for skill assessments," 2020, *arXiv:2012.01186*.
- [94] V. Raina and M. Gales, "Multiple-choice question generation: Towards an automated assessment framework," 2022, *arXiv:2209.11830*.
- [95] S. Maity, A. Deroy, and S. Sarkar, "A novel multi-stage prompting approach for language agnostic MCQ generation using GPT," in *Proc. Eur. Conf. Inf. Retr.*, 2024, pp. 268–277.
- [96] K. Zeinalipour, Y. G. Keptig, M. Maggini, and M. Gori, "Automating Turkish educational quiz generation using large language models," 2024, *arXiv:2406.03397*.
- [97] D. De-Fitero-Dominguez, A. Garcia-Cabot, and E. Garcia-Lopez, "Automated multiple-choice question generation in Spanish using neural language models," *Neural Comput. Appl.*, vol. 36, no. 29, pp. 18223–18235, Oct. 2024.
- [98] R. Mitkov, L. A. Ha, H. Maslak, T. Ranasinghe, and V. Sosoni, "Automatic generation of multiple-choice test items from paragraphs using deep neural networks," in *Advancing Natural Language Processing in Educational Assessment*. Evanston, IL, USA: Routledge, 2023, pp. 77–89.
- [99] Y. Kido, H. Yamada, T. Tokunaga, R. Kimura, Y. Miura, Y. Sakyo, and N. Hayashi, "Automatic question generation for the Japanese national nursing examination using large language models," in *Proc. 16th Int. Conf. Comput. Supported Educ.*, 2024, pp. 821–829.
- [100] G. Kumar, R. Banchs, and L. F. D'Haro, "RevUP: Automatic gap-fill question generation from educational texts," in *Proc. 10th Workshop Innov. Use NLP Building Educ. Appl.*, 2015, pp. 154–161.
- [101] S. Al Shuriaqi, A. Aal Abdulsalam, and K. Masters, "Generation of medical case-based multiple-choice questions," *Int. Med. Educ.*, vol. 3, no. 1, pp. 12–22, Dec. 2023.
- [102] A. Saddish, P. Somaiah, V. Gambhir, and S. J. Nirmala, "Generation of multiple choice questions from Indian educational text," in *Proc. 3rd Asian Conf. Innov. Technol. (ASIANCON)*, Aug. 2023, pp. 1–7.
- [103] A. Santhanavijayan, S. R. Balasundaram, S. H. Narayanan, S. V. Kumar, and V. V. Prasad, "Automatic generation of multiple choice questions for e-assessment," *Int. J. Signal Imag. Syst. Eng.*, vol. 10, nos. 1–2, pp. 54–62, 2017.
- [104] A. S. Bhatia, M. Kirti, and S. K. Saha, "Automatic generation of multiple choice questions using Wikipedia," in *Proc. 5th Int. Conf. Pattern Recognit. Mach. Intell.*, Kolkata, India, USA: Springer, Dec. 2013, pp. 733–738.
- [105] R. Dhanvardini, G. Deepak, and A. Santhanavijayan, "QG-SKI: Question classification and MCQ question generation using sequential knowledge induction," in *Proc. Int. Conf. Hybrid Intell. Syst.*, 2023, pp. 116–126.
- [106] N. Afzal and R. Mitkov, "Automatic generation of multiple choice questions using dependency-based semantic relations," *Soft Comput.*, vol. 18, no. 7, pp. 1269–1281, Jul. 2014.
- [107] W. Yu, Z. Jiang, Y. Dong, and J. Feng, "ReClor: A reading comprehension dataset requiring logical reasoning," 2020, *arXiv:2002.04326*.

- [108] A. Rogers, O. Kovaleva, M. T. Downey, and A. Rumshisky, "Getting closer to AI complete question answering: A set of prerequisite real tasks," in *Proc. AAAI Conf. Artif. Intell.*, 2020, vol. 34, no. 5, pp. 8722–8731.
- [109] K. Sun, D. Yu, J. Chen, D. Yu, Y. Choi, and C. Cardie, "DREAM: A challenge data set and models for dialogue-based reading comprehension," *Trans. Assoc. for Comput. Linguistics*, vol. 7, pp. 217–231, Nov. 2019.
- [110] T. Khot, P. E. Clark, M. Guerquin, P. Jansen, and A. Sabharwal, "QASC: A dataset for question answering via sentence composition," in *Proc. AAAI Conf. Artif. Intell.*, 2020, vol. 34, no. 5, pp. 8082–8090.
- [111] X. Kong, V. Gangal, and E. Hovy, "SCDE: Sentence cloze dataset with high quality distractors from examinations," 2020, *arXiv:2004.12934*.
- [112] Z. Zhang, M. Mita, and M. Komachi, "Cloze quality estimation for language assessment," *J. Natural Lang. Process.*, vol. 31, no. 2, pp. 328–348, 2024.
- [113] Q. Xie, G. Lai, Z. Dai, and E. Hovy, "Large-scale cloze test dataset created by teachers," 2017, *arXiv:1711.03225*.
- [114] S. Ren and K. Q. Zhu, "Knowledge-driven distractor generation for cloze-style multiple choice questions," in *Proc. AAAI Conf. Artif. Intell.*, 2020, vol. 35, no. 5, pp. 4339–4347.
- [115] T. Onishi, H. Wang, M. Bansal, K. Gimpel, and D. McAllester, "Who did what: A large-scale person-centered cloze dataset," 2016, *arXiv:1608.05457*.
- [116] M. Tapaswi, Y. Zhu, R. Stiefelwagen, A. Torralba, R. Urtasun, and S. Fidler, "MovieQA: Understanding stories in movies through question-answering," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2016, pp. 4631–4640.
- [117] A. Kembhavi, M. Seo, D. Schwenk, J. Choi, A. Farhadi, and H. Hajishirzi, "Are you smarter than a sixth grader? Textbook question answering for multimodal machine comprehension," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit.*, Mar. 2017, pp. 5376–5384.
- [118] S. Antol, A. Agrawal, J. Lu, M. Mitchell, D. Batra, C. L. Zitnick, and D. Parikh, "VQA: Visual question answering," in *Proc. IEEE Int. Conf. Comput. Vis.*, May 2015, pp. 2425–2433.
- [119] C. A. Nwafor and I. E. Onyenwe, "An automated multiple-choice question generation using natural language processing techniques," 2021, *arXiv:2103.14757*.
- [120] L. A. Becker, S. Basu, and L. Vanderwende, "Mind the gap: Learning to choose gaps for question generation," in *Proc. Conf. North Amer. Chapter Assoc. Comput. Linguistics: Human Lang. Technol.*, 2012, pp. 742–751.
- [121] R. Zellers, Y. Bisk, R. Schwartz, and Y. Choi, "SWAG: A large-scale adversarial dataset for grounded commonsense inference," 2018, *arXiv:1808.05326*.
- [122] S. Zhang, X. Liu, J. Liu, J. Gao, K. Duh, and B. Van Durme, "ReCoRD: Bridging the gap between human and machine commonsense reading comprehension," 2018, *arXiv:1810.12885*.
- [123] S. Yagcioglu, A. Erdem, E. Erdem, and N. Ikizler-Cinbis, "RecipeQA: A challenge dataset for multimodal comprehension of cooking recipes," 2018, *arXiv:1809.00812*.
- [124] M. Sap, H. Rashkin, D. Chen, R. LeBras, and Y. Choi, "SocialQA: Commonsense reasoning about social interactions," 2019, *arXiv:1904.09728*.
- [125] Y. Yang, W.-T. Yih, and C. Meek, "WikiQA: A challenge dataset for open-domain question answering," in *Proc. Conf. Empirical Methods Natural Lang. Process.*, 2015, pp. 2013–2018.
- [126] A. Trischler, T. Wang, X. Yuan, J. Harris, A. Sordani, P. Bachman, and K. Suleman, "NewsQA: A machine comprehension dataset," 2016, *arXiv:1611.09830*.
- [127] T. Mihaylov, P. Clark, T. Khot, and A. Sabharwal, "Can a suit of armor conduct electricity? A new dataset for open book question answering," 2018, *arXiv:1809.02789*.
- [128] D. Vilares and C. Gómez-Rodríguez, "HEAD-QA: A healthcare dataset for complex reasoning," 2019, *arXiv:1906.04701*.
- [129] T. Kočiský, J. Schwarz, P. Blunsom, C. Dyer, K. M. Hermann, G. Melis, and E. Grefenstette, "The NarrativeQA reading comprehension challenge," *Trans. Assoc. Comput. Linguistics*, vol. 6, pp. 317–328, Dec. 2018.
- [130] M. Majumder and S. K. Saha, "Automatic selection of informative sentences: The sentences that can generate multiple choice questions," *Knowl. Manage. E-Learning*, vol. 6, no. 4, pp. 377–391, 2014.
- [131] I. Aldabe, M. L. d. Lacalle, M. Maritxalar, E. Martinez, and L. Uria, "ArikIturri: An automatic question generator based on corpora and NLP techniques," in *Proc. Intell. Tutoring Systems: 8th Int. Conf., Jhongli, Taiwan, USA: Springer, Jun. 2006*, pp. 584–594.
- [132] E. V. Vinu and S. P. Kumar, "A novel approach to generate MCQs from domain ontology: Considering DL semantics and open-world assumption," *J. Web Semantics*, vol. 34, pp. 40–54, Oct. 2015.
- [133] A. Ben Abacha, J. C. Dos Reis, Y. Mrabet, C. Pruski, and M. Da Silveira, "Towards natural language question generation for the validation of ontologies and mappings," *J. Biomed. Semantics*, vol. 7, no. 1, pp. 1–15, Dec. 2016.
- [134] T. Goto, T. Kojiri, T. Watanabe, T. Iwata, and T. Yamada, "An automatic generation of multiple-choice cloze questions based on statistical learning," in *Proc. 17th Int. Conf. Comput. Educ.*, 2009, pp. 415–422.
- [135] R. Shah, D. Shah, and L. Kurup, "Automatic question generation for intelligent tutoring systems," in *Proc. 2nd Int. Conf. Commun. Syst., Comput. IT Appl. (CSCITA)*, Apr. 2017, pp. 127–132.
- [136] J. C. Brown, G. A. Frishkoff, and M. Eskenazi, "Automatic question generation for vocabulary assessment," in *Proc. Conf. Human Lang. Technol. Empirical Methods Natural Lang. Process. HLT*, R. Mooney, C. Brew, L.-F. Chien, and K. Kirchhoff, Eds., Vancouver, BC, Canada: Association for Computational Linguistics, Oct. 2005, pp. 819–826. [Online]. Available: <https://aclanthology.org/H05-1103/>
- [137] Y. Susanti, R. Iida, and T. Tokunaga, "Automatic generation of English vocabulary tests," in *Proc. 7th Int. Conf. Comput. Supported Educ.*, 2015, pp. 77–87.
- [138] Y.-T. Huang, Y.-M. Tseng, Y. S. Sun, and M. C. Chen, "TEDQuiz: Automatic quiz generation for TED talks video clips to assess listening comprehension," in *Proc. IEEE 14th Int. Conf. Adv. Learn. Technol.*, Jul. 2014, pp. 350–354.
- [139] Y. S. Kiyak, Ö. Coşkun, I. İ. Budakoğlu, and C. Uluoğlu, "ChatGPT for generating multiple-choice questions: Evidence on the use of artificial intelligence in automatic item generation for a rational pharmacotherapy exam," *Eur. J. Clin. Pharmacol.*, vol. 80, no. 5, pp. 729–735, May 2024.
- [140] Y. S. Kiyak, I. İ. Budakoğlu, Ö. Coşkun, and E. Koyun, "The first automatic item generation in Turkish for assessment of clinical reasoning in medical education," *Tıp Eğitimi Dnyası*, vol. 22, no. 66, pp. 72–90, 2023.
- [141] Y. S. Kiyak, "A ChatGPT prompt for writing case-based multiple-choice questions," *Revista Española de Educación Médica*, vol. 4, no. 3, pp. 98–103, Oct. 2023.
- [142] T. Leslie and M. J. Gierl, "Using automatic item generation to create multiple-choice questions for pharmacy assessment," *Amer. J. Pharmaceutical Educ.*, vol. 87, no. 10, Oct. 2023, Art. no. 100081.
- [143] S. Knoop and S. Wilske, "Wordgap-automatic generation of gap-filling vocabulary exercises for mobile learning," in *Proc. 2nd Workshop NLP Comput.-Assisted Lang. Learn.*, 2013, pp. 39–47.
- [144] Y. Sun, H. Chen, and J. Wang, "Multiple-choice question generation for the Chinese language," in *Proc. 14th Int. Joint Conf. Knowl. Discovery, Knowl. Eng. Knowl. Manage.*, 2022, pp. 345–354.
- [145] S. Smith, P. V. S. Avinesh, and A. Kilgarriff, "Gap-fill tests for language learners: Corpus-driven item generation," in *Proc. 8th Int. Conf. Natural Lang. Process.*, India, 2010, pp. 1–6.
- [146] P. P. Jadhav, M. D. Laddha, and M. T. Student, "An automatic gap-fill multiple choices question generator for quizzing," *Int. J. Eng. Sci.*, vol. 7, no. 5, pp. 1–4, 2017.
- [147] P. Shuai, L. Li, S. Liu, and J. Shen, "QDG: A unified model for automatic question-distractor pairs generation," *Appl. Intell.*, vol. 53, no. 7, pp. 8275–8285, Apr. 2023.
- [148] J. Ling and M. Afzaal, "Automatic question-answer pairs generation using pre-trained large language models in higher education," *Comput. Educ., Artif. Intell.*, vol. 6, Jun. 2024, Art. no. 100252.
- [149] K. W. Chan, F. Ali, J. Park, K. S. B. Sham, E. Y. T. Tan, F. W. C. Chong, K. Qian, and G. K. Sze, "Automatic item generation in various STEM subjects using large language model prompting," *Comput. Education: Artif. Intell.*, vol. 8, Jun. 2025, Art. no. 100344.
- [150] R. Mitkov, L. A. Ha, and N. Karamanis, "A computer-aided environment for generating multiple-choice test items," *Natural Lang. Eng.*, vol. 12, no. 2, pp. 177–194, Jun. 2006.
- [151] R. Correia, J. Baptista, M. Eskénazi, and N. Mamede, "Automatic generation of cloze question stems," in *Proc. Comput. Process. Portuguese Language: 10th Int. Conf., Coimbra, Portugal, USA: Springer, Apr. 2012*, pp. 168–178.
- [152] S. Rathi, V. Pophale, P. Kutwal, S. Mishra, and A. Nadkarni, "Question and assessment generator: Deep learning approach for customizable and intelligent assessment creation," in *Proc. IEEE Int. Conf. Women Innov., Technol. Entrepreneurship (ICWITE)*, Feb. 2024, pp. 618–624.

- [153] Q. Wang, R. Rose, N. Orita, and A. Sugawara, "Automated generation of multiple-choice cloze questions for assessing English vocabulary using GPT-turbo 3.5," 2024, *arXiv:2403.02078*.
- [154] M. A. Mohammed, M. L. Mohamed, A. Bahai, M. A. Borhamy, M. H. Abd-Elhassib, S. Saad, M. A. Awad, and A. S. Fath-Allah, "End-to-end quiz-style question generation for educational purposes," in *Proc. 11th Int. Conf. Intell. Comput. Inf. Syst. (ICICIS)*, Nov. 2023, pp. 549–554.
- [155] M.-H. Chu, W.-Y. Chen, and S.-D. Lin, "A learning-based framework to utilize E-HowNet ontology and Wikipedia sources to generate multiple-choice factual questions," in *Proc. Conf. Technol. Appl. Artif. Intell.*, Nov. 2012, pp. 125–130.
- [156] S. Maniar, J. Parmani, M. Bodke, and K. Saxena, "Generation and grading of arduous MCQs using NLP and OMR detection using OpenCV," in *Proc. 12th Int. Conf. Comput. Commun. Netw. Technol. (ICCCNT)*, Jul. 2021, pp. 1–7.
- [157] L.-C. Sung, Y.-C. Lin, and M. C. Chen, "An automatic quiz generation system for English text," in *Proc. 7th IEEE Int. Conf. Adv. Learn. Technol. (ICALT)*, Jul. 2007, pp. 196–197.
- [158] L. Wang, S. Li, H. Wang, and S. Yu, "Corpus-based automatic generation of multiple choice questions for college English tests," in *Proc. 2nd Int. Conf. Modern Manage., Educ. Technol., Social Sci. (MMETSS)*, 2017, pp. 156–162.
- [159] K. Sakaguchi, Y. Arase, and M. Komachi, "Discriminative approach to fill-in-the-blank quiz generation for language learners," in *Proc. 51st Annu. Meeting Assoc. Comput. Linguistics*, 2013, pp. 238–242.
- [160] K. Stasaski and M. A. Hearst, "Multiple choice question generation utilizing an ontology," in *Proc. 12th Workshop Innov. Use NLP Building Educ. Appl.*, 2017, pp. 303–312.
- [161] J. Araki, D. Rajagopal, S. Sankaranarayanan, S. Holm, Y. Yamakawa, and T. Mitamura, "Generating questions and multiple-choice answers using semantic analysis of texts," in *Proc. COLING*, 2016, pp. 1125–1136.
- [162] G. Kumar, R. E. Banchs, and L. F. D'Haro, "Automatic fill-the-blank question generator for student self-assessment," in *Proc. IEEE Frontiers Educ. Conf. (FIE)*, Oct. 2015, pp. 1–3.
- [163] V. E. Vinu and P. S. Kumar, "Automated generation of assessment tests from domain ontologies," *Semantic Web, Interoperability, Usability, Applicability*, vol. 8, no. 6, pp. 1023–1047, Aug. 2017.
- [164] D. Gates, "How to generate cloze questions from definitions: A syntactic approach," in *Proc. AAAI Fall Symp. Ser.*, 2011, pp. 19–22.
- [165] D. Seyler, M. Yahya, and K. Berberich, "Knowledge questions from knowledge graphs," in *Proc. ACM SIGIR Int. Conf. Theory Inf. Retr.*, Oct. 2017, pp. 11–18.
- [166] D. Pochiraju, A. Chakilam, P. Betham, P. Chimulla, and S. Govinda Rao, "Extractive summarization and multiple choice question generation using XLNet," in *Proc. 7th Int. Conf. Intell. Comput. Control Syst. (ICICCS)*, May 2023, pp. 1001–1005.
- [167] B. Das, M. Majumder, S. Phadikar, and A. A. Sekh, "Automatic generation of fill-in-the-blank question with corpus-based distractors for e-assessment to enhance learning," *Comput. Appl. Eng. Educ.*, vol. 27, no. 6, pp. 1485–1495, Nov. 2019.
- [168] B. Das and M. Majumder, "Factual open cloze question generation for assessment of learner's knowledge," *Int. J. Educ. Technol. Higher Educ.*, vol. 14, no. 1, pp. 1–12, Dec. 2017.
- [169] A. Killawala, I. Khokhlov, and L. Reznik, "Computational intelligence framework for automatic quiz question generation," in *Proc. IEEE Int. Conf. Fuzzy Syst. (FUZZ-IEEE)*, Jul. 2018, pp. 1–8.
- [170] A. Y. Satria and T. Tokunaga, "Automatic generation of English reference question by utilising nonrestrictive relative clause," in *Proc. 9th Int. Conf. Comput. Supported Educ.*, 2017, pp. 379–386.
- [171] M. Agarwal and P. Mannem, "Automatic gap-fill question generation from text books," in *Proc. 6th workshop Innov. use NLP building Educ. Appl.*, 2011, pp. 56–64.
- [172] J. Achiam et al., "GPT-4 technical report," 2023, *arXiv:2303.08774*.
- [173] A. Bordes, N. Usunier, S. Chopra, and J. Weston, "Large-scale simple question answering with memory networks," 2015, *arXiv:1506.02075*.
- [174] B. S. R. Kangari, T. Kanagala, and B. Saha, "Review on the generation of MCQ," *Kilby*, vol. 100, p. 7, May 2023.
- [175] K. Hwang, S. Challagundla, M. Alomair, L. K. Chen, and F.-S. Choa, "Towards AI-assisted multiple choice question generation and quality evaluation at scale: Aligning with Bloom's taxonomy," in *Proc. Workshop Generative AI Educ.*, 2023.
- [176] E. Kasneci et al., "ChatGPT for good? On opportunities and challenges of large language models for education," *Learn. Individual Differences*, vol. 103, Apr. 2023, Art. no. 102274.
- [177] T.-c. Hsu and S. F. Sadock, "Computer-assisted test construction: The state of the art," pp. 19–38, 1985.
- [178] S. Khalid and S. Wu, "Supporting scholarly search by query expansion and citation analysis," *Eng., Technol. Appl. Sci. Res.*, vol. 10, no. 4, pp. 6102–6108, Aug. 2020.
- [179] S. Bano, S. Khalid, N. M. Tairan, H. Shah, and H. A. Khattak, "Summarization of scholarly articles using BERT and BiGRU: Deep learning-based extractive approach," *J. King Saud Univ. Comput. Inf. Sci.*, vol. 35, no. 9, Oct. 2023, Art. no. 101739.
- [180] S. Minaee, T. Mikolov, N. Nikzad, M. Chenaghlu, R. Socher, X. Amatriain, and J. Gao, "Large language models: A survey," 2024, *arXiv:2402.06196*.
- [181] A. K. Law, J. So, C. T. Lui, Y. F. Choi, K. H. Cheung, K. Kei-Ching Hung, and C. A. Graham, "AI versus human-generated multiple-choice questions for medical education: A cohort study in a high-stakes examination," *BMC Med. Educ.*, vol. 25, no. 1, p. 208, Feb. 2025.
- [182] P. Pawar, R. Dube, A. Joshi, Z. Gulhane, and R. Patil, "Automated generation and evaluation of MultipleChoice quizzes using langchain and Gemini LLM," in *Proc. Int. Conf. Electr. Electron. Comput. Technol. (ICEECT)*, Aug. 2024, pp. 1–7.
- [183] Y. Zhang, Y. Su, Y. Liu, X. Wang, J. Burgess, E. Sui, C. Wang, J. Aklilu, A. Lozano, A. Wei, L. Schmidt, and S. Yeung-Levy, "Automated generation of challenging multiple-choice questions for vision language model evaluation," 2025, *arXiv:2501.03225*.
- [184] J. Wang, R. Xiao, and Y.-J. Tseng, "Generating AI literacy MCQs: A multi-agent LLM approach," in *Proc. 56th ACM Tech. Symp. Comput. Sci. Educ.* New York, NY, USA: Association for Computing Machinery, Feb. 2025, pp. 1651–1652, doi: 10.1145/3641555.3705189.
- [185] Y. S. Kiyak and E. Emekli, "ChatGPT prompts for generating multiple-choice questions in medical education and evidence on their validity: A literature review," *Postgraduate Med. J.*, vol. 100, no. 1189, pp. 858–865, Oct. 2024.
- [186] A. Khatun and D. G. Brown, "A study on large language models' limitations in multiple-choice question answering," 2024, *arXiv:2401.07955*.



**MUHAMMAD RAHEEL ANWAR** received the B.Sc. degree in computer science from the NFC Institute of Engineering and Technology (NFC IET), Multan, and the M.Sc. degree in computer science from the National University of Sciences and Technology (NUST), Islamabad. He is currently a Consultant AI with Systems Ltd. Previously, he was a Senior Research Officer with the National Center of Artificial Intelligence (NCAI), Pakistan, where he led research initiatives in Agentic AI and Vision-Language Models (VLMs). Additionally, he is the Founder and the Product Lead with the Edutech startup Inshort Tech. His research interests include large language models (LLMs), multi-agent systems, and RAG-based architectures. More details about his research and professional portfolio can be found at: <https://raheelism.github.io/>.



**SHAH KHALID** received the M.S. degree from the University of Peshawar, Pakistan, and the Ph.D. degree from Jiangsu University, China. He is currently an Associate Professor with the School of Electrical Engineering and Computer Science, National University of Sciences and Technology (NUST-SEECS), Islamabad, Pakistan. He has been involved in numerous research projects in Pakistan and abroad. His research interests include information retrieval, web search engines, scholarly retrieval systems, recommender systems, knowledge graphs, social web, real-time sentiment analysis, web engineering, text summarization, federated search, and digital libraries. For more information, please visit his website at <https://sites.google.com/view/shahkhalid>





puting and Information  
Saudi Arabia.

**SAIED ALSHAHRANI** received the M.Sc. degree in computer science with a specialization in security, computer systems, and networks from Monmouth University, West Long Branch, NJ, USA, and the Ph.D. degree in artificial intelligence with a concentration in arabic natural language processing from Clarkson University, Potsdam, NY, USA. He is currently an Assistant Professor with the Department of Computer Science and Artificial Intelligence with the College of Com-



**MOHAMMED ALDAWSARI** received the Ph.D. degree in computer science from Florida International University. He is currently the Head of the Computer Engineering and Information Department with Prince Sattam Bin Abdulaziz University, Wadi ad-Dwasir Branch. His primary area of expertise is AI, with a specific focus on NLP. He has published several papers in prestigious conferences and journals in the NLP field.

...



School of Electrical Engineering and Computer Science (SEECs), NUST. His research interests include health informatics, artificial intelligence, data science, and he continues to play a vital role in advancing academic and scientific excellence in his domain.

**HAFIZ SYED MUHAMMAD BILAL** received the M.S. degree from the National University of Sciences and Technology (NUST), Pakistan, and the Ph.D. degree in computer science and engineering from Kyung Hee University. With over 15 years of experience in teaching and research, he has made significant contributions in the computing field, authoring nearly 19 journal publications and over 20 conference papers. He is currently an Assistant Professor with the Department of Computing,