

NOVA

IMS

Information
Management
School

Programming for Data Science

2nd Session: Variable Declaration, Flow Control, I/O Operations

Flávio Pinheiro

fpinheiro@novaims.unl.pt

Maria Almeida

malmeida@novaims.unl.pt

Nuno Alpalhão


nalpalhao@novaims.unl.pt

Class topics

 **Quick reminder / variable overview**

 **Flow Control**

 **I/O Operations**

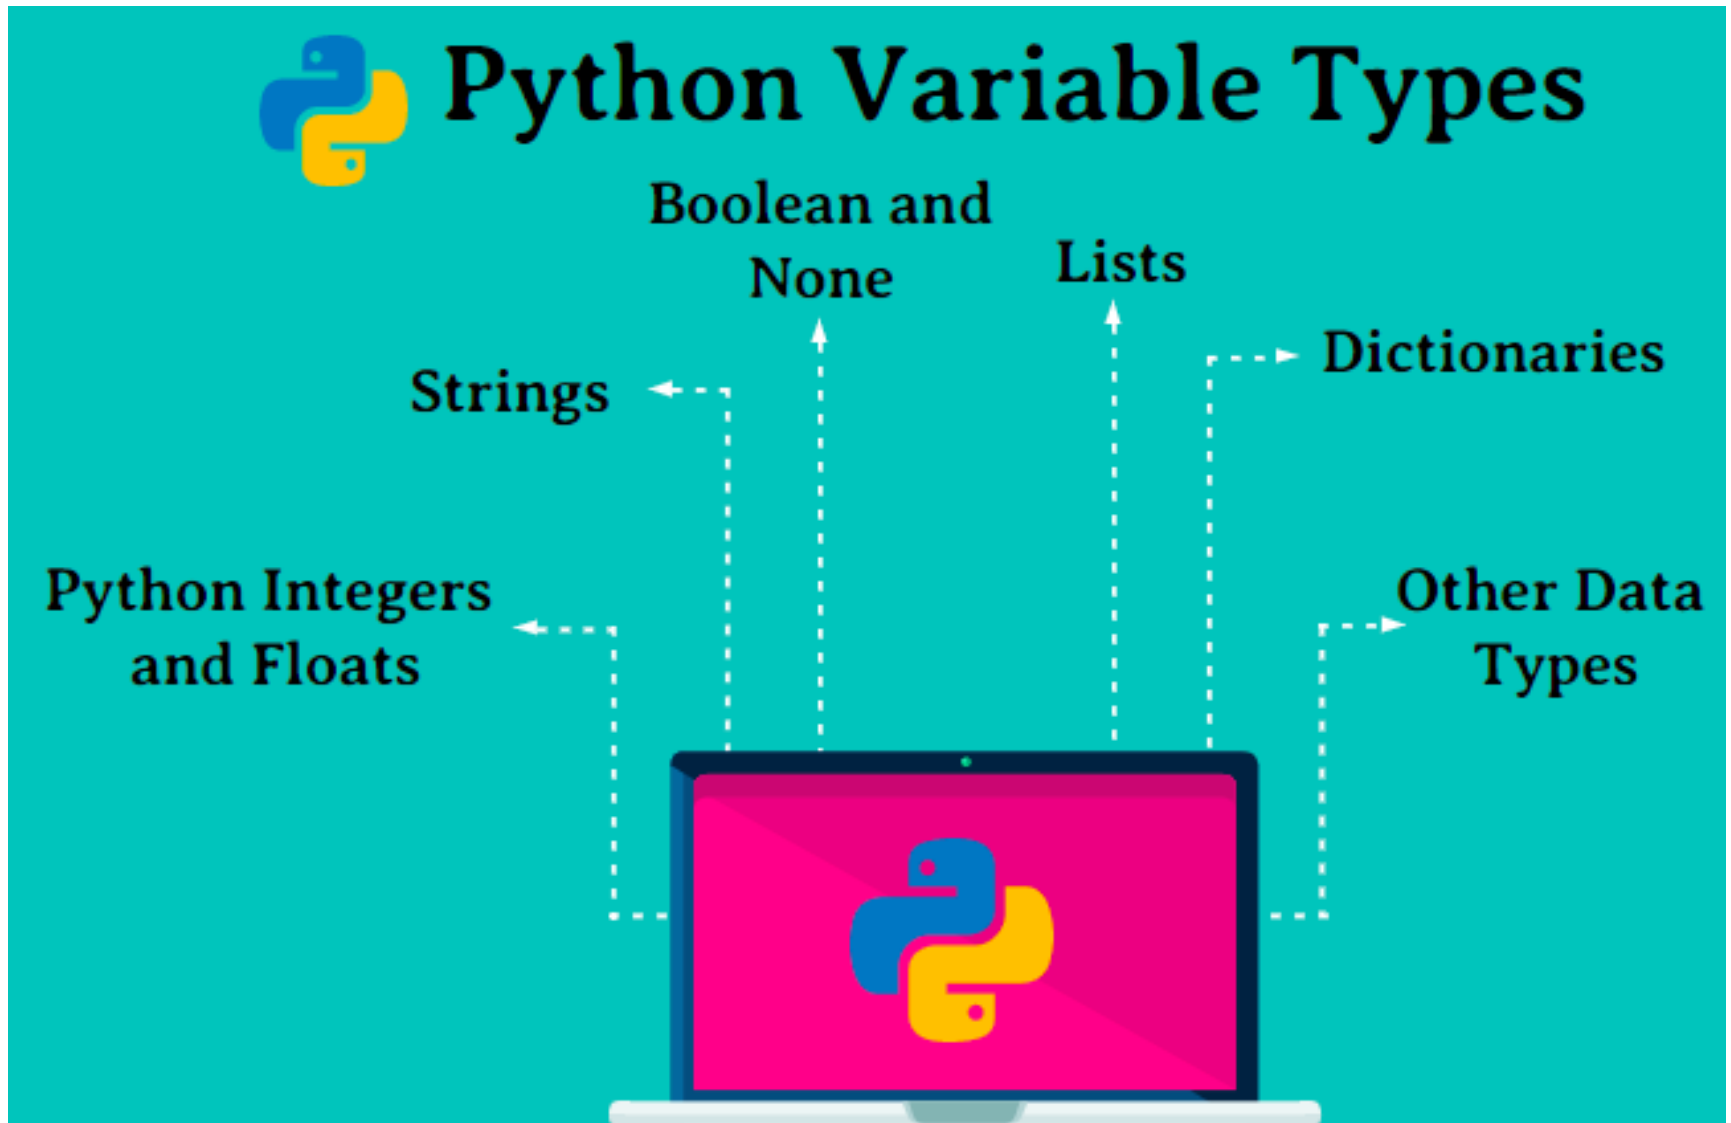

Python Integers and Floats

12345
67890

12345
67890

```
In [1]: integer = 3
```

```
In [2]: integer
```

```
Out[2]: 3
```

```
In [3]: my_float = 2.4
```

```
In [4]: my_float
```

```
Out[4]: 2.4
```

Strings

```
my_string = "He stole it from us! My Preciousss..."
```

```
my_string
```

```
'He stole it from us! My Preciousss...'
```

```
my_string[0]
```

```
'H'
```

```
my_string[-1]
```

```
'.'
```

```
my_string.upper()
```

```
'HE STOLE IT FROM US! MY PRECIOUSSS...'
```

```
my_string.lower()
```

```
'he stole it from us! my preciousss...'
```

```
len(my_string)
```

```
37
```

Boolean and None

```
10 > 9
```

True

```
15%2 == 0
```

False

```
15%2 == 0 or 10 > 9
```

True

```
15%2 == 0 and 10 > 9
```

False

```
annoying_data = None
```

```
a_boolean_variable = True
```

```
a_boolean_variable
```

True

```
annoying_data + my_float
```

TypeError

Traceback (most recent call last)

```
<ipython-input-21-bfd059f75e15> in <module>
```

```
----> 1 annoying_data + my_float
```

TypeError: unsupported operand type(s) for +: 'NoneType' and 'float'

Boolean and None

```
type(annoying_data)
```

NoneType

```
annoying_data is None
```

True

Lists

List Creation

```
L = [1, 2, 3, None, 'Hello']
```

First element

```
L[0]
```

1

Last element

```
L[-1]
```

'Hello'

Adding a value


```
L.append("pickle Rick!")
```

Removing specific value

```
L.remove(None)
```

Removing by index

```
L.pop(3)
```

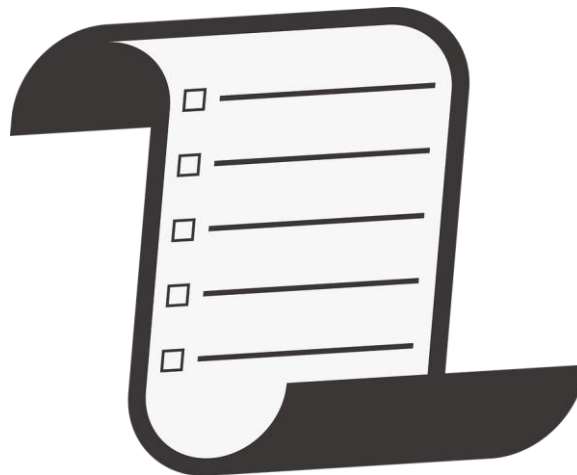

Etc...

Dictionaries

```
months = {
    'jan' : 1, 'feb' : 2, 'mar' : 3, 'apr' : 4, 'may' : 5, 'jun' : 6, 'jul' : 7,
    'aug' : 8, 'sep' : 9, 'oct' : 10, 'nov' : 11, 'dec' : 12
}
```

Printing value of key

```
months['aug']
```

8

Printing the keys of the dictionary

```
months.keys()
```

```
dict_keys(['jan', 'feb', 'mar', 'apr', 'may', 'jun', 'jul', 'aug', 'sep', 'oct', 'nov', 'dec'])
```

Printing the values of the dictionary

```
months.values()
```

```
dict_values([1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12])
```

Collection Data Structures

	Mutable	Immutable
Ordered	List	Tuple
Unordered	Dictionary	Sets

Can we change the value of an element in a data structure?

How are elements sorted? By an index or history of addition

Which will fail?

```
my_list = [1, 2, 3]
my_tuple = (1, 2, 3)

mylist[0] = 5
my_tuple[0] = 5
```

Use tab to see what functions we can use with our variable

```
In [ ]: my_set = {"apple", "banana", "cherry"}
```

```
my_set.
```

- add
- clear
- copy
- difference
- difference_update
- discard
- intersection
- intersection_update
- isdisjoint
- issubset

We can “cast” object to different to types

```
converted_list = list(my_tuple)
converted_list

[1, 2, 3]
```

Class topics

 Quick reminder / variable overview

 **Flow Control**


 **I/O Operations**

How can I control the flow of my program?

`if a:`
do this


`elif b:`
do that

`else:`
whatever

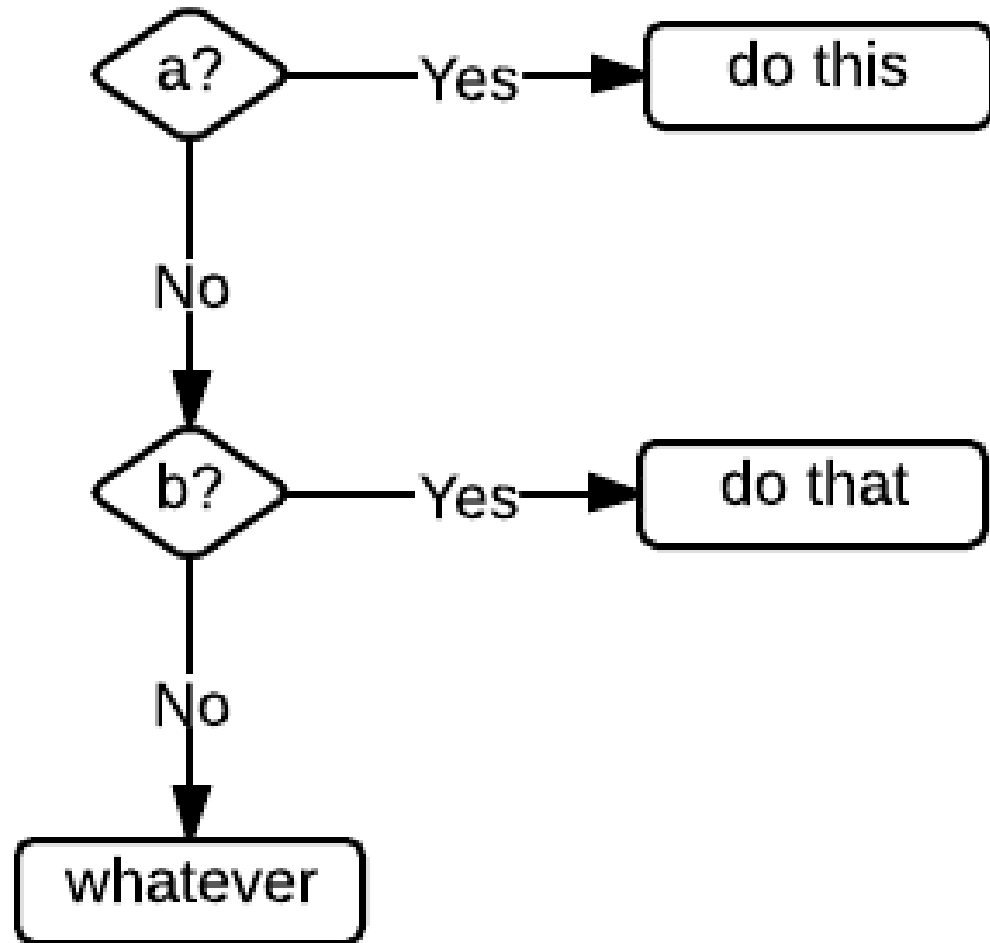


If, elif, else: Eating breakfast

If You are a sane person



Elif You are a maniac

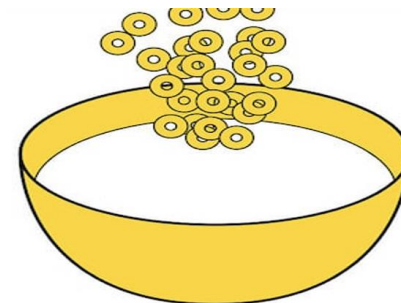

Else I guess no cereal for you...



If, elif, else...

```
if 10>100:  
    print("first condition")  
  
elif 50 <20:  
    print("second condition")  
  
else:  
    print("third condition")
```

third condition

Loops – for loops

for loops are traditionally used when you have a block of code which you want to repeat a fixed number of times

```
fruits = ["apple", "banana", "cherry"]
for x in fruits:
    print(x)
```

```
apple
banana
cherry
```

```
for x in range(7):
    print(x)
```

```
0
1
2
3
4
5
6
```

```
range(5)
```

```
range(0, 5)
```

In Python we make use of the range object

Loops – while loops

while loops can be used when a condition needs to be checked each iteration.

```
x = 1
while True:
    print("To infinity and beyond! We're getting close, on %d now!" % (x))
    x += 1
```

```
To infinity and beyond! We're getting close, on 1 now!
To infinity and beyond! We're getting close, on 2 now!
To infinity and beyond! We're getting close, on 3 now!
To infinity and beyond! We're getting close, on 4 now!
To infinity and beyond! We're getting close, on 5 now!
To infinity and beyond! We're getting close, on 6 now!
To infinity and beyond! We're getting close, on 7 now!
To infinity and beyond! We're getting close, on 8 now!
To infinity and beyond! We're getting close, on 9 now!
To infinity and beyond! We're getting close, on 10 now!
To infinity and beyond! We're getting close, on 11 now!
To infinity and beyond! We're getting close, on 12 now!
To infinity and beyond! We're getting close, on 13 now!
To infinity and beyond! We're getting close, on 14 now!
To infinity and beyond! We're getting close, on 15 now!
To infinity and beyond! We're getting close, on 16 now!
To infinity and beyond! We're getting close, on 17 now!
To infinity and beyond! We're getting close, on 18 now!
```

With while loops its easier to create an infinite loop

Class topics

 Quick reminder / variable overview

 Flow Control

 I/O Operations

How to obtain input from a user?

 As we said, python is pretty straight forward. You want the user's input? Type **input**

```
input("what is your name?")
```

what is your name?

 You can also save this input into a variable!

```
a = input("what is your name?")
```

what is your name?

a

'Legolas'

How to load a dataset so that we can start exploring?

Accessing the filesystem (or you can use magics):

```
# Part 1. we start by loading the OS module
import os

# and then we can call the method listdir() to print the files in y our working folder
print("files in working directory: ",os.listdir())

#additionally using the sys we can check which paths is your python using to load modules
import sys
print("paths: ",sys.path)
```

Writting to and reading from files:

```
#point 2
with open("unordered.csv","w") as file:
    writer = csv.writer(file)
    writer.writerow(lista)
file.close()

#point 3
rawdata = []
with open("unordered.csv","r") as file:
    reader = csv.reader(file)
    for r in reader:
        rawdata.append(r)
rawdata = rawdata[0]
```

See you next week 😊

me: accidentally adds
one extra space
python:



End