



# QATIP Intermediate

## Azure Lab07

### Managing Azure Storage using Terraform

#### Contents

|                                                             |    |
|-------------------------------------------------------------|----|
| Lab Objectives .....                                        | 2  |
| Teaching Points.....                                        | 2  |
| Before you begin .....                                      | 2  |
| Solution .....                                              | 2  |
| Task 1. Create a Resource Group.....                        | 3  |
| Try it yourself.....                                        | 3  |
| Step-by-Step.....                                           | 3  |
| Task 2. Add a Blob Storage Account and Container .....      | 4  |
| Try it yourself.....                                        | 5  |
| Step-by-Step.....                                           | 5  |
| Task 3. Examine the Files Upload code .....                 | 6  |
| Code breakdown. ....                                        | 6  |
| Code Summary.....                                           | 8  |
| Task 4. Create an Azure Storage management policy .....     | 10 |
| Try it yourself.....                                        | 10 |
| Step-by-Step.....                                           | 10 |
| Task 5. Create an Azure Storage Access Signature token..... | 12 |
| Try it yourself.....                                        | 12 |
| Step-by-Step.....                                           | 12 |
| Task 6. Using the SAS token.....                            | 13 |
| Task 7. Lab Clean-Up .....                                  | 14 |

## Lab Objectives

1. In this lab, you will use terraform to create the following resources...
  - Resource Group
  - Storage Account
  - Container
  - Storage Management Policy
  - Shared Access Signature (SAS) token

## Teaching Points

This lab focusses on using terraform to create and manage Azure storage accounts, including creating containers, uploading data, storage management policies and SAS tokens.

## Before you begin

1. Ensure you have completed Lab0 before attempting this lab
2. In the IDE terminal pane, enter the following command...  
**cd c:\azure-tf-int\labs\07**
3. This shifts your current working directory to c:\azure-tf-int\labs\07. Ensure all commands are executed in this directory
4. Close any open files and use the Explorer pane to navigate to and open the bonuslab

## Solution

The solution to this lab is in folder c:\azure-tf-int\labs\solutions\07. Try to use this only as a last resort if you are struggling to complete the step-by-step processes.

## Task 1. Create a Resource Group

### [Blob Storage](#)

#### Try it yourself


Using the Registry resource url above for guidance....

1. Populate the **Task1** section of **main.tf** with an Azure provider block and a resource block creating a resource group called **"RG1"** in **"East US"**
2. Save, plan, and apply the deployment.
3. Switch to the Azure portal to verify the deployment

#### Step-by-Step

Using the Registry resource url above for guidance....

1. Click on the Overview tab copy the terraform and provider blocks into the Task1 section of **main.tf**

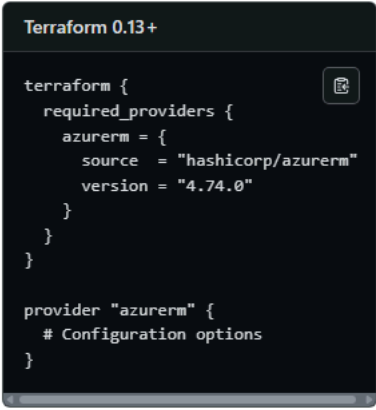A screenshot of a code editor window titled "Terraform 0.13+". The editor shows a Terraform configuration snippet. It starts with a "terraform {" block containing a "required\_providers {" block. Inside "required\_providers", there is an "azurerm =" block with "source = \"hashicorp/azurerm\"" and "version = \"4.74.0\"". Below this is a "provider \"azurerm\" {" block with a comment "# Configuration options".

```
terraform {
  required_providers {
    azurerm = {
      source = "hashicorp/azurerm"
      version = "4.74.0"
    }
  }
}

provider "azurerm" {
  # Configuration options
}
```

2. Use your browser 'back' button to return to azurerm\_storage\_blob documentation.
3. Copy the **azurerm\_resource\_group** example block and paste below the provider block.
4. Change the resource name to **"RG1"**

5. Change the location to **"East US"**
6. Save changes
7. Run **terraform init**
8. Run **terraform plan**
9. An error is returned because the azurerm provider block is missing a features section
10. The features section allows you to configure the way terraform behaves when configuring certain resources. See [Features Block](#) for more details.
11. To accept the default behaviour, enter a blank block; **features {}** within the provider block..

```
provider "azurerm" {  
  features{}  
  # Configuration options  
}
```
12. Beneath the features section; add the following, replacing <your subscription id here> with your subscription id..

```
subscription_id = "<your subscription id here>"
```
13. Save the file changes
14. Run **terraform plan**
15. The planning stage should complete successfully.
16. Run **terraform apply** followed by **yes**
17. Switch to the Azure portal and verify the new Resource group **RG1** exists.

## Task 2. Add a Blob Storage Account and Container

### [Blob Storage](#)

## Try it yourself

Using the Registry resource above for guidance, update the **Task2** section of **main.tf** with the following...

1. An **azurerm\_storage\_account** resource block with the following parameter/values...  
**name:** "storageacct<add a unique-identifier>"
2. An **azurerm\_storage\_container** resource block with the following parameter/values...  
**name:** "examplecontainer"
3. Save, plan, and apply the deployment.
4. Switch to the Azure portal to verify the deployment of the storage account and container.

## Step-by-Step

1. Open the Registry resource above for guidance.
2. Copy the **azurerm\_storage\_account** resource block example code into the **Task2** section of **main.tf**
3. Update the code as follows..  
**name:** "storageacct<add a unique-identifier>"
4. Copy the **azurerm\_storage\_container** resource block example code into the Task2 section of main.tf
5. Update the code as follows  
**name:** "example-container"
6. Save, plan, and apply the deployment.
7. Switch to the Azure portal to verify the deployment of the storage account and container.
8. Run **terraform state list** to verify the following resources have been deployed..

```
PS C:\azurelabs\bonuslab> terraform state list
azurerm_resource_group.RG_1
azurerm_storage_account.Storage_Acct_1
azurerm_storage_container.Storage_Cont_1
```

### Task 3. Examine the Files Upload code

1. The Registry resource gives an simple example of copying a local file into a storage container...

#### DO NOT USE THIS CODE

```
resource "azurerm_storage_blob" "example" {
  name = "my-awesome-content.zip"
  storage_account_name = azurerm_storage_account.example.name
  storage_container_name = azurerm_storage_container.example.name
  type = "Block"
  source = "some-local-file.zip"
}
```

2. Whilst this code would work as shown, it has very limited use. A more realistic example would be to upload several files and identify the mime type of the files to ensure its metadata is correctly stored.
3. To achieve this requires code of more complexity. Your **main.tf** is pre-populated with a Task3 section that contains an example of such code, but all lines are currently commented out.
5. Uncomment all code lines in the Task3 section of your main.tf

#### Code breakdown.

##### Mime types

```
locals {
  mime_types = jsondecode(file("${path.module}/mime.json"))
}
```

**mime\_types:** This variable is a map (key-value pairs) of MIME types, loaded from the **mime.json** file in the root directory

This map will be used to nominate the content-type of a file based upon its file extension....

```

".txt": "text/plain",
".csv": "text/csv",
".jpeg": "image/jpeg",
".jpg": "image/jpeg",
".png": "image/png"

```

for\_each in the Resource Block..

```

resource "azurerm_storage_blob" "upload_files" {
  for_each = fileset("${path.module}/static_files", "**/*")

```

**for\_each:** This lets you create multiple instances of the resource, one for each file.

**fileset():** Scans the folder **static\_files** for all files that match the pattern **\*\*/\*** (all files and subdirectories recursively).

### Blob Name

```

resource "azurerm_storage_blob" "upload_files" {
  for each = fileset("${path.module}/static_files", "**/*")
  name      = each.key

```

**each.key:** Refers to the relative path of the current file found by fileset().

**Example Output:** "Teide.jpeg"

### Blob Source

```

type      = "Block"
source    = "${path.module}/static_files/${each.key}"
content_md5 = filemd5("${path.module}/static_files/${each.key}")

```

**source:** Specifies the full local path to the file being uploaded.

**\${path.module}:** Refers to the current working directory of the Terraform module.

**Example Source:** "c:\azure-tf-int\labs\08\static\_files\Teide.jpeg"

### File Integrity

```

source      = "${path.module}/static_files/${each.key}"
content_md5 = filemd5("${path.module}/static_files/${each.key}")

```

**filemd5():** Computes the MD5 checksum of the file. This ensures file integrity during the upload process.

Azure uses the checksum to verify that the file has not been corrupted during upload.

## MIME Type

```
content_type = lookup(
  local.mime_types,
  regex("\\.[^.]+$", each.key),
  "application/octet-stream"
```

Purpose: Assigns a content type (like image/jpeg or text/plain) based on the file extension.

### Extract File Extension:

```
regex("\\.[^.]+$", each.key):
```

Finds the file extension (e.g., .jpeg, .png).

**Example Input:** "Teide.jpeg" → Output: ".jpeg".

The regex `\\.[^.]+$` is used to extract the file extension from a file name by matching a dot (.) followed by one or more characters that are not dots, located at the end of the string. This helps identify the file type (e.g., **.txt**, **.jpeg**) for mapping to its corresponding MIME type in the **local.mime\_types** map. If no match is found, it defaults to **"application/octet-stream"**.

## Code Summary

This Terraform code defines a process for uploading files as blobs to our Azure Storage container with appropriate metadata:

**Local MIME Type Mapping:** The locals block reads a JSON file (**mime.json**) from the module path. This file contains mappings of file extensions to their respective MIME types, and the **jsondecode()** function converts it into a usable map in Terraform.

**Iterating Over Files:** The **azurerm\_storage\_blob** resource uses the **fileset()** function to iterate over all files in the **static\_files** directory (including subdirectories). Each file is identified by its relative path.

**Blob Name Assignment:** The name attribute of each blob is set.



**Storage Container Details:** The storage account and container names are set using existing resources, `azurerm_storage_account.storage_acct_1` and `azurerm_storage_container.storage_cont_1`.

**Blob Type:** The type of blob is specified as Block, which is commonly used for uploading large files.


**File as Blob Source:** The source attribute specifies the absolute file path from which the blob content will be uploaded.

**MD5 Checksum for Verification:** The `content_md5` attribute computes the MD5 hash of the file to ensure data integrity during the upload process.

**MIME Type Assignment:** The `content_type` attribute determines the appropriate MIME type for the file. It uses `regex("\\.[^.]+$", each.key)` to extract the file extension from the file name, then looks up the corresponding MIME type in the `local.mime_types` map. If no match is found, it defaults to "application/octet-stream".

So, this configuration automates the process of iterating through local files, mapping them to their MIME types, and uploading them as blobs into the Azure Storage container while preserving metadata and ensuring integrity.

6. Save the file changes
7. Run **terraform plan**
8. The planning stage should complete successfully.
9. Run **terraform apply** followed by **yes**
10. Switch to the Azure portal and verify the uploading of the 3 files to the storage container that the correct content-type has been attributed...

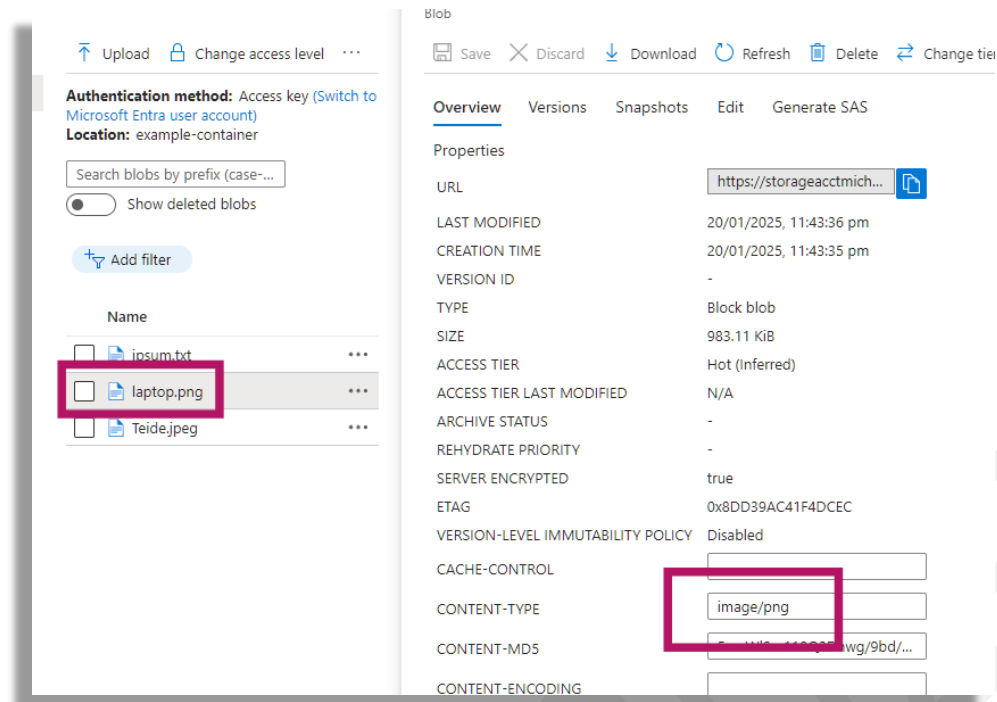

## Task 4. Create an Azure Storage management policy

### [Storage Management Policy](#)


#### Try it yourself

1. Review the sample code using the above link to familiarize yourself with storage management policy.
2. Using the example code for reference, in the Task 4 section of main.tf, create a policy that has a single rule focussing on the **base\_blob** storage tier for **all** blob changes over time.
3. Associate the policy with your storage account.
4. Save, plan, and apply the deployment.
5. Switch to the portal and verify the policy creation.


#### Step-by-Step

1. Open Terraform Registry Resources link above.
2. Copy the sample code for an **azurerm\_storage\_management\_policy** resource block into the Task4 section of main.tf

3. The example code contains 2 rules. **Remove all of rule2.**
4. For filtering, we want the policy to apply to all blobs, so remove the **prefix\_match** and **match\_blob\_index\_tag** portions of the filters block.
5. We are focussing on the blobs themselves here so remove the **snapshot** block
6. Save, plan, and apply the deployment.
7. Switch to the portal and verify the policy creation. (your storage account name will differ)..

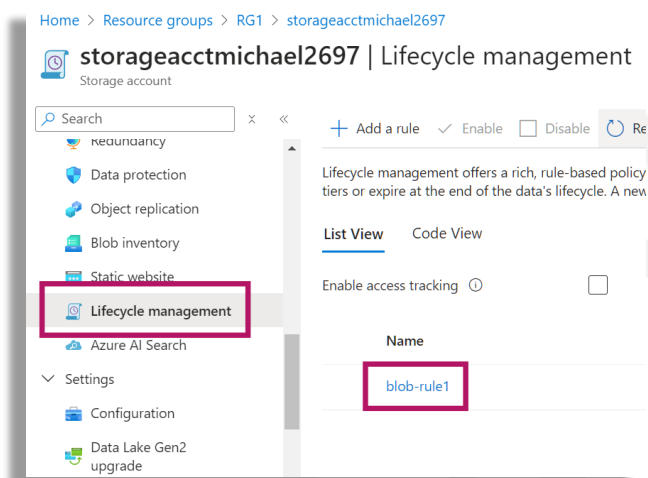

8. Click into the rule to view the parameters..

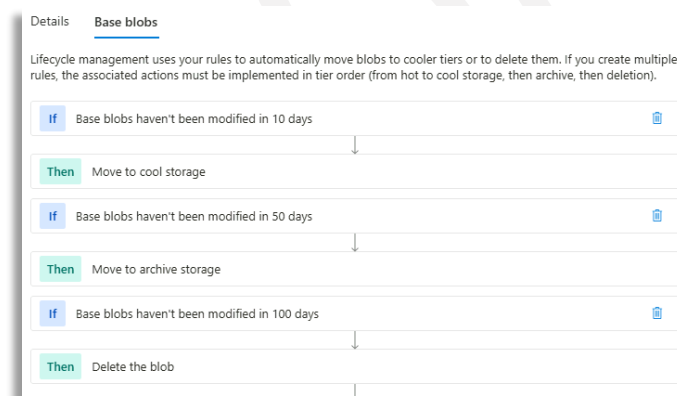

## Task 5. Create an Azure Storage Access Signature token

### [SAS Tokens](#)

#### Try it yourself

1. Review the sample code using the above link to familiarize yourself with Storage Access Signature token creation.
2. Create a data resource block to generate a SAS token with the following parameters:

Permissions to apply to **container** resource types and **blob** services only  
SAS should be valid for all of year 2026  
SAS should grant read/write/list permissions

3. Link the SAS to your storage account
4. Mark the output as sensitive
5. Save, plan, and apply your changes

#### Step-by-Step

1. Open Terraform Registry Resources link above.
2. Copy the `azurerm_storage_account_sas` example data block into the Task5 section of `main.tf`
3. Change the `connection_string` value to link this SAS with our storage account..  
**`azurerm_storage_account.example.primary_connection_string`**
4. Remove the **`signed_version_attribute`**
5. Set the resource types to **containers** only (set as '**true**', set others as '**false**')
6. Leave **blob** as the only service
7. Change the date portion of the **start** date to **`2026-01-01`**
8. Change the date portion of the **expiry** date to **`2027-01-01`**
9. Set **read/write/list** permissions to **true**, all others to **false**.
10. Save your file changes and then run **`terraform plan`**

## 11. An error should be displayed regarding the output code block...

```
To reduce the risk of accidentally exporting sensitive data that was intended to be only internal,
Terraform requires that any root module output containing sensitive data be explicitly marked as
sensitive, to confirm your intent.

If you do intend to export this data, annotate the output value as sensitive by adding the following
argument:
    sensitive = true
```

12. The SAS token is security sensitive and terraform will not display it directly as part of an output block. To fix this issue we and mark this value as being 'sensitive' which means it will not be displayed but can be explicitly requested. To mark a value as sensitive, enter a line under the value..

```
output "sas_url_query_string" {
  value = data.azurestorageaccount.azurestorageaccount.example.sas
  sensitive = true
}
```


13. Save your file changes and then run **terraform plan**
14. Planning should complete
15. Run **terraform apply** followed by **yes**
16. **Note.** The Shared Access Signature (SAS) token generated via Terraform using the `azurestorageaccount.azurestorageaccount.example.sas` data block is not stored or visible directly in the Azure Portal. This is because SAS tokens created through APIs, SDKs, or Terraform are generated on the client-side and not stored by Azure for security reasons.

## Task 6. Using the SAS token

1. Output the SAS token using **terraform output sas\_url\_query\_string**
2. Reconstruct the following URL, substituting values as appropriate to your resources (ensure there are no spaces)..

```
https://<storage account name>.blob.core.windows.net/<container
name>?restype=container&comp=list&<your sas token (minus leading
?)>
```

3. Paste the re-constructed URL into a web browser to view the container object details using the SAS token..

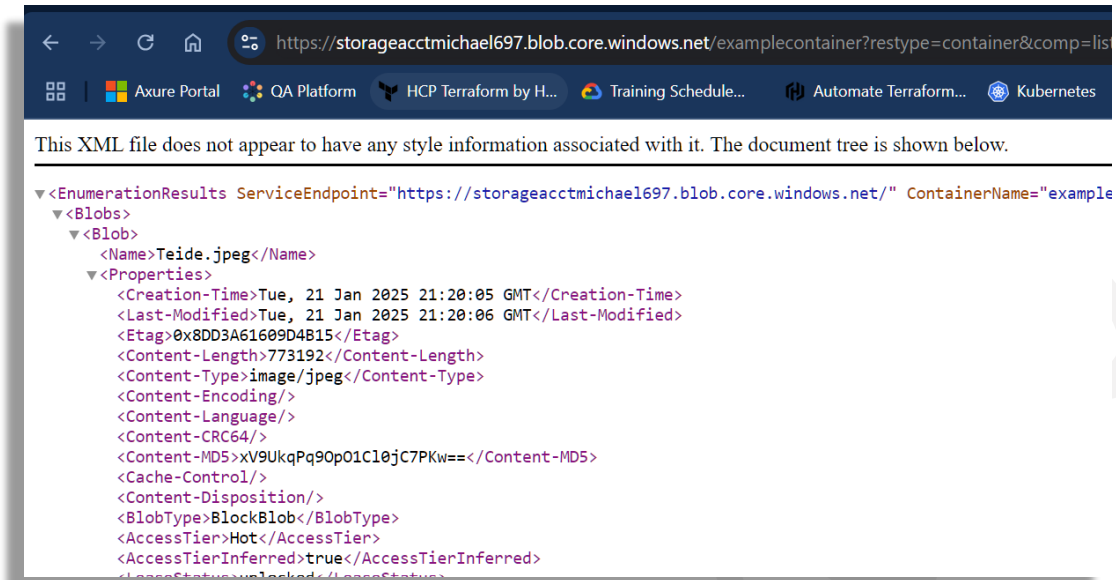

## Task 7. Lab Clean-Up

1. Run **terraform destroy** and confirm with **yes** when prompted.

**\*\*\*\* Congratulations, you have completed this lab \*\*\*\***

## **Copyright**

© 2026 QA Michael Coulling-Green. All rights reserved. These lab materials are provided as part of an authorised training course. Course attendees may reuse these materials for their own personal learning and reference outside of the training session. Unauthorised copying, redistribution, publication, or use of these materials to deliver training is prohibited without prior written permission from the author.

© QA 2026