


Lab Report #3. DML

Task 1. Generate and insert 200 random rows in your airport database.

SQL Query:

```
INSERT INTO passengers (passenger_id, first_name, last_name,
                        date_of_birth, gender,
                        country_of_citizenship, country_of_residence, passport_number,
                        created_at, updated_at)
SELECT
    1000 + s,
    'FirstName' || s,
    'LastName' || s,
    DATE '1970-01-01' + (random() * 18000)::int,
    CASE WHEN random() < 0.5 THEN 'Male' ELSE 'Female' END,
    (ARRAY['Kazakhstan', 'USA', 'France', 'Germany', 'Turkey'])
[floor(random()*5+1)],
    (ARRAY['Kazakhstan', 'USA', 'France', 'Germany', 'Turkey'])
[floor(random()*5+1)],
    'P' || LPAD((random()*99999999)::int::text, 8, '0'),
    now(),
    now()
FROM generate_series(1, 200) AS s;
```

Query Result:

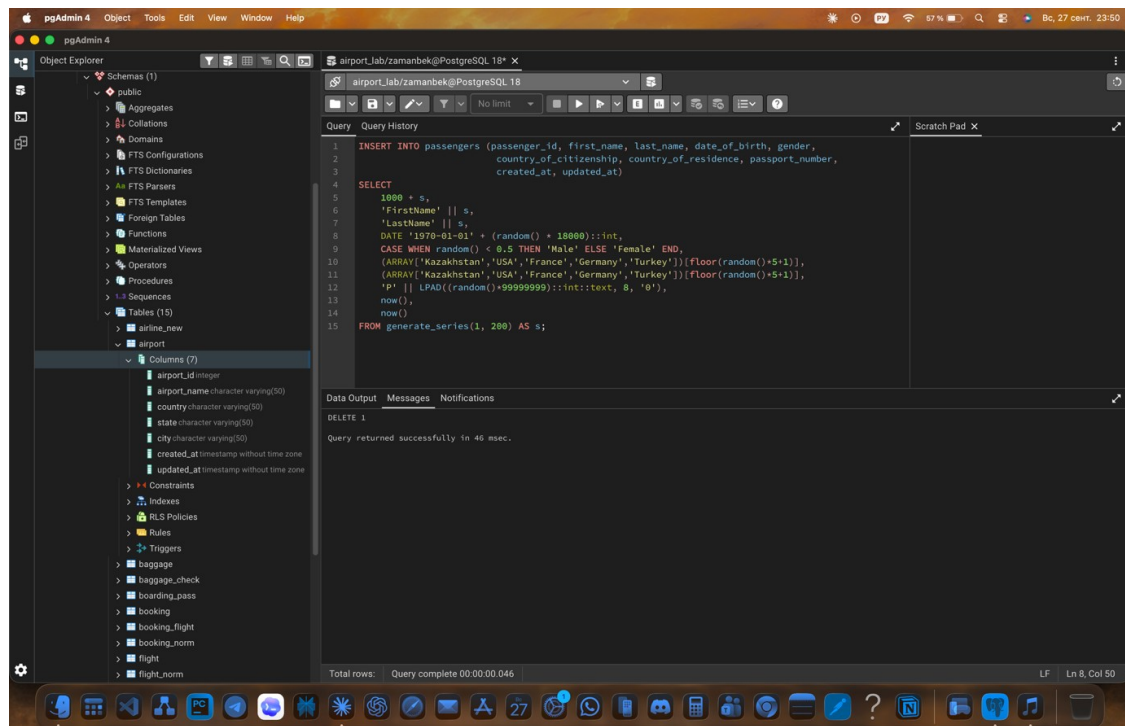


Task 2. Add a new airline named "KazAir" based in "Kazakhstan" to the airline table.

SQL Query:

```
INSERT INTO airline (airline_code, airline_name, airline_country,
                    created_at, updated_at)
```

```
VALUES ('KZ1', 'KazAir', 'Kazakhstan', now(), now());
```

Query Result:

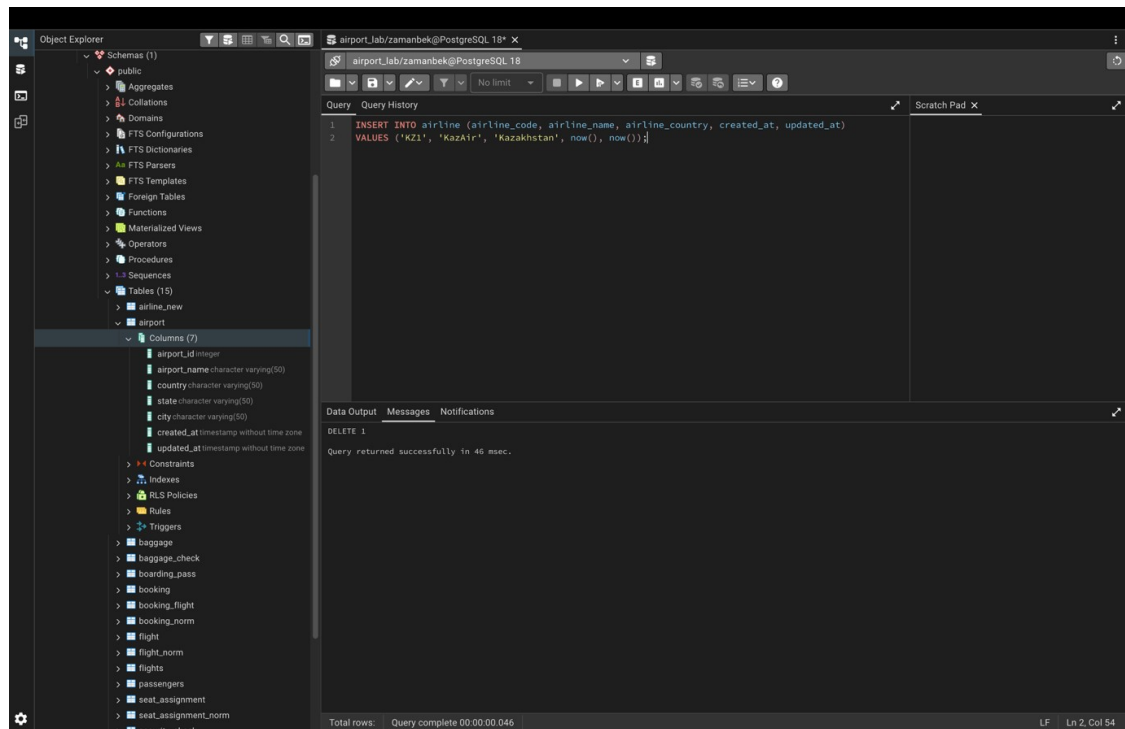


Task 3. Update the airline country "KazAir" to "Turkey".

SQL Query:

```
UPDATE airline
SET airline_country = 'Turkey'
WHERE airline_name = 'KazAir';
```

Query Result:

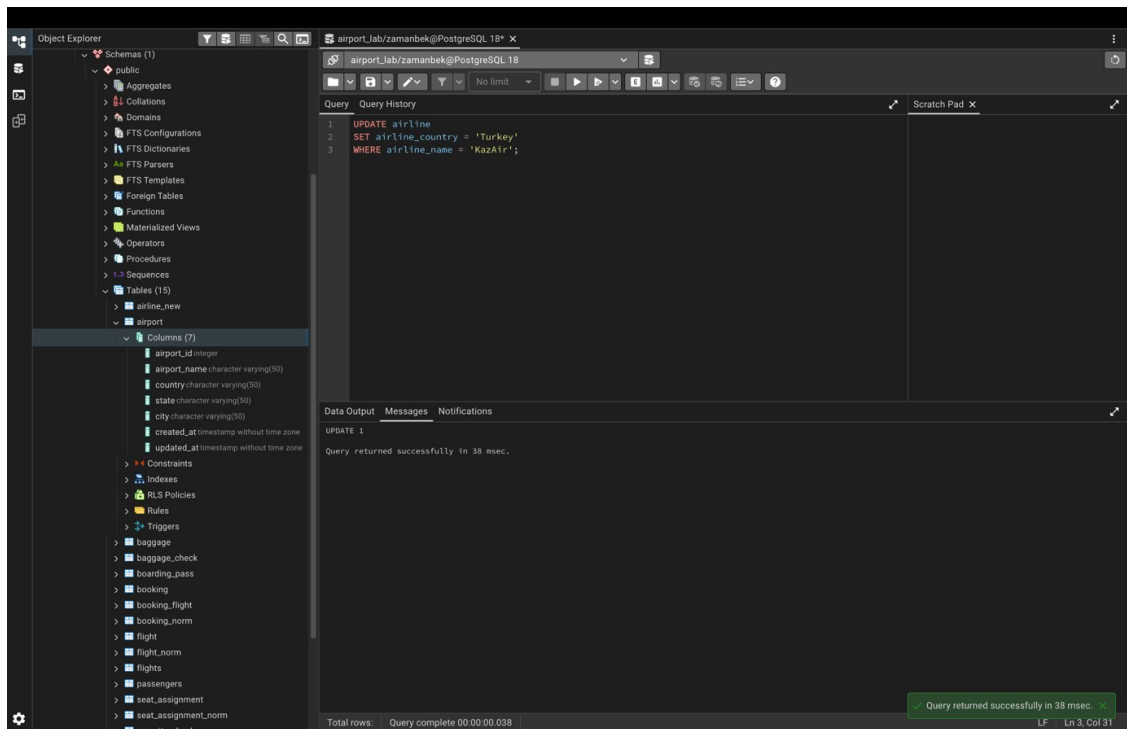

Task 4. Add three airlines at once: "AirEasy" in "France", "FlyHigh" in "Brazil" and "FlyFly" in "Poland".

SQL Query:

```
INSERT INTO airline (airline_code, airline_name, airline_country,
created_at, updated_at)
VALUES
    ('AE1', 'AirEasy', 'France', now(), now()),
    ('FH1', 'FlyHigh', 'Brazil', now(), now()),
    ('FF1', 'FlyFly', 'Poland', now(), now());
```


Screenshot not available for this query yet — run it in pgAdmin and insert the result screenshot here.

Task 5. Delete all flights whose arrival in 2024 year.

SQL Query:

```
DELETE FROM flights
WHERE EXTRACT(YEAR FROM sch_arrival_time) = 2024;
```

Query Result:

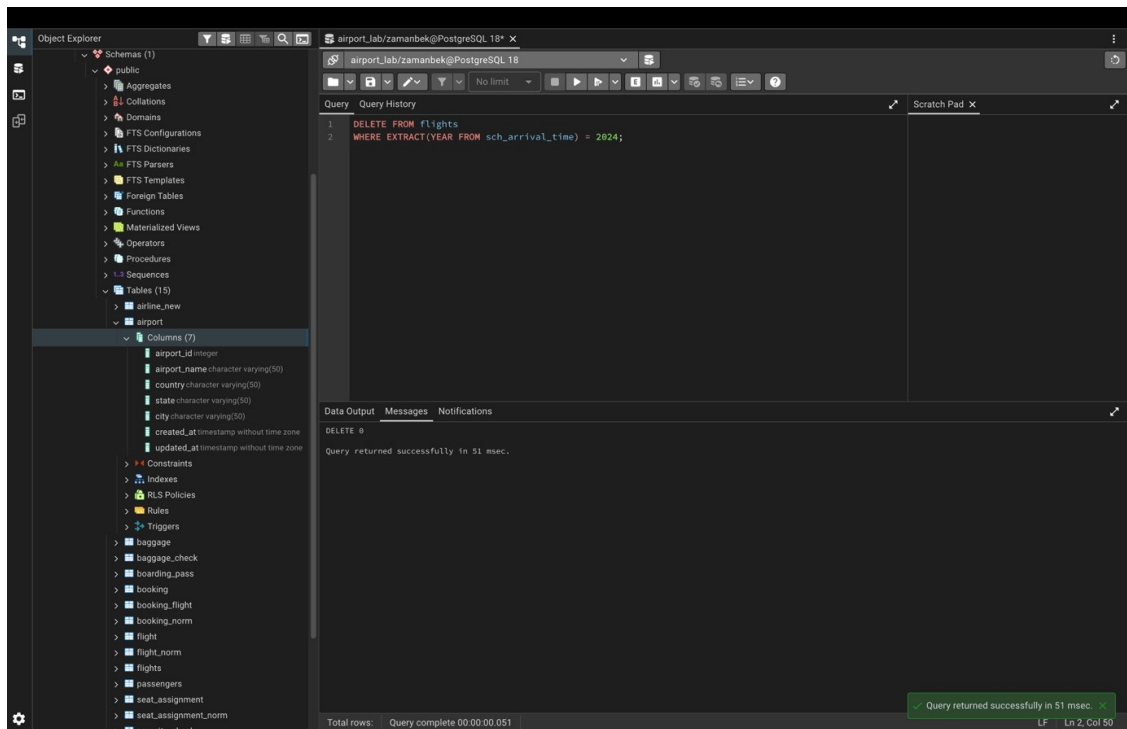


Task 6. Increase the price of all tickets in booking table for flights by 15%.

SQL Query:

```
UPDATE booking
SET ticket_price = ticket_price * 1.15;
```

Query Result:

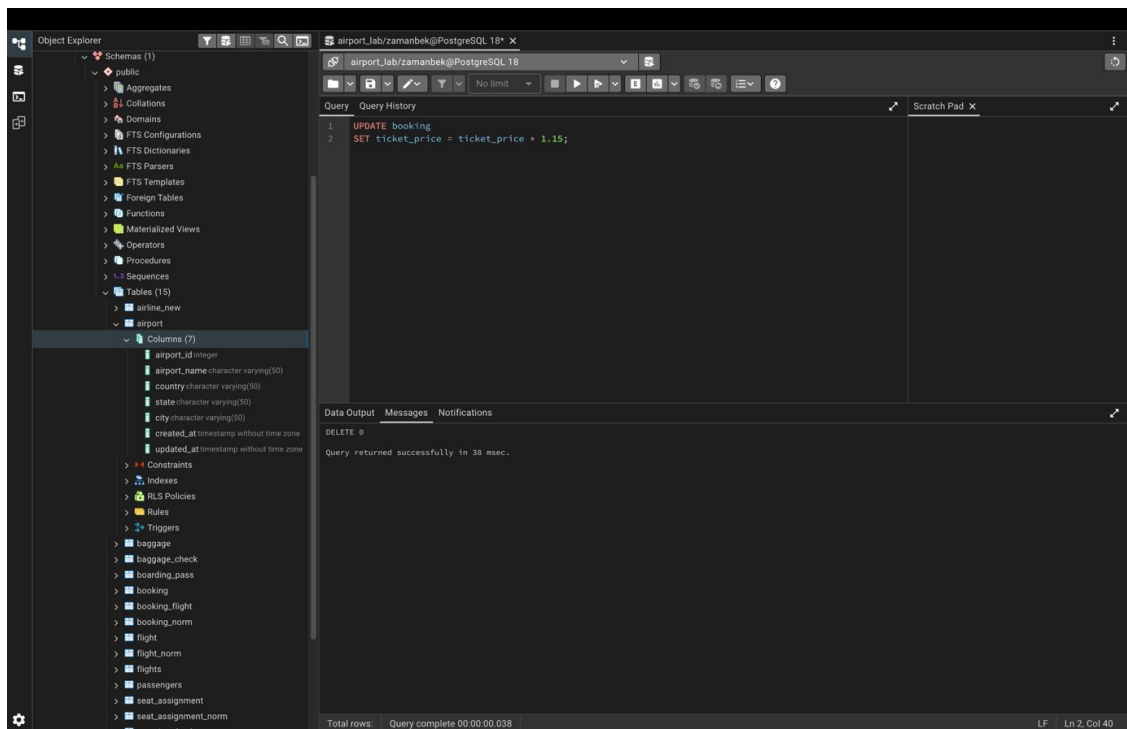


Task 7. Delete all tickets where price is less than 10000.

SQL Query:

```
DELETE FROM booking
WHERE ticket_price < 10000;
```

Query Result:

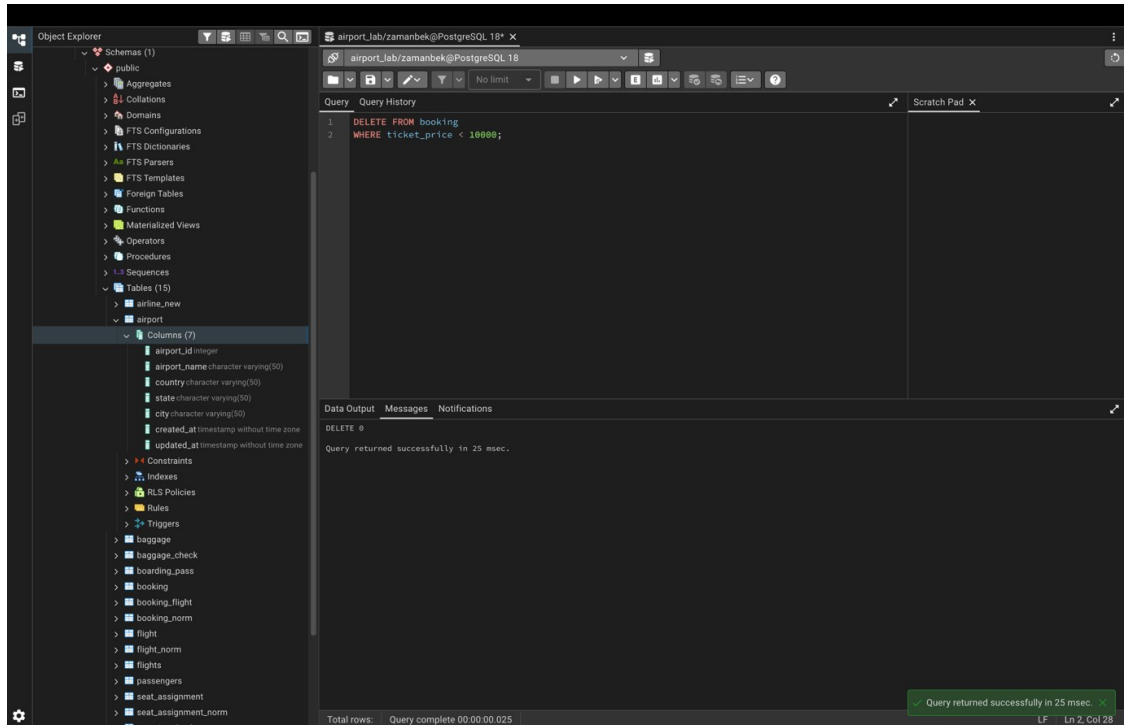


Task 8. Set a default code 'UNK' (Unknown) for any airline in the airline table where airline_code is missing (NULL).

SQL Query:

```
UPDATE airline
SET airline_code = 'UNK'
WHERE airline_code IS NULL;
```

Query Result:

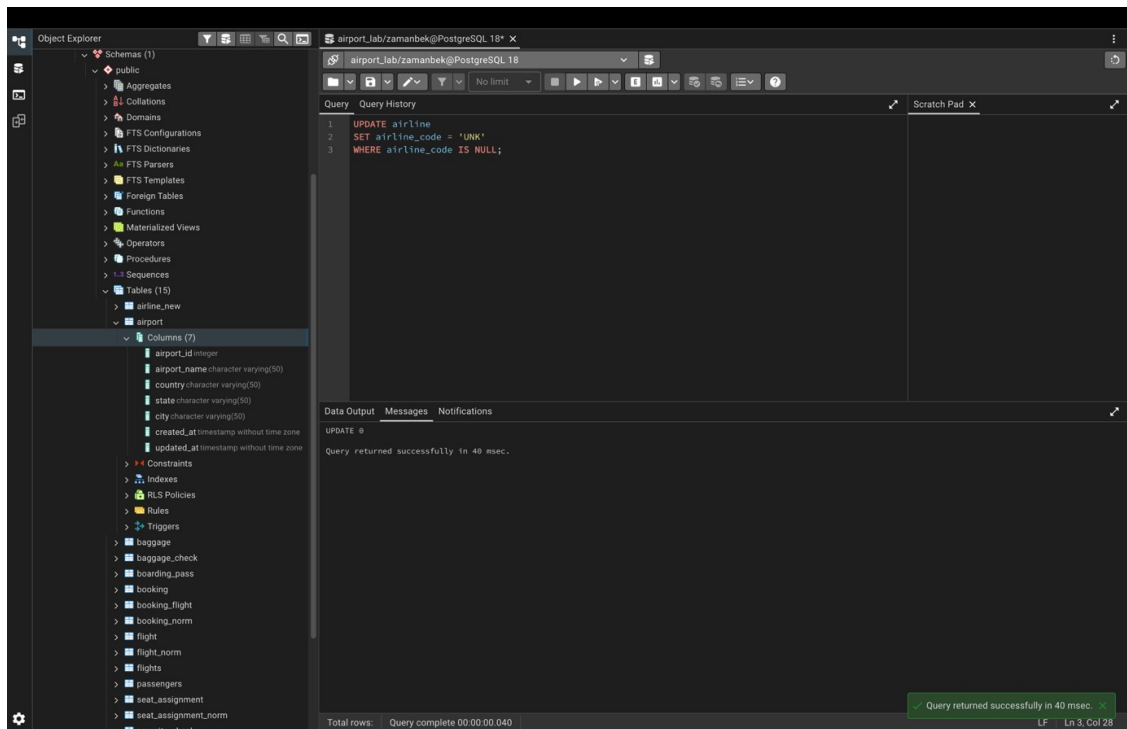


Task 9. Delete all baggage check records created before June 1, 2023, whose result is still 'Not checked'.

SQL Query:

```
DELETE FROM baggage_check
WHERE created_at < '2023-06-01'
AND check_result = 'Not checked';
```

Query Result:

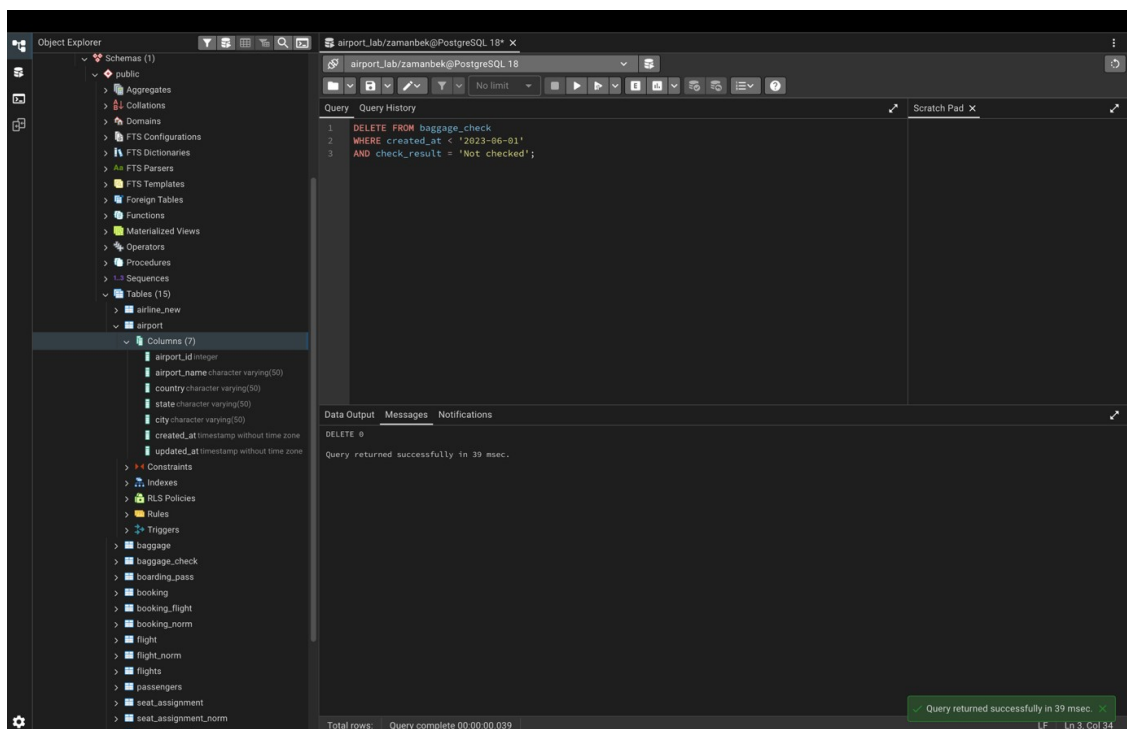


Task 10. Delete all entries from the airport table where state is missing (NULL) and the city is either 'Mlawe' or 'Kepuh'.

SQL Query:

```
DELETE FROM airport
WHERE state IS NULL
AND city IN ('Mlawe', 'Kepuh');
```

Query Result:

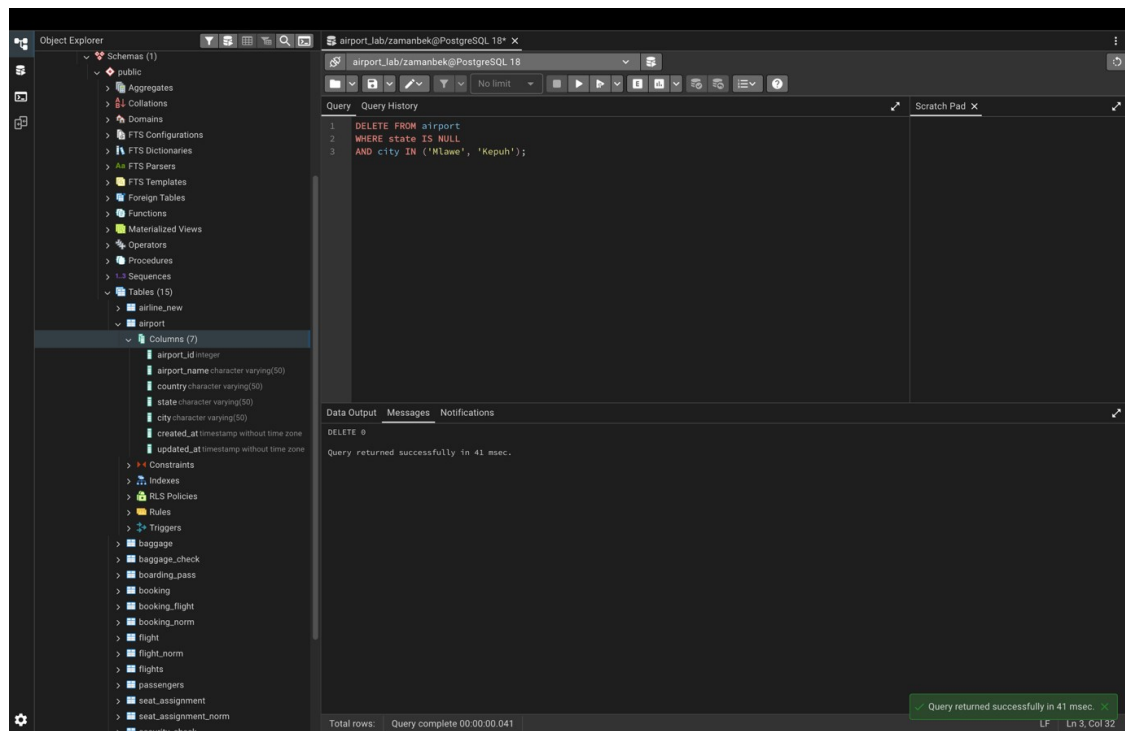


Task 11. Insert a new unchecked baggage inspection record and immediately return its newly generated baggage_check_id and created_at timestamp.

SQL Query:

```
INSERT INTO baggage_check (check_result, created_at, updated_at,
booking_id, passenger_id)
VALUES ('Not checked', now(), now(), 1, 1)
RETURNING baggage_check_id, created_at;
```

Query Result:

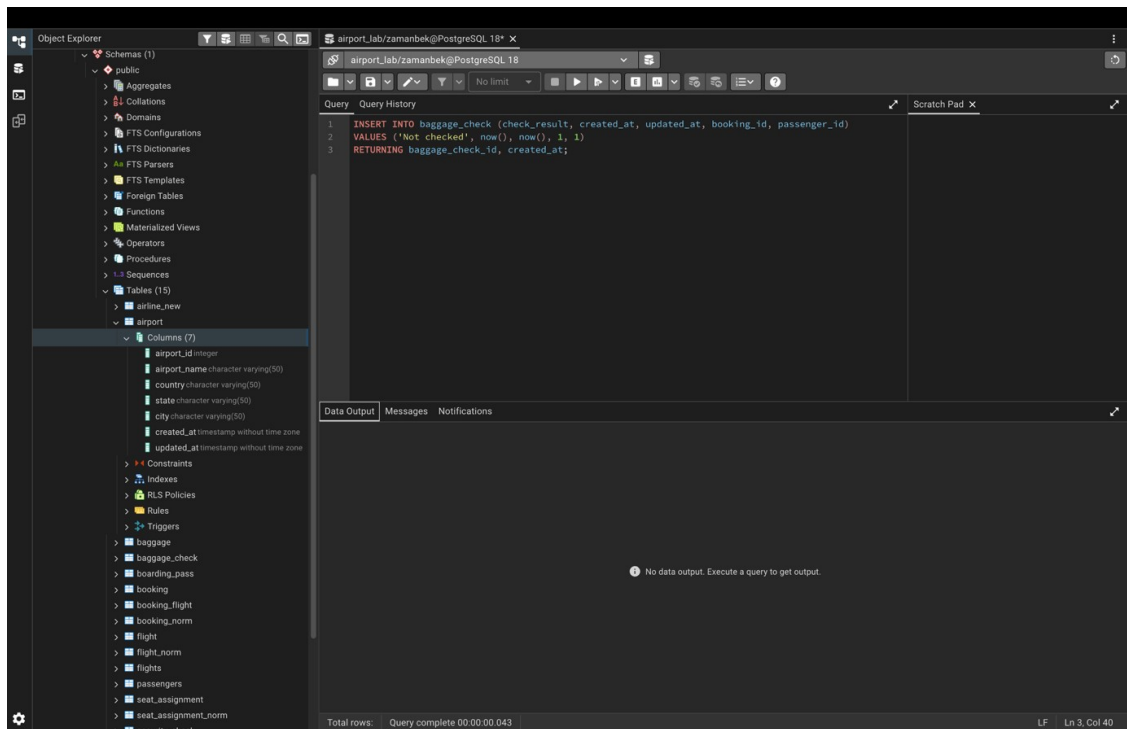


Task 12. Convert all country names in the airline table to uppercase to ensure data consistency.

SQL Query:

```
UPDATE airline
SET airline_country = UPPER(airline_country);
```

Query Result:

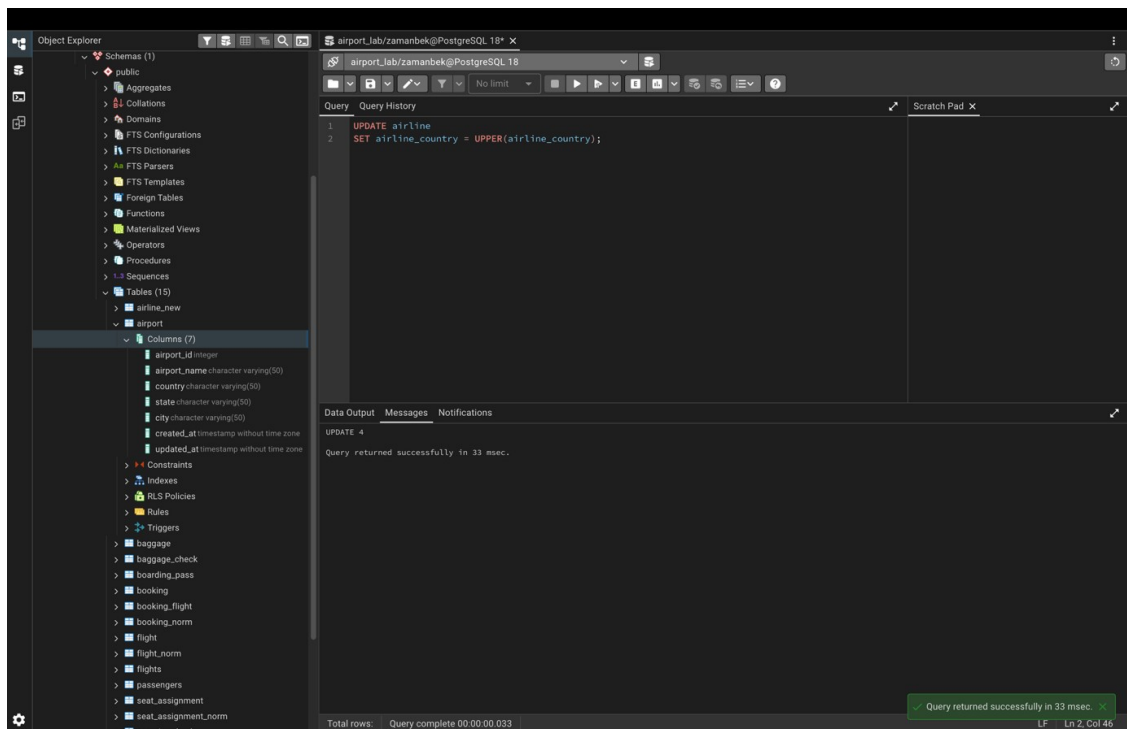


Task 13. Update both the name and country for the airline with `airline_id` = 5. Set the name to 'Global Airways' and the country to 'United Kingdom', while updating `updated_at` to the current date.

SQL Query:

```
UPDATE airline
SET airline_name = 'Global Airways',
    airline_country = 'United Kingdom',
    updated_at = CURRENT_DATE
WHERE airline_id = 5;
```

Query Result:

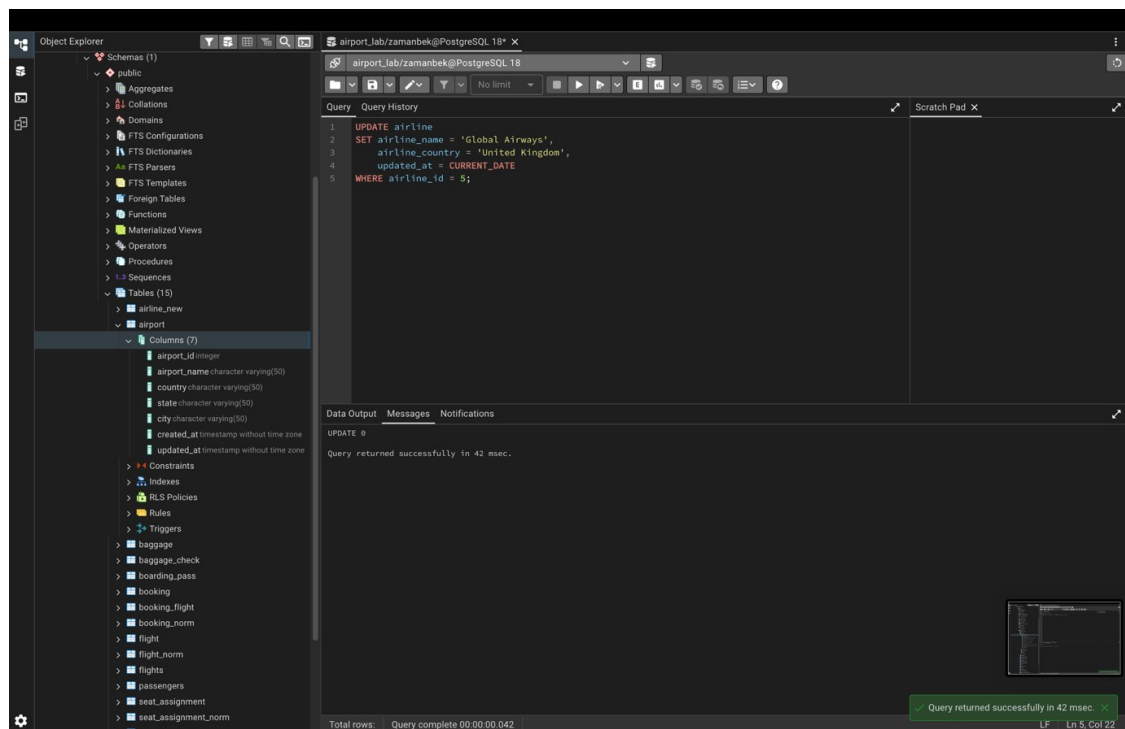


Task 14. Set the state field to 'Capital District' for airports located in specific cities: 'Astana', 'London', and 'Tokyo'.

SQL Query:

```
UPDATE airport
SET state = 'Capital District'
WHERE city IN ('Astana', 'London', 'Tokyo');
```

Query Result:

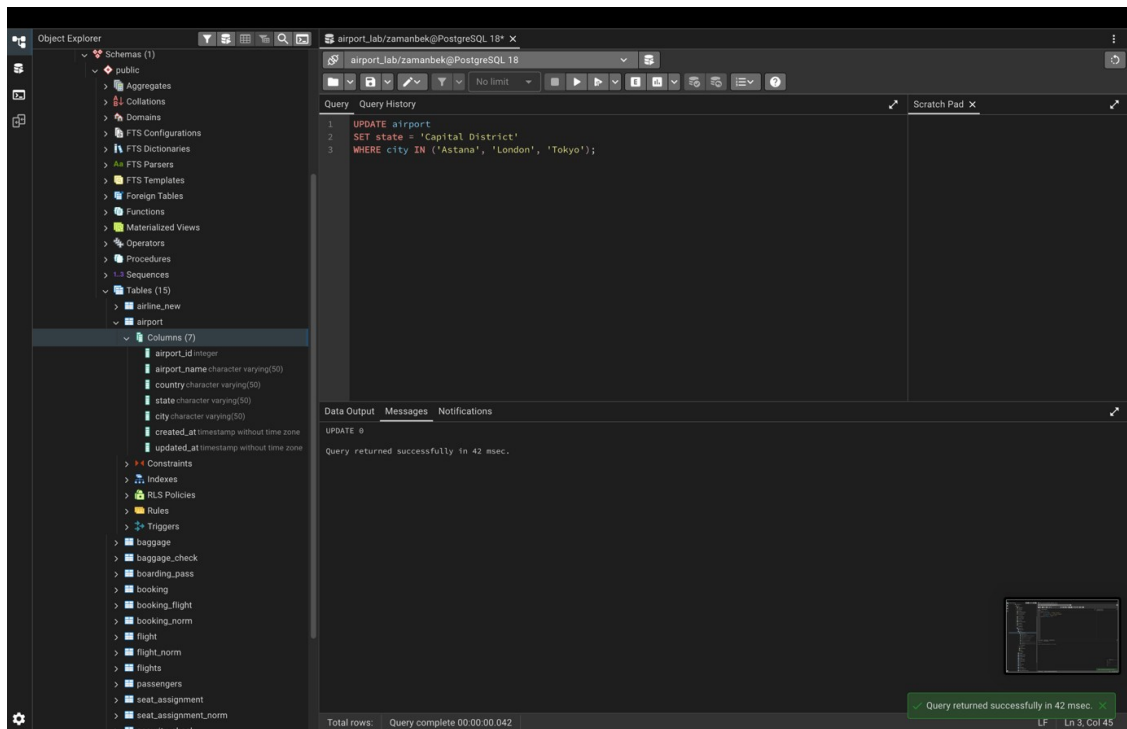

Task 15. Mark all baggage check records (baggage_check) created in March 2024 with a status of 'Not checked' as completed ('Checked').

SQL Query:

```
UPDATE baggage_check
SET check_result = 'Checked'
WHERE check_result = 'Not checked'
AND created_at >= '2024-03-01'
AND created_at < '2024-04-01';
```

Query Result:

Object Explorer

- Schemas (1)
 - public
 - Aggregates
 - Collations
 - Domains
 - FTS Configurations
 - FTS Dictionaries
 - FTS Parsers
 - FTS Templates
 - Foreign Tables
 - Functions
 - Materialized Views
 - Operators
 - Procedures
 - Sequences
 - Tables (15)
 - airline_new
 - airport
 - Columns (7)
 - airport_id integer
 - airport_name character varying(50)
 - country character varying(50)
 - state character varying(50)
 - city character varying(50)
 - created_at timestamp without time zone
 - updated_at timestamp without time zone
 - Constraints
 - Indexes
 - RLS Policies
 - Rules
 - Triggers
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_flight
 - booking_norm
 - flight
 - flight_norm
 - flights
 - passengers
 - seat_assignment
 - seat_assignment_norm
 - security_check

airport_lab/zamanbek@PostgreSQL 18

Query History

```
1 UPDATE baggage_check
2 SET check_result = 'Checked'
3 WHERE check_result = 'Not checked'
4 AND created_at >= '2024-03-01'
5 AND created_at < '2024-04-01';
```

Scratch Pad

Data Output Messages Notifications

UPDATE 0

Query returned successfully in 44 msec.

Total rows: Query complete 00:00:00.044

Query returned successfully in 44 msec.

LF Ln 5, Col 31