

## HOA 12.1 - Build a sample web app in a docker container\_Soriano

### CPE 232 - Managing enterprise servers

Gabriel Soriano

CPE31S23

Submitted on: November 25, 2022

#### Lab - Build a Sample Web App in a Docker Container

##### Objectives

**Part 1: Launch the DEVASC VM**

**Part 2: Create a Simple Bash Script**

**Part 3: Create a Sample Web App**

**Part 4: Configure the Web App to Use Website Files**

**Part 5: Create a Bash Script to Build and Run a Docker Container**

**Part 6: Build, Run, and Verify the Docker Container**

##### Background / Scenario

In this lab, you will review basic bash scripting techniques because bash scripting is a prerequisite for the rest of the lab. You will then build and modify a Python script for a simple web application. Next, you will create a bash script to automate the process for creating a Dockerfile, building the Docker container, and running the Docker container. Finally, you will use **docker** commands to investigate the intricacies of the Docker container instance.

##### Required Resources

- 1 PC with operating system of your choice
- Virtual Box or VMWare
- DEVASC Virtual Machine

##### Instructions

###### Part 1: Launch the DEVASC VM

If you have not already completed the **Lab - Install the Virtual Machine Lab Environment**, do so now. If you have already completed that lab, launch the DEVASC VM now.

### Part 2: Create a Simple Bash Script


Bash knowledge is crucial for working with continuous integration, continuous deployment, containers, and with your development environment. Bash scripts help programmers automate a variety of tasks in one script file. In this part, you will briefly review how to create a bash script. Later in the lab, you will use a bash script to automate the creation of a web app inside of a Docker container.

#### Step 1: Create an empty bash script file.

Change your working directory to `~/labs/devnet-src/sample-app` and add a new file called `user-input.sh`.

```
devasc@labvm:~$ cd labs/devnet-src/sample-app/  
devasc@labvm:~/labs/devnet-src/sample-app$ touch user-input.sh
```

#### SCREENSHOT:

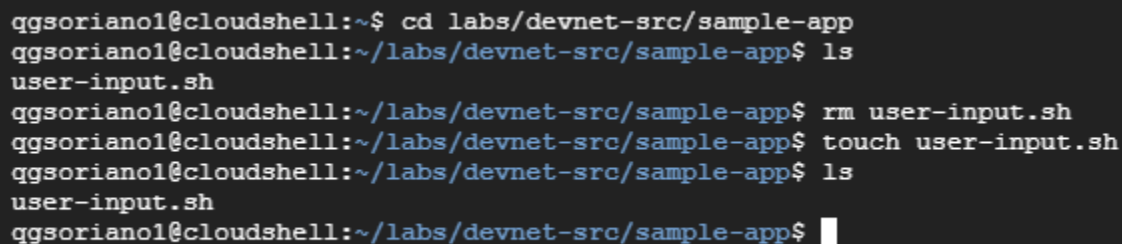


```
qgsoriano1@cloudshell:~$ cd labs/devnet-src/sample-app  
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls  
user-input.sh  
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ rm user-input.sh  
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ touch user-input.sh  
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls  
user-input.sh  
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

#### Step 2: Open the file in the nano text editor.

Use the **nano** command to open the nano text editor.

```
devasc@labvm:~/labs/devnet-src/sample-app$ nano user-input.sh
```

#### SCREENSHOT:

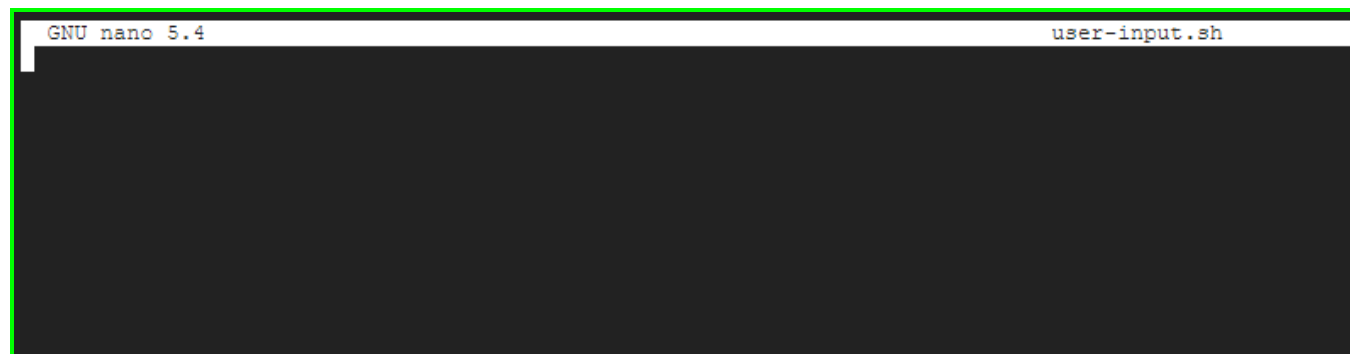

### Step 3: Add the 'she-bang' to the top of the script.

From here you can enter commands for your bash script. Use the arrow keys to navigate in **nano**. Notice the commands at the bottom (not shown here) for managing the file. The carat symbol (^) indicates that you use the CTRL or Command key on your keyboard. For example, to exit **nano**, type CTRL+X.

Add the 'she-bang' which tells the system that this file includes commands that need to be run in the bash shell.

```
#!/bin/bash
```


**Note:** You can use a graphical text editor or open the file with VS Code. However, you should be familiar with command-line text editors like **nano** and **vim**. Search the internet for tutorials to refresh your skill or learn more about them.

### Step 4: Add simple bash commands to the script.

Enter some simple bash commands for your script. The following commands will ask the user for a name, set the name to a variable called **userName**, and display a string of text with the user's name.

```
echo -n "Enter Your Name: "  
read userName  
echo "Your name is $userName."
```

### SCREENSHOT:

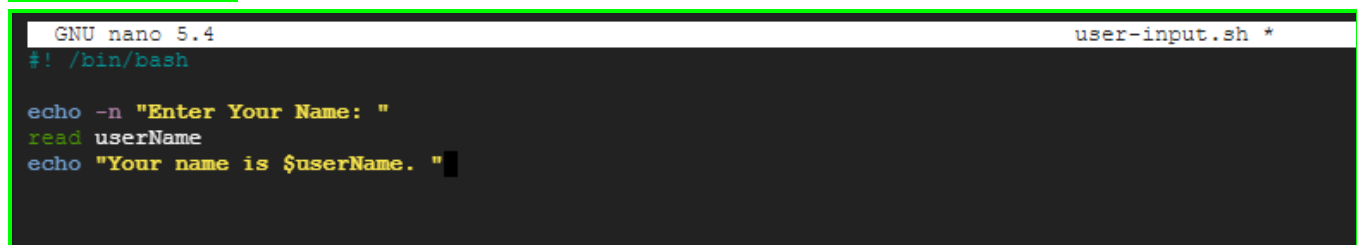


```
GNU nano 5.4 user-input.sh *  
#!/bin/bash  
  
echo -n "Enter Your Name: "  
read userName  
echo "Your name is $userName."
```

### Step 5: Exit nano and save your script.

Press **CTRL+X**, then **Y**, then **ENTER** to exit **nano** and save your script.

### SCREENSHOT:

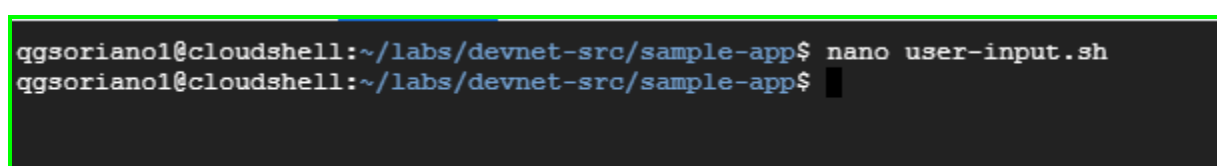

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ nano user-input.sh  
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

### Step 6: Run your script from the command line.

You can run it directly from the command line using the following command.


```
devasc@labvm:~/labs/devnet-src/sample-app$ bash user-input.sh
```

```
Enter Your Name: Bob
```

```
Your name is Bob.
```

```
devasc@labvm:~/labs/devnet-src/sample-app$
```

### SCREENSHOT:

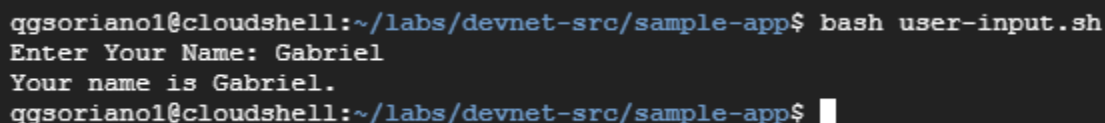

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ bash user-input.sh
Enter Your Name: Gabriel
Your name is Gabriel.
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

### Step 7: Change the mode of the script to an executable file for all users.

Change the mode of the script to an executable using the **chmod** command. Set the options to **a+x** to make the script executable (x) by all users (a). After using **chmod**, notice permissions have been modified for users, groups, and others to include the "x" (executable).

```
devasc@labvm:~/labs/devnet-src/sample-app$ ls -l user-input.sh
```


```
-rw-rw-r-- 1 devasc devasc 84 Jun  7 16:43 user-input.sh
```

```
devasc@labvm:~/labs/devnet-src/sample-app$ chmod a+x user-input.sh
```

```
devasc@labvm:~/labs/devnet-src/sample-app$ ls -l user-input.sh
```

```
-rwxrwxr-x 1 devasc devasc 84 Jun  7 16:43 user-input.sh
```

### SCREENSHOT:

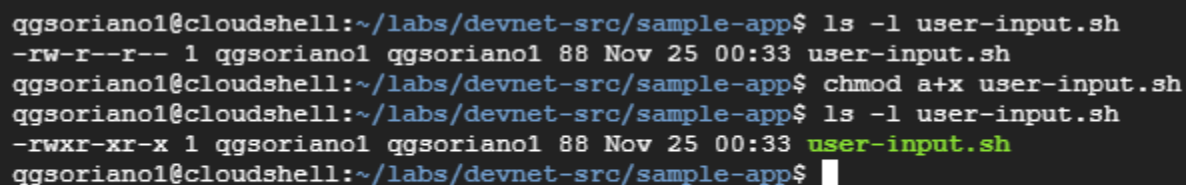


```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls -l user-input.sh
-rw-r--r-- 1 qgsoriano1 qgsoriano1 88 Nov 25 00:33 user-input.sh
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ chmod a+x user-input.sh
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls -l user-input.sh
-rwxr-xr-x 1 qgsoriano1 qgsoriano1 88 Nov 25 00:33 user-input.sh
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

### Step 8: **Rename the file to remove the .sh extension.**

You can rename the file to remove the extension so that users do not have to add .sh to the command to execute the script.

```
devasc@labvm:~/labs/devnet-src/sample-app$ mv user-input.sh user-input
```

#### SCREENSHOT:

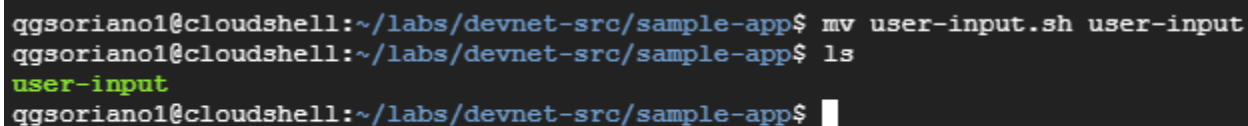

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ mv user-input.sh user-input
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls
user-input
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

### Step 9: **Execute the script from the command line.**

Now the script can be run from the command line without the **source** command or an extension. To run a bash script without the source command, you must preface the script with "./".


```
devasc@labvm:~/labs/devnet-src/sample-app$ ./user-input
```

Enter Your Name: **Bob**

Your name is Bob.

```
devasc@labvm:~/labs/devnet-src/sample-app$
```

#### SCREENSHOT:

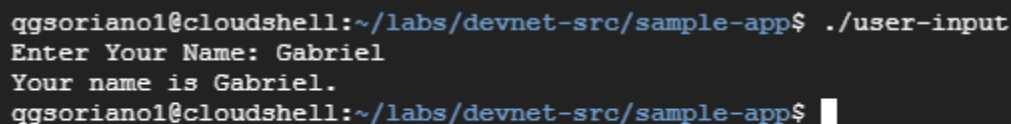

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ./user-input
Enter Your Name: Gabriel
Your name is Gabriel.
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

### Step 10: **Investigate other bash scripts.**

If you have little or no experience creating bash scripts, take some time to search the internet for bash tutorials, bash examples, and bash games.

## Part 3: **Create a Sample Web App**

Before we can launch an application in a Docker container, we first need to have the app. In this part, you will create a very simple Python script that will display the IP address of the client when the client visits the web page.

### Step 1: Install Flask and open a port on the DEVASC VM firewall.

Web application developers using Python typically leverage a framework. A framework is a code library to make it easier for developers to create reliable, scalable and maintainable web applications. Flask is a web application framework written in Python. Other frameworks include Tornado and Pyramid.

You will use this framework to create the sample web app. Flask receives requests and then provides a response to the user in the web app. This is useful for dynamic web applications because it allows user interaction and dynamic content. What makes your sample web app dynamic is that it will be displaying the IP address of the client.

**Note:** Understanding Flask functions, methods, and libraries are beyond the scope of this course. It is used in this lab to show how quickly you can get a web application up and running. If you want to learn more, search the internet for more information and tutorials on the Flask framework.

Open a terminal window and import **flask**.

```
devasc@labvm:~/labs/devnet-src/sample-app$ pip3 install flask
```

#### SCREENSHOT:

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ pip3 install flask
Requirement already satisfied: flask in /usr/local/lib/python3.9/dist-packages (2.2.2)
Requirement already satisfied: Werkzeug>=2.2.2 in /usr/local/lib/python3.9/dist-packages (from flask) (2.2.2)
Requirement already satisfied: importlib-metadata>=3.6.0 in /usr/local/lib/python3.9/dist-packages (from flask) (5.0.0)
Requirement already satisfied: click>=8.0 in /usr/local/lib/python3.9/dist-packages (from flask) (8.1.3)
Requirement already satisfied: Jinja2>=3.0 in /usr/local/lib/python3.9/dist-packages (from flask) (3.1.2)
Requirement already satisfied: itsdangerous>=2.0 in /usr/local/lib/python3.9/dist-packages (from flask) (2.1.2)
Requirement already satisfied: zipp>=0.5 in /usr/local/lib/python3.9/dist-packages (from importlib-metadata>=3.6.0->flask) (3.10.0)
Requirement already satisfied: MarkupSafe>=2.0 in /usr/local/lib/python3.9/dist-packages (from Jinja2>=3.0->flask) (2.1.1)
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

### Step 2: Open the sample\_app.py file.

Open the **sample\_app.py** file located in the **/sample-app** directory. You can do this inside VS Code or you can use a command-line text editor like **nano** or **vim**.

#### SCREENSHOT:

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ cat sample_app.py
# Add to this file for the sample app lab
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

### Step 3: Add the commands to import methods from flask.

Add the following commands to import the required methods from the flask library.

```
from flask import Flask
```

```
from flask import request
```

### Step 4: **Create an instance of the Flask class.**

Create an instance of the Flask class and name it **sample**. Be sure to use two underscores before and after the "name".

```
sample = Flask(__name__)
```

### Step 5: **Define a method to display the client IP address.**

Next, configure Flask so that when a user visits the default page (root directory), it displays a message with the IP address of the client.

```
@sample.route("/")
def main():
    return "You are calling me from " + request.remote_addr + "\n"
```

Notice the `@sample.route("/")` Flask statement. Frameworks such as Flask use a routing technique (`.route`) to refer to an application URL (this not to be confused with network routing). Here the `/` (root directory) is bound to the `main()` function. So, when the user goes to `http://localhost:8080/` (root directory) URL, the output of the return statement will be displayed in the browser.

### Step 6: **Configure the app to run locally.**

Finally, configure Flask to run the app locally at `http://0.0.0.0:8080`, which is also `http://localhost:8080`. Be sure to use two underscores before and after "name", and before and after "main".

```
if __name__ == "__main__":
    sample.run(host="0.0.0.0", port=8080)
```

### SCREENSHOT:

```
# Add to this file for the sample app lab
from flask import Flask
from flask import request

sample = Flask(__name__)

@sample.route("/")
def main():
    return "You are calling me from " + request.remote_addr + "\n"


if __name__ == "__main__":
    sample.run(host="0.0.0.0", port=8080)
```

### Step 7: Save and run your sample web app.


Save your script and run it from the command line. You should see the following output which indicates that your “sample-app” server is running. If you do not see the following output or if you receive an error message, check your `sample_app.py` script carefully.

```
devasc@labvm:~/labs/devnet-src/sample-app$ python3 sample_app.py
* Serving Flask app "sample-app" (lazy loading)
* Environment: production
  WARNING: This is a development server. Do not use it in a production deployment.
  Use a production WSGI server instead.
* Debug mode: off
* Running on http://0.0.0.0:8080/ (Press CTRL+C to quit)
```

### SCREENSHOT:

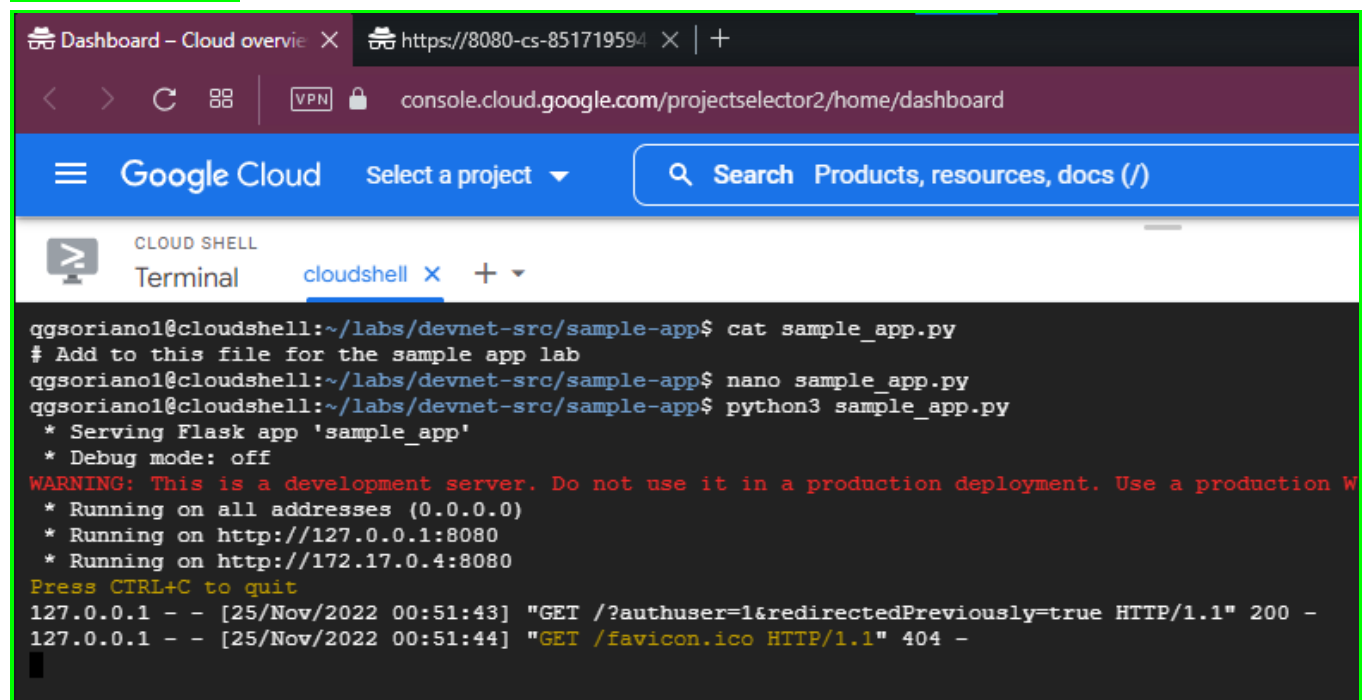



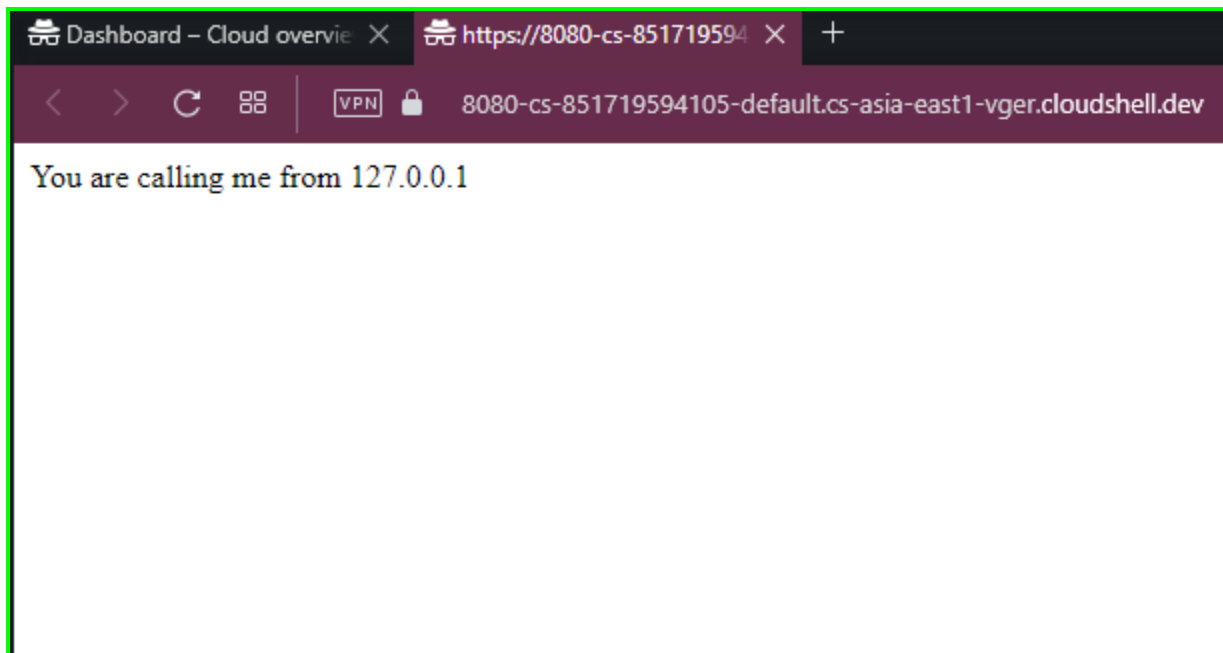

### Step 8: **Verify the server is running.**

You can verify the server is running in one of two ways.

- Open the Chromium web browser and enter 0.0.0.0:8080 in the URL field. You should get the following output:

**You are calling me from 127.0.0.1**

If you receive an "HTTP 400 Bad Request" response, check your sample\_app.py script carefully.

- Open another terminal window and use the command-line URL tool (cURL) to verify the server's response.

```
devasc@labvm:~/labs/devnet-src/sample-app$ curl http://0.0.0.0:8080
```

```
You are calling me from 127.0.0.1
```

```
devasc@labvm:~/labs/devnet-src/sample-app$
```

### Step 9: **Stop the server.**

Return to the terminal window where the server is running and press CTRL+C to stop the server.

## Part 4: **Configure the Web App to use Website Files**

In this part, build out the sample web app to include an **index.html** page and **style.css** specification. The **index.html** is typically the first page loaded in a client's web browser when visiting your website. The **style.css** is a style sheet used to customize the look of the web page.

### Step 1: Explore the directories that will be used by the web app.

The directories **templates** and **static** are already in the **sample-app** directory. Open the **index.html** and **style.css** to view their contents. If you are familiar with HTML and CSS, feel free to customize these directories and files as much as you like. However, be sure you keep the embedded `{{request.remote_addr}}` Python code in the **index.html** file as this is the dynamic aspect of the sample web app.

```
devasc@labvm:~/labs/devnet-src/sample-app$ cat templates/index.html
```

```
<html>
<head>
  <title>Sample app</title>
  <link rel="stylesheet" href="/static/style.css" />
</head>
<body>
  <h1>You are calling me from {{request.remote_addr}}</h1>
</body>
</html>
```

```
devasc@labvm:~/labs/devnet-src/sample-app$ cat static/style.css
```

```
body {background: lightsteelblue;}
```

```
devasc@labvm:~/labs/devnet-src/sample-app$
```

### SCREENSHOTS:

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls
sample_app.py  templates  user-input
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ cat templates/index.html
<html>
<head>
  <title>Sample app</title>
  <link rel="styleshee" href="/static/style.css" />
</head>
<body>
  <h1>You are calling me from {{request.remot_addr}}</h1>
</body>
</html>
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ cat static/style.css
body {background: lightsteelblue;}
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

### Step 2: Update the Python code for the sample web app.

Now that you have explored the basic website files, you need to update the **sample\_app.py** file so that it renders the **index.html** file instead of just returning data. Generating HTML content using Python code can be cumbersome, especially when using conditional statements or repeating structures. The HTML file can be rendered in Flask automatically using the `render_template` function. This requires importing the **render\_template** method from the flask library and editing to the **return** function. Make the highlighted edits to your script.


```
from flask import Flask
from flask import request
from flask import render_template

sample = Flask(__name__)

@sample.route("/")
def main():
    return render_template("index.html")

if __name__ == "__main__":
    sample.run(host="0.0.0.0", port=8080)
```

### SCREENSHOT:

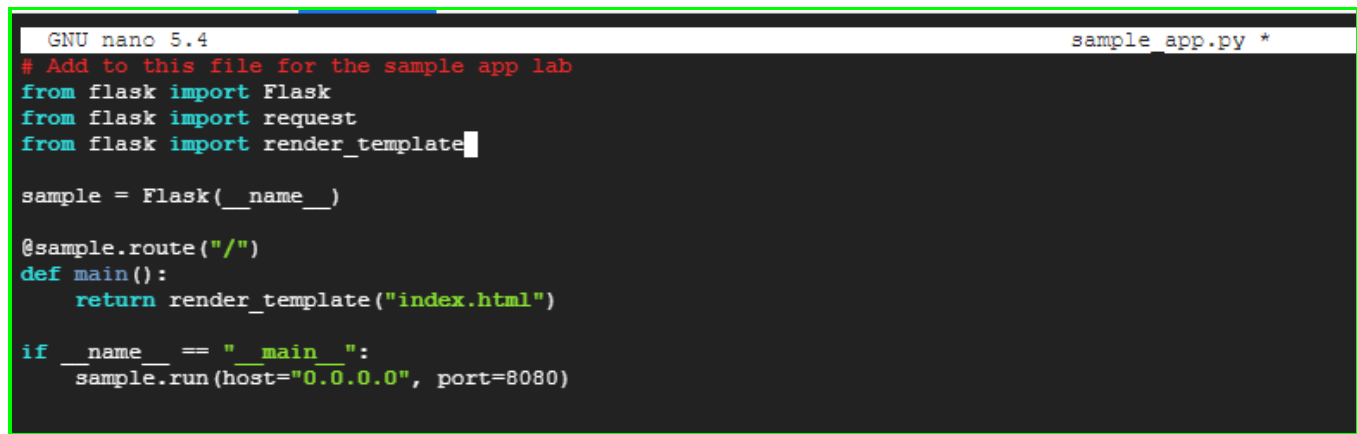

```
GNU nano 5.4 sample_app.py *
# Add to this file for the sample app lab
from flask import Flask
from flask import request
from flask import render_template

sample = Flask(__name__)

@sample.route("/")
def main():
    return render_template("index.html")

if __name__ == "__main__":
    sample.run(host="0.0.0.0", port=8080)
```

### Step 3: Save and run your script.

Save and run your **sample-app.py** script. You should get output like the following:

```
devasc@labvm:~/labs/devnet-src/sample-app$ python3 sample_app.py
* Serving Flask app "sample-app" (lazy loading)
* Environment: production
```


WARNING: This is a development server. Do not use it in a production deployment.  
Use a production WSGI server instead.

- \* Debug mode: off
- \* Running on http://0.0.0.0:8080/ (Press CTRL+C to quit)

**Note:** If you got Traceback output and an error with the message with something like **OSError: [Errno 98] Address already in use**, then you did not shutdown your previous server. Return to the terminal window where that server is running and press CTRL+C to end the server process. Re-run your script.

### SCREENSHOT:

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ python3 sample_app.py
* Serving Flask app 'sample_app'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:8080
* Running on http://172.17.0.4:8080
Press CTRL+C to quit
127.0.0.1 - - [25/Nov/2022 01:05:07] "GET /?authuser=1&redirectedPreviously=true HTTP/1.1" 200 -
127.0.0.1 - - [25/Nov/2022 01:05:16] "GET /?authuser=1 HTTP/1.1" 200 -
^Cqgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ nano sample_app.py
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls
sample_app.py static templates user-input
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ cd static
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/static$ ls
style.css
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/static$ nano style.css
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/static$ cd ..
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls
sample_app.py static templates user-input
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ cd templates
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/templates$ ls
index.html
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/templates$ nano index.html
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/templates$ cd ..
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ python3 sample_app.py
* Serving Flask app 'sample_app'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:8080
* Running on http://172.17.0.4:8080
Press CTRL+C to quit
127.0.0.1 - - [25/Nov/2022 01:09:40] "GET /?authuser=1 HTTP/1.1" 200 -
127.0.0.1 - - [25/Nov/2022 01:09:40] "GET /static/style.css HTTP/1.1" 200 -
```

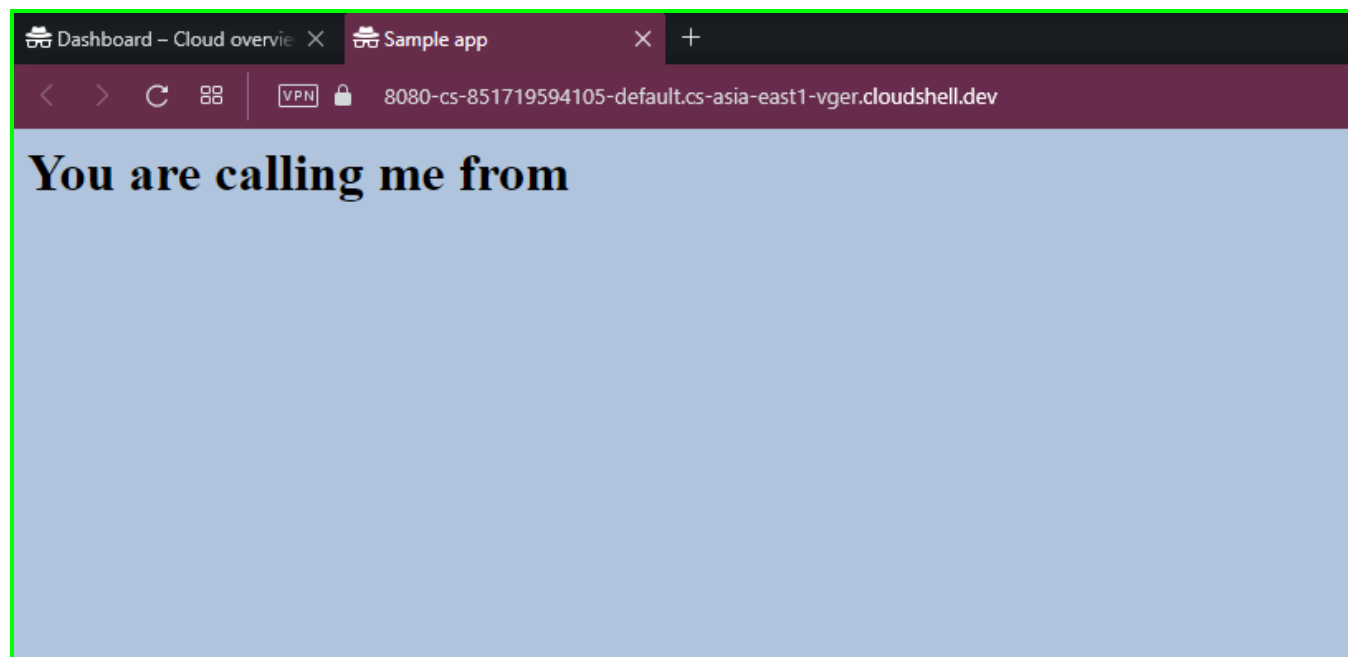

Step 4: **Verify your program is running.**

Again, you can verify your program is running in one of two ways.

- a. Open the Chromium web browser and enter 0.0.0.0:8080 in the URL field. You should get the same output as before. However, your background will be light steel blue and the text will be formatted as H1.

**You are calling me from 127.0.0.1**

**DONE ABOVE**

- b. Open another terminal window and use the **curl** command to verify the server's response. This is where you will see the result of the HTML code rendered automatically using the `render_template` function. In this case, you will get all the HTML content. However, the dynamic Python code will be replaced with the value for `{{request.remote_addr}}`. Also, notice your prompt will be on the same line as the last line of HTML output. Press ENTER to get a new line.

```
devasc@labvm:~/labs/devnet-src/sample-app$ curl http://0.0.0.0:8080
```

```
<html>
<head>
  <title>Sample app</title>
  <link rel="stylesheet" href="/static/style.css" />
</head>
<body>
  <h1>You are calling me from 127.0.0.1</h1>
```

```
</body>
</html>devasc@labvm:~/labs/devnet-src/sample-app$
devasc@labvm:~/labs/devnet-src/sample-app$
```

### SCREENSHOT:

```
CLOUD SHELL
Terminal cloudshell x cloudshell x + v Open Editor

127.0.0.1 - - [25/Nov/2022 01:05:16] "GET /?authuser=1 HTTP/1.1" 200 -
^Cqgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ nano sample_app.py
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls
sample_app.py static templates user-input
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ cd static
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/static$ ls
style.css
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/static$ nano style.css
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/static$ cd ..
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls
sample_app.py static templates user-input
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ cd templates
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/templates$ ls
index.html
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/templates$ nano index.html
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app/templates$ cd ..
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ python3 sample_app.py
* Serving Flask app 'sample_app'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:8080
* Running on http://172.17.0.4:8080
Press CTRL+C to quit
127.0.0.1 - - [25/Nov/2022 01:09:40] "GET /?authuser=1 HTTP/1.1" 200 -
127.0.0.1 - - [25/Nov/2022 01:09:40] "GET /static/style.css HTTP/1.1" 200 -
^Cqgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ python3 sample_app.py
* Serving Flask app 'sample_app'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:8080
* Running on http://172.17.0.4:8080
Press CTRL+C to quit
127.0.0.1 - - [25/Nov/2022 01:15:09] "GET / HTTP/1.1" 200 -
^

qgsoriano1@cloudshell:~$ ls
cloudshell_open Documents err.txt hardwareinfo.txt myfile SampleDirect shutdown.sh Soriano_Act8F std.err update.sh
CPE231 soriano emptydir File.sh labs mymessage script1.sh shutImage.sh Soriano_Act9 std.out
CPE232 Soriano emptyfile find.out multitask.sh README-cloudshell.txt script2.sh Soriano_Act10 Soriano_PrelimExam testAnsible

qgsoriano1@cloudshell:~$ cd labs/devnet-src/sample-app
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ curl https://0.0.0.0:8080
curl: (7) Failed to connect to 0.0.0.0 port 8080: Connection refused
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ curl http://0.0.0.0:8080
curl: (7) Failed to connect to 0.0.0.0 port 8080: Connection refused
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ curl http://0.0.0.0:8080
<html>
<head>
  <title>Sample app</title>
  <link rel="stylesheet" href="/static/style.css" />
</head>
<body>
  <h1>You are calling me from </h1>
</body>
</html>qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

### Step 5: Stop the server.

Return to the terminal window where the server is running and press CTRL+C to stop the server.

## Part 5: Create a Bash Script to Build and Run a Docker Container

An application can be deployed on a bare metal server (physical server dedicated to a single-tenant environment) or in a virtual machine, like you just did in the previous Part. It can also be deployed in a containerized solution like Docker. In this part, you will create a bash script and add commands to it that complete the following tasks to build and run a Docker container:

- Create temporary directories to store the website files.
- Copy the website directories and `sample_app.py` to the temporary directory.
- Build a Dockerfile.
- Build the Docker container.
- Start the container and verify it is running.


### Step 1: Create temporary directories to store the website files.

Open the **sample-app.sh** bash script file in the `~/labs/devnet-src/sample-app` directory. Add the 'she-bang' and the commands to create a directory structure with **tempdir** as the parent folder.

```
#!/bin/bash

mkdir tempdir
mkdir tempdir/templates
mkdir tempdir/static
```

### SCREENSHOT:

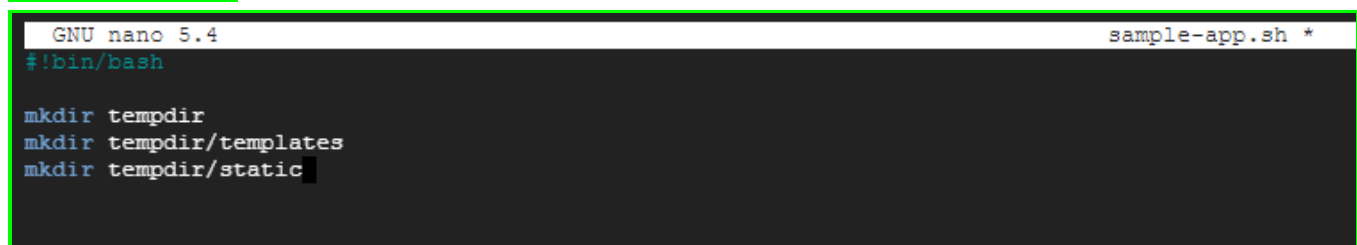

```
GNU nano 5.4 sample-app.sh *
#!/bin/bash

mkdir tempdir
mkdir tempdir/templates
mkdir tempdir/static
```

### Step 2: Copy the website directories and `sample_app.py` to the temporary directory.

in the **sample-app.sh** file, add the commands to copy the website directory and script to **tempdir**.

```
cp sample_app.py tempdir/.
cp -r templates/* tempdir/templates/.
cp -r static/* tempdir/static/.
```

### Step 3: Create a Dockerfile.

In this step, you enter the necessary bash **echo** commands to the **sample-app.sh** file to create a Dockerfile in the **tempdir**. This Dockerfile will be used to build the container.

- a. You need Python running in the container, so add the Docker **FROM** command to install Python in the container.

```
echo "FROM python" >> tempdir/Dockerfile
```

- b. Your **sample\_app.py** script needs Flask, so add the Docker **RUN** command to install Flask in the container.

```
echo "RUN pip install flask" >> tempdir/Dockerfile
```

- c. Your container will need the website folders and the **sample\_app.py** script to run the app, so add the Docker **COPY** commands to add them to a directory in the Docker container. In this example, you will create **/home/myapp** as the parent directory inside the Docker container. Besides copying the **sample\_app.py** file to the Dockerfile, you will also be copying the **index.html** file from the **templates** directory and the **style.css** file from the **static** directory.

```
echo "COPY ./static /home/myapp/static/" >> tempdir/Dockerfile
```

```
echo "COPY ./templates /home/myapp/templates/" >> tempdir/Dockerfile
```

```
echo "COPY sample_app.py /home/myapp/" >> tempdir/Dockerfile
```

- d. Use the Docker **EXPOSE** command to expose port 8080 for use by the webserver.

```
echo "EXPOSE 8080" >> tempdir/Dockerfile
```

- e. Finally, add the Docker **CMD** command to execute the Python script.

```
echo "CMD python3 /home/myapp/sample_app.py" >> tempdir/Dockerfile
```

### Step 4: Build the Docker container.

Add the commands to the **sample-app.sh** file to switch to the **tempdir** directory and build the Docker container. The **docker build** command **-t** option allows you to specify the name of the container and the trailing period (.) indicates that you want the container built in the current directory.

```
cd tempdir
```

```
docker build -t sampleapp .
```

### Step 5: Start the container and verify it is running.

- a. Add the **docker run** command to the **sample-app.sh** file to start the container.

```
docker run -t -d -p 8080:8080 --name samplerunning sampleapp
```

The **docker run** options indicate the following:

- **-t** specifies that you want a terminal created for the container so the you can access it at the command line.



- **-d** indicates that you want the container to run in the background and print the container ID when executing the **docker ps -a** command.
  - **-p** specifies that you want to publish the container's internal port to the host. The first "8080" references the port for the app running in the docker container (our sampleapp). the second "8080" tells docker to use this port on the host. These values do not have to be the same. For example, an internal port 80 to external 800 (**80:800**).
  - **--name** specifies first what you want to call the instance of the container (**samplerunning**) and then the container image that the instance will be based on (**sampleapp**). The instance name can be anything you want. However, the image name needs to match the container name you specified in the docker build command (**sampleapp**).
- b. Add the **docker ps -a** command to display all currently running Docker containers. This command will be the last one executed by the bash script.

docker ps -a

### SCREENSHOT:

```
GNU nano 5.4 sample-app.sh *
#!/bin/bash

mkdir tempdir
mkdir tempdir/templates
mkdir tempdir/static

cp sample_app.py tempdit/.
cp -r templates/* tempdir/templates/.
cp -r static/* tempdir/static/.

echo "FROM python" >> tempdir/Dockerfile

echo "RUN pip install flask" >> tempdir/Dockerfile

echo "COPY ./static /home/myapp/static/" >> tempdir/Dockerfile
echo "COPY ./templates /home/myapp/templates/" >> tempdir/Dockerfile
echo "COPY sample_app.py /home/myapp/" >> tempdir/Dockerfile

echo "EXPOSE 8080" >> tempdir/Dockerfile

echo "CMD python3 /home/myapp/sample_app.py" >> tempdir/Dockerfile

cd tempdir
docker build -t sampleapp .

docker run -t -d -p 8080:8080 --name samplerunning sampleapp

docker ps -a
```

Step 6: **Save your bash script.**

### Part 6: **Build, Run, and Verify the Docker Container**

In this part, you will execute bash script which will make the directories, copy over the files, create a Dockerfile, build the Docker container, run an instance of the Docker container, and display output from the **docker ps -a** command showing details of the container currently running. Then you will investigate the Docker container, stop the container from running, and remove the container.

**Note:** Be sure you stopped any other web server processes you may still have running from the previous parts of this lab.

Step 1: **Execute the bash script.**

Execute the bash script from the command line. You should see output similar to the following. After creating the **tempdir** directories, the script executes the commands to build the Docker container. Notice that Step 7/7 in the output executes the **sample\_app.py** that creates the web server. Also, notice the container ID. You will see this in the Docker command prompt later in the lab.

```
devasc@labvm:~/labs/devnet-src/sample-app$ bash ./sample-app.sh
Sending build context to Docker daemon 6.144kB
Step 1/7 : FROM python
latest: Pulling from library/python
90fe46dd8199: Pulling fs layer
35a4f1977689: Pulling fs layer
bbc37f14aded: Pull complete
74e27dc593d4: Pull complete
4352dcff7819: Pull complete
deb569b08de6: Pull complete
98fd06fa8c53: Pull complete
7b9cc4fdefe6: Pull complete
512732f32795: Pull complete
Digest:
sha256:ad7fb5bb4770e08bf10a895ef64a300b288696a1557a6d02c8b6fba98984b86a
Status: Downloaded newer image for python:latest
---> 4f7cd4269fa9
Step 2/7 : RUN pip install flask
---> Running in 32d28026afea
Collecting flask
  Downloading Flask-1.1.2-py2.py3-none-any.whl (94 kB)
Collecting click>=5.1
  Downloading click-7.1.2-py2.py3-none-any.whl (82 kB)
```

```
Collecting Jinja2>=2.10.1
  Downloading Jinja2-2.11.2-py2.py3-none-any.whl (125 kB)
Collecting Werkzeug>=0.15
  Downloading Werkzeug-1.0.1-py2.py3-none-any.whl (298 kB)
Collecting itsdangerous>=0.24
  Downloading itsdangerous-1.1.0-py2.py3-none-any.whl (16 kB)
Collecting MarkupSafe>=0.23
  Downloading MarkupSafe-1.1.1-cp38-cp38-manylinux1_x86_64.whl (32 kB)
Installing collected packages: click, MarkupSafe, Jinja2, Werkzeug, itsdangerous, flask
Successfully installed Jinja2-2.11.2 MarkupSafe-1.1.1 Werkzeug-1.0.1 click-7.1.2
flask-1.1.2 itsdangerous-1.1.0
Removing intermediate container 32d28026afea
---> 619aee23fd2a
Step 3/7 : COPY ./static /home/myapp/static/
---> 15fac1237eec
Step 4/7 : COPY ./templates /home/myapp/templates/
---> dc807b5cf615
Step 5/7 : COPY sample_app.py /home/myapp/
---> d4035a63ae14
Step 6/7 : EXPOSE 8080
---> Running in 40c2d35aa29a
Removing intermediate container 40c2d35aa29a
---> eb789099a678
Step 7/7 : CMD python3 /home/myapp/sample_app.py
---> Running in 41982e2c6209
Removing intermediate container 41982e2c6209
---> a2588e9b0593
Successfully built a2588e9b0593
Successfully tagged sampleapp:latest
8953a95374ff8ebc203059897774465312acc8f0ed6abd98c4c2b04448a56ba5
CONTAINER ID    IMAGE    COMMAND    CREATED
STATUS    PORTS    NAMES
8953a95374ff    sampleapp    "/bin/sh -c 'python ..."    1 second ago    Up Less
than a second    0.0.0.0:8080->8080/tcp    samplerunning
devasc@labvm:~/labs/devnet-src/sample-app$
```

**SCREENSHOT:**

```
Step 6/14 : EXPOSE 8080
----> Running in e8795612f30e
Removing intermediate container e8795612f30e
----> 3060f14c9ed7
Step 7/14 : CMD python3 /home/myapp/sample_app.py
----> Running in cdd6e38d81a4
Removing intermediate container cdd6e38d81a4
----> 558e8d3accf6
Step 8/14 : FROM python
----> ee4e7a0f1c35
Step 9/14 : RUN pip install flask
----> Using cache
----> 860980ab4a08
Step 10/14 : COPY ./static /home/myapp/static/
----> Using cache
----> 0334c0f3e8d0
Step 11/14 : COPY ./templates /home/myapp/templates/
----> Using cache
----> 8e5a55717f11
Step 12/14 : COPY sample_app.py /home/myapp/
----> Using cache
----> f585260add70
Step 13/14 : EXPOSE 8080
----> Using cache
----> 3060f14c9ed7
Step 14/14 : CMD python3 /home/myapp/sample_app.py
----> Using cache
----> 558e8d3accf6
Successfully built 558e8d3accf6
Successfully tagged sampleapp:latest
4d0791b0cf6062d8d3dbf243bde3d4f7e11eb1090c0c8c8e373f40f315abb67c
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS                               NAMES
4d0791b0cf60   sampleapp     "/bin/sh -c 'python3..." 1 second ago   Up           0.0.0.0:8080->8080/tcp             samplerunning
qgsorianol@cloudshell:~/labs/devnet-src/sample-app$ ls
sample_app.py  sample-app.sh  static  tempdir  templates  user-input
qgsorianol@cloudshell:~/labs/devnet-src/sample-app$
```

### Step 2: Investigate the running Docker container and the web app.

- The creation of the **tempdir** directories is not shown in the output for the script. You could add **echo** commands to print out messages when they are successfully created. You can also verify they are there with the **ls** command. Remember, this directory has the files and folders used to build the container and launch the web app. It is not the container that was built.

```
devasc@labvm:~/labs/devnet-src/sample-app$ ls tempdir/
```

```
Dockerfile sample_app.py static templates
```

```
devasc@labvm:~/labs/devnet-src/sample-app$
```

- Notice the Dockerfile created by your bash script. Open this file to see how it looks in its final form without the **echo** commands.

```
devasc@labvm:~/labs/devnet-src/sample-app$ cat tempdir/Dockerfile
```

```
FROM python
```

```
RUN pip install flask
```

```
COPY ./static /home/myapp/static/
```

```
COPY ./templates /home/myapp/templates/
```

```
COPY sample_app.py /home/myapp/
```

```
EXPOSE 8080
```

```
CMD python3 /home/myapp/sample_app.py
```

- c. The output for the **docker ps -a** command may be hard to read depending on the width of your terminal display. You can redirect it to a text file where you can view it better without word wrapping.

```
devasc@labvm:~/labs/devnet-src/sample-app$ docker ps -a >> running.txt
devasc@labvm:~/labs/devnet-src/sample-app$
```

- d. The Docker container creates its own IP address from a private network address space. Verify the web app is running and reporting the IP address. In a web browser at **http://localhost:8080**, you should see the message **You are calling me from 172.17.0.1** formatted as H1 on a light steel blue background. You can also use the **curl** command, if you like.

```
devasc@labvm:~/labs/devnet-src/sample-app$ curl http://172.17.0.1:8080
<html>
<head>
  <title>Sample app</title>
  <link rel="stylesheet" href="/static/style.css" />
</head>
<body>
  <h1>You are calling me from 172.17.0.1</h1>
</body>
</html>devasc@labvm:~/labs/devnet-src/sample-app$
devasc@labvm:~/labs/devnet-src/sample-app$
```

- e. By default, Docker uses the IPv4 172.17.0.0/16 subnet for container networking. (This address can be changed if necessary.) Enter the command **ip address** to display all the IP addresses used by your instance of the DEVASC VM. You should see the loopback address 127.0.0.1 that the web app used earlier in the lab and the new Docker interface with the IP address 172.17.0.1.

```
devasc@labvm:~/labs/devnet-src/sample-app$ ip address
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN
    group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
<output omitted>
4: docker0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc noqueue
    state UP group default
    link/ether 02:42:c2:d1:8a:2d brd ff:ff:ff:ff:ff:ff
    inet 172.17.0.1/16 brd 172.17.255.255 scope global docker0
        valid_lft forever preferred_lft forever
```

```
inet6 fe80::42:c2ff:fed1:8a2d/64 scope link
valid_lft forever preferred_lft forever
<output omitted>
```

### Step 3: Access and explore the running container.

Remember that a Docker container is a way of encapsulating everything you need to run your application so that it can easily be deployed in a variety of environments--not just in your DEVASC VM.

- To access the running container, enter the **docker exec -it** command specifying the name of the running container (samplerunning) and that you want a bash shell (/bin/bash). The **-i** option specifies that you want it to be interactive and the **-t** option specifies that you want terminal access. The prompt changes to **root@containerID**. Your container ID will be different than the one shown below. Notice the container ID matches the ID shown in the output from **docker ps -a**.

```
devasc@labvm:~/labs/devnet-src/sample-app$ docker exec -it samplerunning
/bin/bash
root@8953a95374ff:/#
```

- You are now in root access for the **samplerunning** Docker container. From here, you can use Linux commands to explore the Docker container. Enter **ls** to see the directory structure at the root level.

```
root@8953a95374ff:/# ls
bin  dev  home  lib64  mnt  proc  run  srv  tmp  var
boot  etc  lib   media  opt  root  sbin  sys  usr
root@8953a95374ff:/#
```

- Recall that in your bash script, you added commands in the Dockerfile that copied your app directories and files to the **home/myapp** directory. Enter the **ls** command again for that folder to see your **sample\_app.py** script and directories. To get a better understanding of what is included in your Docker container, you may wish to use the **ls** command to examine other directories such as /etc and /bin.

```
root@8953a95374ff:/# ls home/myapp/
sample_app.py  static  templates
root@8953a95374ff:/#
```

- Exit the Docker container to return to the DEVASC VM command line.

```
root@8953a95374ff:/# exit
exit
devasc@labvm:~/labs/devnet-src/sample-app$
```

### Step 4: Stop and remove the Docker container.

- You can stop the Docker container with the **docker stop** command specifying the name of the running container. It will take a few seconds to clean up and cache the container.

You can see that it still exists by entering the **docker ps -a** command. However, if you refresh the web page for **http://localhost:8080**, you will see the web app is no longer running.

```
devasc@labvm:~/labs/devnet-src/sample-app$ docker stop samplerunning
```

```
samplerunning
```

```
devasc@labvm:~/labs/devnet-src/sample-app$ docker ps -a
```

CONTAINER ID	IMAGE	COMMAND	CREATED	
STATUS	PORTS	NAMES		
df034cb53e72	sampleapp	"/bin/sh -c 'python ..."	49 minutes ago	Exited
(137)	20 seconds ago	samplerunning		

```
devasc@labvm:~/labs/devnet-src/sample-app$
```

- b. You can restart a stopped container with the **docker start** command. The container will immediately spin up.

```
devasc@labvm:~/labs/devnet-src/sample-app$ docker start samplerunning
```

```
samplerunning
```

```
devasc@labvm:~/labs/devnet-src/sample-app$
```

- c. To permanently remove the container, first stop it and then remove it with the **docker rm** command. You can always rebuild it again executing the **sample-app** program. Use the **docker ps -a** command to verify the container has been removed.

```
devasc@labvm:~/labs/devnet-src/sample-app$ docker stop samplerunning
```

```
samplerunning
```

```
devasc@labvm:~/labs/devnet-src/sample-app$ docker rm samplerunning
```

```
samplerunning
```

```
devasc@labvm:~/labs/devnet-src/sample-app$ docker ps -a
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS
PORTS	NAMES			

```
devasc@labvm:~/labs/devnet-src/sample-app$
```

### SCREENSHOTS:

## Lab - Build a Sample Web App in a Docker Container

```
---> Using cache
---> f585260add70
Step 13/21 : EXPOSE 8080
---> Using cache
---> 3060f14c9ed7
Step 14/21 : CMD python3 /home/myapp/sample_app.py
---> Using cache
---> 558e8d3accf6
Step 15/21 : FROM python
---> ee4e7a0f1c35
Step 16/21 : RUN pip install flask
---> Using cache
---> 860980ab4a08
Step 17/21 : COPY ./static /home/myapp/static/
---> Using cache
---> 0334c0f3e8d0
Step 18/21 : COPY ./templates /home/myapp/templates/
---> Using cache
---> 8e5a55717f11
Step 19/21 : COPY sample_app.py /home/myapp/
---> Using cache
---> f585260add70
Step 20/21 : EXPOSE 8080
---> Using cache
---> 3060f14c9ed7
Step 21/21 : CMD python3 /home/myapp/sample_app.py
---> Using cache
---> 558e8d3accf6
Successfully built 558e8d3accf6
Successfully tagged sampleapp:latest
docker: Error response from daemon: Conflict. The container name "/samplerunning" is already in use by container "4d0791b0cf6062d8d3dbf243bde3d4f7e11eb1090c0c8c8e373f40f315abb67c". You have to remove (or rename) that container to be able to reuse that name.
See 'docker run --help'.
CONTAINER ID   IMAGE      COMMAND                  CREATED        STATUS        PORTS                               NAMES
4d0791b0cf60   sampleapp  "/bin/sh -c 'python3_..." 18 minutes ago Up 18 minutes  0.0.0.0:8080->8080/tcp              samplerunning
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ docker ps -a
CONTAINER ID   IMAGE      COMMAND                  CREATED        STATUS        PORTS                               NAMES
4d0791b0cf60   sampleapp  "/bin/sh -c 'python3_..." 20 minutes ago Up 20 minutes  0.0.0.0:8080->8080/tcp              samplerunning
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ docker ps -a
CONTAINER ID   IMAGE      COMMAND                  CREATED        STATUS        PORTS                               NAMES
4d0791b0cf60   sampleapp  "/bin/sh -c 'python3_..." 20 minutes ago Up 20 minutes  0.0.0.0:8080->8080/tcp              samplerunning
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ docekr ps -a >> running.txt
-bash: docekr: command not found
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ docker ps -a >> running.txt
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ ls
running.txt  sample_app.py  sample-app.sh  static  tmpdir  templates  user-input
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$
```

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ docker exec -it
"docker exec" requires at least 2 arguments.
See 'docker exec --help'.
```

Usage: docker exec [OPTIONS] CONTAINER COMMAND [ARG...]

Run a command in a running container

```
qgsoriano1@cloudshell:~/labs/devnet-src/sample-app$ docker exec -it samplerunning /bin/bash
root@4d0791b0cf60:/#
```

## SCREENSHOTS:



```
-bash: cd: labs: No such file or directory
qgsoriano1@cloudshell:~$ cd HOA12.1_Soriano
qgsoriano1@cloudshell:~/HOA12.1_Soriano$ ls
labs README.md
qgsoriano1@cloudshell:~/HOA12.1_Soriano$ git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    labs/

nothing added to commit but untracked files present (use "git add" to track)
qgsoriano1@cloudshell:~/HOA12.1_Soriano$ git add *
qgsoriano1@cloudshell:~/HOA12.1_Soriano$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   labs/devnet-src/sample-app/running.txt
    new file:   labs/devnet-src/sample-app/sample-app.sh
    new file:   labs/devnet-src/sample-app/sample_app.py
    new file:   labs/devnet-src/sample-app/static/style.css
    new file:   labs/devnet-src/sample-app/templedir/Dockerfile
    new file:   labs/devnet-src/sample-app/templedir/sample_app.py
    new file:   labs/devnet-src/sample-app/templedir/static/style.css
    new file:   labs/devnet-src/sample-app/templedir/templates/index.html
    new file:   labs/devnet-src/sample-app/templates/index.html
    new file:   labs/devnet-src/sample-app/user-input

qgsoriano1@cloudshell:~/HOA12.1_Soriano$ git commit -m "FINISHED ON NOVEMBER 25, 2022 AT 11:01AM"
[main cad0070] FINISHED ON NOVEMBER 25, 2022 AT 11:01AM
10 files changed, 102 insertions(+)
create mode 100644 labs/devnet-src/sample-app/running.txt
create mode 100644 labs/devnet-src/sample-app/sample-app.sh
```

```
Changes to be committed:
(use "git restore --staged <file>..." to unstage)
    new file:   labs/devnet-src/sample-app/running.txt
    new file:   labs/devnet-src/sample-app/sample-app.sh
    new file:   labs/devnet-src/sample-app/sample_app.py
    new file:   labs/devnet-src/sample-app/static/style.css
    new file:   labs/devnet-src/sample-app/tmpdir/Dockerfile
    new file:   labs/devnet-src/sample-app/tmpdir/sample_app.py
    new file:   labs/devnet-src/sample-app/tmpdir/static/style.css
    new file:   labs/devnet-src/sample-app/tmpdir/templates/index.html
    new file:   labs/devnet-src/sample-app/templates/index.html
    new file:   labs/devnet-src/sample-app/user-input

qgsoriano1@cloudshell:~/HOA12.1_Soriano$ git commit -m "FINISHED ON NOVEMBER 25, 2022 AT 11:01AM"
[main cad0070] FINISHED ON NOVEMBER 25, 2022 AT 11:01AM
10 files changed, 102 insertions(+)
create mode 100644 labs/devnet-src/sample-app/running.txt
create mode 100644 labs/devnet-src/sample-app/sample-app.sh
create mode 100644 labs/devnet-src/sample-app/sample_app.py
create mode 100644 labs/devnet-src/sample-app/static/style.css
create mode 100644 labs/devnet-src/sample-app/tmpdir/Dockerfile
create mode 100644 labs/devnet-src/sample-app/tmpdir/sample_app.py
create mode 100644 labs/devnet-src/sample-app/tmpdir/static/style.css
create mode 100644 labs/devnet-src/sample-app/tmpdir/templates/index.html
create mode 100644 labs/devnet-src/sample-app/templates/index.html
create mode 100755 labs/devnet-src/sample-app/user-input
qgsoriano1@cloudshell:~/HOA12.1_Soriano$ git push origin main
Enumerating objects: 16, done.
Counting objects: 100% (16/16), done.
Delta compression using up to 2 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (15/15), 1.86 KiB | 380.00 KiB/s, done.
Total 15 (delta 0), reused 0 (delta 0), pack-reused 0
To github.com:qgsoriano1/HOA12.1_Soriano.git
   19a37d6..cad0070  main -> main
qgsoriano1@cloudshell:~/HOA12.1_Soriano$
```

The screenshot shows a GitHub repository page for a user named qgsoriano1. The repository is named HOA12.1\_Soriano and is public. The page displays the repository's structure with a file tree showing folders like labs/devnet-src/sample-app and files like README.md. The commit history shows a single commit by qgsoriano1 with the message "FINISHED ON NOVEMBER 25, 2022 AT 11:01AM". The README.md file is visible, showing the title "HOA12.1\_Soriano". The right sidebar contains metadata such as "No description, v", "Readme", "0 stars", "1 watching", "0 forks", and "Releases".

- This shows the successful performance of the activity and the successful git adding, committing, and pushing of the files that has been created and performed in this activity.