gitalk / gitalk

hexo next 主题配置 gitalk 评论后无法初始化创建 issue #115

New issue

(F) Closed | qhh0205 opened this issue 11 hours ago · 14 comments



qhh0205 commented 11 hours ago • edited ▼

@booxood @lex111 @mamboer

问题描述

我根据这篇教程配的,过程完全一模一样,但是配完后打开每篇文章(没有报任何错),没有评论框,只有 如下 gitalk 提示:

未找到相关的 Issues 进行评论

请联系 @ghh0205 初始化创建

使用 Github 登录

我点击底下的登录按钮后直接进入 github 博客仓库了,并没有 issue 产生,这是什么原因呢? 而且返回页 面后还是这样,没有什么变化,一直显示没有相关 issue。。

我的 blog 地址: https://qhh0205.github.io/

主要配置

next 主题文件 gitalk 配置:

```
gitalk:
  enable: true
  githubID: qhh0205
  repo: qhh0205.github.io
  ClientID:
  ClientSecret:
  adminUser: qhh0205
  distractionFreeMode: true
```


layout/_third-party/comments/gitalk.swig 文件:

```
{% if page.comments && theme.gitalk.enable %}
 <link rel="stylesheet" href="https://unpkg.com/gitalk/dist/gitalk.css">
  <script src="https://unpkg.com/gitalk/dist/gitalk.min.js"></script>
   <script type="text/javascript">
        var gitalk = new Gitalk({
          clientID: '{{ theme.gitalk.ClientID }}',
          clientSecret: '{{ theme.gitalk.ClientSecret }}',
          repo: '{{ theme.gitalk.repo }}',
          owner: '{{ theme.gitalk.githubID }}'
          admin: ['{{ theme.gitalk.adminUser }}'],
          id: location.pathname,
distractionFreeMode: '{{ theme.gitalk.distractionFreeMode }}'
        gitalk.render('gitalk-container')
   </script>
{% endif %}
```

Assignees No one assigned Labels None yet Projects None yet Milestone No milestone Notifications

2 participants (C)

🌠 qhh0205 changed the title from hexo next 主题配置 gitalk 评论后没有评论框 to hexo next 主题配 置 gitalk 评论后无法初始化创建 issue 10 hours ago

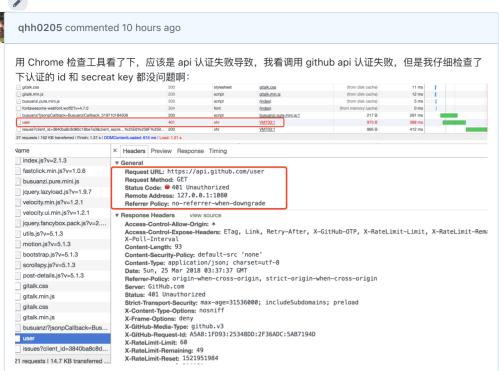



iochen commented 9 hours ago

crieurzecier: .ioaaizeiezzsza/3cz4daaeda

repo: 'qhh0205.github.io', owner: 'ahh0205'.

填repo名字、不是填地址



iochen commented 9 hours ago

同时,建议不要使用中文为post文件名,

https://qhh0205.github.io/2018/03/24/Python-两大环境管理神器: pyenv-和-virtualenv/

详见 #102 (comment)



qhh0205 commented 9 hours ago

我的仓库的名字就是 qhh0205.github.io

https://github.com/qhh0205/qhh0205.github.io



qhh0205.github.io

Rename



iochen commented 9 hours ago • edited •

好吧,是我看错了……看看下一个方案有没有用,我以前就吃过文件名过长的坑 #115 (comment)



🚺 🧿 iochen referenced this issue in geedme/gitalk 9 hours ago

Hexo中Gitalk配置使用教程-可能是目前最详细的教程 | ioChen's Blog #3

① Open



qhh0205 commented 9 hours ago

@iochen

应该不是文件名过长问题,我刚新建了一个 post,名称为: test ,这个够短了吧,但是还是同样的问题。https://qhh0205.github.io/2018/03/25/test/



iochen commented 8 hours ago • edited •

 $https://github.com/qhh0205/qhh0205.github.io/\underline{lerror=redirect\ uri\ mismatch} \\ error_description=The+redirect_uri+MUST+match+the+registere$

回调地址确认一下

在这里 https://github.com/settings/developers 修改



iochen commented 8 hours ago

Authorization callback URL

https://iochen.com

Your application's callback URL. Read our OAuth documentation for more information.

这是我的







qhh0205 commented 8 hours ago

@iochen

回调地址也是没问题的:

Application name

qhh0205.github.io

Something users will recognize and trust

Homepage URL

https://github.com/qhh0205/qhh0205.github.io

The full URL to your application homepage

Application description

qhh0205 gitalk 评论

This is displayed to all users of your application

Authorization callback URL

https://github.com/qhh0205/qhh0205.github.io/

Your application's callback URL. Read our OAuth documentation for more information.

Update application

Delete application




qhh0205 commented 8 hours ago

@iochen 回调地址是博客地址吗?还是仓库地址



qhh0205 commented 8 hours ago • edited •

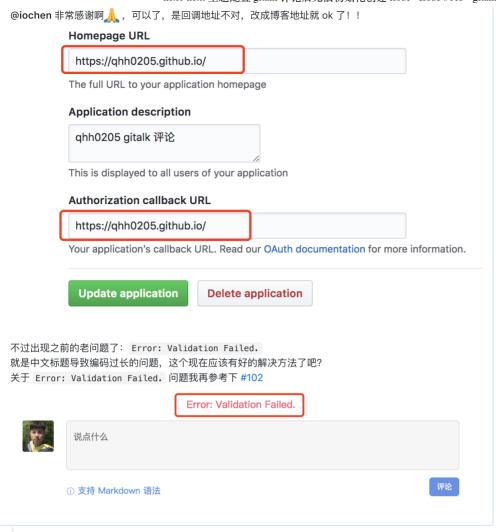



ghh0205 commented 7 hours ago • edited ▼

@iochen 你好麻烦再请教下,我按照之前的 issue #102 用 md5 加密 id,本地 npm install md5 是成功的。但是没生效,blog 页面底下评论框都没了,不知道什么原因。。。

blog 地址: http://qhh0205.github.io/

具体配置如下:

```
{% if page.comments && theme.gitalk.enable %}
 <link rel="stylesheet" href="https://unpkg.com/gitalk/dist/gitalk.css">
 <script src="https://unpkg.com/gitalk/dist/gitalk.min.js"></script>
  <script type="text/javascript">
       var gitalk = new Gitalk({
         clientID: '3840ba8c8d80c18be7e3',
         clientSecret: '1b00f2efe5285973c24da9ed9ac895775eacc8ea',
         repo: '{{ theme.gitalk.repo }}',
         owner: '{{ theme.gitalk.githubID }}'
         admin: ['{{ theme.gitalk.adminUser }}'],
         id: md5(location.pathname),
         distractionFreeMode: '{{ theme.gitalk.distractionFreeMode }}'
       })
       gitalk.render('gitalk-container')
   </script>
{% endif %}
```



iochen commented 6 hours ago

```
@qhh0205 将 https://github.com/blueimp/JavaScript-MD5/blob/master/is/md5.min.js 下载放到你hexo
的js文件夹中, 然后在配置上方加上 <script src="这里是你的MD5的js的路径"></script>
就像这样
{% if page.comments && theme.gitalk.enable %}
  <link rel="stylesheet" href="https://unpkg.com/gitalk/dist/gitalk.css">
  <script src="https://unpkg.com/gitalk/dist/gitalk.min.js"></script>
  <script src="/js/src/md5.min.js"></script>
   <script type="text/javascript">
         var gitalk = new Gitalk({
           clientID: '{{ theme.gitalk.ClientID }}',
clientSecret: '{{ theme.gitalk.ClientSecret }}',
           repo: '{{ theme.gitalk.repo }}',
owner: '{{ theme.gitalk.owner }}',
admin: ['{{ theme.gitalk.adminUser }}'],
           id: md5({{ theme.gitalk.ID }}),
           perPage: {{ theme.gitalk.perPage }},
           pagerDirection: '{{ theme.gitalk.pagerDirection }}',
           createIssueManually: {{ theme.gitalk.createIssueManually }},
distractionFreeMode: {{ theme.gitalk.distractionFreeMode }}
        gitalk.render('gitalk-container')
        </script>
{% endif %}
然后上传测试一下, 我自己测试了一下。可以
 #6 opened 4 minutes ago by iochen
```



qhh0205 commented 5 hours ago

@iochen 非常感谢,又帮我解决了个问题。

我没有本地加载,我选择远程加载了下,我一般把代码片段都保存成了 gist,所以我创建了个 gitst,然后远程引入 is gist 地址。

在此把具体过程详细写下,献给小白朋友们(当然我也是 QAQ):

解决: gitalk 报错 Error: Validation Failed. --MD5 加密 id 避免 github issue lables 50 字符限制

1. 创建一个github gist 文件保存 https://github.com/blueimp/JavaScript-

MD5/blob/master/js/md5.min.js js 源码:

https://gist.githubusercontent.com/qhh0205/78e9e0b1f3114db6737f3ed8cdd51d3a/raw/3894c5be5aa2378336b1f5ee0f296fa0b22d06e9/md5.min.js

2. 将 gist 链接嵌入到 layout/_third-party/comments/gitalk.swig 文件,嵌入时的 js 链接地址需要注意下:

不能直接写第一步的创建的 gitst 链接地址,需要将 gist.githubusercontent.com 替换为 rawgit.com 。即嵌入地址为:

https://rawgit.com/qhh0205/78e9e0b1f3114db6737f3ed8cdd51d3a/raw/3894c5be5aa2378336b1f5ee0f296fa0b22d06e9/md5.min.js

最终 layout/_third-party/comments/gitalk.swig 配置如下:

```
{% if page.comments && theme.gitalk.enable %}
  <link rel="stylesheet" href="https://unpkg.com/gitalk/dist/gitalk.css">
  <script src="https://unpkg.com/gitalk/dist/gitalk.min.js"></script>
  <script src="https://rawqit.com/qhh0205/78e9e0b1f3114db6737f3ed8cdd51d3a/raw/3894c5be5aa.</pre>
   <script type="text/javascript">
        var gitalk = new Gitalk({
          clientID: '3840ba8c8d80c18be7e3',
          clientSecret: '1b00f2efe5285973c24da9ed9ac895775eacc8ea',
          repo: '{{ theme.gitalk.repo }}',
          owner: '{{ theme.gitalk.githubID }}'
          admin: ['{{ theme.gitalk.adminUser }}'],
          id: md5(location.pathname),
          distractionFreeMode: '{{ theme.gitalk.distractionFreeMode }}'
        })
        gitalk.render('gitalk-container')
    </script>
{% endif %}
```

