

# MultiSim: A Python Toolbox for Simulating Datasets with Time-Resolved Multivariate Effects

Alex Lepauvre<sup>1,2</sup>, Qian Chu<sup>1,3,4,5</sup>, Lucia Melloni<sup>1,6,7</sup>, and Peter Zeidman<sup>8</sup>

<sup>1</sup> Neural Circuits, Consciousness and Cognition Research Group, Max Planck Institute for Empirical Aesthetics, Frankfurt am Main, Germany <sup>2</sup> Department of Psychology, Technische Universität Dresden, Dresden 01187, Germany <sup>3</sup> Max Planck – University of Toronto Centre for Neural Science and Technology <sup>4</sup> Krembil Brain Institute, Toronto Western Hospital, University Health Network, Toronto, ON, Canada <sup>5</sup> Institute of Biomedical Engineering, University of Toronto, Toronto, ON, Canada <sup>6</sup> Department of Neurology, New York University Grossman School of Medicine, New York, NY, USA <sup>7</sup> Predictive Brain Department, Research Center One Health Ruhr, University Alliance Ruhr, Faculty of Psychology, Ruhr University Bochum, Bochum, Germany <sup>8</sup> Wellcome Centre for Human Neuroimaging, Institute of Neurology, University College London, London, UK <sup>\*</sup> Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

## Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Open Journals](#)

## Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

## License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#))

## Summary

MultiSim is a Python package for simulating multivariate patterns in multi-channel and time-resolved neural signals. Users can flexibly specify the time windows, temporal dynamics, and size of the multivariate effects to simulate trial-by-trial epoched data according to custom experimental designs. The simulated data thus contain “ground truth” effects that can be used to benchmark multivariate analysis pipelines to establish their sensitivity and specificity. In addition, the toolbox can be used to perform power analysis, by varying the number of subjects and number of trials per subjects at fixed effect size and noise parameters to identify the optimal combination to ensure that their sample is properly powered.

## Statement of needs

Multivariate pattern analysis (MVPA) is an established method in cognitive neuroscience for probing how the brain represents information (Haxby et al., 2001; Haynes & Rees, 2006; Kriegeskorte et al., 2008; Poldrack et al., 2009; Ritchie et al., 2019). Applied to high-temporal-resolution electrophysiology signals such as electro- and magneto-encephalography (EEG and MEG respectively), MVPA can reveal the millisecond-by-millisecond unfolding of mental representations (Cichy et al., 2014; Cogitate Consortium et al., 2025; King et al., 2016; King & Dehaene, 2014; Kok et al., 2017). However, the parameter space of MVPA is large, and the sensitivity and specificity of analysis pipelines are often unclear. While real neural data can be used to benchmark pipelines, they often lack objective ground truth, making it difficult to systematically evaluate the performance of MVPA methods and make recommendations for studies.

Simulated neurophysiological data, on the other hand, could provide a solution. While several toolboxes can simulate EEG/MEG data—such as MNE-Python (Gramfort et al., 2013), FieldTrip (Oostenveld et al., 2011), Brainstorm (Tadel et al., 2011) and unfoldSim (Schepers et al., 2025) — these are typically designed to model univariate ERP components, source-level activity, or general sensor-level signals. Critically, none allows researchers to specify multivariate effects with controlled timing, spatial structure, and strength, nor to systematically manipulate noise, channel covariance, and between-subject variability. As a result, there is currently no

43 standard method to test the sensitivity and specificity of decoding pipelines, or to estimate, in  
44 advance, the number of trials and participants required to detect effects of a given size.

45 MultiSim addresses this gap by letting investigators simulate time-resolved multi-channel signals  
46 tailored to their recording setups, embedding multivariate effects with known spatiotemporal  
47 properties while flexibly controlling signal and noise parameters. The core of our simulation  
48 engine builds on and extends a function from the SPM toolbox (see DEMO\_CVA\_RSA.m,  
49 Tierney et al., 2025), which we adapted to support dynamic time-resolved signals and to give  
50 users direct control over effect size specification.


## 51 Functionalities

52 The code block below provides a minimal example, highlighting the simplicity with which  
53 multivariate effects can be specified with our toolbox (see Figure 1A for a visual representation  
54 of key parameters):

```
import numpy as np
import pandas as pd
from multisim import Simulator

# 100 trials, 1 experimental condition
X = pd.DataFrame(np.random.randn(100, 1), columns=["face-object"])
effects = [{"condition": "face-object", "windows": [0.1, 0.3], "effect_size": 0.5}]
sims = Simulator(
    X,
    effects,
    noise_std=0.1,
    n_channels=64,
    n_subjects=20,
    tmin=-0.2,
    tmax=0.8,
    sfreq=250,
)
sims.summary() # Should return 20 subjects
```

55 Our algorithm produces multi-subject datasets in which ground truth effects are known with  
56 precise timing (see Figure 1B). Furthermore, our pipelines enable full flexibility regarding  
57 the temporal dynamics of the effects (see Figure 1C) as well as the temporal generalization  
58 of the injected effects (see Figure 1D), enabling the simulation of all patterns presented by  
59 (King & Dehaene, 2014) (Figure 2). By running custom analysis pipelines on simulated data,  
60 researchers obtain a direct read-out of its true-positive rate (can it recover the injected effects?)  
61 and false-positive rate (does it raise false alarms when nothing is present?). In addition, our  
62 simulator can be used to perform computational power analysis, to determine the number of  
63 trials and subjects, by iterating over these parameters.

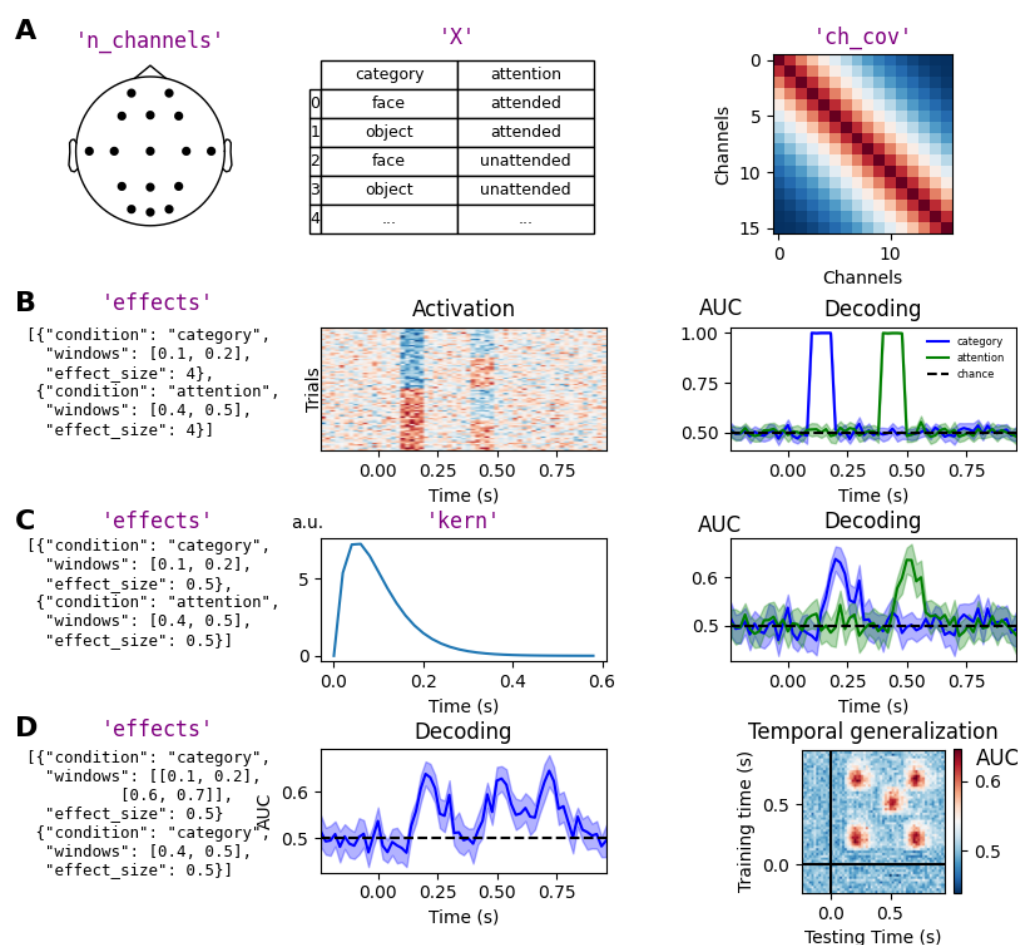

**Figure 1: Overview of the simulation and decoding framework.** **A.** General data parameters for the simulation. Left: `n_channels` corresponds to the number of channels in the montage. Middle: `X` represents the design matrix, with each column being an experimental condition and each row being a trial). Right: `ch_cov` is the channel-by-channel covariance matrix of the data to be simulated. **B.** A minimal example with effects for two experimental conditions (category and attention) with large effect sizes. Left: `effects` is a dictionary that specifies the "condition", time window ("windows") and effect size ("effect\_size") of each effect to simulate. The example specifies an effect of category from 0.1 and 0.2 s with an effect size of 4, and an effect of the attention condition from 0.4 to 0.5 with an effect size of 4. Middle: the time-resolved activation of a single channel. Right: the resulting decoding accuracy (using a support vector machine classifier). **C.** Example of simulated effects with an added gamma kernel to simulate effects with biologically plausible temporal dynamics. Left: `effects` similar to that of B but with effect size of 0.5 for each condition. Middle: gamma kernel, specifying the temporal dynamics of the multivariate effect. Right: the resulting decoding accuracy. **D.** Example of simulated data with cross-temporal generalization of the category effect. Left: `effects` dictionary specifies two different time windows for the effect of category as a list. Middle: the resulting decoding accuracy. Right: temporal generalization of the decoding.

In conclusion, MultiSim promotes best practices in MVPA by giving researchers a tailored benchmark for their specific experimental designs, a testbed for developing new decoding methods, and a principled way to check that planned studies are properly powered—ultimately enabling more reliable and efficient investigations of brain function.

## Code Quality and Documentation

MultiSim is hosted on GitHub. Examples and API documentation are available on the platform [here](#). We provide installation guides, algorithm introductions, and examples of using the package with [Jupyter Notebook](#). We further provide the full mathematical details of our simulation [here](#). The package is available on Linux, macOS, and Windows for Python  $\geq 3.10$ . MultiSim can be installed with `pip install multisim`.

## Acknowledgements

This work was supported by the Templeton World Charity Foundation (TWCF0389) and the Max Planck Society. The opinions expressed in this publication are those of the authors and do not necessarily reflect the views of TWCF. We want to thank Zefan Zheng for his feedback on the manuscript and code.

## References

{bibliography}

## Supplementary

- Cichy, R. M., Pantazis, D., & Oliva, A. (2014). Resolving human object recognition in space and time. *Nature Neuroscience*, 17(3), 455–462.
- Cogitate Consortium, Ferrante, O., Gorska-Klimowska, U., Henin, S., Hirschhorn, R., Khalaf, A., Lepauvre, A., Liu, L., Richter, D., Vidal, Y., & others. (2025). Adversarial testing of global neuronal workspace and integrated information theories of consciousness. *Nature*, 1–10.
- Gramfort, A., Luessi, M., Larson, E., Engemann, D. A., Strohmeier, D., Brodbeck, C., Goj, R., Jas, M., Brooks, T., Parkkonen, L., & others. (2013). MEG and EEG data analysis with MNE-python. *Frontiers in Neuroinformatics*, 7, 267.
- Haxby, J. V., Gobbini, M. I., Furey, M. L., Ishai, A., Schouten, J. L., & Pietrini, P. (2001). Distributed and overlapping representations of faces and objects in ventral temporal cortex. *Science*, 293(5539), 2425–2430.
- Haynes, J.-D., & Rees, G. (2006). Decoding mental states from brain activity in humans. *Nature Reviews Neuroscience*, 7(7), 523–534.
- King, J.-R., & Dehaene, S. (2014). Characterizing the dynamics of mental representations: The temporal generalization method. *Trends in Cognitive Sciences*, 18(4), 203–210.
- King, J.-R., Pescetelli, N., & Dehaene, S. (2016). Brain mechanisms underlying the brief maintenance of seen and unseen sensory information. *Neuron*, 92(5), 1122–1134.
- Kok, P., Mostert, P., & De Lange, F. P. (2017). Prior expectations induce prestimulus sensory templates. *Proceedings of the National Academy of Sciences*, 114(39), 10473–10478.
- Kriegeskorte, N., Mur, M., & Bandettini, P. A. (2008). Representational similarity analysis—connecting the branches of systems neuroscience. *Frontiers in Systems Neuroscience*, 2, 249.
- Oostenveld, R., Fries, P., Maris, E., & Schoffelen, J.-M. (2011). FieldTrip: Open source software for advanced analysis of MEG, EEG, and invasive electrophysiological data. *Computational Intelligence and Neuroscience*, 2011(1), 156869.

- 108 Poldrack, R. A., Halchenko, Y. O., & Hanson, S. J. (2009). Decoding the large-scale structure  
109 of brain function by classifying mental states across individuals. *Psychological Science*,  
110 20(11), 1364–1372.
- 111 Ritchie, J. B., Kaplan, D. M., & Klein, C. (2019). Decoding the brain: Neural representation  
112 and the limits of multivariate pattern analysis in cognitive neuroscience. *The British Journal*  
113 *for the Philosophy of Science*.
- 114 Schepers, J., Lips, L., Marathe, M., & Ehinger, B. V. (2025). UnfoldSim. JI: Simulating  
115 continuous event-based time series data for EEG and beyond. *Journal of Open Source*  
116 *Software*, 10(107), 6641.
- 117 Tadel, F., Baillet, S., Mosher, J. C., Pantazis, D., & Leahy, R. M. (2011). Brainstorm: A user-  
118 friendly application for MEG/EEG analysis. *Computational Intelligence and Neuroscience*,  
119 2011(1), 879716.
- 120 Tierney, T. M., Alexander, N. A., Avila, N. L., Balbastre, Y., Barnes, G., Bezsudnova, Y.,  
121 Brudfors, M., Eckstein, K., Flandin, G., Friston, K., & others. (2025). SPM 25: Open  
122 source neuroimaging analysis software. *arXiv Preprint arXiv:2501.12081*.

DRAFT