

**CSCI 2110**  
**Data Structures and Algorithms**  
**Practice Question Bank for the Final Exam**

1. Derive the big O complexities for each of the following running times (Show steps).
  - a.  $0.25 n^3 + 1000 n^2 + n + 100000$
  - b.  $2n(15 + \log n) + 4\log n(3n + 5n^2)$
  - c.  $(1 + 2 + 3 + \dots + n) * (1 + 2 + 3 + \dots + n)$
  - d.  $(1 + 2 + 3 + \dots + n) / (1 + 3 + 5 + \dots + (2n - 1))$
  - e.  $\log n^n + n \log n^{10} + n \log n^2$
2. Arrange the following growth functions in *increasing order* of growth rates. (Reduce the growth functions wherever necessary).
  - a. The growth functions that you derived in Question 1 above.
  - b.  $10000n, 100n^2, \sqrt{n}, 10n^3, 2^n, \sqrt{n} * \log n, n \log n$
  - c.  $(7/2)n, n^2 \log n, (3/2)^n, n^{3/2}, n \log n^2, (\log_3 n) / (\log_2 n), 1000000$
3. An algorithm with complexity  $O(n^{1.5})$  takes 5 ms to process 1000 data items.
  - a. Estimate how long it will take to process 1000,000 data items.
  - b. Estimate how much data can be processed in 100 ms.

4. Software packages A and B spend exactly  $T_A(n) = c_A n^2$  and  $T_B(n) = c_B n^3 + 500$  milliseconds to process  $n$  data items, respectively, where  $c_A$  and  $c_B$  are some constants. During a test, A takes 1000 milliseconds and B takes 600 milliseconds to process  $n = 100$  data items. Which package is better for processing 10 data items? Which package is better for processing 1000 data items? (Show steps).
5. Give one example each of an algorithm that has the following time complexity:
- a.  $O(n)$
  - b.  $O(n \log n)$
6. Implement the following methods in the `LinkedList` class.

You may assume that the `Node<T>` class exists (given on the reference sheet) and the `LinkedList` class has the following structure:

```
public class LinkedList<T>
{
    private Node<T> front;
    private int count;

    public LinkedList()
    {
        front = null;
        count=0;
    }
}
```

- a. Add a given item after the first node. If the list is empty, just return.
- b. Remove the second last item (last but one) in the list. If the list has only one node, just return.

7. Show the step-by-step process of how the binary search algorithm would work on the following array of integers.

-5	-2	10	12	17	25	35	45	55	63	105
0	1	2	3	4	5	6	7	8	9	10

for the following search:

- a) Search for 13

8. What is the maximum number of searches required for a binary search algorithm of  $n$  items in the worst case when
- $n$  is a power of 2
  - $n$  is not a power of 2

9. You are given the methods in the Unordered List class on the reference sheet.

**Using these methods**, implement the following method.

```
//create a new list that has the union of list1
//and list2. Order doesn't matter but items must not be
//repeated.
public static<T> List unite(List<T> list1, List<T>
list2)
{
```

10. Given the following list of integers:

3, 9, 2, 15, -5, 18, 7, 5, 8

- a) What is the maximum number of comparisons for a search?
- b) What is the average number of comparisons assuming that all entries are searched with equal probability?
- c) What is the average number of comparisons if the search probabilities are respectively the following:

0.1, 0.3, 0.05, 0.2, 0.05, 0.1, 0.05, 0.1, 0.05

- d) How would you rearrange the list so as to minimize the average number of comparisons?

11. You are given the ordered list class. Using the methods in this class, write a method that accepts a given ordered list of Strings and two String keys k1 and k2 and returns a new ordered list with all the elements smaller than or equal to k1 and larger than or equal to k2. You may assume that  $k1 < k2$  but k1 and k2 may or may not be in the ordered list.

For example, if the ordered list is:

A → C → F → G → H → L → M → N → Z and k1 and k2 are, respectively, G and O, then return the ordered list

A → C → F → G → Z

```
public static OrderedList<String> rangeList(OrderedList<String> list1, String k1, String k2)
{
```

12.

- a) Write a *recursive* method named `min` to return the smallest number in an array of `doubles`.
- b) Write a *recursive* method named `sum` to return sum of an array of `doubles`.
- c) Write a *recursive* method named `log` that returns the number of times its input `int` parameter must be divided by `2` in order to get `0`.

13. Given the following set of character-probability pairs:

(A,0.2), (B,0.1), (C,0.3), (D,0.15), (E,0.05), (F,0.2)

(The probability associated with each character is the probability of the character occurring in the text to be compressed.)


Build a Huffman tree for this character set and derive the encoding for each character. What is the ratio of the average code length with Huffman coding to the average code length without Huffman coding?

14 (a)


i) Show the BST after inserting 45, 43, 100, 34, 23, 44 and 46 into an empty BST.

ii) Trace the search algorithm for target key = 36.

iii) Show the BST after deleting 15 from the following BST.




iv) Show the BST after deleting 60 from the following BST.




14 (b) Repeat the above example, but use an AVL tree instead of an ordinary BST. That means, after each operation, perform rotations if necessary.




15. Show the inorder, preorder, and postorder of the following BST.

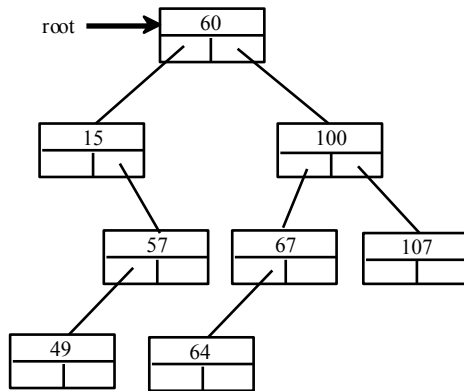


16. a) Give two different reasons to explain why the following binary tree is not a heap:



b) Draw a new heap that is created by inserting 82 into the following heap:



c) Draw a new heap that is created by removing the max item from the following heap:



17. Starting from an empty max-heap, do the following operations *in sequence*. Show the heap after each operation.

- a) Insert 12, 19, 10, 4, 23, 7, 45, 8, 15
- b) Delete\_max
- c) Insert 22
- d) Delete\_max
- e) Delete\_max five times

18. The following three processes arrive for processing by the CPU at the time units shown. Show how the heap is used to complete all the processes. Assume that the CPU time slice is 2 time units.

Note: Each process can be represented by a tuple (process id, time units required, priority)

Process	Time of arrival
(1, 3, 20)	1
(2, 2, 10)	1
(3, 2, 10)	3

19. Write the pseudocode for heapsort. What is its order of complexity?

20. You are given the following keys to be hashed into a hash table of size 10.  
496, 943, 272, 768, 663, 328, 552, 956, 999, 120

Assuming that the hash function is  $\text{key} \bmod 10$ , show the hash table if the hash collision technique used is:

- a) Separate chaining
- b) Linear Probing
- c) How is search performed in a hash table that uses linear probing to store items?

21. Insert the following keys using quadratic probing and a hash function  $\text{key mod } 10$  into a table of size 10:

96, 43, 72, 68, 63, 28, 52


22. The figure below shows the current state of a 10-element hash table, with the occupied cells shown with an XX. Assuming that collisions are handled using linear probing and a hash function of  $\text{key mod } 10$ , show where the following keys are inserted:

44, 55, 66, 77


	XX		XX	XX	XX	XX	XX		
0	1	2	3	4	5	6	7	8	9

23. For the graph given below


- State whether the graph is weighted or unweighted, directed or undirected, connected or unconnected, cyclic or non-cyclic.
- List all vertices with degree = 3.
- List a cycle in the graph, if it exists.
- List all possible simple paths from A to D.
- Determine the DFS and BFS traversals from node A.



24. For the following graph, which node(s) has the highest indegree? What is the highest indegree? Which node(s) has the highest outdegree? What is the outdegree? Is the graph strongly connected or weakly connected?



25. For the following dependency graph, derive a total order by giving topological numbers to each node using (a) depth first search and (b) breadth first search



26. Using Dijkstra's algorithm, find the shortest paths from node A to all other nodes in the following graph:

