


PLATFORM BRIEF

Intel® Core™ i7, Core™ i5, and Core™ i3 Processors
with Mobile Intel® QM67 Express and
Mobile Intel® HM65 Express Chipsets
Intelligent Systems



2nd Generation Intel® Core™ Processors with Mobile Intel® Express Chipset-Based Platforms for Intelligent Systems

Ideal for Intelligent Systems—context-aware, securely managed embedded devices that connect seamlessly to networks, clouds, and each other.

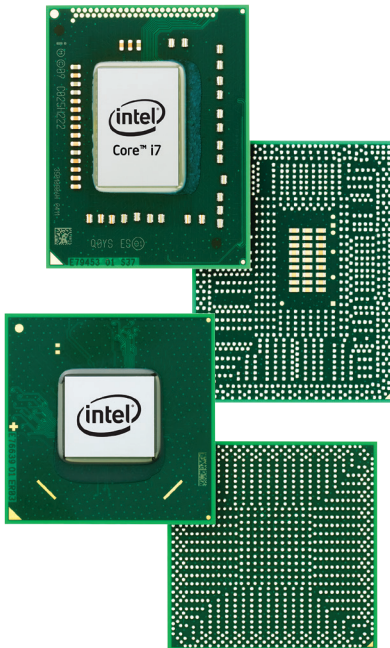

Product Overview

These Intel® Core™ i7, Core™ i5, and Core™ i3 processors are based on the 2nd generation Intel® Core™ microarchitecture on 32nm process technology. They feature new levels of performance for compute-intensive intelligent systems along with advanced features for remote management capabilities and reliability. When paired with the Mobile Intel® QM67 Express or Mobile Intel® HM65 Express chipset, these two-chip platforms provide excellent media, graphics, and I/O flexibility, stunning and seamless visual experiences, as well as error correcting code (ECC) memory¹. These platforms meet the requirements of a broad range of embedded applications, including retail and transaction solutions, signage, gaming platforms, industrial automation and medical equipment.

Processors offer quad-core and dual-core processing with industry-leading performance capabilities. While incorporating advanced technology, they remain software-compatible with previous IA-32 processors.

The next-generation graphics engine, Intel® HD Graphics 3000, doubles graphics performance compared with previous Intel® Core™ processor-based platforms. Full integration of the CPU, media/graphics capabilities and memory controller reduces overall platform footprint and provides faster performance as well as board real estate savings. Additionally, developers can create one board design and scale a product line between quad- and dual-core processors using the same socket. Thermal design power (TDP) options are 17W, 25W, 35W, and 45W.

Product Highlights

Intel® HD Graphics 3000: Supports high-end enhanced media/graphics capabilities and performance while reducing overall platform power requirements.

Intel® Advanced Vector Extensions: Accelerates floating-point compute performance for signal and image processing applications.

Intel® Quick Sync Video: Improves media/video performance and frees up the CPU for other tasks.


ECC¹: Provides a high level of data integrity, reliability, and system uptime (select SKUs).

Intel® Intelligent Power Technology²: Reduces idle power consumption through architectural improvements such as integrated power gates and automated low-power states.

Intel® Turbo Boost Technology³ 2.0: Runs applications faster by using available thermal headroom to run at a higher frequency.

Intel® Hyper-Threading Technology⁴: Simultaneous multi-threading helps boost performance for parallel, multi-threaded applications.

Intel® vPro™ Technology⁵: When paired with the Mobile Intel QM67 Express chipset, these Intel Core i7 and Core i5 processor-based platforms deliver unprecedented hardware support for vital security and management functions utilizing Intel® Virtualization Technology⁶, Intel® Active Management Technology⁷, and Intel® Trusted Execution Technology⁸.

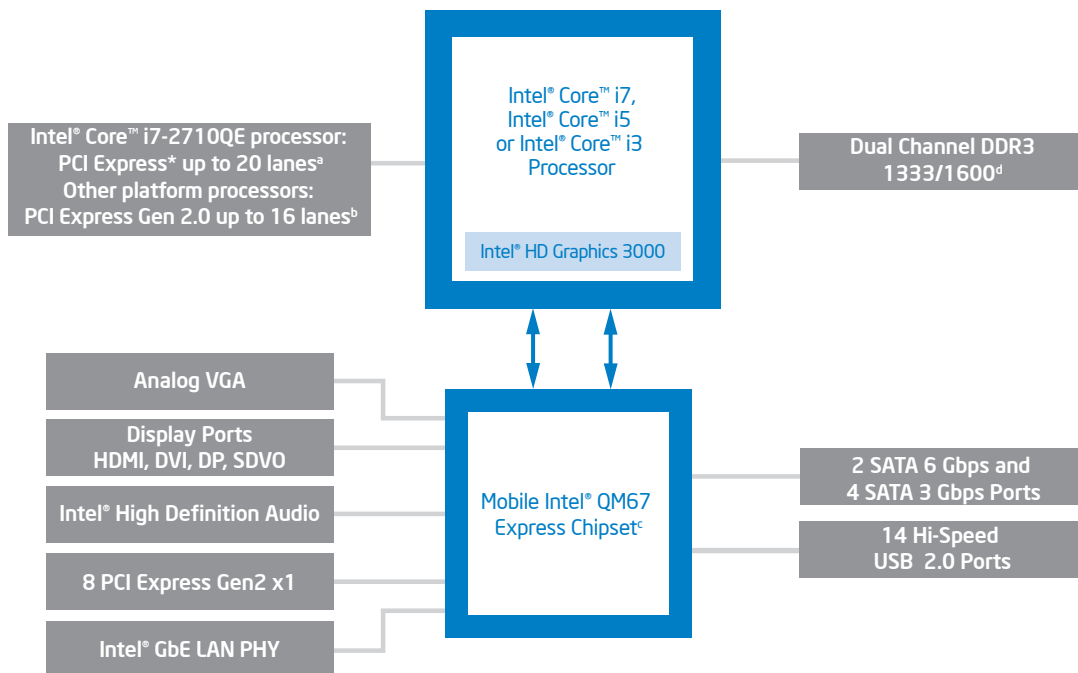

^a1x16 + 1x4; 2x8 + 1x4; or 1x8 + 3x4

^b1x16; 2x8; 1x8 + 2x4

^cMobile Intel® HM65 Express chipset also available with a subset of features.

^dAll SKUs support 1333 MT/s (1 DIMM per channel); PGA 4-core SKU supports 1333 MT/s (2 DIMMs per channel) or 1600 MT/s (1 DIMM per channel).

Software Overview

The following independent operating system and BIOS vendors provide support for these platforms.

OPERATING SYSTEM

Microsoft Windows* 7
Microsoft Windows XP SP3
Microsoft Windows Embedded Standard 7
Microsoft Windows Embedded Standard 2009
Microsoft Windows Embedded POSReady (WEPOS)
Red Hat Enterprise Linux* 6.1
SUSE SLE* 11 SP1
Wind River Linux* 5.0
Wind River VxWorks* 6.9

CONTACT

Intel provides drivers⁹
Intel provides drivers⁹
Intel provides drivers⁹
Intel provides drivers⁹
Intel provides drivers⁹
Red Hat
Novell
Wind River
Wind River

BIOS

American Megatrends
Insyde Software
Phoenix Technologies
Byosoft

Platform Features and Benefits

| FEATURES | BENEFITS |
|---|---|
| Supports key embedded platform requirements | Ideal for compute-intensive embedded applications. |
| Extended life cycle product support | Protects system investment by enabling extended product availability for embedded customers. |
| Ecosystem support | Along with a strong ecosystem of hardware and software vendors, including members of the Intel® Intelligent Systems Alliance (intel.com/go/intelligentsystems-alliance), Intel helps to cost-effectively meet development challenges and speed time-to-market. |
| Intel® Advanced Vector Extensions | Accelerates compute performance for image and signal processing applications. |
| Intel® Turbo Boost Technology ³ 2.0 | Boosts performance for specific workloads by increasing processor frequency. |
| Intel® HD Graphics 3000 | Excellent 3D performance for a broad range of embedded applications with support for dual LVDS and hybrid multi-monitor configurations. |
| Intel® Hyper-Threading Technology ⁴ | Enables simultaneous multi-threading within each processor core, up to two threads per core; reduces computational latency, making optimal use of every clock cycle. |
| Intel® Smart Cache Technology | Large on-die shared Last-Level Cache reduces latency to data, improving performance and power efficiency. |
| Intel® AES New Instructions (Intel® AES-NI) | New instructions added to the architecture help accelerate data encryption and decryption, and improve performance. |
| Error Correcting Code memory ¹ (select SKUs) | Detects multiple-bit memory errors; locates and corrects single-bit errors to keep the system up and running. |
| Intel® Intelligent Power Technology ² | Automated energy efficiency reduces power consumption. |
| Intel® Quick Sync Video Technology | Speeds up video conversion, editing and sharing for embedded applications such as video surveillance. |
| Automated low-power states | Adjusts system power consumption based on real-time processor loads. |
| Intel® Clear Video HD Technology | Visual quality and color fidelity enhancements deliver spectacular HD media playback for embedded applications such as digital signage and gaming. |
| Intel® vPro™ Technology ⁵ | Remote management, flexible virtualization, and enhanced security capabilities enable solutions that are trusted and cost-effective. |
| Intel® Active Management Technology ⁷ | The latest remote management and maintenance capabilities enable vendors to rollback firmware image; remote host-based provisioning helps to ease provisioning of end device. |
| Intel® Virtualization Technology ⁶ | Speeds the transfer of platform control and movement of data between the virtual machine monitor (VMM) and other platform agents (including guest operating systems and I/O devices). By lowering the workload on the VMM, this technology addresses many embedded system design challenges, like migrating legacy software, increasing real-time performance, and making applications more secure. |
| Intel® Trusted Execution Technology ⁸ | Protects embedded devices and virtual environments against rootkit and other system level attacks. Using an industry-standard TPM 1.2 to store keys and other protected data, this portion of Intel® vPro™ technology boots the BIOS, operating system, and software into a “trusted” execution state, verifying the integrity of the virtual machine and protecting the platform from unauthorized access. |

Mobile Intel® QM67 and Mobile Intel® HM65 Express Chipsets for Intelligent Systems

| PRODUCT | PRODUCT CODE | PACKAGE | FEATURES |
|---|--------------|-----------|---|
| Intel® BD82QM67 Platform Controller Hub | BD82QM67 | FCBGA 989 | Supports Intel® vPro™ technology; 6 SATA ports; 14 Hi-Speed USB 2.0 ports; 8 PCI Express* I/O ports |
| Intel® BD82HM65 Platform Controller Hub | BD82HM65 | FCBGA 989 | 4 SATA ports; 12 USB ports; 6 PCI Express I/O ports |

Intel® Core™ i7, Core™ i5, and Core™ i3 Processors for Intelligent Systems

| PROCESSOR NUMBER ^A | CORES/ THREADS | CORE FREQUENCY (GHz) | | INTEL® SMART CACHE | THERMAL DESIGN POWER | PACKAGE | ERROR CORRECTING CODE |
|-------------------------------|-------------------|----------------------|-----------------------|-----------------------|-------------------------|------------|-----------------------------|
| | | BASE FREQUENCY | 1 CORE TURBO (MAX) | | | | |
| Intel® Core™ i7-2710QE | 4/8 | 2.1 | 3.0 | 6 MB | 45 W | FCPGA 988 | No |
| Intel® Core™ i7-2715QE | 4/8 | 2.1 | 3.0 | 6 MB | 45 W | FCBGA 1023 | Yes |
| Intel® Core™ i7-2655LE | 2/4 | 2.2 | 2.9 | 4 MB | 25 W | FCBGA 1023 | Yes |
| Intel® Core™ i7-2610UE | 2/4 | 1.5 | 2.4 | 4 MB | 17 W | FCBGA 1023 | Yes |
| Intel® Core™ i5-2510E | 2/4 | 2.5 | 3.1 | 3 MB | 35 W | FCPGA 988 | No |
| Intel® Core™ i5-2515E | 2/4 | 2.5 | 3.1 | 3 MB | 35 W | FCBGA 1023 | Yes |
| Intel® Core™ i3-2310E | 2/4 | 2.1 | NA | 3 MB | 35 W | FCBGA 1023 | Yes |
| Intel® Core™ i3-2330E | 2/4 | 2.2 | NA | 3 MB | 35 W | FCPGA 988 | No |
| Intel® Core™ i3-2340UE | 2/4 | 1.3 | NA | 3 MB | 17 W | FCBGA 1023 | Yes |

| PROCESSOR NUMBER ^A | INTEL® vPRO™ TECHNOLOGY ^B | | | | | |
|-------------------------------|--------------------------------------|-------------------------------------|--|--|---|---|
| | INTEL® AES-NI | INTEL® TURBO BOOST TECHNOLOGY | INTEL® HYPER- THREADING TECHNOLOGY | INTEL® VIRTUALIZATION TECHNOLOGY | INTEL® ACTIVE MANAGEMENT TECHNOLOGY | INTEL® TRUSTED EXECUTION TECHNOLOGY |
| Intel® Core™ i7-2710QE | Yes | Yes | Yes | Yes | Yes | Yes |
| Intel® Core™ i7-2715QE | Yes | Yes | Yes | Yes | Yes | Yes |
| Intel® Core™ i7-2655LE | Yes | Yes | Yes | Yes | Yes | Yes |
| Intel® Core™ i7-2610UE | Yes | Yes | Yes | Yes | Yes | Yes |
| Intel® Core™ i5-2510E | Yes | Yes | Yes | Yes | Yes | Yes |
| Intel® Core™ i5-2515E | Yes | Yes | Yes | Yes | Yes | Yes |
| Intel® Core™ i3-2310E | No | No | Yes | Yes | No | No |
| Intel® Core™ i3-2330E | No | No | Yes | Yes | No | No |
| Intel® Core™ i3-2340UE | No | No | Yes | Yes | No | No |

^AWhen paired with Mobile Intel® QM67 Express chipset.

Intel in Intelligent Systems: intel.com/intelligentsystems

^A Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families. See www.intel.com/products/processor_number for details.

¹ Error Correcting Code memory is available only on Intel® Core™ processors which come in a Ball Grid Array (BGA) package and these SKUs were specifically developed by the Intel® Embedded and Communication Group.

² Intel® Intelligent Power Technology requires a computer system with an enabled Intel® processor, chipset, BIOS and for some features, an operating system enabled for it. Functionality or other benefits may vary depending on hardware implementation and may require a BIOS and/or operating system update. Please check with your system vendor for details.

³ Requires a system with Intel® Turbo Boost Technology capability. Consult your PC manufacturer. Performance varies depending on hardware, software and system configuration. For more information, visit <http://www.intel.com/technology/turboboost>.

⁴ Requires an Intel® HT Technology-enabled system, check with your PC manufacturer. Performance will vary depending on the specific hardware and software used. For more information including details on which processors support HT Technology, visit <http://www.intel.com/info/hyperthreading>.

⁵ Intel® vPro™ Technology is sophisticated and requires setup and activation. Availability of features and results will depend upon the setup and configuration of your hardware, software and IT environment. To learn more visit: <http://www.intel.com/technology/vpro>.

⁶ Intel® Virtualization Technology requires a computer system with an enabled Intel® processor, BIOS, virtual machine monitor (VMM). Functionality, performance or other benefits will vary depending on hardware and software configurations. Software applications may not be compatible with all operating systems. Consult your PC manufacturer. For more information, visit <http://www.intel.com/go/virtualization>.

⁷ Requires activation and a system with a corporate network connection, an Intel® AMT-enabled chipset, network hardware and software. For notebooks, Intel AMT may be unavailable or limited over a host OS-based VPN, when connecting wirelessly, on battery power, sleeping, hibernating or powered off. Results dependent upon hardware, setup and configuration. For more information, visit <http://www.intel.com/technology/platform-technology/intel-amt>.

⁸ No computer system can provide absolute security under all conditions. Intel® Trusted Execution Technology (Intel® TXT) requires a computer system with Intel® Virtualization Technology, an Intel TXT-enabled processor, chipset, BIOS, Authenticated Code Modules and an Intel TXT-compatible measured launched environment (MLE). In addition, Intel TXT also requires the system to contain a TPM v1.s. For more information, see <http://www.intel.com/technology/security>.

⁹ Drivers available at: downloadcenter.intel.com (enter chipset name).

Performance results are based on certain tests measured on specific computer systems. Any difference in system hardware, software or configurations will affect actual performance. For more information go to <http://www.intel.com/performance>.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. UNLESS OTHERWISE AGREED IN WRITING BY INTEL, THE INTEL PRODUCTS ARE NOT DESIGNED NOR INTENDED FOR ANY APPLICATION IN WHICH THE FAILURE OF THE INTEL PRODUCT COULD CREATE A SITUATION WHERE PERSONAL INJURY OR DEATH MAY OCCUR.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. The information here is subject to change without notice. Do not finalize a design with this information.

The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request. Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order. Copies of documents which have an order number and are referenced in this document, or other Intel literature, may be obtained by calling 1-800-548-4725, or by visiting Intel's Web site at www.intel.com.

Copyright © 2013 Intel Corporation. All rights reserved. Intel, the Intel logo, Core, and vPro are trademarks of Intel Corporation in the U.S. and other countries.

*Other names and brands may be claimed as the property of others.

Printed in USA

0313/KSC/OCG/XX/PDF

♻ Please Recycle

324537-006US

