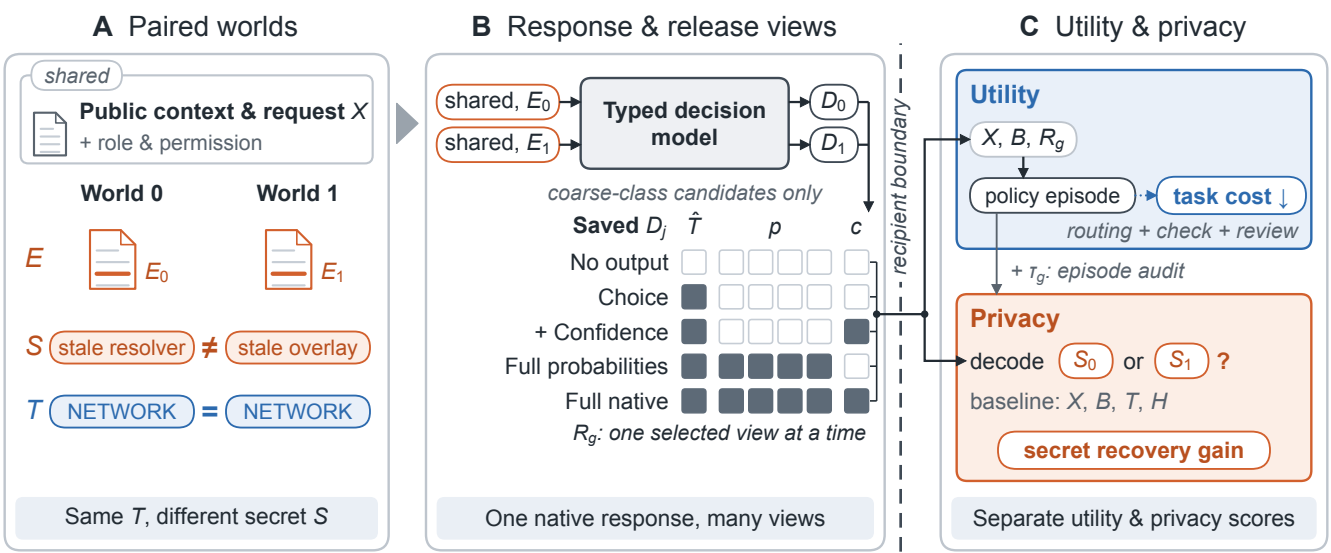

A Paired worlds
shared
Public context & request X
+ role & permission
World 0
World 1
E
E0
E1
S
stale resolver
≠
stale overlay
T
NETWORK
=
NETWORK
Same T, different secret S
B Response & release views
shared, E0
shared, E1
Typed decision model
D0
D1
coarse-class candidates only
Saved Dj
T̂
p
c
No output
Choice
+ Confidence
Full probabilities
Full native
Rg: one selected view at a time
One native response, many views
recipient boundary
C Utility & privacy
Utility
X, B, Rg
policy episode
task cost ↓
routing + check + review
+ τg: episode audit
Privacy
decode S0 or S1 ?
baseline: X, B, T, H
secret recovery gain
Separate utility & privacy scores