

Syslog (FortiGate + Endpoint Central) to Coralogix — Docker Compose

Accept RFC5424 Syslog from FortiGate and ManageEngine Endpoint Central, then forward each source to its own Coralogix application/subsystem using one OpenTelemetry Collector Compose service. No custom OTel parsing. Screenshots below are for operator convenience; README.md stays text-only.

1. What this does

```
FortiGate --UDP RFC5424--> host 0.0.0.0:514 -> container :5514/udp
      |
      v
Coralogix app <fortigate-application> / subsystem <fortigate-subsystem>

Endpoint Central --TCP RFC5424--> host 0.0.0.0:5515 -> container :5515/tcp
      |
      v
Coralogix app <endpoint-central-application> / subsystem <endpoint-central-
subsystem>
```

Compose publishes on 0.0.0.0. FortiGate uses host UDP 514 (mapped to container 5514 so the collector stays unprivileged). Endpoint Central uses host TCP 5515. The collector does not parse log bodies — Coralogix does.

Suggested order: key → .env → Compose up → firewall → FortiGate → Endpoint Central → verify.

2. Requirements

- Docker with Compose v2 (or Podman Desktop).
- Coralogix Send-Your-Data API key (one-line value).
- Coralogix domain for your region (for example ap3.coralogix.com).
- Network path from each source to this host on the configured ports.
- FortiGate: RFC5424 over UDP.
- Endpoint Central 11.4.2524.01+ with Syslog integration (TCP).

3. Repository files

File	Purpose
compose.yaml	Collector; ports bound to 0.0.0.0; Docker/Podman secret
config.yaml	Two RFC5424 receivers, two Coralogix exporters
.env.example	Non-secret settings + path to the key file
README.md	Text guide (mermaid diagram; no screenshots)
images/	Screenshot sources embedded in this Word guide

Syslog-FortiGate-EndpointCentral-Coralogix-Docker-Compose-Guide.docx	This guide
--	------------

4. Prepare the Coralogix key

Keep the Send-Your-Data key in a host file, mode 0600. One line, key only. Never commit it. If you have a JSON key export, extract `apiKey.keyValue` into a one-line file — do not mount the JSON.

```
chmod 600 /path/to/coralogix-send-data-key
```

5. Configure .env

```
cp .env.example .env
# edit CORALOGIX_DOMAIN, CORALOGIX_KEY_FILE,
# CORALOGIX_FORTIGATE_APPLICATION / SUBSYSTEM,
# CORALOGIX_ENDPOINT_CENTRAL_APPLICATION / SUBSYSTEM,
# FORTIGATE_SYSLOG_UDP_PORT=514 by default; change if already in use
```

.env holds paths and non-secret settings only. Never put the API key value in .env.

6. Start Compose

```
docker compose --env-file .env config
docker compose --env-file .env up -d
docker compose --env-file .env ps
docker compose --env-file .env logs -f syslog-collector
```

docker compose config must show `0.0.0.0:514→5514/udp` (or your FortiGate port) and `0.0.0.0:5515→5515/tcp` (or your Endpoint Central port). It must not print the API key. Host UDP 514 may need Docker Desktop or privileged Podman.

7. Open host firewall ports

Compose binds 0.0.0.0, but Windows Firewall / NSG can still block FortiGate and Endpoint Central. Open the same ports as in .env.

7.1 Windows GUI (recommended)

- Start → search Windows Defender Firewall with Advanced Security → open it.

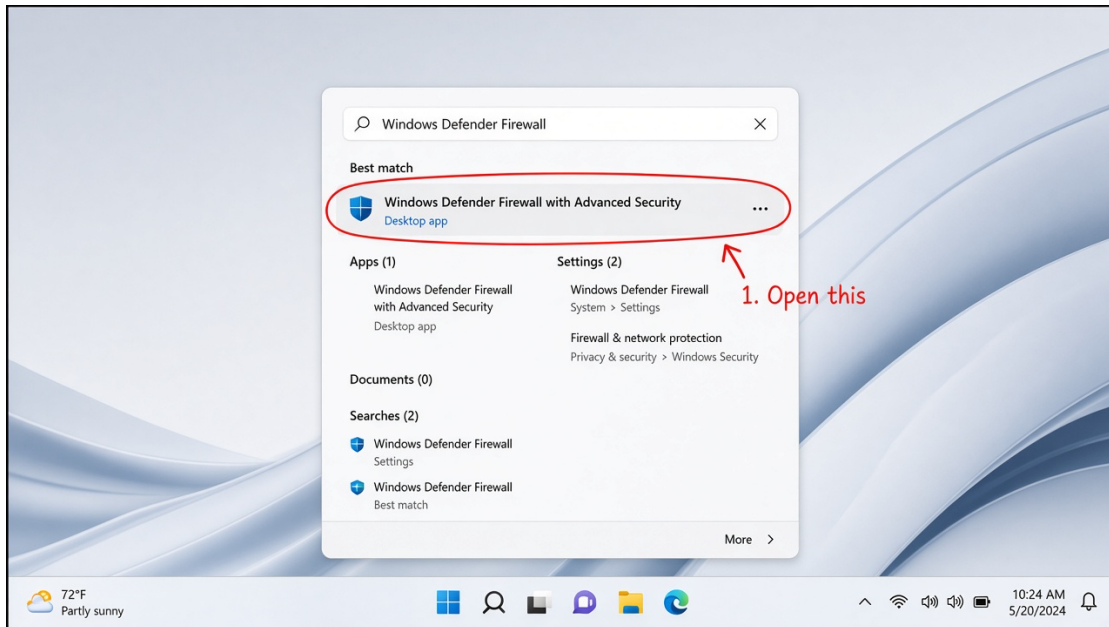


Figure: Open Windows Defender Firewall with Advanced Security

- Inbound Rules → New Rule...

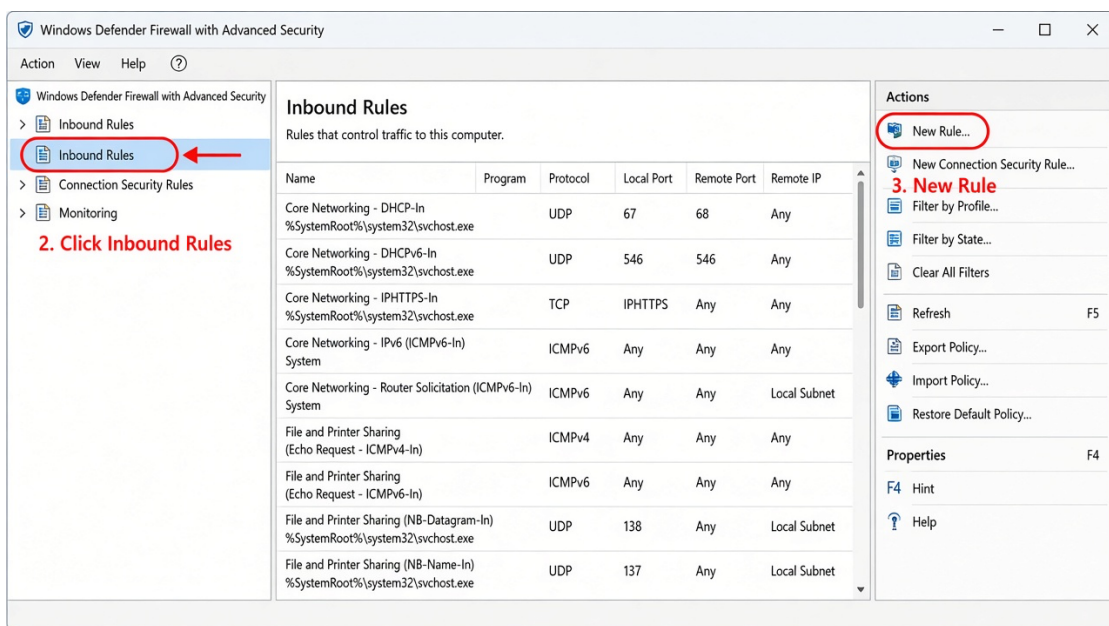


Figure: Inbound Rules → New Rule

- Rule Type → Port → Next

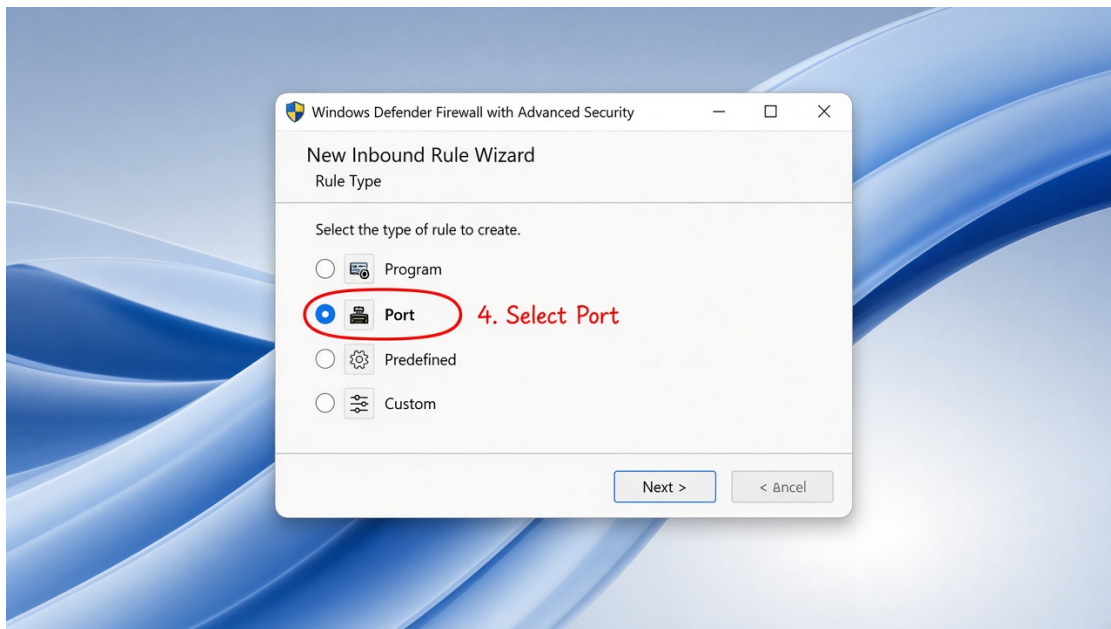


Figure: Select Port

- UDP → Specific local ports → 514 → Next

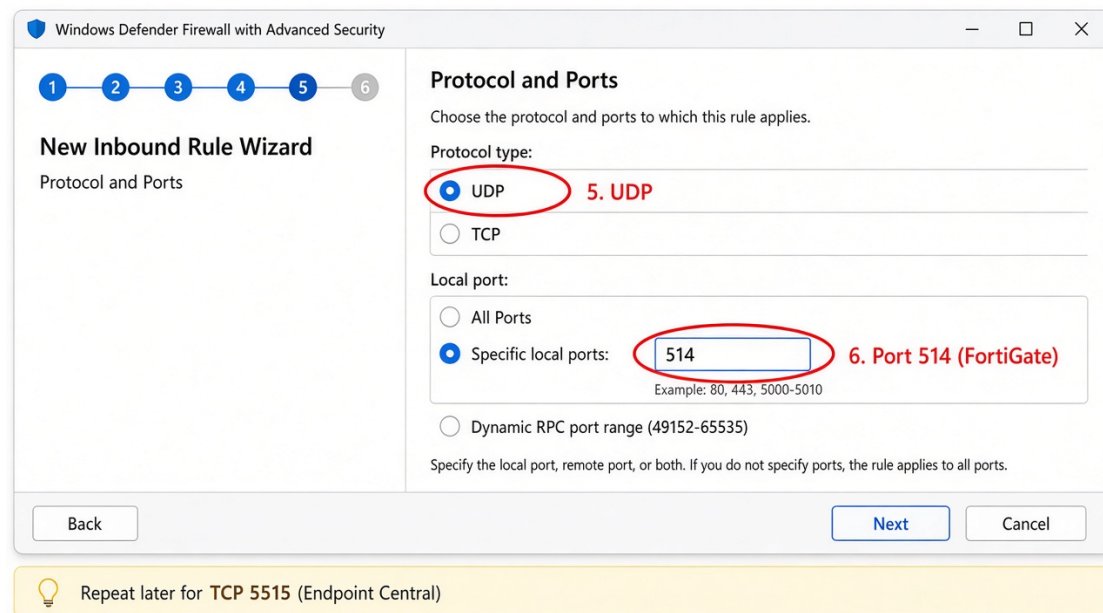


Figure: UDP port 514 (FortiGate)

- Allow the connection → profiles as needed → name FortiGate syslog UDP 514 → Finish

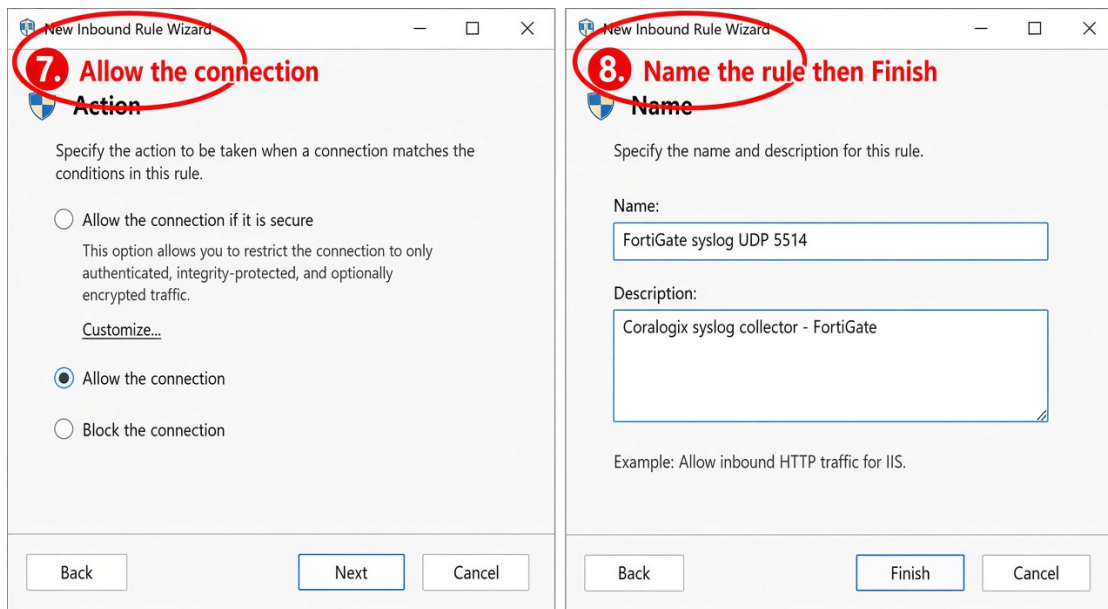


Figure: Allow the connection and name the rule (use name ...UDP 514)

- Repeat for TCP port 5515 → name Endpoint Central syslog TCP 5515

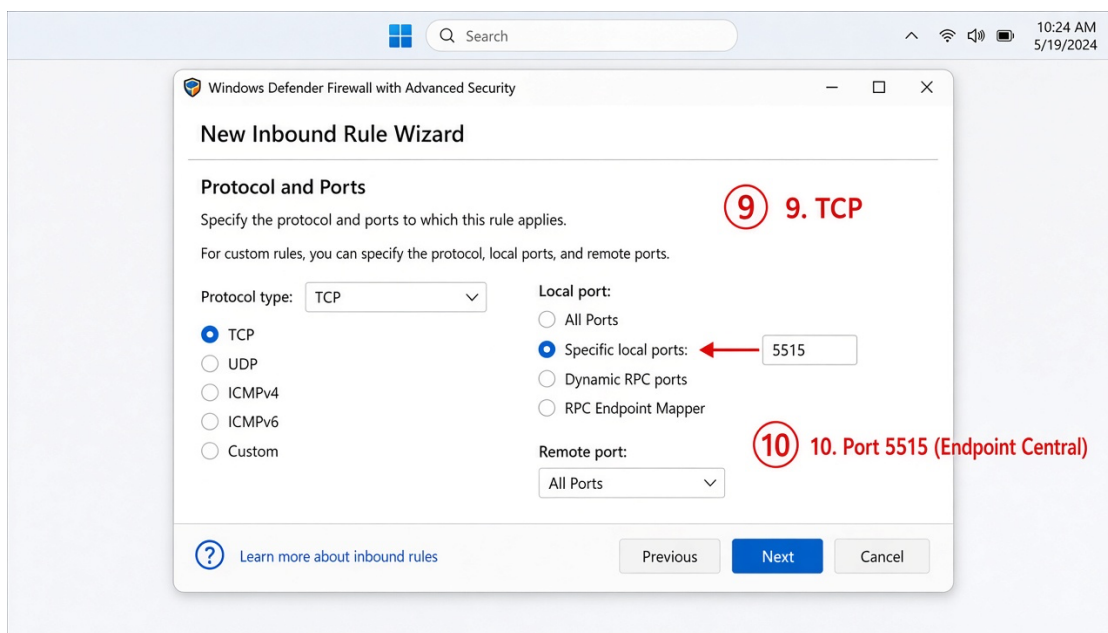


Figure: TCP port 5515 (Endpoint Central)

7.2 Windows (elevated Command Prompt)

```
netsh advfirewall firewall add rule name="FortiGate syslog UDP 514" dir=in  
action=allow protocol=UDP localport=514  
netsh advfirewall firewall add rule name="Endpoint Central syslog TCP 5515"  
dir=in action=allow protocol=TCP localport=5515
```

7.3 Linux / macOS

See README.md for ufw, firewalld, and pf snippets.

8. Configure FortiGate (after Compose + firewall)

Point FortiGate at this host's reachable IP (the machine running Compose), not 127.0.0.1. GUI enables syslog and sets the server IP; CLI is required for RFC5424 (port 514 matches this template's default).

8.1 GUI

- Log & Report → Log Settings (FortiOS 7.4+: Global Settings → Syslog Logging)
- Enable Send Logs to Syslog
- Enter the Compose host IP → Apply

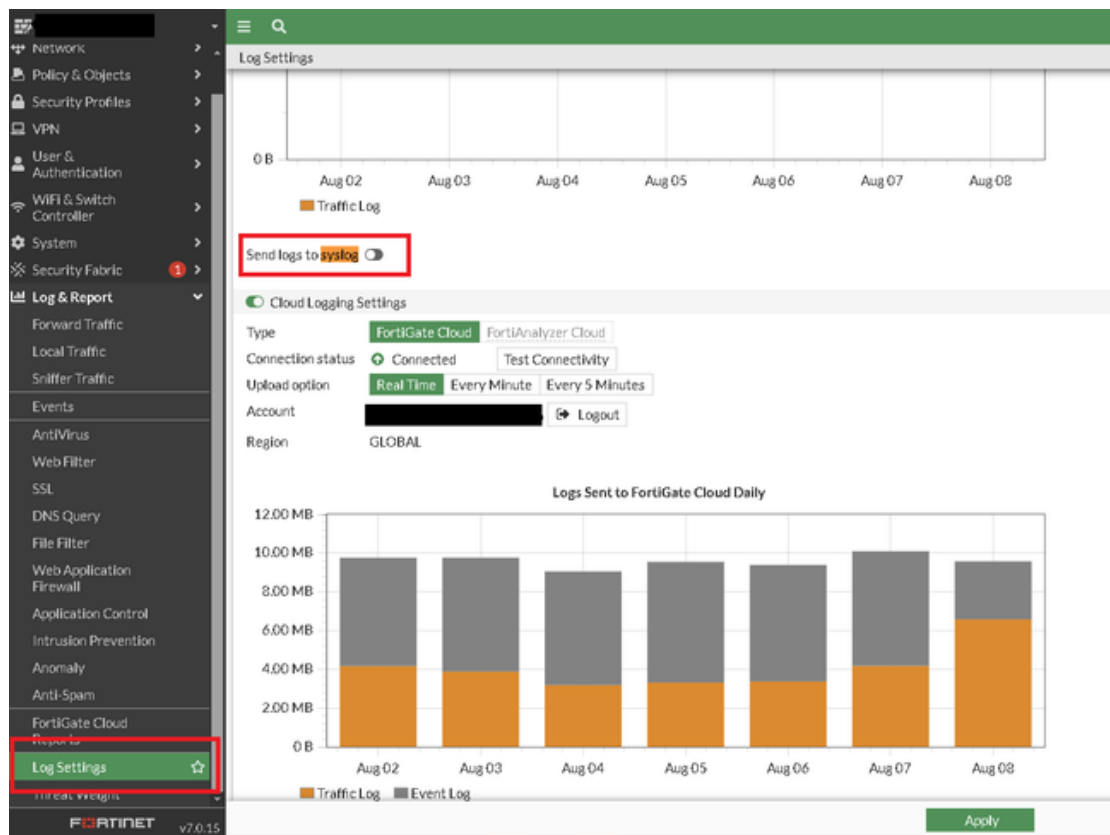


Figure: FortiGate Log Settings (source: vendor documentation mirrors)

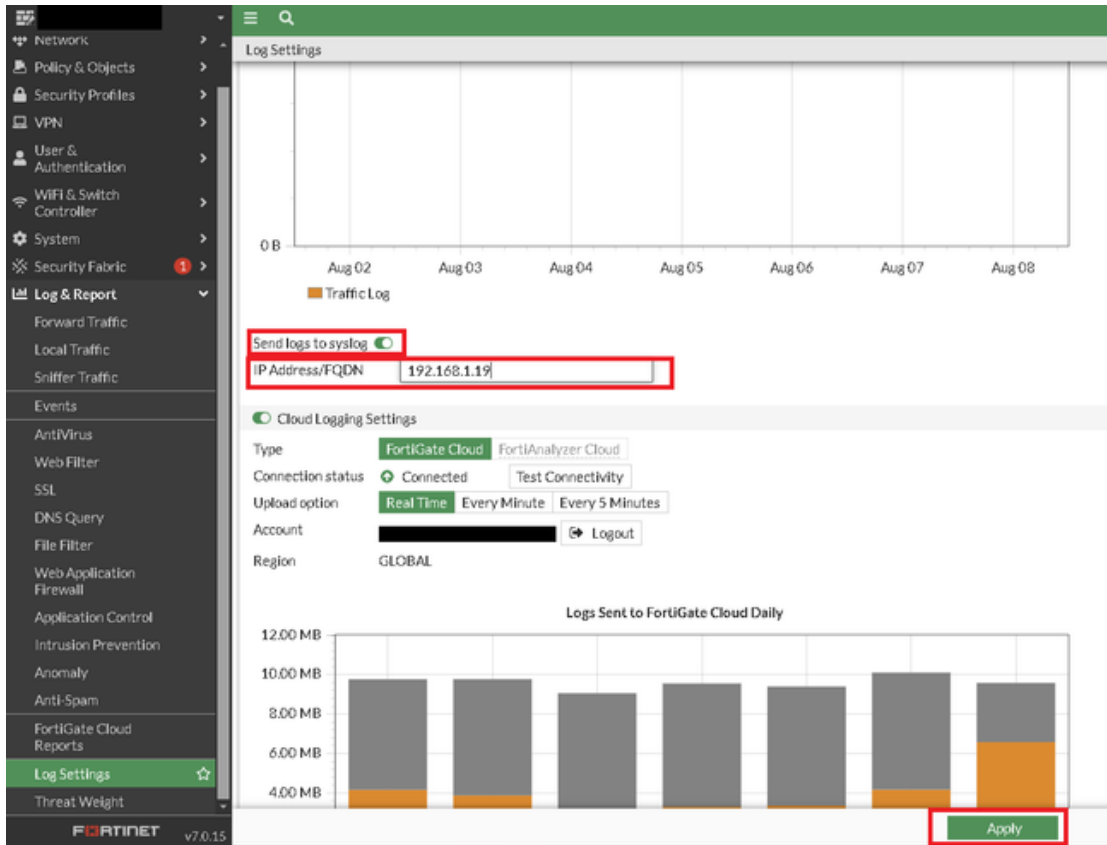


Figure: Enable Send Logs to Syslog and set collector IP

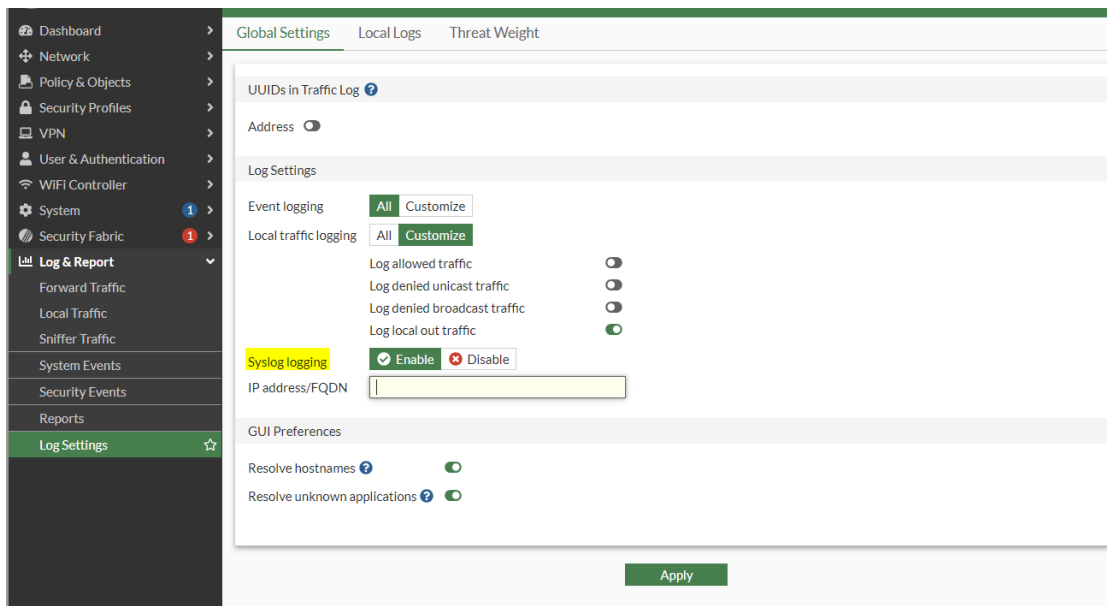


Figure: FortiGate syslog enable (Fortinet community tip)

8.2 CLI (required for this template)

```
config log syslogd setting
    set status enable
    set server "<COMPOSE_HOST_IP>"
    set mode udp
    set port 514
    set format rfc5424
end

execute ping <COMPOSE_HOST_IP>
diagnose log test
```

Source: Fortinet Technical Tip — How to configure syslog on FortiGate. Match CLI keywords to your FortiOS version.

9. Configure Endpoint Central (after Compose + firewall)

Requires Endpoint Central / Desktop Central 11.4.2524.01 or later.

- Admin → Integrations → All Integrations

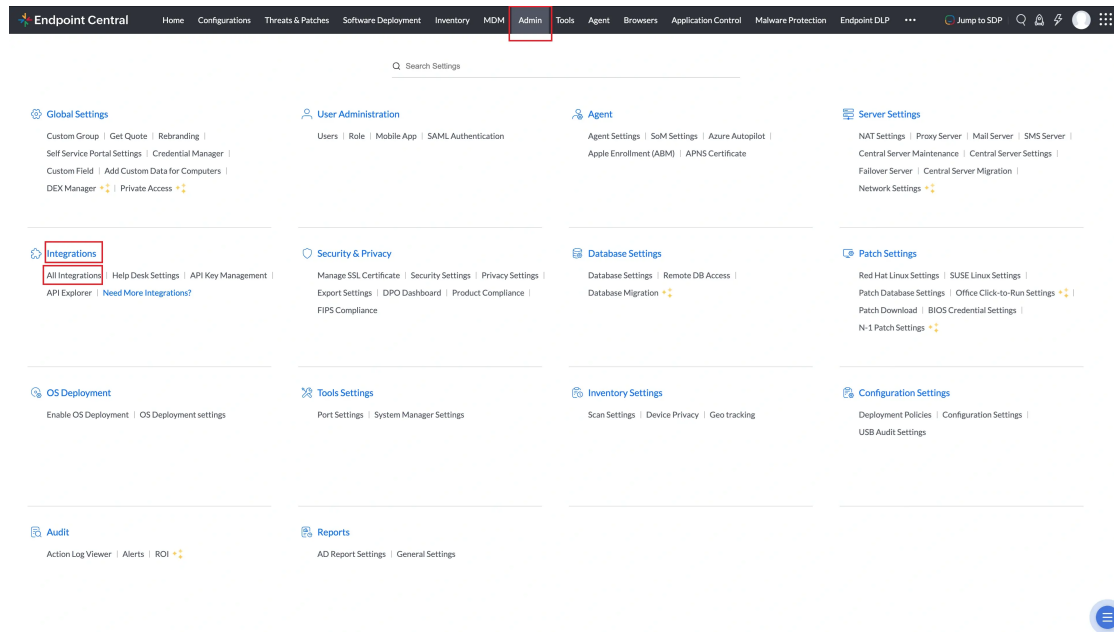


Figure: Admin → Integrations → All Integrations (ManageEngine help)

- Search Syslog → Configure

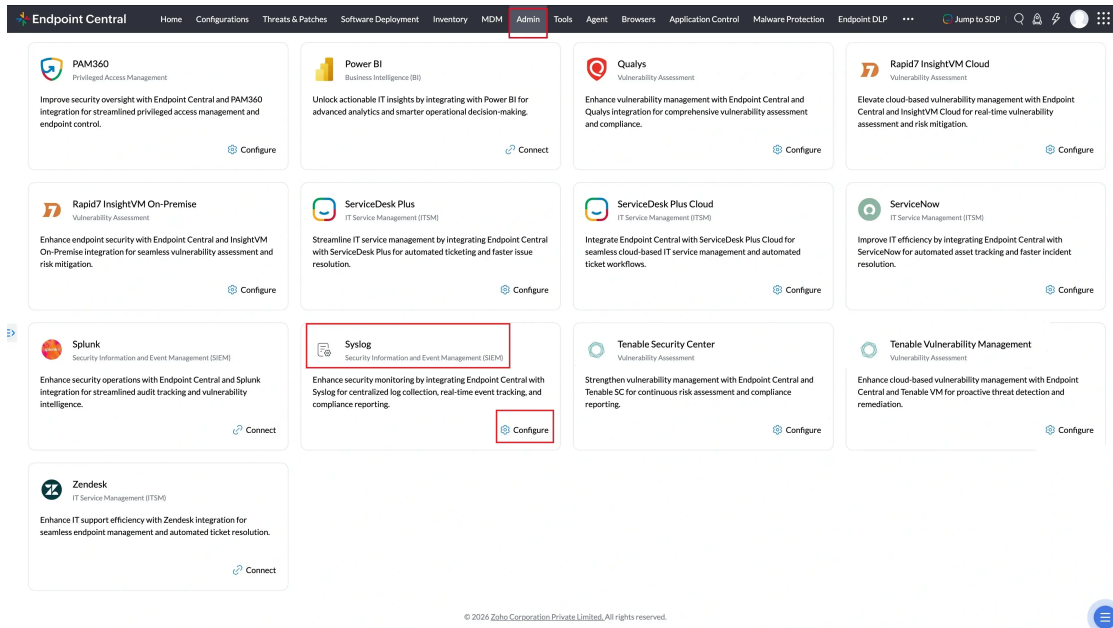


Figure: Syslog → Configure

- Syslog Server Address = Compose host IP
- Protocol = TCP
- TLS Enabled = off (this template)
- Server Port = 5515 (or your .env value) → Save

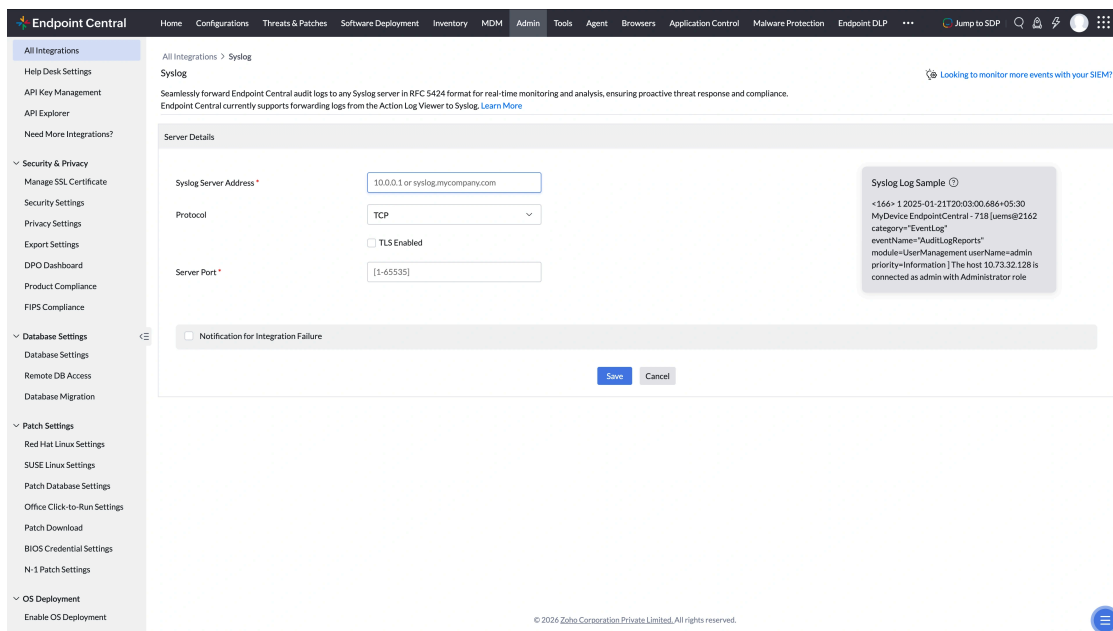


Figure: Syslog server fields

If TLS is enabled and the certificate is unknown, trust it when prompted. This template leaves TLS off.

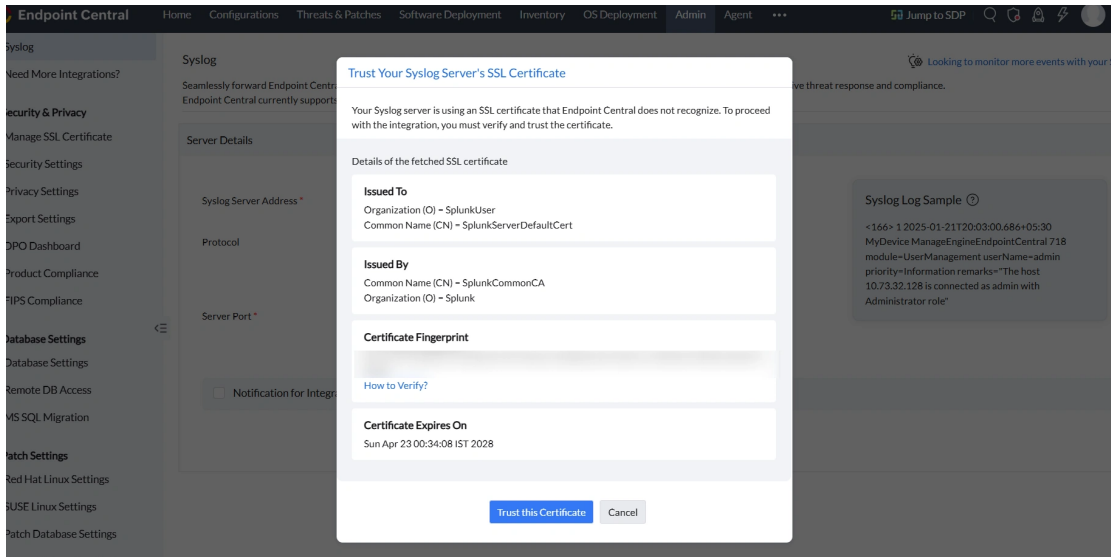


Figure: Trust certificate dialog (TLS only)

- Confirm consent (Yes, Proceed) to share Action Log Viewer data

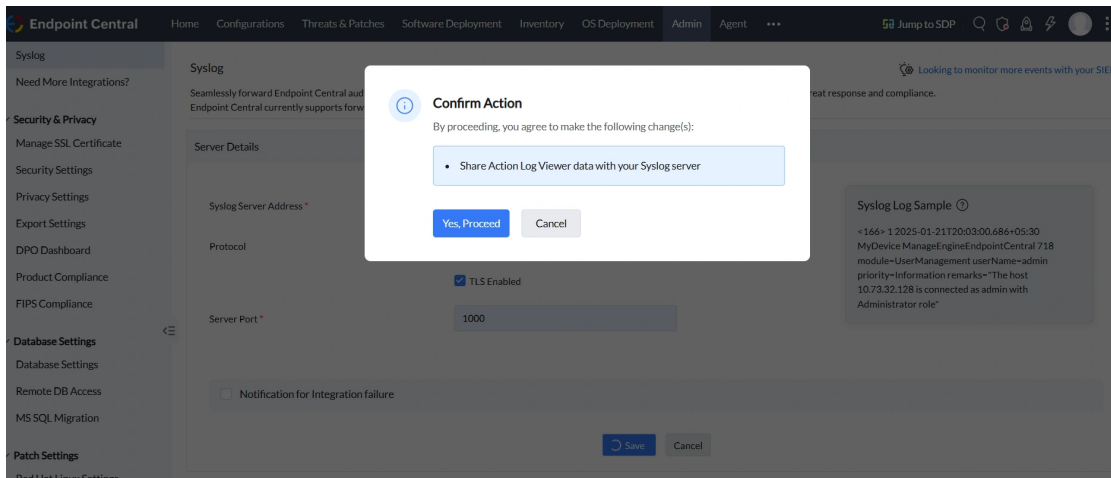


Figure: Consent to share Action Log Viewer data

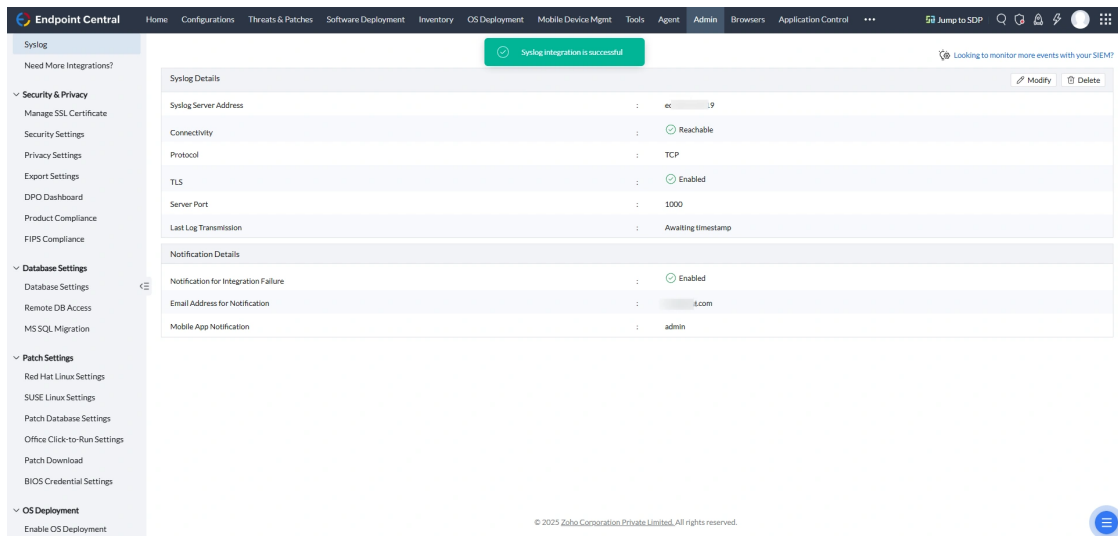


Figure: Active Syslog integration details

Source: ManageEngine Endpoint Central help — Integrate with Syslog Server.

10. Logs and health

```
docker compose --env-file .env ps
docker compose --env-file .env logs -f syslog-collector
```

11. Verify delivery with local cx (optional)

```
cx logs "source logs | filter $1.applicationname == '<fortigate-application>' |
filter $1.subsystemname == '<fortigate-subsystem>' | limit 20" \
--start now-30m --end now --tier frequent -o json --read-only

cx logs "source logs | filter $1.applicationname == '<endpoint-central-
application>' | filter $1.subsystemname == '<endpoint-central-subsystem>' |
limit 20" \
--start now-30m --end now --tier frequent -o json --read-only
```

- Delivery — collector export without auth/config errors.
- Visibility — records in the matching application/subsystem.
- Parsing — Coralogix rules/extensions, not this collector.

12. Restart and stop

```
docker compose --env-file .env restart
docker compose --env-file .env down
```

13. Troubleshooting

Symptom	Likely cause	Action
Compose fails on :?	Missing .env value	Fill every required variable
/bin/sh not found	Distroless + shell entryptpoint	Use \${file:/run/secrets/coralogix_key}
No FortiGate records	UDP/firewall/format	Confirm 0.0.0.0:514→5514/udp + rfc5424
bind denied on host 514	Rootless Podman / no <1024 bind	Use Docker Desktop or set FORTIGATE_SYSLOG_UDP_PORT=5514
Connection refused (EC)	TCP/firewall	Confirm inbound TCP 5515
authorization non-printable ASCII	JSON key mounted	One-line Send-Your-Data key only
Coralogix 401/403	Wrong key/domain	Check key and region domain
Mixed sources in one app	Shared app/subsystem	Distinct .env names per source

14. Security notes

- Distroless collector; key via read-only Docker/Podman secret.
- .env and key file must never be committed.
- TLS on Syslog listeners is off in this template.
- 0.0.0.0 bind — restrict with host firewall / cloud NSG.

15. Screenshot sources

- Windows Firewall figures: instructional UI mockups for this guide.
- FortiGate figures: Fortinet community tip / public documentation mirrors (see images/SOURCES.txt).
- Endpoint Central figures: ManageEngine official help CDN (integrate-with-syslog.html).