

# Ancillary qubits

Quantum Computing Minicourse ICTP-SAIFR

---

Stefano Carrazza<sup>‡</sup> and Matteo Robbiati<sup>†</sup>

8 April 2024


<sup>‡</sup> Associate Professor & Researcher, University of Milan and INFN Milan, Italy.

<sup>†</sup> PhD candidate, University of Milan, Italy and CERN, Switzerland.



## Ancillary qubits

Ancilla qubits are extra qubits, which help a qubit system in some computations. For example:

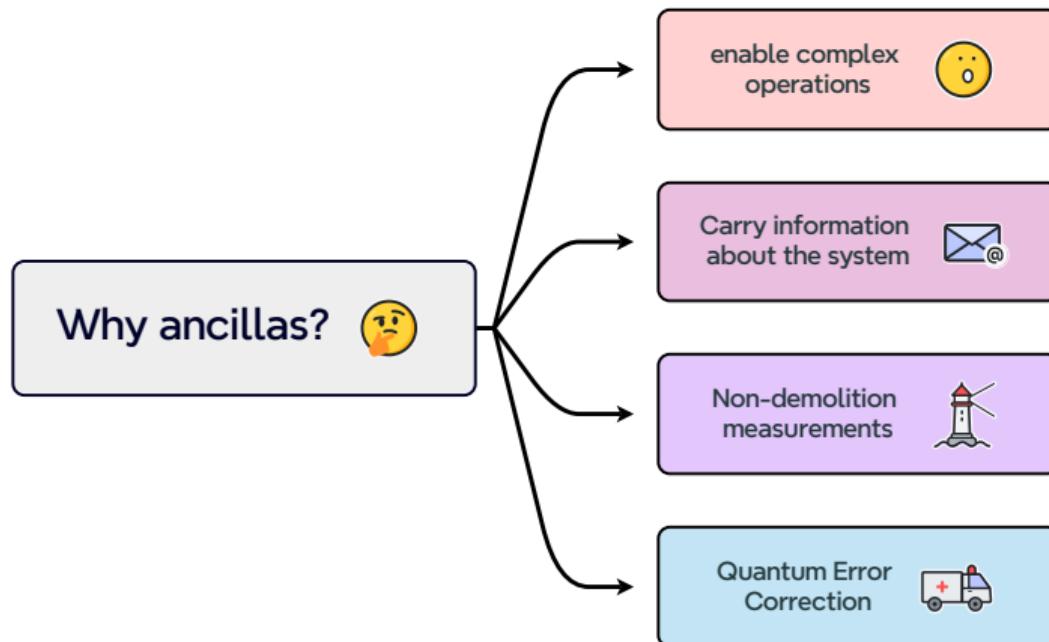

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .
2. Suppose we prepare  $x$  into a superposed state and  $y$  into the excited state:

$$|x\rangle = H|0\rangle = \frac{|0\rangle + |1\rangle}{\sqrt{2}}, \quad |y\rangle = |1\rangle.$$

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .
2. Suppose we prepare  $x$  into a superposed state and  $y$  into the excited state:

$$|x\rangle = H|0\rangle = \frac{|0\rangle + |1\rangle}{\sqrt{2}}, \quad |y\rangle = |1\rangle.$$

3. Let's consider now a gate  $G$  for which  $|1\rangle$  is eigenvector:  $G|1\rangle = \lambda_G|1\rangle$ .

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .
2. Suppose we prepare  $x$  into a superposed state and  $y$  into the excited state:

$$|x\rangle = H|0\rangle = \frac{|0\rangle + |1\rangle}{\sqrt{2}}, \quad |y\rangle = |1\rangle.$$

3. Let's consider now a gate  $G$  for which  $|1\rangle$  is eigenvector:  $G|1\rangle = \lambda_G|1\rangle$ .
4. What happens if we now apply a controlled- $G$  gate on  $y$  using  $x$  as control?

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .
2. Suppose we prepare  $x$  into a superposed state and  $y$  into the excited state:

$$|x\rangle = H|0\rangle = \frac{|0\rangle + |1\rangle}{\sqrt{2}}, \quad |y\rangle = |1\rangle.$$

3. Let's consider now a gate  $G$  for which  $|1\rangle$  is eigenvector:  $G|1\rangle = \lambda_G|1\rangle$ .
4. What happens if we now apply a controlled- $G$  gate on  $y$  using  $x$  as control?
5. we could expect something happen on the target qubit! Not really:

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .
2. Suppose we prepare  $x$  into a superposed state and  $y$  into the excited state:

$$|x\rangle = H|0\rangle = \frac{|0\rangle + |1\rangle}{\sqrt{2}}, \quad |y\rangle = |1\rangle.$$

3. Let's consider now a gate  $G$  for which  $|1\rangle$  is eigenvector:  $G|1\rangle = \lambda_G|1\rangle$ .
4. What happens if we now apply a controlled- $G$  gate on  $y$  using  $x$  as control?
5. we could expect something happen on the target qubit! Not really:

$$CG\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CG\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) =$$

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .
2. Suppose we prepare  $x$  into a superposed state and  $y$  into the excited state:

$$|x\rangle = H|0\rangle = \frac{|0\rangle + |1\rangle}{\sqrt{2}}, \quad |y\rangle = |1\rangle.$$

3. Let's consider now a gate  $G$  for which  $|1\rangle$  is eigenvector:  $G|1\rangle = \lambda_G|1\rangle$ .
4. What happens if we now apply a controlled- $G$  gate on  $y$  using  $x$  as control?
5. we could expect something happen on the target qubit! Not really:

$$CG\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CG\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) = \frac{|01\rangle + G|11\rangle}{\sqrt{2}} =$$

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .
2. Suppose we prepare  $x$  into a superposed state and  $y$  into the excited state:

$$|x\rangle = H|0\rangle = \frac{|0\rangle + |1\rangle}{\sqrt{2}}, \quad |y\rangle = |1\rangle.$$

3. Let's consider now a gate  $G$  for which  $|1\rangle$  is eigenvector:  $G|1\rangle = \lambda_G|1\rangle$ .
4. What happens if we now apply a controlled- $G$  gate on  $y$  using  $x$  as control?
5. we could expect something happen on the target qubit! Not really:

$$CG\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CG\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) = \frac{|01\rangle + G|11\rangle}{\sqrt{2}} = \frac{|01\rangle + \lambda_G|11\rangle}{\sqrt{2}} =$$

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .
2. Suppose we prepare  $x$  into a superposed state and  $y$  into the excited state:

$$|x\rangle = H|0\rangle = \frac{|0\rangle + |1\rangle}{\sqrt{2}}, \quad |y\rangle = |1\rangle.$$

3. Let's consider now a gate  $G$  for which  $|1\rangle$  is eigenvector:  $G|1\rangle = \lambda_G|1\rangle$ .
4. What happens if we now apply a controlled- $G$  gate on  $y$  using  $x$  as control?
5. we could expect something happen on the target qubit! Not really:

$$CG\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CG\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) = \frac{|01\rangle + G|11\rangle}{\sqrt{2}} = \frac{|01\rangle + \lambda_G|11\rangle}{\sqrt{2}} = \frac{|0\rangle + \lambda_G|1\rangle}{\sqrt{2}} \otimes |1\rangle.$$

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .
2. Suppose we prepare  $x$  into a superposed state and  $y$  into the excited state:

$$|x\rangle = H|0\rangle = \frac{|0\rangle + |1\rangle}{\sqrt{2}}, \quad |y\rangle = |1\rangle.$$

3. Let's consider now a gate  $G$  for which  $|1\rangle$  is eigenvector:  $G|1\rangle = \lambda_G|1\rangle$ .
4. What happens if we now apply a controlled- $G$  gate on  $y$  using  $x$  as control?
5. we could expect something happen on the target qubit! Not really:

$$CG\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CG\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) = \frac{|01\rangle + G|11\rangle}{\sqrt{2}} = \frac{|01\rangle + \lambda_G|11\rangle}{\sqrt{2}} = \frac{|0\rangle + \lambda_G|1\rangle}{\sqrt{2}} \otimes |1\rangle.$$

6. adding an extra  $H$  to the control qubit, we will detect the state manipulation!

## The phase kickback

One clever trick we can implement using ancillas is the **phase kickback**.

1. Take into account two qubits: a system qubit  $x$  and an ancilla  $y$ .
2. Suppose we prepare  $x$  into a superposed state and  $y$  into the excited state:

$$|x\rangle = H|0\rangle = \frac{|0\rangle + |1\rangle}{\sqrt{2}}, \quad |y\rangle = |1\rangle.$$

3. Let's consider now a gate  $G$  for which  $|1\rangle$  is eigenvector:  $G|1\rangle = \lambda_G|1\rangle$ .
4. What happens if we now apply a controlled- $G$  gate on  $y$  using  $x$  as control?
5. we could expect something happen on the target qubit! Not really:

$$CG\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CG\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) = \frac{|01\rangle + G|11\rangle}{\sqrt{2}} = \frac{|01\rangle + \lambda_G|11\rangle}{\sqrt{2}} = \frac{|0\rangle + \lambda_G|1\rangle}{\sqrt{2}} \otimes |1\rangle.$$

6. adding an extra  $H$  to the control qubit, we will detect the state manipulation!

Important

This happens if the ancilla is prepared into a state which is eigenvector of the controlled operation.

## Oracles

---

It can be useful to define the phase kickback using the concept of quantum **oracle**.

1. let's consider a system of qubits of state  $|x\rangle$  and a set of extra qubits of state  $|y\rangle$ ;

## Oracles

It can be useful to define the phase kickback using the concept of quantum **oracle**.

1. let's consider a system of qubits of state  $|x\rangle$  and a set of extra qubits of state  $|y\rangle$ ;
2. in reversible computation  $x$  is called **input register** and  $y$  **output register**. In this course  $x$  will always be composed of our system of qubits and  $y$  will be ancillary qubits;

## Oracles

---


It can be useful to define the phase kickback using the concept of quantum **oracle**.

1. let's consider a system of qubits of state  $|x\rangle$  and a set of extra qubits of state  $|y\rangle$ ;
2. in reversible computation  $x$  is called **input register** and  $y$  **output register**. In this course  $x$  will always be composed of our system of qubits and  $y$  will be ancillary qubits;
3. let's consider also a policy  $f$ , defined as a function  $f : \{0, 1\}^N \rightarrow \{0, 1\}$ .

## Oracles

It can be useful to define the phase kickback using the concept of quantum **oracle**.

1. let's consider a system of qubits of state  $|x\rangle$  and a set of extra qubits of state  $|y\rangle$ ;
2. in reversible computation  $x$  is called **input register** and  $y$  **output register**. In this course  $x$  will always be composed of our system of qubits and  $y$  will be ancillary qubits;
3. let's consider also a policy  $f$ , defined as a function  $f : \{0, 1\}^N \rightarrow \{0, 1\}$ .
4. this function is typically embedded into an oracle  $U_f$ , a **black box** operator whose action on the system is:

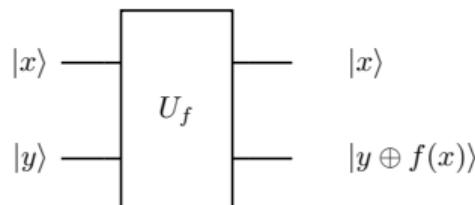


where the symbol  $\oplus$  represents the “addition modulo 2” operation, equivalent to the logical operation XOR:

$$1 \oplus 1 = 0, \quad 0 \oplus 0 = 0, \quad 0 \oplus 1 = 1, \quad 1 \oplus 0 = 1.$$

## Oracles

It can be useful to define the phase kickback using the concept of quantum **oracle**.

1. let's consider a system of qubits of state  $|x\rangle$  and a set of extra qubits of state  $|y\rangle$ ;
2. in reversible computation  $x$  is called **input register** and  $y$  **output register**. In this course  $x$  will always be composed of our system of qubits and  $y$  will be ancillary qubits;
3. let's consider also a policy  $f$ , defined as a function  $f : \{0, 1\}^N \rightarrow \{0, 1\}$ .
4. this function is typically embedded into an oracle  $U_f$ , a **black box** operator whose action on the system is:

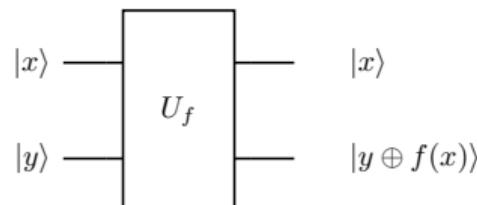

where the symbol  $\oplus$  represents the “addition modulo 2” operation, equivalent to the logical operation XOR:

$$1 \oplus 1 = 0, \quad 0 \oplus 0 = 0, \quad 0 \oplus 1 = 1, \quad 1 \oplus 0 = 1.$$

In other terms, the action of this oracle can be expressed as  $U_f |x\rangle |y\rangle = |x\rangle |y \oplus f(x)\rangle$ .

## A remarkable case: the phase flip

If we set  $G$  to be a  $Z$  gate, then the action of the phase kickback will be a complete phase flip.

$$CZ\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CZ\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) =$$

## A remarkable case: the phase flip

If we set  $G$  to be a  $Z$  gate, then the action of the phase kickback will be a complete phase flip.

$$CZ\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CZ\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) = \frac{|01\rangle + Z|11\rangle}{\sqrt{2}} =$$

## A remarkable case: the phase flip

If we set  $G$  to be a  $Z$  gate, then the action of the phase kickback will be a complete phase flip.

$$CZ\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CZ\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) = \frac{|01\rangle + Z|11\rangle}{\sqrt{2}} = \frac{|01\rangle - |11\rangle}{\sqrt{2}} =$$

## A remarkable case: the phase flip

If we set  $G$  to be a  $Z$  gate, then the action of the phase kickback will be a complete phase flip.

$$CZ\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CZ\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) = \frac{|01\rangle + Z|11\rangle}{\sqrt{2}} = \frac{|01\rangle - |11\rangle}{\sqrt{2}} = \frac{|0\rangle - |1\rangle}{\sqrt{2}} \otimes |1\rangle.$$

This will be incredibly useful when we will implement some more complex algorithm.

## A remarkable case: the phase flip

If we set  $G$  to be a  $Z$  gate, then the action of the phase kickback will be a complete phase flip.

$$CZ\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CZ\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) = \frac{|01\rangle + Z|11\rangle}{\sqrt{2}} = \frac{|01\rangle - |11\rangle}{\sqrt{2}} = \frac{|0\rangle - |1\rangle}{\sqrt{2}} \otimes |1\rangle.$$

This will be incredibly useful when we will implement some more complex algorithm.

We can recall the oracle notation introduced in the previous slide considering slightly different setup. We can write our policy as  $f(x) = x$  and prepare the ancilla into the state  $|-\rangle$ . Then, the action of  $U_f$  will be:

$$U_f |x\rangle |-\rangle = (-1)^{f(x)} |x\rangle |-\rangle.$$

## A remarkable case: the phase flip

If we set  $G$  to be a  $Z$  gate, then the action of the phase kickback will be a complete phase flip.

$$CZ\left(\frac{|0\rangle + |1\rangle}{\sqrt{2}} \otimes |1\rangle\right) = CZ\left(\frac{|01\rangle + |11\rangle}{\sqrt{2}}\right) = \frac{|01\rangle + Z|11\rangle}{\sqrt{2}} = \frac{|01\rangle - |11\rangle}{\sqrt{2}} = \frac{|0\rangle - |1\rangle}{\sqrt{2}} \otimes |1\rangle.$$

This will be incredibly useful when we will implement some more complex algorithm.

We can recall the oracle notation introduced in the previous slide considering slightly different setup. We can write our policy as  $f(x) = x$  and prepare the ancilla into the state  $|-\rangle$ . Then, the action of  $U_f$  will be:

$$U_f |x\rangle |-\rangle = (-1)^{f(x)} |x\rangle |-\rangle.$$

The previous formula can be extended to the case of using multi-controlled operations once the policy is rewritten so that:

$$f(x) = \begin{cases} 1 & \text{if } x = |11\dots1\rangle \\ 0 & \text{otherwise.} \end{cases}$$

# Is the phase kickback useful?

Some of the most powerful and famous quantum computing algorithms make use of the phase kickback



Figure 1: Deutsch-Josza

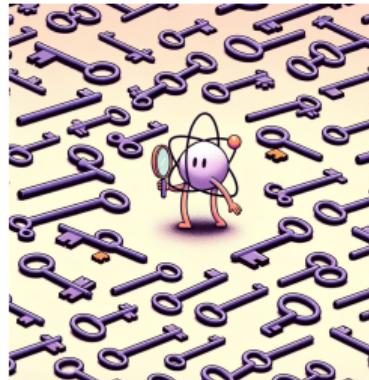


Figure 2: Grover

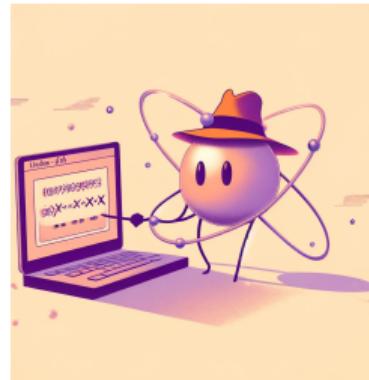


Figure 3: Shor

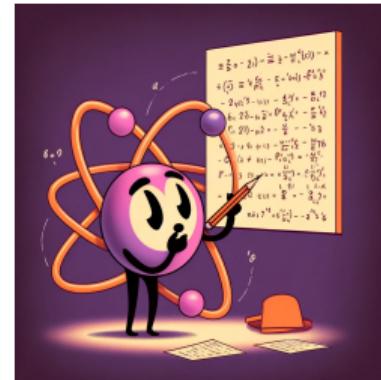


Figure 4: HHL

All of them are proved to outperform any classical algorithm, leading to a theoretical **quantum advantage**!

# Let's code!

