



a Stimulus and the original 37-dimensional input

Situation = 16 features; each feature has one of four values



At every step the model predicts four possible values or 'don't know.' No boundary flag or completion mask is added.

b One trial contains three events

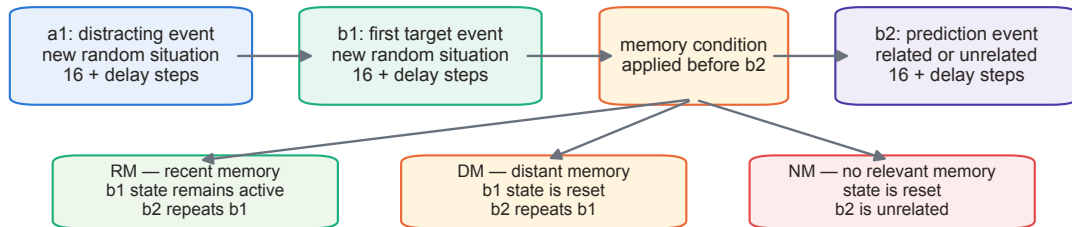

Observation order is random. Query order is fixed, begins after a delay of 0–4 steps in meta-training, and has delay 0 in held-out evaluation.