



a A situation is revealed one feature at a time

Situation = 16 features; each feature has one of four values



At every step the model predicts four values or ‘don’t know.’ If an observation is withheld, its four value units are zero. No boundary flag is added.

b One trial contains three events

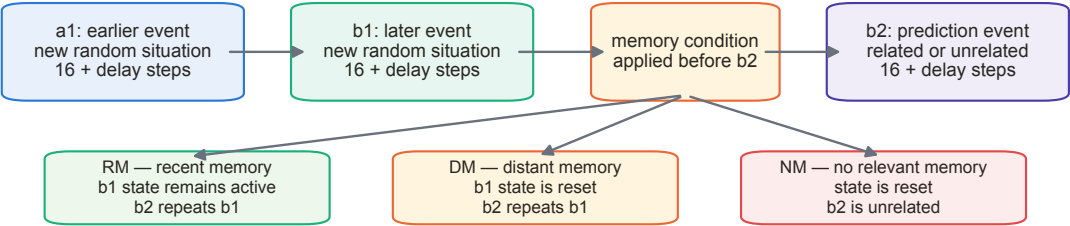

Observation order is random. Query order is fixed, begins after a delay of 0–4 steps in training, and has delay 0 in the fixed-duration evaluation. The encoding policy is not told which event will matter later.