

Final Project Algorithm Documentation

Folio - Personalized arXiv Paper Recommendation System

Kind Monkeys

May 2, 2026

Contents

1	Project Summary	2
2	Algorithm Description	2
2.1	System overview	2
2.2	Notation	2
3	Offline Artifact Pipeline	3
3.1	Corpus text and embedding	3
3.2	k-means spatial index	3
3.3	Category and concept anchors	5
4	User Embedding Initialization	5
4.1	Design goal	5
4.2	Seed sources	5
4.3	Google Scholar profile import	6
4.4	Free-text expansion	6
4.5	Core and support seeds	7
4.6	Agglomerative threshold grouping	7
4.7	Golden-test parameter tuning	7
5	Daily Feed Algorithm	8
5.1	Purpose	8
5.2	Cluster selection	8
5.3	Candidate pool and scoring	9
5.4	Final top-20 diversification	9
6	Personalized Query Search Algorithm	9
6.1	Purpose	9
6.2	Query expansion and embedding	9
6.3	Candidate retrieval	9
6.4	Reranking components	10

7	Evaluation Experiment Design	10
7.1	Evaluation goals and sample size	10
7.2	Headline results	11
7.3	Paper-level scores	11
7.4	Aggregate relevance metrics	12
7.5	Daily Feed diversity metrics	12
7.6	Query Search evaluation	12
7.7	Daily Feed evaluation variants	13
7.8	Recommended plots and reported artifacts	13
8	Implementation Invariants	13
9	Presentation-Level Summary	14

1 Project Summary

Folio is a personalized arXiv paper recommendation system designed for researchers who want both a passive daily feed and an active search experience. The user-facing problem is that modern research discovery is simultaneously too broad and too fragmented: keyword search is useful when the user already knows what to ask, while generic feeds often collapse into a narrow or noisy view of the literature. Folio addresses this by building a persistent user-interest representation and reusing it across two product modes:

1. **Daily Feed:** a personalized top-20 feed generated from the user’s inferred research threads, recency signals, and diversity controls.
2. **Personalized Query Search:** a query search bar that treats the user’s explicit query as the primary intent while using the learned profile as a personalization prior.

The core algorithmic idea is to represent a user as a small set of research-thread centroids rather than a single averaged vector. Onboarding signals can come from arXiv categories, predefined concept tags, optional free-text interests, and an optional Google Scholar profile import. These heterogeneous signals are converted into normalized embeddings, grouped by threshold-based agglomeration, and capped at at most three user-interest threads. The same multi-centroid user profile then supports both feed serving and query-search reranking.

The system uses SPECTER2-style scientific-paper embeddings, a MiniBatchKMeans spatial index over the full corpus for efficient retrieval, arXiv category centroids for interpretable cold-start labels, cached concept embeddings for non-arXiv interests such as Healthcare AI, Climate and Weather, Computational Biology, and Scientific ML, and optional Google Scholar paper embeddings for user-specific prior work. The k-means layer is deliberately treated as a spatial index, not as human-readable topic discovery.

Evaluation has two goals: first, to quantify the performance of the current algorithms; second, to validate design choices through baselines and ablations. The final experiment is designed around ranked top-20 outputs. Relevance is judged at the paper level and aggregated with Strict Precision@20, Soft Precision@20, Mean Relevance@20, and NDCG@20. For Daily Feed, we additionally report Thread Coverage@20 and Redundancy@20 to ensure that the system is not merely relevant but also diverse across the user’s inferred research threads.

2 Algorithm Description

2.1 System overview

The current system has one offline artifact-building pipeline and three online modules: user initialization, daily-feed serving, and query-search serving. Offline, the corpus is embedded and indexed. Online, onboarding choices create a multi-centroid user profile. Daily Feed retrieves papers around that profile, while Query Search retrieves around both the query and the user profile.

2.2 Notation

Let N be the number of papers in the indexed corpus and $d = 768$ the embedding dimension. For paper p , let $\mathbf{e}_p \in \mathbb{R}^d$ be its normalized embedding. Let $E \in \mathbb{R}^{N \times d}$ be the matrix of paper embeddings. Let K_c be the number of MiniBatchKMeans spatial-index clusters, $z_p \in \{1, \dots, K_c\}$ the cluster id of paper p , and $C \in \mathbb{R}^{K_c \times d}$ the matrix of normalized k-means centroids.

A user profile is represented as

$$U = \{(\mathbf{u}_1, \pi_1), \dots, (\mathbf{u}_m, \pi_m)\}, \quad 1 \leq m \leq 3,$$

where $\mathbf{u}_j \in \mathbb{R}^d$ is a normalized research-thread centroid and $\pi_j \geq 0$ is the normalized thread weight, with $\sum_{j=1}^m \pi_j = 1$. The user diversity index is denoted by $\delta \in [0, 1]$.

Table 1: Runtime and offline artifacts.

Artifact	Shape / Type	Role
E	$N \times 768$ matrix	Unit-normalized paper embeddings; dot product equals cosine similarity.
z_p	integer cluster id	Spatial-index assignment for paper p .
C	$K_c \times 768$ matrix	MiniBatchKMeans centroids used to select candidate clusters.
Category centroids	dict: arXiv code $\rightarrow \mathbb{R}^{768}$	Human-interpretable onboarding anchors derived from arXiv categories.
Concept embeddings	dict: concept tag $\rightarrow \mathbb{R}^{768}$	Cached embeddings for predefined non-arXiv tags.
Paper metadata	table / JSONL	Titles, abstracts, categories, timestamps, arXiv ids, and display fields.
Optional visualization assets	reducer and 2D coordinates	Used only for visualization; not part of ranking.

3 Offline Artifact Pipeline

3.1 Corpus text and embedding

For each arXiv paper, the encoder input is the scientific text

$$T_p = \text{title}_p + ". " + \text{abstract}_p.$$

The paper embedding is

$$\mathbf{e}_p = \text{normalize}(\text{SPECTER2}(T_p)).$$

All retrieval and ranking similarities use dot products between normalized vectors.

3.2 k-means spatial index

MiniBatchKMeans is trained on E to produce a spatial index:

$$(z_1, \dots, z_N), C = \text{MiniBatchKMeans}(E, K_c).$$

For a query vector or user centroid, the system first selects nearby clusters and then computes exact dot-product scores only within the selected clusters. This is an efficiency mechanism. The cluster ids are not interpreted as semantic topics.

Choice of K_c . The production index uses

$$K_c = 500.$$

This value was selected using an elbow-style diagnostic sweep over $K_c \in \{300, 350, 400, 450, 500, 600, 700\}$. The diagnostic tracks inertia, inertia per sample, relative improvement from the previous K_c , fit time, and cluster-size distribution. The estimated elbow occurs around $K_c = 450$, while $K_c = 500$ was retained as the production value because it lies in the same elbow region, gives smaller candidate buckets for exact dot-product reranking, has no empty clusters in the sweep, and remains compatible with the current runtime artifacts. Thus $K_c = 500$ should be interpreted as a retrieval-efficiency choice, not as the number of human-readable topics.

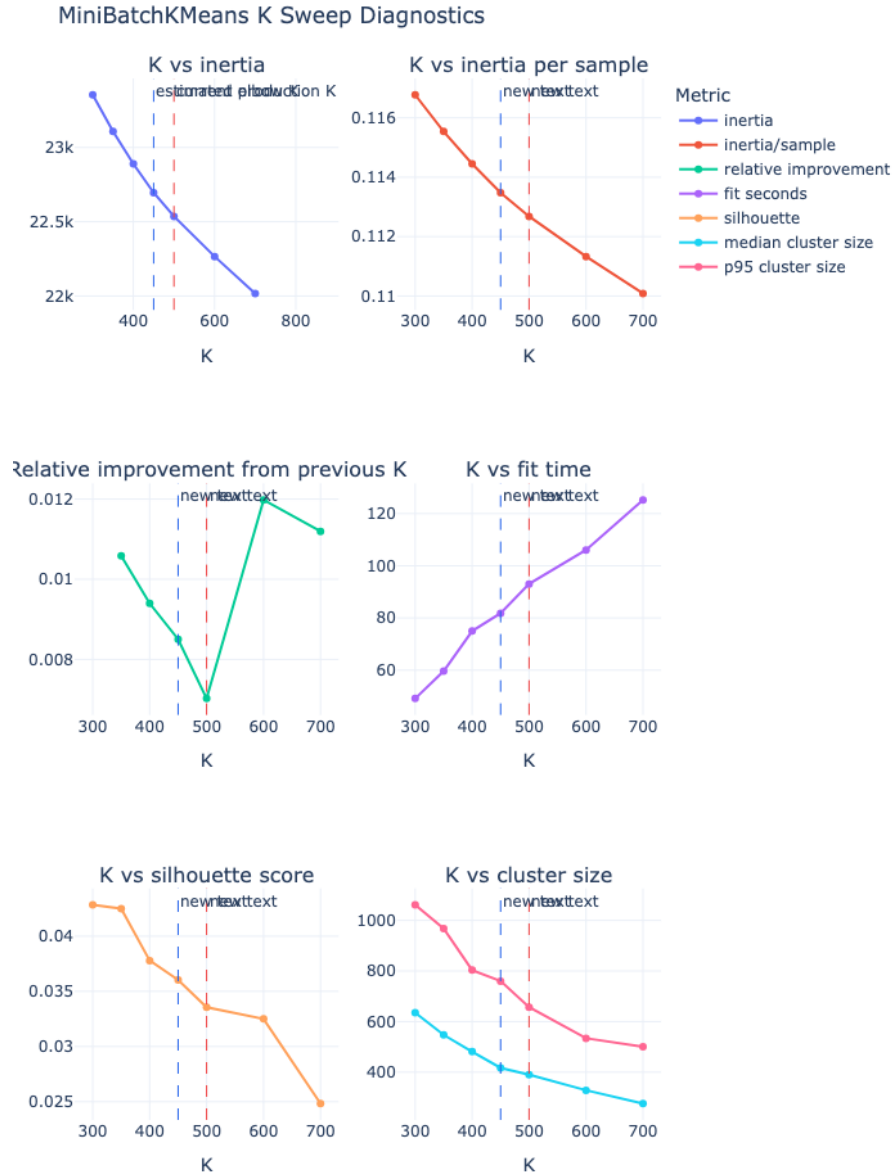


Figure 1: MiniBatchKMeans diagnostic sweep. The elbow region is around $K_c = 450$ – 500 ; the production spatial index uses $K_c = 500$.

Table 2: Selected k-means diagnostic values around the elbow region.

K_c	Inertia	Inertia/sample	Rel. improv.	Fit sec.	Median cluster size
400	22890.262	0.114451	0.0094	74.98	481.0
450	22695.648	0.113478	0.0085	81.82	417.0
500	22536.229	0.112681	0.0070	93.01	390.0
600	22266.203	0.111331	0.0120	106.02	328.5

3.3 Category and concept anchors

For an arXiv category a , define

$$P_a = \{p : a \in \text{categories}(p)\}, \quad \mathbf{c}_a = \text{normalize} \left(\frac{1}{|P_a|} \sum_{p \in P_a} \mathbf{e}_p \right).$$

These category centroids are interpretable anchors for onboarding.

Predefined concept tags are embedded using descriptive scientific templates rather than raw short labels. If x is a concept label, the cached concept vector is

$$\mathbf{v}_x = \text{normalize}(\text{Embed}(\text{expand}(x))),$$

where $\text{expand}(x)$ is a research-context prompt describing methods, applications, datasets, benchmarks, and scientific contributions relevant to x .

4 User Embedding Initialization

4.1 Design goal

The current initialization algorithm replaces the older small-seed k-means approach. It is designed to handle heterogeneous onboarding inputs and infer a small number of coherent research threads. The key design principle is that broad tags should support the profile but should not automatically create separate interests. Specific signals, especially free text and specific concept tags, are allowed to form threads.

Current tuned initialization parameters.

$$\text{MERGE_THRESHOLD} = 0.05, \quad \text{MAX_THREADS} = 3, \quad \text{CORE_SPLIT_POWER} = 0.6.$$

4.2 Seed sources

The unified onboarding UI may contain arXiv-category tags and predefined concept tags in the same visible pool. The backend routes them differently:

- arXiv labels call the category-seed path and may map to one or more arXiv category centroids;
- concept labels call the concept-seed path and use cached concept embeddings;
- optional free-text interests are expanded and embedded at runtime;

- optional Google Scholar profile import constructs paper-based seeds from the user’s own publication profile.

Each input becomes a seed signal

$$s = (\text{text}_s, \mathbf{v}_s, \text{source}_s, w_s, r_s, \sigma_s, \rho_s),$$

where $\mathbf{v}_s$ is unit-normalized, w_s is base weight, r_s is reliability, σ_s is specificity, and ρ_s is split power. The effective weight used for centroid construction is

$$w_s^{\text{eff}} = w_s r_s \sigma_s.$$

The source type controls both centroid weight and thread-forming ability. Broad signals can support a centroid without forcing an additional research thread, while specific text and paper-derived signals are allowed to create distinct threads.

Table 3: Default seed-source parameters for current initialization.

Seed type	w_s	r_s	σ_s	ρ_s
arXiv category centroid	1.8	0.90	0.30	0.45
Broad predefined concept tag	1.0	0.90	0.50	0.30
Specific predefined concept tag	1.5	0.90	0.70	0.70
Free-text interest	2.0	0.80	0.90	1.00
Google Scholar paper seed	2.0	0.95	0.85	1.00

4.3 Google Scholar profile import

If a user uploads or connects a Google Scholar profile, the system uses the profile as an additional high-specificity onboarding source. Let $\mathcal{G}$ be the set of papers parsed from the profile with available title and abstract. The system selects

$$\mathcal{G}_{\text{cite}} = \text{Top3}_{p \in \mathcal{G}}(\text{citations}(p)), \quad \mathcal{G}_{\text{recent}} = \text{Top3}_{p \in \mathcal{G}}(\text{date}(p)),$$

and constructs the Scholar seed set

$$\mathcal{S}_{\text{scholar}} = \mathcal{G}_{\text{cite}} \cup \mathcal{G}_{\text{recent}}.$$

Duplicates are removed if a highly cited paper is also one of the most recent papers. For each selected paper p , the embedded seed text is

$$T_p^{\text{scholar}} = \text{title}_p + ". " + \text{abstract}_p, \quad \mathbf{v}_p = \text{normalize}(\text{Embed}(T_p^{\text{scholar}})).$$

These paper-derived seeds are treated as core seeds in threshold grouping because they are specific evidence of the user’s research interests. They are combined with selected tags and free-text interests rather than replacing them.

4.4 Free-text expansion

For a free-text user interest x , the system embeds expanded retrieval text instead of the raw phrase. A typical template is

Research papers about {x}. Focus on relevant methods, datasets, benchmarks, applications, theoretical contributions, and recent scientific progress.

Then

$$\mathbf{v}_x = \text{normalize}(\text{Embed}(\text{expand}(x))).$$

4.5 Core and support seeds

A seed is a thread-forming core seed when

$$\rho_s \geq \rho_{\min} = \text{CORE_SPLIT_POWER} = 0.6.$$

Otherwise it is a support seed. Core seeds determine the initial thread structure. Support seeds are assigned to the nearest inferred thread and contribute to the final weighted centroid.

4.6 Agglomerative threshold grouping

For normalized vectors, cosine distance is

$$d(\mathbf{a}, \mathbf{b}) = 1 - \mathbf{a}^\top \mathbf{b}.$$

The algorithm starts with each core seed as a singleton group. For a group G , its centroid is

$$\mathbf{g}_G = \text{normalize} \left(\sum_{s \in G} w_s^{\text{eff}} \mathbf{v}_s \right).$$

At each step, the closest pair of groups is merged if

$$\min_{G_i \neq G_j} d(\mathbf{g}_{G_i}, \mathbf{g}_{G_j}) \leq \tau_{\text{merge}}, \quad \tau_{\text{merge}} = 0.05.$$

Merging stops when no pair is close enough. If the number of groups exceeds three, the implementation enforces $m \leq 3$ by merging or retaining the strongest groups according to the configured cap. If no seed is specific enough to be core, all seeds are promoted to the core set so that a user profile is always initialized.

After the core groups are inferred, every support seed is assigned to its nearest core group:

$$\ell(s) = \arg \max_j \mathbf{v}_s^\top \mathbf{g}_{G_j}.$$

Final user centroids and thread weights are recomputed from all seeds assigned to each group:

$$\mathbf{u}_j = \text{normalize} \left(\sum_{s: \ell(s)=j} w_s^{\text{eff}} \mathbf{v}_s \right), \quad \pi_j = \frac{\sum_{s: \ell(s)=j} w_s^{\text{eff}}}{\sum_{h=1}^m \sum_{s: \ell(s)=h} w_s^{\text{eff}}}.$$

The result is $U = \{(\mathbf{u}_j, \pi_j)\}_{j=1}^m$ with $m \leq 3$.

4.7 Golden-test parameter tuning

The agglomerative grouping parameters were tuned with a small but explicit golden-test suite rather than chosen only by intuition. Each golden case $g \in \{1, \dots, 50\}$ consists of a realistic set of onboarding signals X_g and an acceptable range of thread counts

$$[L_g, U_g].$$

For example, the input set

$$\{\text{Healthcare AI, Cryptography, Computational Neuroscience}\}$$

has acceptable inferred thread count $[L_g, U_g] = [2, 3]$, because the interests are not all identical but some overlap or support-seed behavior may reasonably merge nearby directions.

For a candidate parameter vector

$$\theta = (\tau_{\text{merge}}, m_{\text{max}}, \rho_{\text{min}}),$$

the initialization algorithm returns an inferred number of threads $\hat{t}_g(\theta)$. The tuning loss for one case is the squared distance from the acceptable interval:

$$\ell_g(\theta) = \begin{cases} 0, & L_g \leq \hat{t}_g(\theta) \leq U_g, \\ (L_g - \hat{t}_g(\theta))^2, & \hat{t}_g(\theta) < L_g, \\ (\hat{t}_g(\theta) - U_g)^2, & \hat{t}_g(\theta) > U_g. \end{cases}$$

The reported tuning objective is

$$\text{MSE}(\theta) = \frac{1}{50} \sum_{g=1}^{50} \ell_g(\theta).$$

The current parameter combination

$$\tau_{\text{merge}} = 0.05, \quad m_{\text{max}} = 3, \quad \rho_{\text{min}} = 0.6$$

is the tested combination with the smallest MSE. This procedure tunes the intended behavior of the onboarding module: related seeds should merge, genuinely separate interests should remain distinct, and the final profile should remain small enough to be interpretable and usable for retrieval.

5 Daily Feed Algorithm

5.1 Purpose

The original recommendation algorithm is now the algorithm behind the Daily Feed feature. It generates a top-20 personalized feed from the multi-centroid user profile. The objective is to return papers that match the user’s interests, reward timely preprints, and avoid collapsing the feed into one near-duplicate local cluster.

5.2 Cluster selection

For each user centroid $\mathbf{u}_j$, cluster relevance is $C_c^\top \mathbf{u}_j$. The diversity index controls the number of nearby clusters searched:

$$B_{\text{feed}}(\delta) = \lceil 2 + 3\delta \rceil.$$

The selected feed clusters are the union of top-ranked clusters contributed by the user threads:

$$\mathcal{C}_{\text{feed}} = \bigcup_{j=1}^m \text{TopB} \left(\{C_c^\top \mathbf{u}_j\}_{c=1}^{K_c}, B_j \right),$$

where the budgets B_j are allocated from $B_{\text{feed}}(\delta)$ so that active threads receive local neighborhoods when possible.

5.3 Candidate pool and scoring

The candidate pool is

$$\mathcal{P}_0 = \{p : z_p \in \mathcal{C}_{\text{feed}}\} \setminus \mathcal{S}_{\text{seen}},$$

where $\mathcal{S}_{\text{seen}}$ is the set of papers already shown to the user. User similarity is the best match over user threads:

$$s_u(p) = \max_{1 \leq j \leq m} \mathbf{u}_j^\top \mathbf{e}_p.$$

For paper age a_p in days, feed recency is

$$s_r(p) = \exp\left(-\frac{a_p}{30}\right).$$

The Daily Feed score is

$$S_{\text{feed}}(p) = s_u(p) + 0.25s_r(p).$$

The system keeps a pre-finalization pool, typically $M_{\text{feed}} \in [100, 300]$, before diversity filtering.

5.4 Final top-20 diversification

The displayed feed contains $K = 20$ papers. For candidate p , its nearest user thread is

$$t(p) = \arg \max_{1 \leq j \leq m} \mathbf{u}_j^\top \mathbf{e}_p.$$

Candidates are processed in descending $S_{\text{feed}}(p)$ order. The diversification layer controls repeated k-means clusters and encourages thread coverage, especially when δ is high. The exact cap can be tuned, but the invariant is that the final feed should not be dominated by one dense embedding neighborhood or one user thread.

6 Personalized Query Search Algorithm

6.1 Purpose

Personalized Query Search is the search bar above the Daily Feed. Unlike Daily Feed, Query Search is query-centered: explicit query relevance is the dominant signal. The user profile is used as a personalization prior and a retrieval expansion mechanism, not as a replacement for query intent.

6.2 Query expansion and embedding

For raw query q , construct expanded scientific retrieval text $\text{expand}(q)$ and embed it:

$$\mathbf{q} = \text{normalize}(\text{Embed}(\text{expand}(q))).$$

6.3 Candidate retrieval

Query-centered clusters are

$$\mathcal{C}_q = \text{TopB}\left(\{C_c^\top \mathbf{q}\}_{c=1}^{K_c}, B_q\right), \quad B_q \in [8, 12].$$

User-centered cluster relevance is

$$r_c = \max_{1 \leq j \leq m} C_c^\top \mathbf{u}_j,$$

and user-centered clusters are

$$\mathcal{C}_u = \text{TopB}\left(\{r_c\}_{c=1}^{K_c}, B_u\right), \quad B_u = \lceil 2 + 4\delta \rceil.$$

The searched cluster set and candidate pool are

$$\mathcal{C} = \mathcal{C}_q \cup \mathcal{C}_u, \quad \mathcal{P} = \{p : z_p \in \mathcal{C}\} \setminus \mathcal{S}_{\text{seen}}.$$

The query-search pre-reranking pool is intentionally larger than the feed pool, typically $M \in \{500, 1000\}$.

6.4 Reranking components

The four component scores are:

$$\begin{aligned} s_q(p) &= \mathbf{q}^\top \mathbf{e}_p, \\ s_u(p) &= \max_{1 \leq j \leq m} \left(\mathbf{u}_j^\top \mathbf{e}_p + \beta \log(\pi_j + \varepsilon) \right), \quad \beta = 0.05, \\ s_r(p) &= \exp\left(-\frac{a_p}{45}\right), \\ s_\ell(p) &= \ell_p, \end{aligned}$$

where s_q measures query relevance, s_u measures personalized compatibility with a thread-weight adjustment, s_r is a softer recency bonus than Daily Feed, and s_ℓ is an optional lexical score such as keyword overlap or BM25.

For diagnostics, the paper’s matched user thread is

$$t(p) = \arg \max_{1 \leq j \leq m} \left(\mathbf{u}_j^\top \mathbf{e}_p + \beta \log(\pi_j + \varepsilon) \right).$$

Each component is normalized over the candidate set:

$$\text{Norm}_{\mathcal{P}}(x_p) = \frac{x_p - \mu_{\mathcal{P}}(x)}{\sigma_{\mathcal{P}}(x) + \eta},$$

where $\eta > 0$ prevents division by zero. The final score is

$$S(p \mid q, U) = 0.60 \text{Norm}_{\mathcal{P}}(s_q(p)) + 0.25 \text{Norm}_{\mathcal{P}}(s_u(p)) + 0.10 \text{Norm}_{\mathcal{P}}(s_r(p)) + 0.05 \text{Norm}_{\mathcal{P}}(s_\ell(p)).$$

Post-ranking filters remove seen papers, optionally cap repeated near-duplicate clusters, and return the top displayed results. Diversity is lighter than in Daily Feed because the query intent should remain primary.

7 Evaluation Experiment Design

7.1 Evaluation goals and sample size

The first goal of evaluation is to quantify the performance of the current production algorithms at $K = 20$. The second goal is to validate major design choices through controlled comparisons. The final collected evaluation set contains:

$$N_{\text{query}} = 120 \quad \text{Query Search cases,}$$

$$N_{\text{feed}} = 90 \quad \text{Daily Feed cases.}$$

For every case, the system returns a ranked list of 20 papers and a structured judge assigns paper-level scores. The aggregate metrics reported below therefore summarize the actual current algorithm behavior, not only a proposed evaluation plan.

The evaluation asks four questions:

1. What is the current top-20 performance of Personalized Query Search and Daily Feed?
2. Does Personalized Query Search outperform a query-only baseline on expected-use queries?
3. Does Query Search still respect query intent on stress-test queries that are weakly aligned with the user’s profile?
4. Does the Daily Feed benefit from multi-centroid initialization and explicit diversity filtering?

7.2 Headline results

The headline results are computed from the collected evaluation artifacts. Query Search is evaluated with relevance and ranking metrics only; Daily Feed additionally reports thread coverage and redundancy because it is explicitly a feed-diversity task.

Table 4: Headline evaluation metrics at $K = 20$.

Algorithm	Strict P@20	Soft P@20	Mean Rel@20	NDCG@20	Coverage@20	Redundancy@20
Query Search	0.473	0.860	0.682	0.948	–	–
Daily Feed	0.546	0.832	0.674	0.856	0.983	0.374

7.3 Paper-level scores

All headline metrics use paper-level relevance scores on a $[0, 2]$ scale. For Query Search, the judge assigns

$$q_i, u_i, s_i \in \{0, 1, 2\},$$

where q_i is query relevance, u_i is user-interest relevance, and s_i is usefulness. The normal Query Search paper score is

$$r_i^{\text{query}} = 0.60q_i + 0.30u_i + 0.10s_i.$$

For Daily Feed, the judge assigns

$$u_i, s_i, f_i \in \{0, 1, 2\},$$

where u_i is user-interest relevance, s_i is usefulness, and f_i is freshness or timeliness. The Daily Feed paper score is

$$r_i^{\text{feed}} = 0.70u_i + 0.20s_i + 0.10f_i.$$

For query-profile mismatch stress tests, we also report a query-dominant diagnostic score

$$r_i^{\text{stress}} = 0.85q_i + 0.15s_i.$$

This stress score is diagnostic rather than the main Query Search headline score.

7.4 Aggregate relevance metrics

For a ranked list of $K = 20$ papers with paper-level scores $r_1, \dots, r_{20} \in [0, 2]$, define

$$\text{Strict Precision@20} = \frac{1}{20} \sum_{i=1}^{20} \mathbb{I}[r_i \geq 1.5],$$

$$\text{Soft Precision@20} = \frac{1}{20} \sum_{i=1}^{20} \mathbb{I}[r_i \geq 0.8],$$

$$\text{Mean Relevance@20} = \frac{1}{20} \sum_{i=1}^{20} \frac{r_i}{2}.$$

Ranking quality is measured by

$$\text{DCG@20} = \sum_{i=1}^{20} \frac{2^{r_i} - 1}{\log_2(i + 1)}, \quad \text{NDCG@20} = \frac{\text{DCG@20}}{\text{IDCG@20}},$$

with NDCG@20 defined as zero when all relevance scores are zero.

7.5 Daily Feed diversity metrics

For each returned feed paper, assign it to its nearest user thread:

$$t_i = \arg \max_{1 \leq j \leq m} \mathbf{e}_i^\top \mathbf{u}_j.$$

With relevance threshold $\tau = 1.0$, Thread Coverage@20 is

$$\text{Thread Coverage@20} = \frac{\left| \left\{ j : \exists i \leq 20 \text{ such that } t_i = j \text{ and } r_i^{\text{feed}} \geq \tau \right\} \right|}{m}.$$

Redundancy@20 is average pairwise embedding similarity:

$$\text{Redundancy@20} = \frac{2}{20(20 - 1)} \sum_{1 \leq i < j \leq 20} \mathbf{e}_i^\top \mathbf{e}_j.$$

A good diversity-index behavior increases Thread Coverage@20 and decreases Redundancy@20 as δ increases, while keeping Mean Relevance@20 reasonably stable.

7.6 Query Search evaluation

Query Search is evaluated on two groups of cases:

1. **Expected-use queries:** queries related to the user profile that refine one of the user's existing interests.
2. **Stress-test queries:** novel, interdisciplinary, or weakly profile-aligned queries that test whether explicit query intent remains dominant.

The main baseline is query-only retrieval and reranking:

$$S_{\text{query only}}(p) = \lambda_q \text{Norm}(s_q(p)) + \lambda_r \text{Norm}(s_r(p)) + \lambda_\ell \text{Norm}(s_\ell(p)),$$

with no user-profile component. The personalized algorithm should improve expected-use performance while remaining competitive on stress tests.

7.7 Daily Feed evaluation variants

Daily Feed evaluation compares three variants:

1. **Variant A: Single-vector average baseline.** Average all onboarding seed vectors into one normalized user vector, retrieve by cosine similarity, and optionally include the same recency bonus.
2. **Variant B: Multi-centroid profile without diversity filter.** Use threshold-based initialization and max similarity over user centroids, but disable explicit thread coverage and redundancy controls.
3. **Variant C: Full Daily Feed algorithm.** Use threshold-based initialization, recency-aware reranking, and diversity-index behavior.

The diversity sweep evaluates $\delta \in \{0.0, 0.5, 1.0\}$ and reports relevance/diversity tradeoffs.

7.8 Recommended plots and reported artifacts

The final report should include:

- a headline metrics table for each feature and variant;
- Query Search comparison: personalized vs query-only, separated into expected-use and stress-test cases;
- Daily Feed variant comparison across Variants A, B, and C;
- diversity-index sweep plots for Thread Coverage@20, Redundancy@20, and Mean Relevance@20;
- relevance-by-rank curves for visualizing whether relevant papers concentrate near the top;
- qualitative examples of returned papers with judge explanations.

8 Implementation Invariants

1. All vectors used in retrieval and scoring are L2-normalized.
2. MiniBatchKMeans clusters are used as a spatial index, not as interpretable topics.
3. Category centroids, concept embeddings, and Google Scholar paper embeddings are onboarding anchors, not retrieval clusters.
4. User initialization uses threshold-based agglomerative grouping with $\tau_{\text{merge}} = 0.05$, $m \leq 3$, and core split power 0.6, selected by lowest MSE on 50 golden onboarding cases.
5. Broad support seeds can shape final centroids but should not easily create standalone threads.
6. Daily Feed and Query Search share embeddings and user profiles but optimize different objectives.
7. Daily Feed returns 20 papers and must be evaluated with both relevance and diversity metrics.
8. Query Search gives primary weight to explicit query relevance and uses the user profile as a personalization prior.
9. Seen-paper filtering is applied before display unless explicitly disabled for diagnostics.
10. Evaluation must include baselines or ablations, because absolute metrics alone do not show which algorithmic components matter.

9 Presentation-Level Summary

For a five-minute project presentation, the complete story is:

1. Folio solves research discovery by combining a daily personalized feed with profile-aware query search.
2. The central representation is a multi-centroid user profile, initialized from arXiv tags, concept tags, free text, and optional Google Scholar paper seeds.
3. The profile is built using tuned threshold-based agglomerative grouping rather than forcing small-seed k-means.
4. Daily Feed uses user-centered retrieval, recency reranking, and diversity control to return 20 papers.
5. Query Search combines query-centered clusters, user-centered clusters, and a normalized four-component reranking score.
6. Evaluation reports top-20 relevance, ranking quality, thread coverage, redundancy, and baseline comparisons.