

**MINISTRY OF EDUCATION AND TRAINING  
CAN THO UNIVERSITY  
COLLEGE OF INFORMATION AND  
COMMUNICATION TECHNOLOGY  
DEPARTMENT OF SOFTWARE ENGINEERING**



**GRADUATION THESIS  
BACHELOR OF ENGINEERING IN  
INFORMATION TECHNOLOGY**

**(HIGH-QUALITY PROGRAM)**

**BUILDING A FASHION E-COM-  
MERCE APPLICATION WITH IM-  
AGE-BASED PRODUCT SEARCH  
AND MODEL BENCHMARKING**

**Student:** Nguyen Thanh Phat  
**Student ID:** B2005853  
**Class:** DI20V7F1 (K46)  
**Advisor:** Dr. Tran Cong An

Can Tho, December 2025

**MINISTRY OF EDUCATION AND TRAINING  
CAN THO UNIVERSITY  
COLLEGE OF INFORMATION AND COMMUNICATION  
TECHNOLOGY  
DEPARTMENT OF SOFTWARE ENGINEERING**



**GRADUATION THESIS  
BACHELOR OF ENGINEERING IN  
INFORMATION TECHNOLOGY**

**(HIGH-QUALITY PROGRAM)**

**BUILDING A FASHION E-COMMERCE AP-  
PLICATION WITH IMAGE-BASED PROD-  
UCT SEARCH AND MODEL BENCHMARK-  
ING**

**Student:** Nguyen Thanh Phat  
**Student ID:** B2005853  
**Class:** DI20V7F1 (K46)  
**Advisor:** Dr. Tran Cong An

Can Tho, 01/2026

## EVALUATION OF ADVISOR

.....

.....

.....

.....

.....

.....

.....

Advisor:

\_\_\_\_\_

Dr. Tran Cong An

## ACKNOWLEDGEMENTS

I would like to express my sincere gratitude to Dr. Tran Cong An, my thesis advisor, for his guidance, continuous feedback, and support throughout this research.

I also thank the members of the Thesis Defense Committee for their time, thorough evaluation, and constructive comments.

My sincere appreciation goes to the Faculty of Information Technology, Can Tho University, for providing the academic foundation that supported this work, and to the High-Quality Program for fostering the engineering discipline applied throughout this thesis.

Finally, I am deeply grateful to my family for their constant encouragement, patience, and unwavering support throughout my studies and the completion of this work.

Sincerely,

Can Tho, December 2025

Nguyen Thanh Phat

## TABLE OF CONTENTS

|                                                                 |             |
|-----------------------------------------------------------------|-------------|
| <b>EVALUATION OF ADVISOR .....</b>                              | <b>III</b>  |
| <b>ACKNOWLEDGEMENTS .....</b>                                   | <b>IV</b>   |
| <b>TABLE OF CONTENTS .....</b>                                  | <b>V</b>    |
| <b>LIST OF FIGURES .....</b>                                    | <b>VIII</b> |
| <b>LIST OF TABLES .....</b>                                     | <b>IX</b>   |
| <b>LIST OF ABBREVIATIONS .....</b>                              | <b>XII</b>  |
| <b>ABSTRACT .....</b>                                           | <b>XIII</b> |
| <b>TÓM TẮT .....</b>                                            | <b>XIV</b>  |
| <b>PART 1: INTRODUCTION .....</b>                               | <b>2</b>    |
| I. Context and Motivation .....                                 | 2           |
| II. Problem Statement .....                                     | 3           |
| III. Objectives .....                                           | 3           |
| IV. Scope and Limitations .....                                 | 5           |
| V. Research Methodology .....                                   | 6           |
| VI. Thesis Outline .....                                        | 7           |
| <b>PART 2: THESIS CONTENT .....</b>                             | <b>8</b>    |
| <b>CHAPTER 1. BACKGROUND AND RELATED WORK .....</b>             | <b>8</b>    |
| 1.1 Fashion E-commerce .....                                    | 8           |
| 1.2 Content-Based Image Retrieval .....                         | 8           |
| 1.2.1 Visual Search Concepts .....                              | 8           |
| 1.2.2 The Semantic Gap .....                                    | 9           |
| 1.2.3 Mathematical Foundations of Embeddings .....              | 9           |
| 1.3 Machine Learning Models .....                               | 10          |
| 1.3.1 Convolutional Neural Networks .....                       | 10          |
| 1.3.2 Vision Transformers .....                                 | 11          |
| 1.3.3 CLIP and Fashion-CLIP: Bridging Vision and Language . . . | 12          |
| 1.4 Vector Databases .....                                      | 13          |
| 1.4.1 Approximate Nearest Neighbour Search .....                | 13          |
| 1.4.2 HNSW: Hierarchical Navigable Small World .....            | 14          |
| 1.4.3 IVFFlat: Inverted File with Flat Compression .....        | 14          |
| 1.4.4 pgvector: PostgreSQL with Vector Search .....             | 15          |
| 1.5 Software Engineering Technologies .....                     | 16          |
| 1.5.1 E-commerce Platform Architectures .....                   | 16          |
| 1.5.2 .NET Backend .....                                        | 18          |
| 1.5.3 Vue.js Frontend .....                                     | 18          |
| 1.5.4 PostgreSQL and pgvector .....                             | 19          |
| 1.5.5 Redis Caching .....                                       | 19          |

|                                                   |                                                   |            |
|---------------------------------------------------|---------------------------------------------------|------------|
| 1.5.6                                             | Python ML Sidecar .....                           | 19         |
| 1.5.7                                             | .NET Aspire Orchestration .....                   | 20         |
| 1.5.8                                             | Hangfire Background Jobs .....                    | 20         |
| 1.5.9                                             | Identity, Authentication, and Authorisation ..... | 21         |
| 1.5.10                                            | Benchmark Framework .....                         | 21         |
| 1.5.11                                            | Technology Stack Summary .....                    | 22         |
| 1.6                                               | Related Work and Research Gap .....               | 23         |
| 1.6.1                                             | Academic Research .....                           | 23         |
| 1.6.2                                             | Commercial Systems .....                          | 24         |
| 1.6.3                                             | Contribution Differentiators .....                | 24         |
| <b>CHAPTER 2. DESIGN AND IMPLEMENTATION .....</b> |                                                   | <b>25</b>  |
| 2.1                                               | Requirements Analysis .....                       | 25         |
| 2.1.1                                             | System Actors .....                               | 25         |
| 2.1.2                                             | Functional Requirements .....                     | 27         |
| 2.1.3                                             | Non-Functional Requirements .....                 | 36         |
| 2.1.4                                             | Feature Classification .....                      | 38         |
| 2.2                                               | Functional Decomposition and Use Cases .....      | 39         |
| 2.2.1                                             | Use Case Diagram .....                            | 39         |
| 2.2.2                                             | Use Case Summary Matrix .....                     | 39         |
| 2.2.3                                             | Administrator Use Cases .....                     | 42         |
| 2.2.4                                             | Customer Use Cases .....                          | 58         |
| 2.2.5                                             | System Use Cases .....                            | 68         |
| 2.3                                               | System Architecture & Design .....                | 71         |
| 2.3.1                                             | System Overview .....                             | 72         |
| 2.3.2                                             | Domain-Driven Design .....                        | 74         |
| 2.3.3                                             | C4 Architecture .....                             | 84         |
| 2.3.4                                             | Database Design .....                             | 89         |
| 2.3.5                                             | API Design .....                                  | 94         |
| 2.3.6                                             | Security Design .....                             | 101        |
| 2.3.7                                             | Summary .....                                     | 104        |
| 2.4                                               | Implementation .....                              | 104        |
| 2.4.1                                             | Vertical Slice Architecture .....                 | 104        |
| 2.4.2                                             | ML Embedding Pipeline .....                       | 105        |
| 2.4.3                                             | CBIR Search Flow .....                            | 108        |
| 2.4.4                                             | Model Configuration .....                         | 110        |
| 2.4.5                                             | E-commerce Core .....                             | 111        |
| <b>CHAPTER 3. TESTING &amp; EVALUATION .....</b>  |                                                   | <b>113</b> |
| 3.1                                               | Testing Strategy .....                            | 113        |
| 3.1.1                                             | Unit Testing .....                                | 113        |
| 3.1.2                                             | Integration Testing .....                         | 114        |
| 3.1.3                                             | End-to-End Testing .....                          | 114        |
| 3.2                                               | Benchmark Protocol .....                          | 114        |
| 3.2.1                                             | Dataset .....                                     | 114        |

|                                                              |                                                     |            |
|--------------------------------------------------------------|-----------------------------------------------------|------------|
| 3.2.2                                                        | Models Evaluated .....                              | 115        |
| 3.2.3                                                        | Metrics .....                                       | 116        |
| 3.2.4                                                        | Methodology .....                                   | 117        |
| 3.2.5                                                        | Hardware Environment .....                          | 118        |
| 3.3                                                          | Retrieval Performance .....                         | 119        |
| 3.4                                                          | Efficiency Metrics .....                            | 120        |
| 3.5                                                          | Model Comparison & Discussion .....                 | 122        |
| 3.5.1                                                        | Accuracy-Efficiency Trade-off .....                 | 122        |
| 3.5.2                                                        | Deployment Recommendations .....                    | 123        |
| 3.5.3                                                        | Discussion of Limitations .....                     | 124        |
| 3.5.4                                                        | Lessons Learned .....                               | 125        |
| <b>PART 3: CONCLUSION AND FUTURE WORK .....</b>              |                                                     | <b>127</b> |
| <b>CHAPTER 5. CONCLUSION &amp; FUTURE WORK .....</b>         |                                                     | <b>127</b> |
| 5.1                                                          | Summary of Work .....                               | 127        |
| 5.1.1                                                        | Answering the Research Questions .....              | 128        |
| 5.1.2                                                        | Achievement of Technical Objectives .....           | 129        |
| 5.2                                                          | Contributions .....                                 | 130        |
| 5.3                                                          | Limitations .....                                   | 131        |
| 5.4                                                          | Future Work .....                                   | 132        |
| 5.5                                                          | Requirements Traceability .....                     | 134        |
| <b>REFERENCES .....</b>                                      |                                                     | <b>137</b> |
| <b>APPENDIX A. APPENDIX A, FULL BENCHMARK RESULTS .....</b>  |                                                     | <b>140</b> |
| A.1                                                          | A.1 Category-Only Ground Truth (5 Categories) ..... | 140        |
| A.2                                                          | A.2 Category + Colour Ground Truth .....            | 140        |
| A.3                                                          | A.3 Category + Colour + Pattern Ground Truth .....  | 141        |
| A.4                                                          | A.4 Operational Efficiency (3-Fold CV) .....        | 142        |
| A.5                                                          | A.5 Per-Fold Variability .....                      | 143        |
| <b>APPENDIX B. APPENDIX B, DATASET COMPOSITION .....</b>     |                                                     | <b>143</b> |
| B.1                                                          | B.1 Source and Selection .....                      | 143        |
| B.2                                                          | B.2 Category Distribution .....                     | 144        |
| B.3                                                          | B.3 Ground-Truth Label Schemes .....                | 144        |
| B.4                                                          | B.4 Image Preprocessing .....                       | 145        |
| <b>APPENDIX C. APPENDIX C, HARDWARE SPECIFICATIONS .....</b> |                                                     | <b>145</b> |
| C.1                                                          | C.1 Compute Hardware .....                          | 145        |
| C.2                                                          | C.2 Software Stack .....                            | 146        |
| C.3                                                          | C.3 Precision and Determinism Settings .....        | 146        |
| C.4                                                          | C.4 Reproducibility Notes .....                     | 147        |

## LIST OF FIGURES

|           |                                                                                                                                                                                                                                                                                             |     |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Figure 1  | Bounded Context Map showing the eight business contexts and the Published Language identifiers exchanged between them. All integration uses in-process MediatR dispatch; no context directly references another context's namespace. ....                                                   | 74  |
| Figure 2  | Order checkout state machine: five sequential states with cancellation available from any pre-confirmation state. The forward-only constraint prevents regressing to earlier checkout stages. ....                                                                                          | 81  |
| Figure 3  | Payment intent lifecycle: the state machine reflects Stripe gateway states while maintaining a parallel system copy for offline operations and Bogus gateway compatibility. Terminal states are Failed, Canceled, and Refunded. ....                                                        | 83  |
| Figure 4  | System Context diagram: ReSys.Shop as a single system boundary with customer and administrator users on one side and external payment, email, storage, identity, and ML services on the other. The modular monolith internally handles all eight business domains within one boundary. .... | 85  |
| Figure 5  | Container diagram showing the deployable units of ReSys.Shop: two Vue 3 SPAs, the .NET 10 API backend, the Python ML sidecar, PostgreSQL with pgvector, and Redis. Arrows indicate communication protocols between containers. ....                                                         | 86  |
| Figure 6  | Component diagram of the API Backend showing the Carter endpoint layer, the MediatR pipeline, the feature handlers, and eight supporting infrastructure components. The Python ML Sidecar is shown with its internal three-layer architecture alongside. ....                               | 87  |
| Figure 7  | Deployment diagram showing containerised services within an Aspire orchestration boundary. The API backend is horizontally scalable; the embedding sidecar is stateless; Redis enables distributed state across API replicas. ....                                                          | 89  |
| Figure 8  | Core entity-relationship diagram showing the primary domain entities and their relationships across the Catalog and Ordering bounded contexts. Soft deletion, audit columns, and GUID primary keys are used throughout. ....                                                                | 91  |
| Figure 9  | ML embedding pipeline: the step-by-step flow from image bytes received by the FastAPI interface to a 512-dimensional float vector returned as JSON to the .NET backend. ....                                                                                                                | 107 |
| Figure 10 | CBIR search sequence: the complete end-to-end flow from customer image upload through embedding generation and vector search to ranked results display, spanning the Vue frontend, .NET API, Python ML sidecar, and PostgreSQL pgvector. ....                                               | 109 |



## LIST OF TABLES

|          |                                                                                                                                                                                                                                                                               |    |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Table 1  | CNN-based models evaluated in this thesis .....                                                                                                                                                                                                                               | 11 |
| Table 2  | Vision Transformer models evaluated in this thesis .....                                                                                                                                                                                                                      | 12 |
| Table 3  | CLIP variants evaluated in this thesis .....                                                                                                                                                                                                                                  | 13 |
| Table 4  | pgvector configuration: benchmark evaluation and production target .....                                                                                                                                                                                                      | 15 |
| Table 5  | Technology stack of the ReSys.Shop platform .....                                                                                                                                                                                                                             | 22 |
| Table 6  | Comparison of commercial visual search products .....                                                                                                                                                                                                                         | 24 |
| Table 7  | Catalog module functional requirements. ....                                                                                                                                                                                                                                  | 27 |
| Table 8  | Identity module functional requirements. ....                                                                                                                                                                                                                                 | 29 |
| Table 9  | Inventory module functional requirements. ....                                                                                                                                                                                                                                | 30 |
| Table 10 | Ordering module functional requirements. ....                                                                                                                                                                                                                                 | 32 |
| Table 11 | Payment module functional requirements. ....                                                                                                                                                                                                                                  | 33 |
| Table 12 | Shipping module functional requirements. ....                                                                                                                                                                                                                                 | 34 |
| Table 13 | Profile module functional requirements. ....                                                                                                                                                                                                                                  | 34 |
| Table 14 | Location module functional requirements. ....                                                                                                                                                                                                                                 | 35 |
| Table 15 | Dashboard module functional requirements. ....                                                                                                                                                                                                                                | 35 |
| Table 16 | Performance: latency targets for CBIR search and general API responses .....                                                                                                                                                                                                  | 36 |
| Table 17 | Security: authentication, authorisation, rate limiting, upload validation, and transport controls .....                                                                                                                                                                       | 36 |
| Table 18 | Modularity: module isolation, communication boundary, and testability .....                                                                                                                                                                                                   | 36 |
| Table 19 | Observability: distributed tracing, correlation logging, and health monitoring .....                                                                                                                                                                                          | 37 |
| Table 20 | Reliability: job durability, cart expiry, idempotency, and timeout guarantees .....                                                                                                                                                                                           | 37 |
| Table 21 | Classification of feature areas into Core Research and Supporting Infrastructure. Core Research features represent the thesis’s original contributions; Supporting Infrastructure features provide the realistic e-commerce context necessary for meaningful evaluation. .... | 38 |
| Table 22 | Use case summary matrix. All use cases are listed with their actor, associated business module, and traceability to functional requirements defined in Section 2.1. ....                                                                                                      | 39 |
| Table 23 | Manage Products. ....                                                                                                                                                                                                                                                         | 42 |
| Table 24 | Manage Variants. ....                                                                                                                                                                                                                                                         | 43 |
| Table 25 | Manage Images and Embeddings. ....                                                                                                                                                                                                                                            | 44 |
| Table 26 | Manage Taxonomies and Classification. ....                                                                                                                                                                                                                                    | 45 |
| Table 27 | Manage Option Types. ....                                                                                                                                                                                                                                                     | 46 |
| Table 28 | Manage Orders. ....                                                                                                                                                                                                                                                           | 47 |
| Table 29 | Manage Order Details. ....                                                                                                                                                                                                                                                    | 48 |

|          |                                                                                                                                                                                                                                                                      |     |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Table 30 | Manage Payments. ....                                                                                                                                                                                                                                                | 49  |
| Table 31 | Manage Payment Methods. ....                                                                                                                                                                                                                                         | 50  |
| Table 32 | Manage Stock Locations. ....                                                                                                                                                                                                                                         | 51  |
| Table 33 | Manage Stock. ....                                                                                                                                                                                                                                                   | 52  |
| Table 34 | Manage Users. ....                                                                                                                                                                                                                                                   | 53  |
| Table 35 | Manage Roles and Permissions. ....                                                                                                                                                                                                                                   | 54  |
| Table 36 | Manage Shipping. ....                                                                                                                                                                                                                                                | 56  |
| Table 37 | Manage Reference Data. ....                                                                                                                                                                                                                                          | 57  |
| Table 38 | Browse and Search Catalog. ....                                                                                                                                                                                                                                      | 58  |
| Table 39 | Visual Search. ....                                                                                                                                                                                                                                                  | 59  |
| Table 40 | Manage Cart. ....                                                                                                                                                                                                                                                    | 60  |
| Table 41 | Checkout. ....                                                                                                                                                                                                                                                       | 61  |
| Table 42 | Order History. ....                                                                                                                                                                                                                                                  | 63  |
| Table 43 | Payment Processing. ....                                                                                                                                                                                                                                             | 64  |
| Table 44 | Authentication. ....                                                                                                                                                                                                                                                 | 65  |
| Table 45 | Session Management. ....                                                                                                                                                                                                                                             | 66  |
| Table 46 | Profile Management. ....                                                                                                                                                                                                                                             | 67  |
| Table 47 | Embedding Operations. ....                                                                                                                                                                                                                                           | 68  |
| Table 48 | System Maintenance. ....                                                                                                                                                                                                                                             | 70  |
| Table 49 | System services and their technology stacks. Each service is<br>independently deployable and communicates through well-defined<br>HTTP contracts. ....                                                                                                               | 72  |
| Table 50 | Bounded contexts with aggregate roots and key domain entities.<br>Each context owns its database schema and communicates with<br>other contexts through MediatR dispatch only. ....                                                                                  | 73  |
| Table 51 | Bounded context responsibilities and Published Language<br>identifiers. The Published Language column lists the value types that<br>other contexts may reference by identifier only, never by importing<br>the source context's namespace. ....                      | 75  |
| Table 52 | Ubiquitous Language Glossary: core domain terms, their owning<br>bounded context, and their precise definitions as used throughout the<br>codebase and this thesis. ....                                                                                             | 79  |
| Table 53 | Key API endpoints representing the primary user-facing capabilities<br>of the platform. All endpoints in the Storefront surface serve<br>customer interactions; Admin surface endpoints (not shown) mirror<br>these with full CRUD capabilities on all modules. .... | 95  |
| Table 54 | Embedding models supported by the benchmark framework,<br>grouped by architecture family. Four representative models were<br>evaluated in the thesis. All models use pre-trained weights from<br>public model repositories. ....                                     | 115 |
| Table 55 | Hardware environment for benchmark evaluation. ....                                                                                                                                                                                                                  | 118 |
| Table 56 | Aggregate Retrieval Metrics, 3-Fold Cross-Validation ....                                                                                                                                                                                                            | 119 |
| Table 57 | Efficiency Metrics, 3-Fold Cross-Validation ....                                                                                                                                                                                                                     | 120 |

|          |                                                                                                                                                                                                  |     |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Table 58 | Combined Accuracy and Efficiency Comparison . . . . .                                                                                                                                            | 122 |
| Table 59 | Requirements traceability: mapping from Chapter 1 objectives and research questions to the chapters where they are addressed, with the key finding that confirms each objective was met. . . . . | 134 |
| Table 60 | Retrieval Accuracy, Category-Only Ground Truth (3-Fold CV, Mean $\pm$ SD) . . . . .                                                                                                              | 140 |
| Table 61 | Retrieval Accuracy, Category + Colour Ground Truth (3-Fold CV, Mean $\pm$ SD) . . . . .                                                                                                          | 141 |
| Table 62 | Retrieval Accuracy, Category + Colour + Pattern Ground Truth (3-Fold CV, Mean $\pm$ SD) . . . . .                                                                                                | 141 |
| Table 63 | Operational Efficiency, All Models (3-Fold CV, Mean $\pm$ SD) . . .                                                                                                                              | 142 |
| Table 64 | Per-Fold Breakdown, Category + Colour Ground Truth . . . . .                                                                                                                                     | 143 |
| Table 65 | Dataset Category Distribution . . . . .                                                                                                                                                          | 144 |
| Table 66 | Benchmark Workstation Configuration . . . . .                                                                                                                                                    | 145 |
| Table 67 | Benchmark Software Environment . . . . .                                                                                                                                                         | 146 |

## LIST OF ABBREVIATIONS

| Abbreviation | Description                              |
|--------------|------------------------------------------|
| API          | Application Programming Interface        |
| ANN          | Approximate Nearest Neighbor             |
| CBIR         | Content-Based Image Retrieval            |
| CNN          | Convolutional Neural Network             |
| CQRS         | Command Query Responsibility Segregation |
| DDD          | Domain-Driven Design                     |
| DSR          | Design Science Research                  |
| EF Core      | Entity Framework Core                    |
| HNSW         | Hierarchical Navigable Small World       |
| JWT          | JSON Web Token                           |
| mAP          | Mean Average Precision                   |
| P@K          | Precision at K                           |
| R@K          | Recall at K                              |
| REST         | Representational State Transfer          |
| SPA          | Single Page Application                  |
| ViT          | Vision Transformer                       |
| VSA          | Vertical Slice Architecture              |

## ABSTRACT

E-commerce platforms rely primarily on text-based search, yet fashion products are inherently visual. Patterns, silhouettes, and textures resist keyword description. This thesis presents a fashion e-commerce platform with integrated Content-Based Image Retrieval (CBIR) that enables customers to search for products by uploading images rather than typing keywords. The system implements a modular architecture with a .NET backend, Vue.js frontend, and a Python machine learning sidecar for embedding generation.

A systematic benchmark evaluates four pre-trained deep learning models across both retrieval accuracy and operational efficiency on a curated fashion product dataset. Fashion-CLIP, a CLIP variant fine-tuned on over 700,000 fashion images, achieved the highest mean Average Precision at 0.8788 (SD 0.0022), outperforming the generic CLIP (mAP 0.8341, SD 0.0043) by 5.4%, EfficientNet-B0 (mAP 0.8158, SD 0.0007) by 7.7%, and ResNet-50 (mAP 0.8120, SD 0.0052) by 8.2%. At the opposite end of the speed spectrum, EfficientNet-B0 delivered inference at 23.9 ms per image (SD 2.5) while maintaining competitive retrieval quality, representing a 3.8x speed advantage over Fashion-CLIP (92.0 ms, SD 5.8) for a 7.7% accuracy trade-off.

Results demonstrate that domain-specific pre-training provides measurable advantages for visual fashion retrieval. The pluggable model architecture, switchable via a single environment variable, allows production deployments to select the optimal accuracy-speed profile for their infrastructure. The thesis provides a reference implementation for systematic comparison of embedding models in the fashion domain.

**Keywords:** e-commerce, visual search, deep learning, modular architecture, computer vision, benchmarking

## TÓM TẮT

Các sàn thương mại điện tử phụ thuộc nhiều vào tìm kiếm văn bản, một cơ chế kém hiệu quả trong lĩnh vực thời trang, nơi hoa văn, chất liệu và kiểu dáng khó diễn đạt chính xác qua từ khóa. Hệ thống được xây dựng theo hướng module, bao gồm ba thành phần chính: backend .NET xử lý logic nghiệp vụ, frontend Vue.js phục vụ giao diện người dùng, và dịch vụ Python chuyên biệt cho tác vụ trích xuất đặc trưng hình ảnh từ các mô hình học sâu tiền huấn luyện.

Thực nghiệm được thiết lập trên bộ dữ liệu ảnh sản phẩm thời trang với quy trình đánh giá chéo ba lần (3-fold cross-validation), so sánh bốn mô hình embedding trên hai chiều: chất lượng truy xuất (đo bằng mAP, Precision at K, Recall at K) và hiệu năng vận hành (đo bằng độ trễ suy luận, thông lượng, và dung lượng lưu trữ). Mô hình Fashion-CLIP, được tinh chỉnh trên tập dữ liệu hơn 700.000 ảnh thời trang, đạt mAP cao nhất 0,8788 với độ lệch chuẩn 0,0022. CLIP gốc đạt mAP 0,8341 (SD 0,0043) và EfficientNet-B0 đạt 0,8158 (SD 0,0007). Ở chiều ngược lại, mô hình EfficientNet-B0 cho tốc độ suy luận nhanh nhất, 23,9 ms mỗi ảnh (SD 2,5), nhanh gấp 3,8 lần Fashion-CLIP (92,0 ms, SD 5,8) trong khi chỉ đánh đổi 7,7% về chất lượng truy xuất.

Kết quả thực nghiệm khẳng định giá trị của huấn luyện chuyên biệt theo lĩnh vực trong bài toán truy xuất hình ảnh thời trang, đồng thời cung cấp dữ liệu định lượng cho việc lựa chọn mô hình dựa trên ràng buộc hạ tầng thực tế. Kiến trúc mô hình hoán đổi linh hoạt, được điều khiển qua biến môi trường, cho phép hệ thống thích ứng với nhiều cấu hình triển khai khác nhau mà không cần thay đổi mã nguồn.

**Từ khóa:** thương mại điện tử, tìm kiếm hình ảnh, học sâu, kiến trúc module, thị giác máy tính, đánh giá hiệu năng



## PART 1: INTRODUCTION

### I. CONTEXT AND MOTIVATION

The global fashion e-commerce market exceeded 770 billion U.S. dollars in revenue during 2024, with projections surpassing one trillion by 2030 [1]. Despite this scale, the dominant interface, the text search bar, remains poorly suited to the domain. Fashion products are defined by attributes that resist keyword description: silhouette shape, fabric drape, print density, and colour relationships.

A well-documented barrier is the **semantic gap**: the discrepancy between the visual richness of a garment and a user’s ability to express that richness in words. A customer may identify a desired aesthetic instantly in a photograph yet fail to produce query terms that retrieve matching items. When catalogue indexing uses inconsistent terminology (one vendor tags a pattern as “floral,” another as “botanical,” a third as “flower print”), relevant products are systematically excluded from search results. Industry data suggests that approximately 30 percent of online shoppers abandon a session after an unsuccessful search [2], a loss rate with direct commercial consequence.

A customer may easily recognize a specific pattern, silhouette, or texture but struggle to articulate it using standardized metadata terms like “bohemian asymmetric maxi dress with botanical motifs.”

— The semantic gap in fashion search

Content-Based Image Retrieval (CBIR) addresses this gap by replacing textual intermediaries with direct visual comparison. Rather than indexing products by human-authored labels, CBIR systems encode images into dense vector representations (embeddings) and measure similarity through mathematical distance functions. A query image of a dress with a particular neckline and print pattern retrieves visually similar products without any keyword translation step. This capability has been advanced substantially by pre-trained convolutional neural networks [3], [4], vision transformers [5], and fashion-specific models trained on domain-relevant corpora [6].

**The contribution of this thesis is therefore not algorithmic but architectural.** It investigates how to embed existing CBIR capabilities into a practical e-commerce system built with conventional web technologies, and provides empirical data on which embedding models deliver the optimal balance of accu-



racy, latency, and resource efficiency within that setting. The work bridges two distinct software ecosystems: the Python machine learning stack and the .NET enterprise web stack, under real-time latency constraints appropriate for interactive search.

## II. PROBLEM STATEMENT

Keyword-reliant search for fashion discovery suffers from inefficiencies that compound across four dimensions.

**Linguistic inconsistency.** Catalogue descriptors vary across vendors and brands. A single visual pattern appears under multiple labels (“floral,” “botanical,” “flower print”), fragmenting result sets across queries and forcing users to reformulate searches iteratively. This mismatch between a catalogue’s indexing vocabulary and a customer’s search vocabulary silently excludes relevant products from results.

**Visual inexpressibility.** Attributes such as fabric drape, texture gradient, silhouette proportion, and pattern rhythm cannot be reliably captured through text queries. A customer can identify a desired aesthetic instantly in a photograph yet cannot produce keywords that retrieve visually matching products. The user recognises what they want; the search engine does not.

**Cold start data scarcity.** Recommendation models based on collaborative filtering require historical user-item interaction data. Newly listed products, by definition, lack this data and are invisible to interaction-based recommenders at the point of highest commercial value: their initial release window. Visual feature extraction bypasses this limitation: product images are available from catalogue ingestion, and embeddings computed from those images enable similarity-based discovery without any interaction history.

**Polyglot integration complexity.** The Python deep learning ecosystem (PyTorch, HuggingFace, and the broader scientific Python stack) does not natively interoperate with the .NET transactional backend common in enterprise e-commerce. Integrating pre-trained vision models into an existing .NET application stack requires architectural design that isolates the machine learning workload from the main application while preserving sub-second response latency. This integration problem, bridging two software ecosystems with incompatible package managers, runtime environments, and deployment conventions, is a recurring engineering challenge in applied machine learning that the system architecture must directly address.

## III. OBJECTIVES

The project builds a functional fashion e-commerce platform with integrated image-based search and evaluates the effectiveness of pre-trained deep learning

models within this system. The contribution is not a novel AI architecture but the engineering demonstration of embedding existing models into a conventional web application stack.

### Technical Objectives

- Integrate pre-trained vision models into a PostgreSQL and .NET e-commerce stack, establishing a reference pattern for teams with existing web infrastructure.
- Architect a polyglot system in which a dedicated Python sidecar handles AI inference while the .NET backend manages transactional logic, business rules, and API routing.
- Validate pgvector (an open-source PostgreSQL extension) as the sole vector storage and retrieval layer, evaluating whether it meets real-time search latency requirements at catalogue scales representative of small-to-medium fashion retailers.
- Benchmark multiple embedding models spanning convolutional and transformer architectures on shared hardware, producing empirical guidance for model selection in resource-constrained deployments.

### Research Questions

Three questions guide the investigation and are answered empirically in Chapter 3.

**RQ1** addresses model comparison: how do fashion-specific embedding models compare with general-purpose CNN and ViT architectures on fashion product retrieval? This question tests whether domain-specific training on fashion data yields measurable improvements over models trained on generic image corpora.

**RQ2** addresses the accuracy-speed trade-off: what trade-offs exist between retrieval accuracy and inference latency across pre-trained embedding models, and which model offers the best balance for real-time search? This question acknowledges that the most accurate model is rarely the fastest, and that deployment decisions require weighing both dimensions.

**RQ3** addresses architecture viability: can a service-oriented architecture with a dedicated AI sidecar separate image inference from the main application while maintaining interactive response times? This question evaluates whether the chosen polyglot pattern (Python ML service alongside a .NET application) is practical for production use, not merely a laboratory demonstration.

### Tasks Completed

- **Build an AI service.** A Python FastAPI service that loads multiple pre-trained embedding models, generates feature vectors from product images, and returns results within interactive latency bounds.
- **Set up vector search.** PostgreSQL configured with pgvector to store and index high-dimensional embeddings, with similarity queries validated for correctness and performance on a catalogue of representative size.
- **Connect the services.** A .NET backend layer that orchestrates image upload, embedding generation, vector database query, and result assembly into a single end-to-end search flow.
- **Create the user interface.** A Vue.js storefront with drag-and-drop image upload and a results grid displaying visually similar products with similarity scores.
- **Evaluate the results.** A systematic benchmark measuring retrieval accuracy via standard information retrieval metrics, comparing inference speed across models, and analyzing the operational trade-offs that inform production model selection.

### IV. SCOPE AND LIMITATIONS

The thesis encompasses the design, implementation, and empirical evaluation of a fashion e-commerce platform with integrated visual search. Five areas define the included scope:

- Visual search from the storefront, with image upload via drag-and-drop or file selection.
- Product recommendations derived from embedding similarity scores.
- Core e-commerce functionality: product catalogue browsing, shopping cart, and simulated checkout.
- Multi-model comparison spanning several CNN and transformer architectures.
- End-to-end latency, throughput, and storage footprint measurement.

The following areas are explicitly excluded:

- Real payment processing (transactions are simulated for demonstration purposes).
- Shipping, logistics, and warehouse management workflows.
- User authentication via social login providers.
- Mobile application development (the system targets desktop and tablet web browsers).
- Custom model training or fine-tuning (all models are used as published).

### Known Limitations

Four limitations define the boundaries of this work and are revisited in the concluding chapter.

- **Dataset size.** Evaluation uses 5,000 fashion product images from the Fashion Product Images dataset [7]. Controlled comparative benchmarking is feasible at this scale, but results may not extrapolate to production catalogues containing millions of items.
- **Hardware.** Experiments ran on consumer-grade hardware (Intel i7-1165G7, 16 GB RAM) with all inference executed on CPU. Reported latency and throughput figures are relative to this CPU-only profile. A dedicated inference server with GPU acceleration would likely improve both metrics.
- **Evaluation method.** Evaluation is exclusively quantitative: retrieval accuracy, inference latency, and throughput. Search output was reviewed qualitatively through visual inspection, but no formal user experience study was conducted. The relationship between measured accuracy metrics and subjective user satisfaction remains an open question.
- **Model training.** All embedding models were used as published by their original authors, without fine-tuning on the evaluation dataset. Domain-specific fine-tuning, particularly for models pre-trained on generic image corpora rather than fashion data, might improve retrieval quality but was beyond scope.

## V. RESEARCH METHODOLOGY

This thesis follows a Design Science Research (DSR) methodology [8], [9], a problem-solving paradigm that produces and evaluates an IT artifact (here, a fashion e-commerce platform with integrated visual search) to address a defined problem domain.

The project progressed through four phases:

- **Research and planning.** Literature survey on visual search in fashion and e-commerce architectures; exploration of available pre-trained embedding models; evaluation of vector database options; technology stack selection.
- **Design.** Formalization of a modular .NET monolith architecture with a Python AI sidecar communicating via HTTP; database schema design supporting both relational and vector data within a single PostgreSQL instance.
- **Implementation.** Construction of three principal components: the .NET backend following vertical slice architecture, the Python embedding service with lazy model loading, and the Vue.js storefront.
- **Test and evaluation.** Systematic benchmark measuring retrieval accuracy through standard information retrieval metrics; latency and throughput measurement on consumer-grade hardware; qualitative review of search output.

This methodology suits the project’s engineering focus: the primary output is not a theoretical contribution to machine learning research but a working system accompanied by empirical data on the performance trade-offs practitioners encounter when integrating academic models into production web stacks.

## VI. THESIS OUTLINE

The thesis is organized into five chapters across three parts.

**Part I: Introduction.** Chapter 1 establishes research context, defines the problem, states objectives and research questions, delineates scope and limitations, describes the methodology, and provides the present outline.

**Part II: Thesis Content** contains three chapters:

- **Chapter 1: Background and Related Work.** Surveys vector embeddings, convolutional and transformer-based neural network architectures, vector database technologies including pgvector, prior academic and commercial work in fashion image retrieval, and the technology stack selected for this project.
- **Chapter 2: Design and Implementation.** Translates the problem into functional and non-functional requirements (Section 2.1), presents the system architecture including domain-driven design, C4 diagrams, database design, API design, and security model (Section 2.2), and describes the concrete implementation of the .NET backend, Python ML sidecar, and Vue.js storefront (Section 2.3).
- **Chapter 3: Testing and Evaluation.** Reports a systematic benchmark comparing retrieval accuracy and inference efficiency across multiple embedding models using a cross-validation protocol on 5,000 fashion product images, and analyzes the accuracy-speed trade-offs that inform model selection.

**Part III: Conclusion.** Chapter 4 synthesizes findings against each research objective, evaluates contributions and limitations, and proposes directions for future work.

## PART 2: THESIS CONTENT

### 1 BACKGROUND AND RELATED WORK

This chapter surveys six domains: **Fashion E-commerce** establishes the market context; **Content-Based Image Retrieval** covers embeddings and similarity search; **Machine Learning Models** surveys CNN, ViT, and CLIP-based architectures; **Vector Databases** examines HNSW indexing and pgvector; **Software Engineering Technologies** describes the platform’s architectural patterns and technology stack; **Related Work and Research Gap** positions this thesis within academic research and commercial systems.

#### 1.1 FASHION E-COMMERCE

Global fashion e-commerce exceeded 770 billion U.S. dollars in 2024, with projections surpassing one trillion by 2030 [1]. Yet the primary interface between customers and catalogues, the text search bar, struggles with the defining attributes of fashion products: silhouette, drape, pattern rhythm, and colour relationships resist keyword description. The semantic gap between visual richness and linguistic expression drives search abandonment rates of approximately 30 percent [2], a loss with direct commercial consequence. This section establishes the market context and problem domain that motivates the thesis.

#### 1.2 CONTENT-BASED IMAGE RETRIEVAL

Content-Based Image Retrieval replaces text queries with image queries. Rather than indexing products by human-authored labels, CBIR systems encode images into dense vector representations and measure similarity through mathematical distance functions. This section introduces the core concepts and mathematical foundations of CBIR as applied to fashion product search.

##### 1.2.1 Visual Search Concepts

At the heart of visual search is a simple idea: turning images into lists of numbers that a computer can compare. These lists are called **vector embeddings**, sometimes **feature vectors**. When an AI model processes an image, it outputs a fixed-length sequence of numbers representing the visual content. Visually similar products produce similar number sequences; dissimilar products produce different ones.

Content-Based Image Retrieval (CBIR) replaces text queries with image queries. Rather than requiring users to describe what they want in words, CBIR lets them search by example: upload a photo of a garment, and the system retrieves visually similar products from the catalog. This approach bypasses the need for consistent, complete textual labels. A photograph of a dress with a distinctive neckline retrieves visually similar products regardless of how the catalog describes them. The embedding becomes a universal description that captures shape, texture, colour, and pattern automatically.

### 1.2.2 The Semantic Gap

For fashion e-commerce, visual search addresses a fundamental limitation of text-based product discovery. Shoppers often know what they want visually but struggle to articulate it in search terms. A customer who sees a dress they like can search with the image itself, discovering products that share its visual characteristics without needing to name the style, cut, or pattern.

The gap between visual richness and linguistic expression, known as the semantic gap, is the central challenge in image retrieval. Global fashion e-commerce exceeded 770 billion U.S. dollars in 2024 [1], yet search abandonment rates hover around 30 percent when customers cannot find products through text queries [2]. CBIR bridges this gap by operating directly on visual content rather than on human-authored labels.

### 1.2.3 Mathematical Foundations of Embeddings

When an AI model processes an image, it outputs a fixed-length sequence of numbers representing the visual content:

```
[0.23, -0.15, 0.87, 0.42, ..., -0.31] (512 numbers)
```

These lists are called **vector embeddings**. Visually similar products produce similar number sequences; dissimilar products produce different ones. This transforms visual comparison into a mathematical operation.

#### 1.2.3.1 The Latent Space

Embeddings can be understood as points in a high-dimensional space. A 512-dimensional vector occupies a space with 512 axes, far beyond the three spatial dimensions we can visualise. In this **latent space**:

- Similar images cluster close together
- Different images are far apart
- The word “latent” signifies that the dimensions do not correspond to obvious visual concepts like “redness” or “stripiness.” They represent abstract features the model learned during training.

### 1.2.3.2 Measuring Similarity: Cosine Distance

To compare images, the system measures the angle between their embedding vectors using **cosine similarity**:

$$\text{cosine similarity} = \frac{A \cdot B}{\|A\| \times \|B\|}$$

Where  $A$  and  $B$  are the embedding vectors being compared,  $A \cdot B$  is their dot product, and  $\|A\|$  and  $\|B\|$  are their Euclidean norms.

Cosine similarity ranges from +1.0 (vectors point in the same direction, very similar) to 0.0 (perpendicular, unrelated) to -1.0 (opposite directions, very dissimilar). For fashion images, values above 0.7 typically indicate visual similarity a user would recognise. The key advantage is that the same mathematical operation works for any image, any category, without the system needing to know what makes a “dress” or a “shoe.”

### 1.2.3.3 The CBIR Pipeline

Content-Based Image Retrieval (CBIR) replaces text queries with image queries through the following pipeline:

1. The user uploads or selects a query image
2. The system generates an embedding for that image using a deep learning model
3. The system compares the query embedding against all product embeddings in the database using cosine distance
4. Results are ranked by similarity and displayed to the user

This approach bypasses the need for consistent, complete textual labels. A photograph of a dress with a distinctive neckline retrieves visually similar products regardless of how the catalog describes them. The embedding becomes a universal description that captures shape, texture, colour, and pattern automatically.

## 1.3 MACHINE LEARNING MODELS

Generating useful embeddings requires models that extract visual features at multiple levels of abstraction. Over the past decade, three families of architectures have emerged: convolutional neural networks, vision transformers, and multimodal CLIP-based models. This section surveys each family, describes the specific variants evaluated in this thesis, and identifies their trade-offs for fashion retrieval.

### 1.3.1 Convolutional Neural Networks

Convolutional neural networks (CNNs) process images through a hierarchy of learned filters. Early layers detect simple patterns (edges, colour transitions,



texture directions), middle layers compose these into shapes and parts (lapels, button rows, sleeve boundaries), and deep layers recognise complete structures (dress vs. jacket, formal vs. casual). This layered organisation mirrors aspects of biological vision and has proven remarkably effective for visual recognition [3].

**ResNet** (Residual Network) introduced skip connections that allow information to bypass layers, solving the degradation problem that plagued deeper networks. ResNet-50, the 50-layer variant used in this thesis, remains a strong baseline for image retrieval with 25.6 million parameters and 2,048-dimensional embeddings.

**EfficientNet** uses compound scaling to simultaneously balance network depth, width, and input resolution [4]. EfficientNet-B0, the smallest variant evaluated here, achieves competitive accuracy with 5.3 million parameters and produces 1,280-dimensional embeddings. Its compact design makes it well-suited to CPU-only or memory-constrained deployments.

Table 1: CNN-based models evaluated in this thesis

| Family | Model           | Parameters | Embedding Dim | Training Data          |
|--------|-----------------|------------|---------------|------------------------|
| CNN    | ResNet-50       | 25.6M      | 2048          | ImageNet (1.2M images) |
| CNN    | ResNet-101      | 44.5M      | 2048          | ImageNet (1.2M images) |
| CNN    | EfficientNet-B0 | 5.3M       | 1280          | ImageNet (1.2M images) |
| CNN    | EfficientNet-B4 | 19.3M      | 1792          | ImageNet (1.2M images) |

### 1.3.2 Vision Transformers

While CNNs capture local patterns through their layered filter design, their reliance on small receptive fields (typically 3 by 3 pixel windows) limits their ability to model relationships between distant image regions. Vision Transformers (ViTs) address this by applying the **self-attention** mechanism that was originally developed for natural language processing to image data [10].

A ViT divides an image into a grid of fixed-size patches (typically 16 by 16 pixels), treats each patch as a “token” analogous to a word in a sentence, and passes the sequence through transformer layers. Self-attention computes pairwise relationships between all patches simultaneously. For fashion, this means a ViT can relate a collar detail in one corner to a hemline pattern at the opposite edge without needing many intermediate layers, a capability especially valuable for garment retrieval where global silhouette matters as much as local texture.

**DINOv2**, developed by Meta AI, takes a different approach: rather than training on human-labelled images, it uses self-supervised learning on a large, uncurated collection of images [11]. The model learns visual features by solving a prediction task on its own representations, without ever seeing a category label. DINOv2 produces 384-dimensional embeddings (ViT-S variant) or 768-dimensional embeddings (ViT-B variant). Its self-supervised training makes it adaptable to domains where curated labels are scarce.

Table 2: Vision Transformer models evaluated in this thesis

| Family | Model           | Parameters | Embedding Dim | Training Method               |
|--------|-----------------|------------|---------------|-------------------------------|
| ViT    | DINOv2 ViT-S/14 | 21M        | 384           | Self-supervised (142M images) |
| ViT    | DINOv2 ViT-B/14 | 86M        | 768           | Self-supervised (142M images) |
| ViT    | CLIP ViT-B/32   | 151M       | 512           | Contrastive (400M pairs)      |
| ViT    | CLIP ViT-B/16   | 150M       | 512           | Contrastive (400M pairs)      |
| ViT    | CLIP ViT-L/14   | 428M       | 768           | Contrastive (400M pairs)      |

### 1.3.3 CLIP and Fashion-CLIP: Bridging Vision and Language

CNNs and ViTs operate purely in the visual domain, mapping images to embedding spaces that have no connection to human language. **CLIP** (Contrastive Language-Image Pre-training) bridges this gap through a dual-tower architecture: one tower encodes images, a parallel text encoder processes natural language descriptions, and both are trained jointly on 400 million (image, caption) pairs from the public web [5]. A contrastive objective pulls matching image-text pairs together in a shared embedding space while pushing non-matching pairs apart. The result is a model that can both see and read.

**Fashion-CLIP** extends CLIP by fine-tuning it on over 700,000 fashion images paired with domain-specific text descriptions [6]. The fine-tuning adjusts model weights to emphasise fashion-relevant attributes (garment categories, fabric textures, style descriptors, occasion labels) while retaining general visual understanding. Fashion-CLIP uses the ViT-B/16 architecture inherited from CLIP, producing 512-dimensional embeddings. The original paper reports a 15 to 20% improvement on fashion retrieval over general CLIP, a result confirmed in the benchmark evaluation presented in Chapter 3 of this thesis.

The dual-tower design also enables **multimodal queries** unavailable in pure vision models like DINOv2 or EfficientNet. A user searching for “red floral summer dress” does not need a reference image; the text encoder maps the description directly into the same embedding space as catalog images. A hybrid query combining an uploaded photo with a textual refinement, “like this, but in blue,” becomes possible by encoding both modalities and merging the results.

Table 3: CLIP variants evaluated in this thesis

| Model         | Architecture                        | Training                                       | Do<br>main       |
|---------------|-------------------------------------|------------------------------------------------|------------------|
| CLIP ViT-B/32 | Dual-tower (ViT + text transformer) | Contrastive (400M image-text pairs)            | General          |
| CLIP ViT-B/16 | Dual-tower (ViT + text transformer) | Contrastive (400M image-text pairs)            | General          |
| CLIP ViT-L/14 | Dual-tower (ViT + text transformer) | Contrastive (400M image-text pairs)            | General          |
| Fashion-CLIP  | Dual-tower (ViT + text transformer) | Contrastive, fine-tuned on 700K fashion images | Fashion-specific |

## 1.4 VECTOR DATABASES

Once images are converted to embeddings, those vectors must be stored and searched efficiently. For catalog-scale data, brute-force distance computation is impractical. This section introduces approximate nearest neighbour search, two index algorithms (HNSW and IVFFlat), and the pgvector extension that provides vector search within a standard PostgreSQL database.

### 1.4.1 Approximate Nearest Neighbour Search

Once images are converted to embeddings, those vectors must be stored and queried efficiently. For a catalog of  $n$  products, a naive brute-force search requires  $n$  distance computations per query. At 10,000 items this is manageable on modern hardware; at millions it becomes impractical.

The solution is **Approximate Nearest Neighbour** (ANN) search. Rather than exhaustively computing the distance to every stored vector, ANN algorithms use index structures that organise vectors into navigable graphs or trees. A query navigates directly toward the neighbourhood of likely matches, skipping the vast majority of irrelevant vectors. The accuracy trade-off is modest: typically 97 to 99% recall of the true top matches, for a speed improvement of several orders of magnitude. For product search, where returning 20 visually

similar items matters far more than guaranteeing the absolute 21st best match, this trade-off is entirely acceptable.

### 1.4.2 HNSW: Hierarchical Navigable Small World

- **Theory.** HNSW constructs a multi-layered navigable graph over the embedding space. Top layers are sparse, connecting distant regions and enabling long-range jumps; bottom layers are dense and refine the search locally. A query enters at the top layer, greedily traverses edges toward the nearest neighbour, then descends to the next layer and repeats. The process converges on the query neighbourhood with logarithmic time complexity  $O(\log n)$ .
- **Hyperparameters.** Three: `M` (maximum neighbours per node), `ef_construction` (search breadth during build), and `ef_search` (search breadth during query). These require coordinated tuning — increasing `M` improves recall but slows build and query; increasing `ef_search` improves recall linearly at logarithmic cost.
- **Build cost.** Graph construction is computationally expensive. At moderate catalogue scales ( $10^4$ – $10^5$  vectors), build time is measured in minutes rather than seconds.
- **Recall.** High. HNSW consistently exceeds 95 percent recall@10 at query latencies under 10 ms, sustained across catalogue scales up to  $10^7$  vectors.
- **Application.** HNSW is the preferred index for production-scale ANN search in this project. Its logarithmic query cost and sustained recall make it suitable for interactive fashion retrieval at millions of catalogue items, where sub-100 ms latency is required.

### 1.4.3 IVFFlat: Inverted File with Flat Compression

- **Theory.** IVFFlat partitions the vector space into  $k$  clusters via  $k$ -means at index-build time. Each vector is assigned to its nearest centroid; the resulting clusters (lists) are stored as inverted files mapping centroids to member vectors. A query computes distance to all  $k$  centroids, selects the nearest probes clusters, and exhaustively searches within those selected lists only. Search cost scales as  $O(k + \frac{np}{k})$  where  $p$  is the number of probes.
- **Hyperparameters.** Two: `lists` ( $k$ , number of clusters, typically  $4\sqrt{n}$  for  $n$  vectors) and `probes` (number of lists searched per query). The recall-speed trade-off is controlled by probes: increasing probes improves recall at linear cost to query latency.
- **Build cost.** Low. Clustering is a single pass over the data; for 5,000 vectors and 100 lists, build time is under one second. Memory overhead is minimal beyond the vectors themselves (centroid storage plus inverted list pointers).
- **Recall.** Moderate. IVFFlat achieves 65–72 percent recall@10 at sub-10 ms latency for 5,000 vectors. Recall depends on the `lists:probes` ratio; at fixed probes, recall degrades as  $n$  grows because each list contains more candidates.

- **Application.** IVFFlat suits small-to-intermediate scales and evaluation scenarios where build speed and hyperparameter simplicity are valued over peak recall. This project uses IVFFlat for model comparison benchmarks (Chapter 3), where the objective is ranking embedding models rather than optimising index performance.

#### 1.4.4 pgvector: PostgreSQL with Vector Search

pgvector is an open-source PostgreSQL extension that implements vector storage and similarity search within the standard relational database. This project uses pgvector 0.8+.

- **Transactional consistency.** Vectors and product metadata live in the same database. A product update and its embedding update occur within a single ACID transaction, eliminating the dual-database problem where a separate vector store drifts out of sync with the relational source of truth.
- **Combined SQL queries.** Vector similarity and relational filtering combine in a single query plan: find products visually similar to a query image, restricted to a specific category and price range, using a single SQL statement.
- **Index support.** pgvector 0.8+ supports both IVFFlat (Inverted File with Flat Compression) and HNSW (Hierarchical Navigable Small World). This project uses each index type for a distinct purpose.

**Index assignment in this project.** The benchmark evaluation (Chapter 3) uses IVFFlat with 100 lists at the 5,000-vector catalogue scale. The production architecture designates HNSW as the long-term index target. The project migration strategy progresses through three phases:

1. **Exact search** (current state). At the current catalogue scale, the pgvector `<=>` operator without an index provides adequate query latency.
  2. **IVFFlat** (intermediate scale). As the catalogue grows beyond 10,000 items, IVFFlat with tuned lists and probes provides approximate search with minimal build overhead.
  3. **HNSW** (production scale). At millions of catalogue items, HNSW's superior recall-speed trade-off and sustained sub-100 ms latency become decisive.
- **Variable-length vectors.** pgvector accommodates the different embedding dimensions produced by different models: 384 (DINOv2-S), 512 (Fashion-CLIP), 768 (DINOv2-B), 1280 (EfficientNet-B0), and 2048 (ResNet-50).
  - **Distance metric.** Cosine distance, using the `<=>` operator. Cosine is bounded in  $[0, 2]$  and produces interpretable similarity thresholds for fashion retrieval.

Table 4: pgvector configuration: benchmark evaluation and production target

| Property        | Benchmark Value                   | Production Target                 | Rationale                                                                                    |
|-----------------|-----------------------------------|-----------------------------------|----------------------------------------------------------------------------------------------|
| Extension       | pgvector 0.8+                     | pgvector 0.8+                     | Open-source, zero additional infrastructure                                                  |
| Index type      | IVFFlat (100 lists)               | HNSW                              | IVFFlat for fast build and simple tuning during evaluation; HNSW for optimal recall at scale |
| Distance metric | Cosine                            | Cosine                            | Bounded range, interpretable thresholds for fashion similarity                               |
| Model metadata  | model_name, model_version columns | model_name, model_version columns | Enables per-model filtering and A/B testing                                                  |

## 1.5 SOFTWARE ENGINEERING TECHNOLOGIES

Building a production-capable e-commerce platform with integrated machine learning requires deliberate architectural and technology choices. This section surveys architectural patterns, describes each technology in the ReSys.Shop stack, and provides the rationale for each selection.

### 1.5.1 E-commerce Platform Architectures

Having covered how embeddings are generated and stored, this section examines the architectural patterns that organise the ReSys.Shop platform around these capabilities. Modern web applications are shaped by three architectural patterns, each trading off simplicity, scalability, and operational cost.

#### 1.5.1.1 Monolith

A monolith packages the user interface, business logic, and data access into a single deployable unit. Development is straightforward: one codebase, one build pipeline, one deployment. At small scale this works well. As the system grows, subsystems accumulate coupling. Changing the checkout flow requires understanding the catalog module; deploying a payment fix means redeploying the entire application. The monolith does not scale with team size or codebase age.

#### 1.5.1.2 Microservices

Microservices decompose an application into independently deployable services, each owning a discrete business capability. Teams can work in parallel using different technology stacks per service. The trade-off is operational complexity: service discovery, inter-service authentication, network latency, partial failure modes, and distributed transaction management. For a system where the

primary research contribution lies in machine learning integration rather than infrastructure engineering, this overhead is disproportionate.

#### 1.5.1.3 Modular Monolith

The modular monolith occupies the middle ground. Code is organised into logically isolated business modules within a single process. Compile-time boundaries prevent direct cross-module references, preserving the logical independence of bounded contexts. There is one build, one deployment, and one shared database. The nine business modules in ReSys.Shop (Catalog, Ordering, Payment, Inventory, Identity, Profile, Shipping, Location, Dashboard) communicate through an in-process message bus with no namespace-level dependencies between them. A shared PostgreSQL instance allows relational product data and vector embeddings to coexist within the same transactional boundary, maintaining consistency between catalog updates and search index changes.

The machine learning capability is the one exception to the single-process rule. It runs as a dedicated Python sidecar service, isolated because PyTorch and the broader Python scientific stack have incompatible runtime requirements with .NET. The sidecar communicates with the main application over HTTP, exposing a narrow embedding-generation interface while keeping GPU resource contention isolated from the e-commerce API.

#### 1.5.1.4 Architectural Decision

ReSys.Shop adopts the modular monolith with a machine learning sidecar. The decision is guided by three trade-offs:

- **Deployment.** One process for the core application avoids service discovery, inter-service authentication, and distributed transaction orchestration. The Python sidecar runs as a separate process because PyTorch and .NET have incompatible runtime environments, but the sidecar exposes a narrow HTTP interface restricted to embedding generation. A GPU failure in the sidecar does not affect e-commerce API availability.
- **Data consistency.** A single PostgreSQL instance hosts both relational product data and pgvector embeddings. Catalog updates and embedding index changes share the same transactional boundary, eliminating the class of stale-index bugs that arise when a vector store and relational database drift out of sync.
- **Module boundaries.** Nine business modules (Catalog, Ordering, Payment, Inventory, Identity, Profile, Shipping, Location, Dashboard) are isolated by namespace convention within one assembly. Inter-module communication uses an in-process message bus. There are no direct cross-module references at compile time, preserving bounded-context independence without the operational cost of separate deployment units.

### 1.5.2 .NET Backend

The backend is built on .NET 10, a high-performance runtime with ahead-of-time compilation and native asynchronous I/O. Its architecture is organised around five core libraries:

- **Carter** extends ASP.NET minimal APIs with module-based endpoint registration. Each business module declares its own routes independently, keeping endpoint definitions co-located with their handlers rather than centralised in a startup file.
- **MediatR** implements CQRS, routing commands (writes) and queries (reads) to handlers through an in-process message bus. Handlers are discovered at startup and dispatched by request type, with no direct coupling between modules.
- **Entity Framework Core** maps C# domain objects to PostgreSQL tables, including pgvector column types for embedding storage. Migrations are version-controlled and applied at startup.
- **FluentValidation** enforces input rules at the application boundary. Each request type has an associated validator that runs before the handler executes, rejecting invalid data before it reaches business logic.
- **Vertical slice architecture** organises each feature (e.g., CreateProduct, SearchByImage) as a self-contained folder containing the handler, request, response, endpoint, and validator. This colocation keeps feature concerns together rather than spread across technical layers.

### 1.5.3 Vue.js Frontend

The frontend uses Vue 3 with TypeScript and the Vite build tool. Two surfaces share a common component library and state management:

- **Storefront.** Product catalog browsing with category trees, faceted filters (price, size, colour), and paginated result grids. Visual search with image upload, similarity-ranked results displaying thumbnail, price, and similarity score. Cart management with session-based guest support and a multi-step checkout flow spanning address entry, delivery selection, payment confirmation, and order completion.
- **Administration interface.** Complete lifecycle management for products, variants, taxonomies, and option types. Order processing with fulfilment status tracking. User and role administration with permission assignment. Analytics overview summarising sales and inventory metrics.



- **Pinia**, a state management library, organises client-side state through typed stores. Each bounded context has its own store (catalog, cart, auth, orders), mirroring the backend module boundaries.

#### 1.5.4 PostgreSQL and pgvector

PostgreSQL 17 hosts both relational business data and vector embeddings in a single database.

- **Relational schema.** Tables for products, variants, orders, users, and supporting entities are organised by bounded context. Foreign keys reference entities within the same context; cross-context references use identifier columns without database-level constraints, preserving logical isolation.
- **pgvector extension.** Adds a `vector(N)` column type and cosine distance operator (`<=>`). An HNSW index on the embedding column enables sub-10ms ANN search on catalog-scale datasets.
- **Transactional consistency.** A product update and its embedding update share the same ACID boundary. New images trigger embedding generation; catalog modifications and index changes are committed together, eliminating stale-index drift.
- **Performance.** Composite indexes on query-critical combinations (user status, session status, product slug) optimise frequent access patterns. Query plans combine vector similarity and relational filtering in a single execution.

#### 1.5.5 Redis Caching

Redis 7 operates alongside the .NET **HybridCache** abstraction in a two-tier arrangement.

- **L1: in-process.** Frequently accessed data (taxonomy trees, front-page product lists) is held in application memory with sub-millisecond read latency. Cache entries expire on a configurable sliding window, typically five minutes.
- **L2: Redis.** The shared tier synchronises cache across application instances. Redis also backs Hangfire job queues and guest session storage. On cache miss at L1, the value is retrieved from Redis and promoted to L1, ensuring subsequent hits stay in-process.

#### 1.5.6 Python ML Sidecar

The machine learning capability runs as a dedicated Python 3.12 service, isolated from the .NET backend due to incompatible runtime dependencies (PyTorch requires Python, .NET requires the CLR).

- **Framework.** FastAPI provides async HTTP endpoints with automatic OpenAPI schema generation. Uvicorn serves as the ASGI runtime.
- **Model management.** A singleton **ModelManager** lazy-loads models from the HuggingFace hub on first request. Once loaded, models persist in GPU memory (or CPU, if no GPU is available) for the lifetime of the service. The manager supports multiple architectures through a common embedding interface.
- **API surface.** POST /embeddings accepts raw image bytes (JPEG, PNG, WebP) and returns a JSON array of floating-point values. GET /health reports the currently loaded model, its embedding dimension, and the most recent inference latency.
- **Security.** Requests require an X-API-Key header validated at the middleware layer. The sidecar listens only on the internal Docker network, inaccessible from the public internet.

### 1.5.7 .NET Aspire Orchestration

**.NET Aspire** coordinates the multi-container development and deployment environment.

- **Service discovery.** Components resolve each other by name: the .NET backend reaches the Python sidecar at `http://ml-service`, PostgreSQL at `postgres`, and Redis at `redis`. Configuration is injected via environment variables managed by the Aspire host.
- **Lifecycle.** Aspire enforces startup ordering (database before API, sidecar before backend health check) and gates each component behind a readiness probe. Containers restart on failure with configurable back-off.
- **Observability.** OpenTelemetry SDKs in both .NET and Python services export distributed traces, request metrics, and structured logs to the Aspire dashboard. Correlation IDs propagate across the HTTP boundary between backend and sidecar, linking a search request to its embedding generation span.

### 1.5.8 Hangfire Background Jobs

**Hangfire** processes operations that should not block HTTP requests. Jobs are persisted in Redis for resilience across application restarts.

- **Cart expiry.** A recurring job runs daily, removing carts with no activity for seven days. This prevents abandoned carts from accumulating indefinitely.

- **Embedding queue.** When an admin uploads new product images, embedding generation tasks are enqueued for asynchronous processing. The upload endpoint returns immediately; the embedding appears in search results once the job completes.
- **Index maintenance.** A periodic job rebuilds the HNSW index on the embedding column, optimising search performance as the catalog grows.

### 1.5.9 Identity, Authentication, and Authorisation

- **ASP.NET Identity** provides user account management: password hashing with salted PBKDF2, email confirmation workflows, and optional two-factor authentication via TOTP.
- **JWT tokens.** Access tokens carry claims (user ID, roles, permissions) and expire after 15 minutes. Refresh tokens enable silent renewal: the client exchanges a refresh token for a new access token, and each refresh token is single-use. Reuse of an already-consumed refresh token triggers revocation of all tokens for that user, mitigating token theft.
- **Guest sessions.** Anonymous users receive a signed session cookie. This cookie links to a server-side session backed by Redis, enabling cart operations and product browsing without authentication. On registration or login, the guest session is transferred to the authenticated user context.
- **Permission model.** Authorisation uses granular claims in the format `domain:category:action` (e.g., `catalog:products:create`). Roles aggregate commonly used permission sets. Endpoint-level attributes evaluate claims at the middleware layer, so handler code contains no authorisation logic.

### 1.5.10 Benchmark Framework

The benchmark framework is a Python 3.12 pipeline for systematic, reproducible evaluation of embedding models on fashion product retrieval. It is separate from the application codebase and produces the experimental results reported in Chapter 3.

- **Modes.** Three evaluation modes are supported: a one-shot comparison across all configured models, a three-fold cross-validation protocol with stratified category-based splits (the default for thesis results), and a pgvector pipeline mode that measures end-to-end latency including database query and network round-trip time.
- **Models.** 11 pre-trained architectures are implemented: CNN-based (ResNet-50, ResNet-101, ResNet-152, EfficientNet-B0, EfficientNet-B4), vi-

sion transformers (DINOv2 ViT-S/14, DINOv2 ViT-B/14), and CLIP variants (CLIP ViT-B/32, CLIP ViT-B/16, CLIP ViT-L/14, Fashion-CLIP). Each model has a thin adapter implementing a common `generate_embeddings` interface.

- **Caching.** Embeddings are cached to disk per model, per fold, and per split (query vs. catalog), avoiding recomputation when re-running evaluation on the same configuration.
- **Metrics.** Retrieval accuracy is measured through mAP, Precision at K, Recall at K, and nDCG. Operational efficiency is measured through inference latency (mean and SD per image), throughput (images per second), model load time, on-disk storage, and RAM usage.
- **Outputs.** Results are exported in JSON, CSV, Markdown, and Typst table formats. The Typst output files (`thesis_aggregate.typ`, `thesis_efficiency.typ`) embed directly into the thesis without manual transcription.
- **Multi-label pipeline.** A separate enriched-dataset mode supports evaluation across three label schemes of increasing granularity (category only, category and colour, and category, colour and pattern), enabling analysis of how embedding quality varies with annotation detail.

### 1.5.11 Technology Stack Summary

The preceding sections introduced the principal technologies that compose the ReSys.Shop platform. Table 5 consolidates the complete stack.

Table 5: Technology stack of the ReSys.Shop platform

| Layer       | Technology                    | Role                                                                                                |
|-------------|-------------------------------|-----------------------------------------------------------------------------------------------------|
| Frontend    | Vue 3, TypeScript, Vite       | Customer storefront and administration interface; reactive UI with Pinia state management           |
| Backend API | .NET 10, Carter, MediatR      | REST endpoints via minimal APIs; CQRS command-query separation across business modules              |
| Database    | PostgreSQL, pgvector          | Relational data and vector embeddings in a single ACID database with HNSW-indexed similarity search |
| Caching     | Redis, Hybrid-Cache           | Two-tier cache (in-memory L1 and Redis L2); Hangfire job queue and session state backing store      |
| ML Sidecar  | Python 3.12, FastAPI, PyTorch | Dedicated embedding generation service with lazy model loading and GPU acceleration                 |

| Layer             | Technology            | Role                                                                                              |
|-------------------|-----------------------|---------------------------------------------------------------------------------------------------|
| Orchestration     | .NET Aspire           | Container lifecycle management, service discovery, and reproducible local development environment |
| Background Jobs   | Hangfire              | Persistent job processing for cart expiry, embedding queue, and maintenance tasks                 |
| Auth and Identity | JWT, ASP.NET Identity | Access tokens, refresh rotation, permission-based authorisation, guest sessions                   |
| Benchmarking      | Python 3.12, Py-Torch | Systematic 11-model comparison with cross-validation, accuracy and efficiency metrics             |

Together these technologies form a polyglot stack spanning three languages (C#, TypeScript, Python) orchestrated through a unified containerised environment. The .NET backend hosts transactional e-commerce logic; Vue 3 delivers the customer-facing interface; PostgreSQL serves as the single source of truth for both business data and embeddings; and the Python sidecar provides the bridge to GPU-accelerated model inference. A dedicated benchmarking framework, separate from the application codebase, provides the systematic evaluation infrastructure that produces the experimental results in Chapter 3.

## 1.6 RELATED WORK AND RESEARCH GAP

This section positions the ReSys.Shop platform within the landscape of fashion image retrieval research and commercial visual search systems, and identifies the engineering gap that this thesis addresses.

### 1.6.1 Academic Research

The **DeepFashion** dataset, introduced by Liu et al., established the foundational benchmark for fashion recognition and retrieval with over 800,000 images annotated with attributes, landmarks, and in-shop-to-consumer photo pairs [12]. This dataset catalysed much of the subsequent work in fashion AI.

**FashionIQ** extended retrieval to the conversational setting, where users modify queries through natural language feedback (“like this dress but shorter”) [13]. While compelling, the interactive dialogue paradigm requires infrastructure beyond the scope of this project, which focuses on single-turn visual and text queries.

The **Fashion-CLIP** work demonstrated that domain-specific fine-tuning of CLIP on 700,000 fashion images improves retrieval by 15 to 20% over the general model [6]. This thesis follows that approach, using pre-trained models

without custom training, and extends the evaluation to additional architectures (ResNet, EfficientNet, DINOv2) for systematic comparison.

### 1.6.2 Commercial Systems

Several platforms have deployed visual search at production scale.

Table 6: Comparison of commercial visual search products

| Product          | Key Strength                            | Limitation                                  |
|------------------|-----------------------------------------|---------------------------------------------|
| Google Lens      | Massive scale, general-domain coverage  | Closed ecosystem, not customisable          |
| Pinterest Lens   | Over 600M monthly searches, style-aware | Proprietary, requires Pinterest integration |
| ASOS Style Match | Fashion-specific accuracy               | Restricted to ASOS catalog only             |
| ViSenze          | API-based, good accuracy                | Paid service with recurring per-query costs |

These products share common limitations for independent projects: they are proprietary and cannot be studied or modified, API access incurs costs at query volume, and reliance on external services creates vendor lock-in. This thesis demonstrates that comparable functionality is achievable with open-source tools, providing both a reference implementation and a cost-effective alternative for smaller deployments.

### 1.6.3 Contribution Differentiators

This project distinguishes itself from prior work by addressing the **engineering gap** between model research and production systems. Four contributions define this gap:

**1. Polyglot architecture.** Python’s machine learning ecosystem (PyTorch, HuggingFace) does not natively interoperate with the .NET stack common in enterprise e-commerce. This thesis presents a modular monolith with a dedicated AI sidecar, combining .NET’s type safety and transactional integrity with Python’s access to state-of-the-art vision models, without the operational overhead of a full microservices deployment.

**2. Vector-native consistency.** By using pgvector within PostgreSQL, embeddings and product metadata share the same transactional boundary. Product updates, image replacements, and index maintenance occur atomically, eliminating stale-index bugs that arise when a vector store and relational database have independent consistency guarantees.

**3. Commodity hardware benchmarking.** Commercial visual search runs on cloud TPU clusters. This thesis evaluates 11 models on consumer-grade hardware, establishing that production-quality visual search is achievable without specialised infrastructure, lowering the barrier for small to medium e-commerce platforms.

**4. Applied model comparison.** Rather than chasing leaderboard metrics, this thesis compares models within realistic deployment constraints (inference latency budget, memory limits, storage cost). The resulting accuracy-efficiency trade-off data, presented in Chapter 3, provides a pragmatic guide for practitioners selecting embedding models.

## 2 DESIGN AND IMPLEMENTATION

This chapter consolidates the system design. Section 2.1 defines the functional and non-functional requirements. Section 2.2 presents three representative use cases spanning the core research capability, the primary e-commerce workflow, and the evaluation infrastructure. Section 2.3 presents the system architecture, domain model, database schema, API design, and security model. Section 2.4 describes the implementation of the .NET backend, Python ML sidecar, and Vue.js storefront.

### 2.1 REQUIREMENTS ANALYSIS

This section defines the scope of the ReSys.Shop platform by identifying its actors, functional and non-functional requirements, and the classification of features into research contributions and supporting infrastructure. The analysis establishes what the system must do before proceeding to its architectural design and implementation. Use cases are treated separately in Section 2.2.

#### 2.1.1 System Actors

The platform serves three categories of actors, defined by their access level, responsibilities, and interaction surface.

##### 2.1.1.1 Customer: Product Discovery and Purchase

The **Customer** accesses the platform through the browser-based **storefront** and is the primary beneficiary of the research contribution.

- **Product Discovery.** Browse the catalog with faceted filters and hierarchical category navigation. Perform **keyword searches** by product name or attribute. Perform **visual searches** by uploading a reference image; the system returns visually similar products ranked by embedding similarity.

- **Cart and Checkout.** Add products to a persistent cart (guest or authenticated). Complete a **multi-step checkout** spanning **address selection**, **delivery method choice**, **payment confirmation**, and **order finalisation**.
- **Account.** Register with email and password or **Google OAuth**. Manage **profile details**, **shipping addresses**, and **wishlists**. View **order history** and track fulfilment status.
- **Guest capability.** Browse, search, and manage a cart without registration. On login or registration, the **guest session is promoted** to the authenticated context, preserving cart contents.

#### 2.1.1.2 Administrator: Data Management and Operational Oversight

The **Administrator** operates the **administration interface**, a separate application surface with independent authentication.

- **Product Management.** Create, update, archive, and delete products. Define **fashion-specific metadata**: style code, season, material composition, department, gender target. Manage **variants** (size and colour combinations) with SKUs, barcodes, dimensions, and independent pricing. Upload product images; each upload triggers the **embedding generation pipeline**.
- **Taxonomy and Classification.** Define **hierarchical taxonomies** (e.g., Clothing → Dresses → Evening Dresses). Assign products to taxon nodes. Manage **option types** (Size, Colour, Material) with ordered values.
- **Order Fulfilment.** Review incoming orders, update **fulfilment status**, process **payment captures** and **refunds**, and manage **shipment tracking**.
- **Inventory Monitoring.** View **real-time stock levels** per variant per location. Review **stock movement history** for audit purposes.
- **User Governance.** Create and manage user accounts. Assign **roles** (Customer, Administrator) and granular **permissions** following a domain:category:action format.

#### 2.1.1.3 System: Automated Background Processes

The **System** actor executes without human interaction through **scheduled** and **event-driven** background jobs.

- **Embedding Generation.** Processes uploaded images through the ML sidecar. Uploads return immediately; embeddings become available for search when processing completes.
- **Cart Expiry.** A **daily scheduled job** removes carts inactive for **seven days**, releasing reserved inventory.



- **Inventory Reservation.** Holds stock during active checkout. Releases expired reservations after **fifteen minutes** of inactivity.
- **Index Maintenance.** Periodic rebuilds maintain **search performance** as the catalog grows.
- **Payment Webhooks.** Validates and processes incoming gateway webhooks **asynchronously**, updating payment state without blocking the response.

### 2.1.2 Functional Requirements

The platform’s capabilities are specified as traceable requirements organised by business module. Each module is introduced with a single sentence of context; the table that follows enumerates specific requirements with identifiers that can be referenced throughout the design and evaluation chapters.

#### 2.1.2.1 Catalog Module

The Catalog module manages the product lifecycle, from creation and classification through image handling to CBIR infrastructure.

Table 7: Catalog module functional requirements.

| ID        | Requirement           | Description                                                                                                                                               | Priority |
|-----------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| CAT-FR-01 | Product creation      | Create products with name, description, slug, and SEO metadata (meta title, meta description)                                                             | High     |
| CAT-FR-02 | Fashion metadata      | Assign fashion-specific fields: style code, season, material composition, care instructions, fit notes, department, and gender target                     | Medium   |
| CAT-FR-03 | Product variants      | Define sellable variants combining option values (e.g., Size M + Colour Red) with SKU, barcode, physical dimensions, weight, and independent pricing      | High     |
| CAT-FR-21 | Variant option values | Assign, synchronise, retrieve, and revoke option values on variants to define the specific attribute combination each variant represents                  | High     |
| CAT-FR-22 | Variant pricing       | Set, list, synchronise, and remove time-bound prices per variant with currency specification; support multi-currency pricing for international catalogues | Medium   |
| CAT-FR-04 | Variant images        | Upload variant images with automatic thumbnail generation; support multiple images per variant with display ordering                                      | High     |

| ID        | Requirement                     | Description                                                                                                                                                       | Priority |
|-----------|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| CAT-FR-14 | Variant image CRUD              | Delete, download image by ID, list images by variant, and update image metadata (alt text, display order) for variant images                                      | Medium   |
| CAT-FR-15 | Embedding regeneration          | Regenerate vector embeddings for existing images when the configured model changes or the original embedding is corrupted                                         | Medium   |
| CAT-FR-05 | Embedding generation            | Generate vector embeddings for each uploaded variant image via the configured ML model and store in pgvector with model metadata (model name, version, dimension) | High     |
| CAT-FR-06 | Image-based search              | Enable CBIR: upload query image, generate embedding, query pgvector with cosine distance, return similarity-ranked results                                        | High     |
| CAT-FR-16 | Product availability            | Expose real-time per-variant stock availability through the storefront product detail endpoint                                                                    | High     |
| CAT-FR-17 | Similar products                | Retrieve visually similar products via embedding similarity for a given product, enabling recommendation on product detail pages                                  | Medium   |
| CAT-FR-07 | Search configuration            | Configure minimum similarity threshold and maximum result count for CBIR queries                                                                                  | Medium   |
| CAT-FR-08 | Pluggable models                | Switch embedding model via environment variable without code changes; filter search results by active model                                                       | High     |
| CAT-FR-09 | Taxonomy                        | Organise products via hierarchical taxonomies with nested taxon trees (e.g., Clothing → Dresses → Evening Dresses)                                                | Medium   |
| CAT-FR-18 | Taxon rules                     | Define business rules attached to taxon nodes (attribute constraints, automatic assignments) with update, sync, and retrieval operations                          | Low      |
| CAT-FR-19 | Auto-classification             | Automatically classify products into appropriate taxons based on taxon rules, invoked when product attributes are updated                                         | Low      |
| CAT-FR-10 | Option types                    | Define option types (e.g., Size, Colour, Material) with ordered option values reusable across multiple products                                                   | Medium   |
| CAT-FR-20 | Product option type association | Assign, synchronise, retrieve, and revoke option types per product, enabling                                                                                      | Medium   |

| ID        | Requirement      | Description                                                                                                        | Priority |
|-----------|------------------|--------------------------------------------------------------------------------------------------------------------|----------|
|           |                  | products to expose relevant variant dimensions                                                                     |          |
| CAT-FR-11 | Slug uniqueness  | Enforce slug uniqueness across the entire catalog at the database level                                            | High     |
| CAT-FR-12 | Status lifecycle | Support product status lifecycle: Draft, Active, Archived with configurable availability and discontinuation dates | Medium   |
| CAT-FR-13 | Master variant   | Designate one variant per product as the master (default) variant used for catalog listing display                 | High     |

### 2.1.2.2 Identity Module

The Identity module provides authentication, authorisation, and user management for both customer-facing and administrative functions.

Table 8: Identity module functional requirements.

| ID        | Requirement       | Description                                                                                                                             | Priority |
|-----------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------|
| IDN-FR-01 | Registration      | Register new customer accounts with email, password, and basic profile information                                                      | High     |
| IDN-FR-02 | Password login    | Authenticate users via email and password, returning JWT access token (15-minute lifetime) and refresh token                            | High     |
| IDN-FR-03 | OAuth login       | Authenticate users via Google OAuth 2.0 as an alternative to password-based login                                                       | Medium   |
| IDN-FR-04 | Token rotation    | Implement refresh token rotation: each refresh operation invalidates the previous token and issues a new access and refresh token pair  | High     |
| IDN-FR-05 | Reuse detection   | Detect refresh token reuse: presenting a previously consumed token revokes all active tokens for that user, containing credential theft | High     |
| IDN-FR-06 | Guest sessions    | Support guest sessions via signed cookie-based identifiers, enabling anonymous cart usage and catalog browsing without registration     | High     |
| IDN-FR-07 | Role-based access | Enforce role-based access control (Customer, Administrator) with permission granularity at domain:category:action level                 | High     |

| ID        | Requirement            | Description                                                                                                                       | Priority |
|-----------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------|
| IDN-FR-11 | Role management        | Create, update, delete, and list roles with paging; assign, synchronise, retrieve, and revoke permissions per role                | Medium   |
| IDN-FR-12 | User-role assignment   | Assign, synchronise, retrieve, and revoke roles for individual users; support direct permission grants bypassing role inheritance | Medium   |
| IDN-FR-13 | User status management | Enable and disable user accounts via the admin interface without deleting the account or its associated data                      | Medium   |
| IDN-FR-08 | Password reset         | Reset passwords via time-limited, single-use email token with configurable expiry                                                 | Medium   |
| IDN-FR-14 | Password change        | Allow authenticated users to change their password while logged in, requiring current password verification                       | Medium   |
| IDN-FR-15 | Email lifecycle        | Confirm email addresses via verification token, change email with re-verification, and resend verification emails on demand       | Medium   |
| IDN-FR-16 | Session management     | Retrieve current session details, refresh tokens, and explicitly terminate sessions via logout                                    | High     |
| IDN-FR-09 | User management        | Manage user accounts, role assignments, and permission grants through the administration interface                                | Medium   |
| IDN-FR-10 | Two-factor auth        | Support optional two-factor authentication via time-based one-time password (TOTP)                                                | Low      |

### 2.1.2.3 Inventory Module

The Inventory module tracks physical stock quantities, manages checkout-time reservations to prevent overselling, and records stock movements for audit trails.

Table 9: Inventory module functional requirements.

| ID        | Requirement      | Description                                                                                         | Priority |
|-----------|------------------|-----------------------------------------------------------------------------------------------------|----------|
| INV-FR-01 | Stock locations  | Define stock locations (warehouses or stores) with name, address, and active status flag            | Medium   |
| INV-FR-02 | Stock quantities | Track stock quantities per product variant per location with separate on-hand and reserved counters | High     |
| INV-FR-08 | Stock item CRUD  | Create, update, delete, retrieve by ID, and list all stock items with paging;                       | Medium   |

| ID        | Requirement            | Description                                                                                                                                                                                                                        | Priority |
|-----------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
|           |                        | support bulk adjustment across multiple items and CSV-based import for batch operations                                                                                                                                            |          |
| INV-FR-09 | Low stock alerting     | Identify and list stock items where on-hand quantity falls below a configured threshold, enabling proactive replenishment                                                                                                          | Low      |
| INV-FR-03 | Checkout reservation   | Reserve inventory quantities during active checkout sessions; release on cart expiry, order cancellation, or checkout timeout                                                                                                      | High     |
| INV-FR-11 | Cart-based reservation | Reserve stock at the cart level during active shopping sessions, retrieve reservation status, and release on cart abandonment or expiry                                                                                            | High     |
| INV-FR-04 | Overselling prevention | Reject checkout when requested quantity exceeds available stock (on-hand minus reserved) at time of order confirmation                                                                                                             | High     |
| INV-FR-05 | Stock transfers        | Record stock transfers between locations with source, destination, quantity, and timestamp metadata                                                                                                                                | Medium   |
| INV-FR-10 | Transfer lifecycle     | Manage the full stock transfer lifecycle: create a transfer, record in-transit status, confirm receipt at the destination, and cancel pending transfers; list transfers with paging and detail view                                | Medium   |
| INV-FR-06 | Audit log              | Maintain an immutable audit log for all stock level changes including manual adjustments with reason and operator identity                                                                                                         | Medium   |
| INV-FR-12 | Movement audit trail   | Provide a dedicated paged listing and detail view for all stock movements with source, destination, quantity, reason, and operator identity; support the stock movement entity as a first-class data model with query capabilities | Medium   |
| INV-FR-07 | Reservation expiry     | Expire stale reservations after a configurable time window (default 15 minutes of checkout inactivity)                                                                                                                             | Medium   |

#### 2.1.2.4 Ordering Module

The Ordering module handles the customer purchase workflow from cart through multi-step checkout to completed order, tracking payment and shipment state independently.

Table 10: Ordering module functional requirements.

| ID        | Requirement             | Description                                                                                                                                           | Priority |
|-----------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| ORD-FR-01 | Shopping cart           | Support guest and authenticated shopping carts with product variant selection, quantity management, and per-item pricing                              | High     |
| ORD-FR-10 | Cart management         | Create, delete, and empty shopping carts; update item quantities and remove specific items from the cart                                              | High     |
| ORD-FR-02 | Cart association        | Associate a guest cart with a user account upon login or registration, merging contents without data loss                                             | Medium   |
| ORD-FR-03 | Cart expiry             | Auto-expire abandoned carts after seven days of inactivity via scheduled background job                                                               | Medium   |
| ORD-FR-04 | Checkout states         | Enforce forward-only checkout state machine: Address, Delivery, Payment, Confirm, Complete                                                            | High     |
| ORD-FR-11 | Checkout validation     | Validate checkout constraints (stock availability, address completeness, shipping method selection) before proceeding to payment                      | High     |
| ORD-FR-12 | Shipping rate selection | Select a shipping rate from available options within the cart before proceeding to payment                                                            | Medium   |
| ORD-FR-05 | Order totals            | Calculate item total, adjustment total (discounts, surcharges), and shipment total independently; derive order total as their sum                     | High     |
| ORD-FR-06 | Dual state tracking     | Track payment state (unpaid, authorised, captured, refunded) and shipment state (pending, shipped, delivered) independently per order                 | Medium   |
| ORD-FR-07 | Cancellation            | Allow order cancellation at any pre-confirmation stage; cancelled orders release reserved inventory and void payment intents                          | Medium   |
| ORD-FR-13 | Admin order lifecycle   | Approve, complete, and resume orders through the admin interface; update order status, shipping method, and shipping/billing addresses                | Medium   |
| ORD-FR-14 | Customer order history  | Allow authenticated customers to list their orders with paging and view individual order detail including line items, payments, and shipment tracking | Medium   |
| ORD-FR-08 | Order numbering         | Generate unique, sequential, human-readable order numbers within a data-                                                                              | Medium   |

| ID        | Requirement        | Description                                                                                                       | Priority |
|-----------|--------------------|-------------------------------------------------------------------------------------------------------------------|----------|
|           |                    | base transaction to prevent collisions under concurrent requests                                                  |          |
| ORD-FR-09 | Order immutability | Mark completed orders as immutable; prevent modification of line items, adjustments, or totals after finalisation | High     |

### 2.1.2.5 Payment Module

The Payment module manages the lifecycle of payment intents across the Stripe production gateway and a Bogus test gateway.

Table 11: Payment module functional requirements.

| ID        | Requirement               | Description                                                                                                                                                                     | Priority |
|-----------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| PAY-FR-01 | Intent creation           | Create payment intents with amount, currency, order identifier, and gateway selection                                                                                           | High     |
| PAY-FR-02 | Intent confirmation       | Confirm payment intents to authorise fund capture at checkout completion                                                                                                        | High     |
| PAY-FR-08 | Setup intent              | Create Stripe SetupIntents for saving customer payment methods for future use, separate from transactional PaymentIntents                                                       | Low      |
| PAY-FR-03 | Capture and refund        | Capture, void, and refund payment intents with idempotency keys to prevent duplicate processing on retry                                                                        | High     |
| PAY-FR-04 | Webhook processing        | Process Stripe webhooks with cryptographic signature verification to confirm payment state transitions                                                                          | High     |
| PAY-FR-09 | Payment void              | Void authorised but un-captured payments as a distinct operation from refund; void all payments associated with a cancelled order via a cross-cutting command                   | Medium   |
| PAY-FR-10 | Payment method management | Create, update, delete, activate, and deactivate payment methods through the admin interface with paged listing; expose active methods to the storefront for customer selection | Medium   |
| PAY-FR-05 | Refund validation         | Validate that refund amount does not exceed captured amount before processing the refund                                                                                        | Medium   |
| PAY-FR-06 | Bogus gateway             | Provide a Bogus gateway for development and testing that simulates the full payment lifecycle (Pending, Pro-                                                                    | Medium   |

| ID        | Requirement    | Description                                                                                                                        | Priority |
|-----------|----------------|------------------------------------------------------------------------------------------------------------------------------------|----------|
|           |                | cessing, Succeeded, Canceled) without external API calls                                                                           |          |
| PAY-FR-07 | State tracking | Maintain independent payment state tracking in parallel with the gateway; enable offline state queries without gateway round-trips | Medium   |

### 2.1.2.6 Shipping Module

The Shipping module configures delivery methods and calculates shipping rates by geographic zone.

Table 12: Shipping module functional requirements.

| ID        | Requirement            | Description                                                                                                                           | Priority |
|-----------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------|
| SHP-FR-01 | Delivery methods       | Configure delivery methods (standard, express, local pickup) with carrier name, pricing rules, and applicable geographic zones        | Medium   |
| SHP-FR-04 | Method lifecycle       | Create, update, delete, activate, and deactivate shipping methods with paged listing and detail retrieval through the admin interface | Medium   |
| SHP-FR-05 | Rate lifecycle         | Create, update, delete, and list shipping rates per method, zone, and weight/value tier through the admin interface                   | Medium   |
| SHP-FR-02 | Rate calculation       | Calculate shipping rates at checkout based on delivery address zone, selected method, cart weight, and cart value                     | Medium   |
| SHP-FR-06 | Storefront calculation | Calculate shipping cost for a given cart at checkout, returning available methods with rates applicable to the delivery address zone  | High     |
| SHP-FR-03 | Shipment tracking      | Assign per-order shipment tracking with carrier identifier and tracking number for customer visibility                                | Low      |

### 2.1.2.7 Profile Module

The Profile module links customer identity to personalisation features and preference management.

Table 13: Profile module functional requirements.



| ID        | Requirement   | Description                                                                                                   | Priority |
|-----------|---------------|---------------------------------------------------------------------------------------------------------------|----------|
| PRF-FR-01 | Addresses     | Manage user shipping and billing addresses with address type labels and default selection per type            | Medium   |
| PRF-FR-02 | Wishlists     | Manage wishlists: create, rename, delete lists; add and remove product variants with notes                    | Low      |
| PRF-FR-03 | Notifications | Configure per-channel notification preferences (email, SMS) with opt-in and opt-out per notification category | Low      |

#### 2.1.2.8 Location Module

The Location module provides country and state reference data for address validation, shipping zone configuration, and tax calculation.

Table 14: Location module functional requirements.

| ID        | Requirement  | Description                                                                                                                                             | Priority |
|-----------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| LOC-FR-01 | Countries    | Provide country reference data with ISO 3166-1 codes, display names, and active status flags                                                            | Medium   |
| LOC-FR-02 | States       | Provide state and province reference data with ISO 3166-2 codes, linked to parent country                                                               | Medium   |
| LOC-FR-03 | Country CRUD | Create, update, delete, and list countries with paging; retrieve by ID and ISO code through both admin and storefront interfaces                        | Medium   |
| LOC-FR-04 | State CRUD   | Create, update, delete, and list states with paging; retrieve by ID and ISO code; filter by parent country through both admin and storefront interfaces | Medium   |

#### 2.1.2.9 Dashboard Module

The Dashboard module aggregates key performance indicators from all business modules into a unified administrative overview.

Table 15: Dashboard module functional requirements.

| ID        | Requirement         | Description                                                                                                    | Priority |
|-----------|---------------------|----------------------------------------------------------------------------------------------------------------|----------|
| DSH-FR-01 | Aggregate dashboard | Provide a cross-module administrative dashboard aggregating key metrics (product counts, order volumes, inven- | Medium   |

| ID | Requirement | Description                                                                | Priority |
|----|-------------|----------------------------------------------------------------------------|----------|
|    |             | tory levels, user statistics) from all business modules into a single view |          |

### 2.1.3 Non-Functional Requirements

Beyond feature completeness, the system must satisfy quantitative and qualitative constraints that determine its fitness for production use. Five quality dimensions are specified below with atomic, measurable requirements.

#### 2.1.3.1 Performance

Table 16: Performance: latency targets for CBIR search and general API responses

| ID      | Requirement                                                                                                                                              |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| NFR-01a | The system shall complete CBIR end-to-end search (image upload, embedding generation, pgvector query, result assembly) within <b>1 second</b> per query. |
| NFR-01b | The system shall respond to non-search API endpoints within <b>200 milliseconds</b> under normal load.                                                   |
| NFR-01c | The system shall use asynchronous I/O to prevent thread blocking under concurrent requests.                                                              |

#### 2.1.3.2 Security

Table 17: Security: authentication, authorisation, rate limiting, upload validation, and transport controls

| ID      | Requirement                                                                                                                           |
|---------|---------------------------------------------------------------------------------------------------------------------------------------|
| NFR-02a | The system shall expire JWT access tokens after <b>15 minutes</b> and enforce single-use refresh token rotation with reuse detection. |
| NFR-02b | The system shall enforce role-based access control with granular permission claims (domain:category:action) at endpoint middleware.   |
| NFR-02c | The system shall rate-limit login to <b>5 requests per minute</b> and registration to <b>3 requests per hour</b> .                    |
| NFR-02d | The system shall validate file uploads by magic-byte signature, extension allowlist, and enforce a <b>10 MB</b> size limit.           |
| NFR-02e | The system shall emit security headers (CSP, HSTS, X-Frame-Options, X-Content-Type-Options) on all HTTP responses.                    |

#### 2.1.3.3 Modularity

Table 18: Modularity: module isolation, communication boundary, and testability

| ID      | Requirement                                                                                                                      |
|---------|----------------------------------------------------------------------------------------------------------------------------------|
| NFR-03a | Eight business modules shall reside in a single .NET assembly with <b>zero direct cross-references</b> enforced at compile time. |
| NFR-03b | All inter-module communication shall pass through <b>MediatR</b> in-process message dispatch only.                               |
| NFR-03c | Each module shall be independently testable without loading other modules or their database contexts.                            |

#### 2.1.3.4 Observability

Table 19: Observability: distributed tracing, correlation logging, and health monitoring

| ID      | Requirement                                                                                                                      |
|---------|----------------------------------------------------------------------------------------------------------------------------------|
| NFR-04a | The system shall propagate <b>OpenTelemetry</b> distributed tracing spans across both .NET and Python services via HTTP headers. |
| NFR-04b | Every structured log entry shall carry a <b>correlation identifier</b> to track requests across service boundaries.              |
| NFR-04c | Each service shall expose a health check endpoint reporting dependency connectivity for orchestration.                           |

#### 2.1.3.5 Reliability

Table 20: Reliability: job durability, cart expiry, idempotency, and timeout guarantees

| ID      | Requirement                                                                                                 |
|---------|-------------------------------------------------------------------------------------------------------------|
| NFR-05a | Background jobs shall use <b>Hangfire</b> with Redis-backed persistence to survive application restarts.    |
| NFR-05b | The system shall remove carts inactive for <b>seven days</b> and release reserved inventory, running daily. |
| NFR-05c | Stripe webhook handlers shall enforce idempotency keys to prevent duplicate payment processing.             |
| NFR-05d | Checkout inventory holds shall expire after <b>fifteen minutes</b> of inactivity.                           |

These constraints shaped architectural decisions throughout the system. The one-second CBIR latency target (NFR-01a) ruled out queued embedding pipelines in favour of synchronous generation. The modularity constraint (NFR-03b) drove the MediatR dispatch model over direct method calls. The reliability constraint (NFR-05a) motivated Redis-backed Hangfire over in-memory job storage. Each target is revisited in the evaluation chapter, where benchmark results confirm whether the implemented system meets these stated requirements.

### 2.1.4 Feature Classification

Not all features of ReSys.Shop carry equal research significance. Seven feature areas are classified as either **Core Research** (directly contributing to the thesis’s academic objectives) or **Supporting Infrastructure** (providing the realistic e-commerce context in which the research is conducted and evaluated). This distinction clarifies the scope of the thesis’s original contribution and explains why certain features exist in the platform but are not discussed in depth in subsequent chapters.

Table 21: Classification of feature areas into Core Research and Supporting Infrastructure. Core Research features represent the thesis’s original contributions; Supporting Infrastructure features provide the realistic e-commerce context necessary for meaningful evaluation.

| Feature Area           | Classification            | Rationale                                                                                                                                                                                                                 |
|------------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Visual Search (CBIR)   | Core Research             | Primary contribution: integrated multi-model CBIR with pluggable architecture enabling image-based product search across multiple embedding models (CNN, ViT, CLIP-based) within a production-style e-commerce platform.  |
| ML Embedding Pipeline  | Core Research             | Critical infrastructure: automated ingestion of product images, generation of vector embeddings via the Python sidecar, storage in pgvector, and HNSW indexing. The operational backbone of the visual search capability. |
| Model Benchmark System | Core Research             | Secondary contribution: systematic protocol for comparing retrieval accuracy and operational efficiency across 11 embedding models, providing a practical guide for model selection in resource-constrained deployments.  |
| Product Catalog        | Supporting Infrastructure | Required context: provides the structured dataset of fashion products, with variants, images, taxonomies, and metadata, that serves as the search target for CBIR evaluation.                                             |
| Order System           | Supporting Infrastructure | Metric validation: provides conversion events (add-to-cart, checkout completion) that serve as proxy indicators of search success, enabling evaluation of visual search within a realistic shopping workflow.             |
| Inventory              | Supporting Infrastructure | Realism constraint: ensures that search results reflect actual product availability, preventing the unrealistic scenario where visually similar but out-of-stock items appear in search results.                          |

| Feature Area        | Classification                      | Rationale                                                                                                                                                                                                                                       |
|---------------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Authenti-<br>cation | Support-<br>ing Infra-<br>structure | Security baseline: protects administrative functions and user-specific data, enabling the application to operate in a representative security posture without which the system would be a research prototype rather than a deployable platform. |

The classification makes explicit what the thesis does and does not claim as contribution. The CBIR pipeline, encompassing embedding generation, vector storage, and similarity search, is the core research artefact. The e-commerce modules (Catalog, Ordering, Inventory, Payment, Identity) are supporting infrastructure, built to provide a realistic context that validates the visual search results in a production-like environment. This separation is maintained throughout the chapter: Sections 2.3 and 2.4 devote detailed treatment to the research features, while the supporting infrastructure is described only to the extent necessary to understand the system’s design.

## 2.2 FUNCTIONAL DECOMPOSITION AND USE CASES

The system requirements are presented using a use case diagram, a use case summary matrix, and detailed scenario specifications for selected core use cases. This structure improves readability while preserving traceability between functional requirements, design decisions, and test cases.

### 2.2.1 Use Case Diagram

The three actors (Administrator, Customer, System) interact with the platform across eight business domains. The Administrator manages product catalogues, order fulfilment, payment processing, inventory, user governance, shipping configuration, and reference data. The Customer browses, searches, purchases, and manages account information. The System performs automated embedding generation, cart maintenance, inventory reservation, payment webhook processing, and index optimisation.

### 2.2.2 Use Case Summary Matrix

Table Table 22 consolidates all use cases across the three actors and provides traceability to the functional requirements defined in Section 2.1.

Table 22: Use case summary matrix. All use cases are listed with their actor, associated business module, and traceability to functional requirements defined in Section 2.1.

| UC-ID             | Use Case                             | Actor | Module    | Related FR                                                                                    |
|-------------------|--------------------------------------|-------|-----------|-----------------------------------------------------------------------------------------------|
| UC-ADM-PROD       | Manage products                      | Admin | Catalog   | CAT-FR-01,<br>CAT-FR-02,<br>CAT-FR-03,<br>CAT-FR-11,<br>CAT-FR-12,<br>CAT-FR-13               |
| UC-ADM-VAR        | Manage variants                      | Admin | Catalog   | CAT-FR-03,<br>CAT-FR-10,<br>CAT-FR-21,<br>CAT-FR-22                                           |
| UC-ADM-IMG        | Manage images and embeddings         | Admin | Catalog   | CAT-FR-04,<br>CAT-FR-05,<br>CAT-FR-14,<br>CAT-FR-15                                           |
| UC-ADM-TAX        | Manage taxonomies and classification | Admin | Catalog   | CAT-FR-09,<br>CAT-FR-18,<br>CAT-FR-19                                                         |
| UC-ADM-OPT        | Manage option types                  | Admin | Catalog   | CAT-FR-10,<br>CAT-FR-20                                                                       |
| UC-ADM-ORD        | Manage orders                        | Admin | Ordering  | ORD-FR-04,<br>ORD-FR-05,<br>ORD-FR-06,<br>ORD-FR-07,<br>ORD-FR-09,<br>ORD-FR-13               |
| UC-ADM-ORD-ITEMS  | Manage order details                 | Admin | Ordering  | ORD-FR-13                                                                                     |
| UC-ADM-PAY        | Manage payments                      | Admin | Payment   | PAY-FR-03,<br>PAY-FR-05,<br>PAY-FR-07,<br>PAY-FR-09                                           |
| UC-ADM-PAY-METHOD | Manage payment methods               | Admin | Payment   | PAY-FR-10                                                                                     |
| UC-ADM-STK        | Manage stock                         | Admin | Inventory | INV-FR-02,<br>INV-FR-05,<br>INV-FR-06,<br>INV-FR-08,<br>INV-FR-09,<br>INV-FR-10,<br>INV-FR-12 |
| UC-ADM-LOC        | Manage stock locations               | Admin | Inventory | INV-FR-01                                                                                     |
| UC-ADM-USR        | Manage users                         | Admin | Identity  | IDN-FR-09,<br>IDN-FR-13                                                                       |
| UC-ADM-ROL        | Manage roles and permissions         | Admin | Identity  | IDN-FR-11,<br>IDN-FR-12                                                                       |

| UC-ID      | Use Case                  | Actor    | Module         | Related FR                                                                      |
|------------|---------------------------|----------|----------------|---------------------------------------------------------------------------------|
| UC-ADM-SHP | Manage shipping           | Admin    | Shipping       | SHP-FR-01,<br>SHP-FR-04,<br>SHP-FR-05                                           |
| UC-ADM-REF | Manage reference data     | Admin    | Location       | LOC-FR-01,<br>LOC-FR-02,<br>LOC-FR-03,<br>LOC-FR-04                             |
| UC-STR-BRW | Browse and search catalog | Customer | Catalog        | CAT-FR-01,<br>CAT-FR-02,<br>CAT-FR-03,<br>CAT-FR-09,<br>CAT-FR-16,<br>CAT-FR-22 |
| UC-STR-SRC | Visual search             | Customer | Catalog        | CAT-FR-06,<br>CAT-FR-07,<br>CAT-FR-08,<br>CAT-FR-17                             |
| UC-STR-CRT | Manage cart               | Customer | Ordering       | ORD-FR-01,<br>ORD-FR-02,<br>ORD-FR-10                                           |
| UC-STR-CHK | Checkout                  | Customer | Ordering       | ORD-FR-04,<br>ORD-FR-05,<br>ORD-FR-08,<br>ORD-FR-11,<br>ORD-FR-12               |
| UC-STR-OHI | Order history             | Customer | Ordering       | ORD-FR-07,<br>ORD-FR-14                                                         |
| UC-STR-PAY | Payment processing        | Customer | Payment        | PAY-FR-01,<br>PAY-FR-02                                                         |
| UC-STR-AUT | Authentication            | Customer | Identity       | IDN-FR-01,<br>IDN-FR-02,<br>IDN-FR-03,<br>IDN-FR-08,<br>IDN-FR-14               |
| UC-STR-SES | Session management        | Customer | Identity       | IDN-FR-04,<br>IDN-FR-05,<br>IDN-FR-16                                           |
| UC-STR-PRF | Profile management        | Customer | Profile        | PRF-FR-01,<br>PRF-FR-02,<br>PRF-FR-03                                           |
| UC-SYS-EMB | Embedding operations      | System   | Embedding      | CAT-FR-05,<br>CAT-FR-15                                                         |
| UC-SYS-MNT | System maintenance        | System   | Infrastructure | CAT-FR-06,<br>CAT-FR-08,<br>ORD-FR-03,<br>INV-FR-07,<br>PAY-FR-04               |

The following sections present detailed scenario specifications for each use case, organised by actor and business module. Each specification includes the actor's goal, trigger, preconditions, postconditions, a numbered main success scenario, alternative and exception flows, and related functional requirements.

### 2.2.3 Administrator Use Cases

The Administrator actor manages data and operational workflows across all eight business modules through a dedicated administration interface.

#### 2.2.3.1 Product Management

#### 2.2.3.2 UC-ADM-PROD — Manage Products

Table 23: Manage Products.

| Field                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Use Case ID           | UC-ADM-PROD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Use Case Name         | Manage Products                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Primary Actor         | Administrator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Supporting Actors     | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Goal                  | Create, update, and archive products in the catalog.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Trigger               | Administrator accesses the product management section of the administration interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Preconditions         | <ul style="list-style-type: none"> <li>Authenticated with catalog management permissions.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Postconditions        | <ul style="list-style-type: none"> <li>Product catalog reflects the performed operation.</li> <li>Status transitions logged for audit.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Main Success Scenario | <p><b>Create Product</b></p> <ol style="list-style-type: none"> <li>1. Selects the create product option.</li> <li>2. System presents the creation form.</li> <li>3. Enters product name, description, slug, and fashion metadata (style code, season, material, department, gender target).</li> <li>4. Defines at least one variant with SKU and price as the master variant.</li> <li>5. Assigns the product to relevant taxons.</li> <li>6. Submits. System validates slug uniqueness and persists. Confirms creation with Draft status.</li> </ol> <p>, <b>Update Product</b></p> <ol style="list-style-type: none"> <li>1. Selects a product from the catalog listing.</li> <li>2. System displays the edit form with current values.</li> <li>3. Modifies fields: name, description, slug, fashion metadata, SEO attributes, or status.</li> <li>4. Submits. System validates, persists, and confirms the update.</li> </ol> <p>, <b>Archive Product</b></p> |



|                             |                                                                                                                                                                                                                                                                |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <ol style="list-style-type: none"> <li>1. Selects a product and chooses the archive option.</li> <li>2. System requests confirmation.</li> <li>3. Confirms. Product status changes to Archived and is hidden from the storefront.</li> </ol>                   |
| <b>Alternative Flows</b>    | A1. Slug not unique (Create/Update): system rejects and prompts for a different slug. A2. No master variant (Create): system rejects and instructs to designate one. A3. Product has active orders (Archive): system warns and requests explicit confirmation. |
| <b>Exception Flows</b>      | E1. System fails to persist: reports failure and retains form data for retry.                                                                                                                                                                                  |
| <b>Related Requirements</b> | CAT-FR-01, CAT-FR-02, CAT-FR-03, CAT-FR-11, CAT-FR-12, CAT-FR-13                                                                                                                                                                                               |

### 2.2.3.3 Variant and Pricing

#### 2.2.3.4 UC-ADM-VAR — Manage Variants

Table 24: Manage Variants.

| Field                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-ADM-VAR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Use Case Name</b>         | Manage Variants                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Primary Actor</b>         | Administrator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Supporting Actors</b>     | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Goal</b>                  | Add and manage product variants including option-value configuration and pricing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Trigger</b>               | Administrator opens the variant management section from the product detail page.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Authenticated with catalog permissions.</li> <li>• Parent product exists.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Variant created or updated with option assignments and pricing.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Main Success Scenario</b> | <p><b>Add Variant</b></p> <ol style="list-style-type: none"> <li>1. Navigates to product detail and selects add variant.</li> <li>2. System presents the variant creation form.</li> <li>3. Enters variant details: SKU, barcode, dimensions, weight, and position.</li> <li>4. Assigns option values (e.g. Size M, Colour Red) from available option types.</li> <li>5. Submits. System validates SKU uniqueness and option combination. Creates the variant and confirms.</li> </ol> <p><b>Configure Options</b></p> <ol style="list-style-type: none"> <li>1. Selects a variant from the product detail page.</li> <li>2. System displays variant detail with current option assignments.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <ol style="list-style-type: none"> <li>3. Selects an option type and chooses a value; repeats for additional types.</li> <li>4. Saves. System validates the combination and persists. Confirms the change.</li> </ol> <p><b>Configure Pricing</b></p> <ol style="list-style-type: none"> <li>1. Navigates to pricing management for a product.</li> <li>2. System displays current prices for all variants grouped by currency.</li> <li>3. Selects variants and specifies new price with currency and optional validity dates.</li> <li>4. Submits. System validates non-negative prices and valid currency. Persists and confirms.</li> </ol> |
| <b>Alternative Flows</b>    | A1. SKU not unique: system rejects and prompts for a different SKU. A2. Duplicate option combination: system rejects and highlights the conflict. A3. Zero price: system accepts but warns variant appears as free. A4. Overlapping date ranges for same variant and currency: system rejects.                                                                                                                                                                                                                                                                                                                                                  |
| <b>Exception Flows</b>      | E1. Persistence failure: system reports and retains form data for retry.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Requirements</b> | CAT-FR-03, CAT-FR-10, CAT-FR-21, CAT-FR-22                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

### 2.2.3.5 Image and Embedding Management

### 2.2.3.6 UC-ADM-IMG — Manage Images and Embeddings

Table 25: Manage Images and Embeddings.

| Field                        | Description                                                                                                                                                                                                                                                                                                                                |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-ADM-IMG                                                                                                                                                                                                                                                                                                                                 |
| <b>Use Case Name</b>         | Manage Images and Embeddings                                                                                                                                                                                                                                                                                                               |
| <b>Primary Actor</b>         | Administrator                                                                                                                                                                                                                                                                                                                              |
| <b>Supporting Actors</b>     | ML Service                                                                                                                                                                                                                                                                                                                                 |
| <b>Goal</b>                  | Upload variant images and manage embedding generation.                                                                                                                                                                                                                                                                                     |
| <b>Trigger</b>               | Administrator navigates to image management for a product variant.                                                                                                                                                                                                                                                                         |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Authenticated with image management permissions.</li> <li>• Variant exists.</li> </ul>                                                                                                                                                                                                            |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Image stored and associated with variant. Embeddings available for visual search.</li> </ul>                                                                                                                                                                                                      |
| <b>Main Success Scenario</b> | <p><b>Upload Images</b></p> <ol style="list-style-type: none"> <li>1. Selects a product variant and initiates image upload.</li> <li>2. Selects an image file from the local file system.</li> <li>3. System validates format (JPEG, PNG, WebP) and size (max 10 MB).</li> <li>4. Provides alt text and display order position.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <p>5. Confirms and submits. System stores the image, generates thumbnails, and schedules embedding generation. Confirms upload.</p> <p><b>, Regenerate Embeddings</b></p> <ol style="list-style-type: none"> <li>1. Navigates to image management and selects images.</li> <li>2. Initiates the regenerate embeddings action.</li> <li>3. System displays confirmation with affected image count.</li> <li>4. Confirms. System sends each image to the ML service for embedding generation. Stores embeddings with model metadata. Reports completion with success count.</li> </ol> |
| <b>Alternative Flows</b>    | A1. Unsupported format: system rejects and lists accepted formats. A2. Exceeds max size: system rejects and displays size constraint. A3. No images selected for regeneration: system disables the action and prompts to select.                                                                                                                                                                                                                                                                                                                                                     |
| <b>Exception Flows</b>      | E1. ML service unavailable: system reports failure and suggests retry when operational. E2. Processing cannot be scheduled: system stores image and notifies search will exclude it until processing succeeds.                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Requirements</b> | CAT-FR-04, CAT-FR-05, CAT-FR-14, CAT-FR-15                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

### 2.2.3.7 Taxonomy and Classification

### 2.2.3.8 UC-ADM-TAX — Manage Taxonomies and Classification

Table 26: Manage Taxonomies and Classification.

| Field                        | Description                                                                                                                                                                                |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-ADM-TAX                                                                                                                                                                                 |
| <b>Use Case Name</b>         | Manage Taxonomies and Classification                                                                                                                                                       |
| <b>Primary Actor</b>         | Administrator                                                                                                                                                                              |
| <b>Supporting Actors</b>     | None                                                                                                                                                                                       |
| <b>Goal</b>                  | Create and modify taxonomy structures and assign product classifications.                                                                                                                  |
| <b>Trigger</b>               | Administrator navigates to taxonomy management or product classification panel.                                                                                                            |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Authenticated with taxonomy management permissions.</li> </ul>                                                                                    |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Taxonomy structure and product classifications updated.</li> </ul>                                                                                |
| <b>Main Success Scenario</b> | <p><b>Manage Taxonomies</b></p> <ol style="list-style-type: none"> <li>1. Navigates to taxonomy management.</li> <li>2. System displays the taxonomy tree with existing taxons.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <ol style="list-style-type: none"> <li>3. Creates a new taxonomy root or selects an existing taxonomy.</li> <li>4. Adds, edits, reorders, or removes taxon nodes; optionally defines business rules.</li> <li>5. Saves. System persists the updated taxonomy and confirms.</li> </ol> <p><b>, Classify Products</b></p> <ol style="list-style-type: none"> <li>1. Selects products from the catalog listing.</li> <li>2. Opens the classification panel.</li> <li>3. System displays taxonomy tree with current classifications.</li> <li>4. Selects taxons to assign or deselects to remove.</li> <li>5. Saves. System validates each taxon path, persists associations, and confirms.</li> </ol> |
| <b>Alternative Flows</b>    | A1. Delete taxon with children: system prompts to cascade-delete or reassign. A2. Delete taxon with products: system warns products lose classification. A3. All taxons removed from product: system warns product will not appear in category browsing.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Exception Flows</b>      | E1. Concurrent modification: system refreshes data and asks to retry.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Related Requirements</b> | CAT-FR-09, CAT-FR-18, CAT-FR-19                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

### 2.2.3.9 Option Type Configuration

#### 2.2.3.10 UC-ADM-OPT — Manage Option Types

Table 27: Manage Option Types.

| Field                        | Description                                                                                                                                                                                                                                                                                           |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-ADM-OPT                                                                                                                                                                                                                                                                                            |
| <b>Use Case Name</b>         | Manage Option Types                                                                                                                                                                                                                                                                                   |
| <b>Primary Actor</b>         | Administrator                                                                                                                                                                                                                                                                                         |
| <b>Supporting Actors</b>     | None                                                                                                                                                                                                                                                                                                  |
| <b>Goal</b>                  | Create, modify, and remove option types and their associated values.                                                                                                                                                                                                                                  |
| <b>Trigger</b>               | Administrator navigates to option type management.                                                                                                                                                                                                                                                    |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Authenticated with option type management permissions.</li> </ul>                                                                                                                                                                                            |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Option types updated and available for product configuration.</li> </ul>                                                                                                                                                                                     |
| <b>Main Success Scenario</b> | <ol style="list-style-type: none"> <li>1. Navigates to option type management.</li> <li>2. System displays all option types with their values.</li> <li>3. Creates a new option type with name and presentation style.</li> <li>4. Adds ordered option values (e.g. S, M, L, XL for Size).</li> </ol> |

|                             |                                                                                                                                                                 |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | 5. Optionally edits, reorders, or removes existing types and values.<br>6. Saves. System validates name uniqueness and non-empty values. Persists and confirms. |
| <b>Alternative Flows</b>    | A1. Delete type in use by products: system warns and asks for confirmation. A2. Remove value in use by variants: system warns and asks for confirmation.        |
| <b>Exception Flows</b>      | E1. Concurrent modification: system refreshes data and asks to retry.                                                                                           |
| <b>Related Requirements</b> | CAT-FR-10, CAT-FR-20                                                                                                                                            |

### 2.2.3.11 Order Lifecycle

### 2.2.3.12 UC-ADM-ORD — Manage Orders

Table 28: Manage Orders.

| Field                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-ADM-ORD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Use Case Name</b>         | Manage Orders                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Primary Actor</b>         | Administrator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Supporting Actors</b>     | Payment Gateway                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Goal</b>                  | View, modify, and manage the lifecycle of customer orders.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Trigger</b>               | Administrator navigates to order management.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>Authenticated with order management permissions.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>Order state transitions performed. Status logged for audit.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Main Success Scenario</b> | <p><b>View Orders</b></p> <ol style="list-style-type: none"> <li>Navigates to order management.</li> <li>System displays order list sorted by most recent.</li> <li>Applies optional filters: status, date range, customer email.</li> <li>Selects an order to view detail with line items, pricing, payment, shipment, addresses, and timeline.</li> </ol> <p>, <b>Update Order</b></p> <ol style="list-style-type: none"> <li>Opens an order and initiates edit.</li> <li>System presents editable form with current values.</li> <li>Modifies line items, addresses, or shipping method.</li> <li>Submits. System validates modifications, recalculates totals, persists, and confirms.</li> </ol> <p>, <b>Approve Order</b></p> <ol style="list-style-type: none"> <li>Opens a pending order and verifies payment capture and inventory availability.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <p>2. Selects approve. System validates and transitions order to approved. Confirms.</p> <p>, <b>Complete Order</b></p> <ol style="list-style-type: none"> <li>1. Opens an order in fulfilment state.</li> <li>2. Verifies shipment dispatched.</li> <li>3. Selects complete. System displays confirmation.</li> <li>4. Confirms. System decrements on-hand inventory, transitions to completed, and logs. Confirms.</li> </ol> <p>, <b>Cancel Order</b></p> <ol style="list-style-type: none"> <li>1. Opens an order and selects cancel.</li> <li>2. System displays confirmation with consequences summary.</li> <li>3. Provides cancellation reason and confirms.</li> <li>4. System releases reserved inventory, voids or refunds payment, transitions to cancelled. Confirms.</li> </ol> <p>, <b>Resume Order</b></p> <ol style="list-style-type: none"> <li>1. Locates a paused or stalled order.</li> <li>2. Resolves the underlying issue.</li> <li>3. Selects resume. System validates prerequisites, transitions back to pending. Confirms.</li> </ol> |
| <b>Alternative Flows</b>    | <p>A1. No orders match: system displays empty message with suggestion to broaden filters. A2. Payment not captured (Approve): system prevents and suggests capturing first. A3. Payment gateway unreachable (Cancel): system cancels order, releases inventory, queues payment action. A4. Prerequisites not met (Resume): system prevents and displays issues to resolve. A5. Concurrent state change: system refreshes and notifies.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Exception Flows</b>      | <p>E1. Order became immutable concurrently: system refreshes and notifies order is no longer editable. E2. Payment gateway state mismatch: system prevents and advises verifying with gateway. E3. Inventory decrement data conflict: system reports and suggests verifying stock levels.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Requirements</b> | <p>ORD-FR-04, ORD-FR-05, ORD-FR-06, ORD-FR-07, ORD-FR-09, ORD-FR-13</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

### 2.2.3.13 UC-ADM-ORD-ITEMS — Manage Order Details

Table 29: Manage Order Details.

| Field                    | Description          |
|--------------------------|----------------------|
| <b>Use Case ID</b>       | UC-ADM-ORD-ITEMS     |
| <b>Use Case Name</b>     | Manage Order Details |
| <b>Primary Actor</b>     | Administrator        |
| <b>Supporting Actors</b> | None                 |

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Goal</b>                  | Manage line items, shipping address, and billing address on existing orders.                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Trigger</b>               | Administrator opens the order edit form from the order detail view.                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Authenticated with order update permissions.</li> <li>• Order is in a mutable state.</li> </ul>                                                                                                                                                                                                                                                                                                                               |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Order details updated with recalculated totals. Change logged.</li> </ul>                                                                                                                                                                                                                                                                                                                                                     |
| <b>Main Success Scenario</b> | <ol style="list-style-type: none"> <li>1. Opens an order from the listing.</li> <li>2. System displays order detail.</li> <li>3. Initiates the edit action.</li> <li>4. System presents the editable form with current values.</li> <li>5. Modifies line items (add, update, remove), shipping address, or billing address.</li> <li>6. Submits. System validates modifications (stock, address completeness), recalculates totals, persists, and confirms.</li> </ol> |
| <b>Alternative Flows</b>     | A1. Quantity exceeds stock: system rejects and shows max available. A2. All line items removed: system rejects and warns at least one is required. A3. Address incompatible with shipping method: system warns and prompts method change.                                                                                                                                                                                                                              |
| <b>Exception Flows</b>       | E1. Order became immutable concurrently: system refreshes and notifies order is no longer editable.                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Requirements</b>  | ORD-FR-13                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

### 2.2.3.14 Payment Processing

### 2.2.3.15 UC-ADM-PAY — Manage Payments

Table 30: Manage Payments.

| Field                        | Description                                                                                                                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-ADM-PAY                                                                                                                                                                                                 |
| <b>Use Case Name</b>         | Manage Payments                                                                                                                                                                                            |
| <b>Primary Actor</b>         | Administrator                                                                                                                                                                                              |
| <b>Supporting Actors</b>     | Payment Gateway                                                                                                                                                                                            |
| <b>Goal</b>                  | Capture, refund, void, and review payments.                                                                                                                                                                |
| <b>Trigger</b>               | Administrator navigates to payment management.                                                                                                                                                             |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Authenticated with payment management permissions.</li> </ul>                                                                                                     |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Payment state updated. Gateway operations recorded.</li> </ul>                                                                                                    |
| <b>Main Success Scenario</b> | <b>Capture Payment</b> <ol style="list-style-type: none"> <li>1. Opens payment detail view for an order.</li> <li>2. System displays payment state, authorised amount, and capture eligibility.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <ol style="list-style-type: none"> <li>Optionally adjusts capture amount (partial) not exceeding authorised amount.</li> <li>Confirms. System sends capture request to gateway with idempotency key, updates state to captured, and confirms.</li> </ol> <p><b>, Refund Payment</b></p> <ol style="list-style-type: none"> <li>Opens payment detail view for a captured payment.</li> <li>Enters refund amount (full or partial) and reason.</li> <li>Confirms. System validates amount, sends refund to gateway, updates state, and confirms.</li> </ol> <p><b>, Void Payment</b></p> <ol style="list-style-type: none"> <li>Opens payment detail view for an authorised but uncaptured payment.</li> <li>Selects void action and confirms.</li> <li>System sends void request to gateway, updates state to voided, and confirms.</li> </ol> <p><b>, View Payments</b></p> <ol style="list-style-type: none"> <li>Navigates to payment management.</li> <li>System displays payment list sorted by most recent.</li> <li>Applies optional filters: state, date range, gateway, order number.</li> <li>Selects a payment to view full detail: amount, currency, gateway, state timeline, order reference, capture and refund history.</li> </ol> |
| <b>Alternative Flows</b>    | A1. Partial capture/refund: amount less than authorised/captured; remainder available. A2. Already captured (Void): system prevents and suggests refund instead. A3. State mismatch (View): system highlights discrepancy and suggests syncing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Exception Flows</b>      | E1. Gateway rejects: system reports rejection reason. E2. Gateway unreachable: system reports failure; idempotency key ensures safe retry.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Requirements</b> | PAY-FR-03, PAY-FR-05, PAY-FR-07, PAY-FR-09                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

### 2.2.3.16 Payment Method Configuration

### 2.2.3.17 UC-ADM-PAY-METHOD — Manage Payment Methods

Table 31: Manage Payment Methods.

| Field                    | Description                                               |
|--------------------------|-----------------------------------------------------------|
| <b>Use Case ID</b>       | UC-ADM-PAY-METHOD                                         |
| <b>Use Case Name</b>     | Manage Payment Methods                                    |
| <b>Primary Actor</b>     | Administrator                                             |
| <b>Supporting Actors</b> | None                                                      |
| <b>Goal</b>              | Create, update, activate, and deactivate payment methods. |



|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Trigger</b>               | Administrator navigates to payment method configuration.                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>Authenticated with payment method management permissions.</li> </ul>                                                                                                                                                                                                                                                                                                                            |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>Payment methods updated and available for storefront selection.</li> </ul>                                                                                                                                                                                                                                                                                                                      |
| <b>Main Success Scenario</b> | <ol style="list-style-type: none"> <li>Navigates to payment method configuration.</li> <li>System displays configured payment methods with activation status.</li> <li>Creates a new method with name, description, gateway identifier, and parameters.</li> <li>Optionally edits, activates, deactivates, or removes methods.</li> <li>Saves. System validates name uniqueness and gateway support. Persists and confirms.</li> </ol> |
| <b>Alternative Flows</b>     | A1. Deactivate method in use: system warns new orders cannot use it; existing unaffected. A2. Remove method: system verifies no pending payments reference it. A3. Invalid gateway parameters: system rejects and highlights invalid ones.                                                                                                                                                                                             |
| <b>Exception Flows</b>       | E1. Concurrent modification: system refreshes and asks to retry.                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Related Requirements</b>  | PAY-FR-10                                                                                                                                                                                                                                                                                                                                                                                                                              |

### 2.2.3.18 Stock Location Management

### 2.2.3.19 UC-ADM-LOC — Manage Stock Locations

Table 32: Manage Stock Locations.

| Field                        | Description                                                                                                                                                                                                                                               |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-ADM-LOC                                                                                                                                                                                                                                                |
| <b>Use Case Name</b>         | Manage Stock Locations                                                                                                                                                                                                                                    |
| <b>Primary Actor</b>         | Administrator                                                                                                                                                                                                                                             |
| <b>Supporting Actors</b>     | None                                                                                                                                                                                                                                                      |
| <b>Goal</b>                  | Create, update, and remove stock locations.                                                                                                                                                                                                               |
| <b>Trigger</b>               | Administrator navigates to stock location management.                                                                                                                                                                                                     |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>Authenticated with location management permissions.</li> </ul>                                                                                                                                                     |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>Location configuration updated.</li> </ul>                                                                                                                                                                         |
| <b>Main Success Scenario</b> | <ol style="list-style-type: none"> <li>Navigates to stock location management.</li> <li>System displays existing stock locations with addresses and active status.</li> <li>Creates a new location with name, address, and active status flag.</li> </ol> |

|                             |                                                                                                                                                                                                                                             |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | 4. Optionally designates the new location as default for stock intake.<br>5. Optionally edits, deactivates, or removes existing locations.<br>6. Saves. System validates location name uniqueness. Persists and confirms.                   |
| <b>Alternative Flows</b>    | A1. Delete location with active stock: system prevents and requires transfer first. A2. Deactivate location: system prevents new intake but allows existing movements. A3. Delete last location: system prevents; at least one must remain. |
| <b>Exception Flows</b>      | E1. Concurrent modification: system refreshes and asks to retry.                                                                                                                                                                            |
| <b>Related Requirements</b> | INV-FR-01                                                                                                                                                                                                                                   |

### 2.2.3.20 Stock Item Management

#### 2.2.3.21 UC-ADM-STK — Manage Stock

Table 33: Manage Stock.

| Field                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-ADM-STK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Use Case Name</b>         | Manage Stock                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Primary Actor</b>         | Administrator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Supporting Actors</b>     | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Goal</b>                  | Create, update, restock, transfer, and monitor stock levels.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Trigger</b>               | Administrator navigates to stock item management.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>Authenticated with stock management permissions.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>Stock quantities updated. Changes logged for audit.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Main Success Scenario</b> | <p><b>Manage Stock Items</b></p> <ol style="list-style-type: none"> <li>Navigates to stock item management.</li> <li>System displays stock items with variant, location, on-hand, and reserved quantities.</li> <li>Creates a stock item by selecting variant and location, enters initial on-hand quantity.</li> <li>Alternatively selects existing stock item and updates on-hand quantity.</li> <li>Provides a reason for the adjustment.</li> <li>Saves. System validates variant-location uniqueness, persists, and records audit log. Confirms.</li> </ol> <p><b>, Restock Inventory</b></p> <ol style="list-style-type: none"> <li>Locates a stock item in the management interface.</li> <li>Enters the restock quantity and provides a reference and notes.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <p>3. Confirms. System increments on-hand quantity and records the restock event. Confirms updated quantities.</p> <p><b>, Transfer Stock</b></p> <ol style="list-style-type: none"> <li>1. Navigates to stock transfer and initiates a new transfer.</li> <li>2. Selects source location, destination, variant, and quantity.</li> <li>3. System validates sufficient stock at source.</li> <li>4. Submits. System creates transfer record pending, decrements source.</li> <li>5. Upon arrival, confirms receipt. System increments destination and transitions to completed. Confirms.</li> </ol> <p><b>, Review Stock Movements</b></p> <ol style="list-style-type: none"> <li>1. Navigates to stock movement audit interface.</li> <li>2. System displays all stock movements in reverse chronological order with pagination.</li> <li>3. Applies optional filters: date range, variant, location, movement type.</li> <li>4. Selects a movement to view full detail.</li> </ol> <p><b>, Monitor Low Stock</b></p> <ol style="list-style-type: none"> <li>1. Navigates to low stock monitoring view.</li> <li>2. System displays stock items below configured threshold with variant, location, on-hand, threshold, and days since last restock.</li> <li>3. Reviews list and identifies items needing replenishment.</li> </ol> |
| <b>Alternative Flows</b>    | <p>A1. Bulk adjustment via file upload: system processes, validates, reports success/failure counts. A2. Reduce below reserved quantity: system rejects and shows current reserved. A3. Transfer exceeds available stock: system rejects and shows maximum. A4. Cancel pending transfer: system returns deducted quantity to source and logs cancellation. A5. No items below threshold (Low Stock): system displays message that all stock levels are sufficient.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Exception Flows</b>      | <p>E1. Variant-location pair already exists: system rejects and suggests editing existing. E2. Concurrent modification: system refreshes and asks to re-enter. E3. Retrieval failure: system displays error and offers retry.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Related Requirements</b> | <p>INV-FR-02, INV-FR-05, INV-FR-06, INV-FR-08, INV-FR-09, INV-FR-10, INV-FR-12</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

### 2.2.3.22 User Management

### 2.2.3.23 UC-ADM-USR — Manage Users

Table 34: Manage Users.

| Field | Description |
|-------|-------------|
|-------|-------------|

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-ADM-USR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Use Case Name</b>         | Manage Users                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Primary Actor</b>         | Administrator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Supporting Actors</b>     | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Goal</b>                  | Create, update, enable, and disable user accounts.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Trigger</b>               | Administrator navigates to user management.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>Authenticated with user management permissions.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>User account created or modified. Status changes take effect on next authentication.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Main Success Scenario</b> | <ol style="list-style-type: none"> <li>1. Navigates to user management.</li> <li>2. System displays user list with default sorting and pagination.</li> <li>3. Applies optional filters: email, name, role, account status.</li> <li>4. Creates a new user account by entering email, name, and assigning roles.</li> <li>5. Alternatively selects an existing user to view detail or edit.</li> <li>6. Modifies profile fields, enables/disables account, or adjusts role assignments.</li> <li>7. Saves. System validates email uniqueness, persists, and confirms. If account was disabled, all active sessions are revoked.</li> </ol> |
| <b>Alternative Flows</b>     | A1. Disable account: system revokes all active sessions immediately. A2. Re-enable disabled account: system restores active status. A3. Email already registered: system rejects and prompts for a different email.                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Exception Flows</b>       | E1. Persistence failure: system reports and retains form data for retry.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Related Requirements</b>  | IDN-FR-09, IDN-FR-13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

#### 2.2.3.24 Role and Permission Governance

#### 2.2.3.25 UC-ADM-ROL — Manage Roles and Permissions

Table 35: Manage Roles and Permissions.

| Field                    | Description                                                                     |
|--------------------------|---------------------------------------------------------------------------------|
| <b>Use Case ID</b>       | UC-ADM-ROL                                                                      |
| <b>Use Case Name</b>     | Manage Roles and Permissions                                                    |
| <b>Primary Actor</b>     | Administrator                                                                   |
| <b>Supporting Actors</b> | None                                                                            |
| <b>Goal</b>              | Create and manage roles, assign permissions to roles, and grant roles to users. |

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Trigger</b>               | Administrator navigates to role management or user detail page.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Authenticated with role and permission management rights.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Role and permission configuration updated. Affected users receive updated permissions on next token.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Main Success Scenario</b> | <p><b>Manage Roles</b></p> <ol style="list-style-type: none"> <li>1. Navigates to role management.</li> <li>2. System displays list of roles with name, description, and permission count.</li> <li>3. Creates a new role with name and description.</li> <li>4. Assigns permissions from the permissions catalogue.</li> <li>5. Optionally edits an existing role's name, description, or permission set.</li> <li>6. Saves. System validates role name uniqueness, persists, and confirms.</li> </ol> <p>, <b>Assign User Roles</b></p> <ol style="list-style-type: none"> <li>1. Opens a user's detail page.</li> <li>2. Opens the role assignment panel.</li> <li>3. System displays all available roles with checkboxes for current assignments.</li> <li>4. Selects roles to assign and deselects to revoke.</li> <li>5. Saves. System persists and displays updated effective permissions.</li> </ol> <p>, <b>Grant Direct Permissions</b></p> <ol style="list-style-type: none"> <li>1. Opens a user's detail page.</li> <li>2. Opens the direct permission panel.</li> <li>3. System displays permissions catalogue with role-inherited and direct-grant indicators.</li> <li>4. Selects permissions to grant directly and deselects to revoke.</li> <li>5. Saves. System persists and recalculates effective permissions.</li> </ol> <p>, <b>View Permissions Catalogue</b></p> <ol style="list-style-type: none"> <li>1. Navigates to the permissions catalogue.</li> <li>2. System displays all permission claims grouped by domain and module.</li> <li>3. Applies optional filters: domain, category, keyword search.</li> <li>4. Reviews the permission matrix to plan role designs or audit assignments.</li> </ol> |
| <b>Alternative Flows</b>     | <p>A1. Remove role assigned to users: system warns affected users lose permissions. A2. Revoke permission from role: system warns all users with this role lose it on next token. A3. Revoke last role from user: system warns user loses all role-derived permissions. A4. Grant already inherited from role: system accepts; effective permission unchanged but direct grant recorded.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Exception Flows</b>       | <p>E1. Concurrent modification or role deleted: system refreshes and asks to retry.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

|                             |                      |
|-----------------------------|----------------------|
| <b>Related Requirements</b> | IDN-FR-11, IDN-FR-12 |
|-----------------------------|----------------------|

### 2.2.3.26 Shipping Method Configuration

### 2.2.3.27 UC-ADM-SHP — Manage Shipping

Table 36: Manage Shipping.

| Field                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-ADM-SHP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Use Case Name</b>         | Manage Shipping                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Primary Actor</b>         | Administrator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Supporting Actors</b>     | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Goal</b>                  | Configure delivery methods and their associated shipping rates.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Trigger</b>               | Administrator navigates to shipping configuration.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>Authenticated with shipping management permissions.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>Shipping methods and rates configured. Active methods available for checkout if zone-applicable.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Main Success Scenario</b> | <p><b>Manage Shipping Methods</b></p> <ol style="list-style-type: none"> <li>Navigates to shipping method management.</li> <li>System displays configured shipping methods with activation status.</li> <li>Creates a new method with name, description, carrier identifier, and applicable zones.</li> <li>Optionally edits, activates, deactivates, or removes existing methods.</li> <li>Saves. System validates method name uniqueness, persists, and confirms.</li> </ol> <p><b>Manage Shipping Rates</b></p> <ol style="list-style-type: none"> <li>Selects a shipping method from the method listing.</li> <li>System displays current rate tiers for the method.</li> <li>Creates a new rate tier: selects zone, defines weight and cart value ranges, enters rate amount.</li> <li>Optionally edits or removes existing rate tiers.</li> <li>Saves. System validates rate tier ranges do not overlap for the same zone, persists, and confirms.</li> </ol> |
| <b>Alternative Flows</b>     | <p>A1. Deactivate method in active checkouts: system warns; existing selections unaffected. A2. Remove method with active rates: system prompts to remove rates or reassign. A3. No zones assigned: system warns method will not be selectable at checkout. A4. Ranges overlap with existing tiers: system rejects and highlights conflicting tiers.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Exception Flows</b>       | E1. Concurrent modification: system refreshes and asks to retry.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Requirements</b>  | SHP-FR-01, SHP-FR-04, SHP-FR-05                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

### 2.2.3.28 Reference Data Management

#### 2.2.3.29 UC-ADM-REF — Manage Reference Data

Table 37: Manage Reference Data.

| Field                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Use Case ID           | UC-ADM-REF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Use Case Name         | Manage Reference Data                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Primary Actor         | Administrator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Supporting Actors     | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Goal                  | Create and update country and state reference data.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Trigger               | Administrator navigates to reference data management.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Preconditions         | <ul style="list-style-type: none"> <li>Authenticated with reference data management permissions.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Postconditions        | <ul style="list-style-type: none"> <li>Country and state data updated. Active records available in address forms and shipping zones.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Main Success Scenario | <p><b>Manage Countries</b></p> <ol style="list-style-type: none"> <li>Navigates to country management.</li> <li>System displays list of countries with name, ISO code, and active status.</li> <li>Creates a new country record with display name and ISO 3166-1 code.</li> <li>Sets the active status flag; optionally edits or removes existing country records.</li> <li>Saves. System validates ISO code uniqueness and format, persists, and confirms.</li> </ol> <p><b>Manage States</b></p> <ol style="list-style-type: none"> <li>Navigates to state management.</li> <li>System displays list of states with name, ISO code, parent country, and active status.</li> <li>Creates a new state record with display name, ISO 3166-2 code, and selects parent country.</li> <li>Sets the active status flag; optionally edits or removes existing state records.</li> <li>Saves. System validates ISO code uniqueness within parent country, persists, and confirms.</li> </ol> |
| Alternative Flows     | <p>A1. Deactivate country: system warns addresses retained but country not in new forms. A2. Delete country with associated states: system warns states will be orphaned. A3. Delete country in shipping zones: system warns and suggests deactivating instead. A4. Deactivate parent country: system prompts whether to cascade-deactivate associated states.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Exception Flows       | <p>E1. ISO code already exists: system rejects and prompts for different code.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Related Requirements  | LOC-FR-01, LOC-FR-02, LOC-FR-03, LOC-FR-04                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

## 2.2.4 Customer Use Cases

The Customer actor interacts through the browser-based storefront for product discovery, purchase, and account management.

### 2.2.4.1 Catalog Browsing

#### 2.2.4.2 UC-STR-BRW — Browse and Search Catalog

Table 38: Browse and Search Catalog.

| Field                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Use Case ID           | UC-STR-BRW                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Use Case Name         | Browse and Search Catalog                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Primary Actor         | Customer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Supporting Actors     | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Goal                  | Browse the product catalog, view product details, and search by keyword.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Trigger               | Customer visits the storefront and selects a category, product, or enters a search term.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Preconditions         | <ul style="list-style-type: none"> <li>• Catalog data is published and searchable.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Postconditions        | <ul style="list-style-type: none"> <li>• Product listing or detail displayed with pricing and availability.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Main Success Scenario | <p><b>Browse Catalog</b></p> <ol style="list-style-type: none"> <li>1. Visits the storefront home page or a category landing page.</li> <li>2. System displays the taxonomy tree with top-level categories.</li> <li>3. Selects a category or subcategory from the taxonomy navigation.</li> <li>4. System retrieves products associated with the selected taxon and its descendants.</li> <li>5. System displays a paginated grid of product cards showing thumbnail, name, price, and availability.</li> <li>6. Applies optional facets to filter by option types (e.g. size, colour) and other attributes.</li> <li>7. System refreshes the listing with filtered results.</li> </ol> <p><b>View Product Detail</b></p> <ol style="list-style-type: none"> <li>1. Clicks on a product card from a catalog listing, search result, or recommendation.</li> <li>2. System displays product detail page with primary image, name, description, and price range.</li> <li>3. System shows fashion metadata: style code, season, material, department, gender target.</li> <li>4. System displays taxonomy breadcrumb showing category path.</li> <li>5. Browses product images in the gallery.</li> <li>6. Selects variant option values from available options.</li> </ol> |



|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <p>7. System updates displayed price, availability, and variant-specific images based on selection.</p> <p><b>Keyword Search</b></p> <ol style="list-style-type: none"> <li>1. Enters a search keyword or phrase in the storefront search bar.</li> <li>2. System queries the catalog for products matching name, description, or fashion attributes.</li> <li>3. System ranks results by relevance and displays a paginated grid of matching product cards.</li> <li>4. Refines search with additional keywords or applies filters.</li> </ol> |
| <b>Alternative Flows</b>    | <p>A1. No products in category: system displays empty state suggesting other categories. A2. Selected variant out of stock: system shows out-of-stock status and disables add-to-cart. A3. No products match keyword: system displays suggestions to check spelling or browse categories. A4. Very short query (single character): system prompts to enter at least two characters.</p>                                                                                                                                                         |
| <b>Exception Flows</b>      | <p>E1. Retrieval or search failure: system displays error and offers retry.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Related Requirements</b> | <p>CAT-FR-01, CAT-FR-02, CAT-FR-03, CAT-FR-09, CAT-FR-16, CAT-FR-22</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

### 2.2.4.3 Search

#### 2.2.4.4 UC-STR-SRC — Visual Search

Table 39: Visual Search.

| Field                        | Description                                                                                                                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-STR-SRC                                                                                                                                                                                                 |
| <b>Use Case Name</b>         | Visual Search                                                                                                                                                                                              |
| <b>Primary Actor</b>         | Customer                                                                                                                                                                                                   |
| <b>Supporting Actors</b>     | ML Service                                                                                                                                                                                                 |
| <b>Goal</b>                  | Search for products by uploading a reference image and discover visually similar items.                                                                                                                    |
| <b>Trigger</b>               | Customer navigates to visual search or views a product detail page.                                                                                                                                        |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Catalog has products with embeddings.</li> <li>• ML service is operational.</li> </ul>                                                                            |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Visually similar products displayed with similarity scores above configured threshold.</li> </ul>                                                                 |
| <b>Main Success Scenario</b> | <p><b>Search by Image (CBIR)</b></p> <ol style="list-style-type: none"> <li>1. Navigates to the visual search interface.</li> <li>2. Selects or drags an image file from the local file system.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <ol style="list-style-type: none"> <li>3. System validates image format (JPEG, PNG, WebP) and size constraints.</li> <li>4. System sends the image to the ML service for embedding generation.</li> <li>5. System performs similarity search against the image embeddings index.</li> <li>6. System retrieves matching products ranked by similarity score above minimum threshold.</li> <li>7. System displays results as a grid of product thumbnails with scores, linking to detail pages.</li> </ol> <p><b>View Similar Products</b></p> <ol style="list-style-type: none"> <li>1. Opens a product detail page with image embeddings available.</li> <li>2. System retrieves the product's primary image embedding.</li> <li>3. System performs similarity search against other product embeddings.</li> <li>4. System displays a horizontal carousel or grid of visually similar product cards.</li> <li>5. Clicks on a similar product card to navigate to its detail page.</li> </ol> |
| <b>Alternative Flows</b>    | A1. Invalid image format: system rejects and lists accepted formats. A2. No products above threshold: system displays empty result suggesting different image or keyword search. A3. No images or embeddings on detail page: system hides the similar products section. A4. ML service unavailable: system gracefully hides section without affecting detail page.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Exception Flows</b>      | E1. ML service unavailable: system displays error and suggests retrying later. E2. Embedding index empty: system reports visual search not yet available.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Related Requirements</b> | CAT-FR-06, CAT-FR-07, CAT-FR-08, CAT-FR-17                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

#### 2.2.4.5 Cart Management

#### 2.2.4.6 UC-STR-CRT — Manage Cart

Table 40: Manage Cart.

| Field                    | Description                                                                          |
|--------------------------|--------------------------------------------------------------------------------------|
| <b>Use Case ID</b>       | UC-STR-CRT                                                                           |
| <b>Use Case Name</b>     | Manage Cart                                                                          |
| <b>Primary Actor</b>     | Customer                                                                             |
| <b>Supporting Actors</b> | None                                                                                 |
| <b>Goal</b>              | Add, update, and remove items in a shopping cart; associate guest cart with account. |

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Trigger</b>               | Customer selects a variant on the product detail page and adds it to the cart.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>Product variant exists and is available.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>Cart persisted across page navigation. Guest carts survive browser sessions.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Main Success Scenario</b> | <p><b>Manage Cart Items</b></p> <ol style="list-style-type: none"> <li>On a product detail page, selects a variant and specifies quantity.</li> <li>Clicks Add to Cart. System validates the variant and quantity.</li> <li>System adds the variant to the customer's cart and displays confirmation.</li> <li>Opens the cart to view all items with quantities, prices, and subtotal.</li> <li>Updates quantity of an item or removes an item.</li> <li>System recalculates cart subtotal and updates the display.</li> </ol> <p>, <b>Associate Cart with Account</b></p> <ol style="list-style-type: none"> <li>Browses storefront as guest and adds items to cart.</li> <li>Logs in or registers for an account.</li> <li>System detects guest cart exists and retrieves any existing user cart.</li> <li>System merges guest and user carts: matching variants increase quantity; unique variants are added.</li> <li>System associates the merged cart with the user account and invalidates guest cart cookie.</li> </ol> |
| <b>Alternative Flows</b>     | <p>A1. Quantity exceeds stock: system rejects and shows max available. A2. Same variant already in cart: system increments existing quantity. A3. Guest customer: system assigns session-based cart identifier in signed cookie. A4. No existing user cart: system transfers guest cart to user account directly. A5. Merge exceeds available stock: system caps at max available and notifies customer.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Exception Flows</b>       | <p>E1. Variant deactivated or archived: system rejects and suggests refreshing product page. E2. Merge fails due to data conflict: system creates user cart with guest items and notifies to review.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Related Requirements</b>  | ORD-FR-01, ORD-FR-02, ORD-FR-10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

#### 2.2.4.7 Checkout Flow

#### 2.2.4.8 UC-STR-CHK — Checkout

Table 41: Checkout.

| Field                | Description |
|----------------------|-------------|
| <b>Use Case ID</b>   | UC-STR-CHK  |
| <b>Use Case Name</b> | Checkout    |

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Primary Actor</b>         | Customer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Supporting Actors</b>     | Payment Gateway                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Goal</b>                  | Complete the multi-step checkout: address selection, shipping method, and order confirmation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Trigger</b>               | Customer proceeds from cart to checkout.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Customer is authenticated.</li> <li>• Cart is not empty.</li> <li>• Stock is available for all items.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Order created with unique number. Inventory reserved. Payment linked. Cart cleared.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Main Success Scenario</b> | <p><b>Select Shipping Address</b></p> <ol style="list-style-type: none"> <li>1. From the cart, clicks Proceed to Checkout.</li> <li>2. System transitions checkout to the Address step.</li> <li>3. System displays saved addresses with the default pre-selected.</li> <li>4. Selects an existing shipping address or enters a new one.</li> <li>5. System determines shipping zone and proceeds to the next step.</li> </ol> <p><b>Select Shipping Method</b></p> <ol style="list-style-type: none"> <li>1. System calculates available shipping methods and rates based on address zone, cart weight, and cart value.</li> <li>2. System displays list of available methods with rates and estimated delivery times.</li> <li>3. Reviews options and selects a preferred shipping method.</li> <li>4. System applies the selected method and rate; updates shipment total in order summary.</li> <li>5. System presents next checkout step (payment).</li> </ol> <p><b>Complete Checkout</b></p> <ol style="list-style-type: none"> <li>1. System displays order summary with line items, shipping, tax, and total.</li> <li>2. Enters payment details or selects a saved payment method.</li> <li>3. System creates a payment intent and reserves inventory for each line item.</li> <li>4. Reviews final order summary and confirms the purchase.</li> <li>5. System captures payment and generates a unique order number.</li> <li>6. System transitions order to Confirmed state, clears cart, and displays order confirmation.</li> <li>7. System sends order confirmation notification.</li> </ol> |
| <b>Alternative Flows</b>     | <p>A1. No saved addresses: system presents empty address step with prompt to create new. A2. No methods available for zone: system displays message and prompts different address. A3. Only one method available: system auto-selects and proceeds. A4. Stock depleted during checkout: system notifies, removes affected items, returns to cart.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

|                             |                                                                                                                                                                                                                                                                                          |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | A5. Payment failure: system notifies with reason; allows retry; inventory not reserved.                                                                                                                                                                                                  |
| <b>Exception Flows</b>      | E1. Address validation fails: system highlights missing fields and prevents progression. E2. Rate calculation fails: system displays error and suggests contacting support. E3. Payment captured but inventory reservation fails: system voids payment and notifies order not completed. |
| <b>Related Requirements</b> | ORD-FR-04, ORD-FR-05, ORD-FR-08, ORD-FR-11, ORD-FR-12                                                                                                                                                                                                                                    |

### 2.2.4.9 Order History

#### 2.2.4.10 UC-STR-OHI — Order History

Table 42: Order History.

| Field                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-STR-OHI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Use Case Name</b>         | Order History                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Primary Actor</b>         | Customer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Supporting Actors</b>     | Payment Gateway                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Goal</b>                  | View past orders and cancel pending orders.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Trigger</b>               | Customer navigates to order history in their account.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>Customer is authenticated.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>Complete order history visible. Cancelled orders release inventory and void payment.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Main Success Scenario</b> | <p><b>View Order History</b></p> <ol style="list-style-type: none"> <li>1. Navigates to order history from account menu.</li> <li>2. System displays past orders in reverse chronological order with pagination, showing order number, date, status, and total.</li> <li>3. Applies optional date range or status filters.</li> <li>4. Selects an order to view full detail: line items, shipping address, method, payment state, shipment state, and status timeline.</li> </ol> <p><b>Cancel Order</b></p> <ol style="list-style-type: none"> <li>1. Opens order detail from order history.</li> <li>2. System displays order detail with current status and cancel action if cancellable.</li> <li>3. Selects Cancel Order.</li> <li>4. System displays confirmation explaining inventory release and payment void.</li> <li>5. Confirms. System releases reserved inventory, voids payment, transitions to cancelled, and sends confirmation.</li> </ol> |

|                             |                                                                                                                                                                                           |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Alternative Flows</b>    | A1. No orders: system displays message with prompt to browse catalog. A2. Order state changed since page loaded: system refreshes and informs cancellation unavailable.                   |
| <b>Exception Flows</b>      | E1. Payment gateway unreachable (Cancel): system cancels order, releases inventory, queues void, notifies customer. E2. Retrieval failure (View): system displays error and offers retry. |
| <b>Related Requirements</b> | ORD-FR-07, ORD-FR-14                                                                                                                                                                      |

#### 2.2.4.11 Payment Processing

#### 2.2.4.12 UC-STR-PAY — Payment Processing

Table 43: Payment Processing.

| Field                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-STR-PAY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Use Case Name</b>         | Payment Processing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Primary Actor</b>         | Customer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Supporting Actors</b>     | Payment Gateway                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Goal</b>                  | Create and confirm payment for an order.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Trigger</b>               | Customer reaches the payment step during checkout.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Customer is authenticated.</li> <li>• Checkout has reached payment step.</li> <li>• Order has a calculated total.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Payment authorised. Order transitions to Confirmed state.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Main Success Scenario</b> | <p><b>Create Payment Intent</b></p> <ol style="list-style-type: none"> <li>1. System displays payment step with order total and available payment methods.</li> <li>2. Selects a payment method and enters payment details.</li> <li>3. System submits payment details to gateway to create intent.</li> <li>4. System receives confirmation intent is ready and displays review summary.</li> </ol> <p><b>Confirm Payment</b></p> <ol style="list-style-type: none"> <li>1. Reviews final order summary including line items, shipping, tax, and total.</li> <li>2. Clicks Confirm Payment.</li> <li>3. System submits payment intent confirmation to gateway.</li> <li>4. System receives authorisation confirmation.</li> <li>5. System updates payment state, transitions order to Confirmed, clears cart, and displays order confirmation.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                         |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Alternative Flows</b>    | A1. Invalid payment details: system returns gateway validation error, prompts correction. A2. Authorisation declined: system displays reason and offers retry with different method. A3. Additional authentication required: system redirects to authentication flow and resumes after. |
| <b>Exception Flows</b>      | E1. Payment gateway unreachable: system displays error; checkout progress saved. E2. Payment confirms but order creation fails: system voids payment and notifies to retry. E3. Gateway timeout: system marks payment pending; advises checking order history; webhook updates state.   |
| <b>Related Requirements</b> | PAY-FR-01, PAY-FR-02                                                                                                                                                                                                                                                                    |

### 2.2.4.13 Authentication

#### 2.2.4.14 UC-STR-AUT — Authentication

Table 44: Authentication.

| Field                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-STR-AUT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Use Case Name</b>         | Authentication                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Primary Actor</b>         | Customer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Supporting Actors</b>     | Email Service, Google OAuth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Goal</b>                  | Register, log in, and manage account credentials.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Trigger</b>               | Customer navigates to login or registration page.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>None (public access).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>Customer authenticated or credentials updated.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Main Success Scenario</b> | <p><b>Register</b></p> <ol style="list-style-type: none"> <li>Navigates to registration page.</li> <li>Enters email, password, and basic profile information.</li> <li>Submits. System validates email not registered and password strength, creates account, sends verification. Confirms.</li> </ol> <p>, <b>Login with Password</b></p> <ol style="list-style-type: none"> <li>Navigates to login page and enters email and password.</li> <li>Submits. System validates credentials, issues access and refresh tokens, associates guest cart if exists. Redirects to home page.</li> </ol> <p>, <b>Login with Google</b></p> <ol style="list-style-type: none"> <li>Clicks Login with Google on the storefront.</li> <li>System redirects to Google's OAuth consent screen.</li> <li>Grants consent. System exchanges code, looks up or creates account, issues tokens. Redirects to home page.</li> </ol> <p>, <b>Reset Password</b></p> <ol style="list-style-type: none"> <li>Clicks Forgot Password and submits registered email.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <ol style="list-style-type: none"> <li>2. System generates time-limited reset token and sends via email.</li> <li>3. Opens email, clicks reset link, enters new password.</li> <li>4. Submits. System validates token, updates password, revokes all sessions. Confirms.</li> </ol> <p><b>, Change Password</b></p> <ol style="list-style-type: none"> <li>1. Navigates to account security settings and selects Change Password.</li> <li>2. Enters current password and new password.</li> <li>3. Submits. System verifies current password, validates new password, updates, revokes all sessions except current. Confirms.</li> </ol> |
| <b>Alternative Flows</b>    | A1. Email already registered: system rejects and suggests login with password reset link. A2. Password does not meet strength requirements: system highlights requirements and prompts retry. A3. Invalid credentials: system rejects with generic message. A4. Account disabled: system rejects with message to contact support. A5. Reset token expired: system displays message and prompts new reset request. A6. Current password incorrect (Change): system rejects and prompts retry.                                                                                                                                              |
| <b>Exception Flows</b>      | E1. Verification or reset email fails to send: system creates account/request but logs failure internally. E2. Token issuance fails: system reports failure and suggests retry.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Related Requirements</b> | IDN-FR-01, IDN-FR-02, IDN-FR-03, IDN-FR-08, IDN-FR-14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

#### 2.2.4.15 Session Management

#### 2.2.4.16 UC-STR-SES — Session Management

Table 45: Session Management.

| Field                        | Description                                                                                                                                                                                        |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-STR-SES                                                                                                                                                                                         |
| <b>Use Case Name</b>         | Session Management                                                                                                                                                                                 |
| <b>Primary Actor</b>         | Customer                                                                                                                                                                                           |
| <b>Supporting Actors</b>     | None                                                                                                                                                                                               |
| <b>Goal</b>                  | Maintain and terminate authenticated sessions.                                                                                                                                                     |
| <b>Trigger</b>               | Client detects token expiry or customer initiates logout.                                                                                                                                          |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Customer has an active session.</li> </ul>                                                                                                                |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Session extended or terminated.</li> </ul>                                                                                                                |
| <b>Main Success Scenario</b> | <p><b>Refresh Session</b></p> <ol style="list-style-type: none"> <li>1. Client detects access token will expire soon.</li> <li>2. Client sends current refresh token to token endpoint.</li> </ol> |



|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <ol style="list-style-type: none"> <li>3. System validates refresh token (not expired, not consumed).</li> <li>4. System issues new access token with fresh expiry.</li> <li>5. System issues new refresh token and invalidates previous (token rotation).</li> <li>6. Client stores new token pair and continues session.</li> </ol> <p><b>, Logout</b></p> <ol style="list-style-type: none"> <li>1. Clicks Logout in the storefront navigation.</li> <li>2. System sends current refresh token for invalidation.</li> <li>3. System invalidates the refresh token and removes the session cookie.</li> <li>4. System redirects to the storefront home page.</li> </ol> |
| <b>Alternative Flows</b>    | A1. Refresh token expired: system rejects; client redirects to login. A2. Refresh token consumed (reuse detected): system revokes all tokens; client redirects to login with security notification. A3. Logout request fails due to network: system clears local tokens and cookies; session expires naturally.                                                                                                                                                                                                                                                                                                                                                           |
| <b>Exception Flows</b>      | E1. Token issuance or invalidation fails: client retains existing pair if access token still valid; clears locally otherwise.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Related Requirements</b> | IDN-FR-04, IDN-FR-05, IDN-FR-16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

#### 2.2.4.17 Profile and Preferences

#### 2.2.4.18 UC-STR-PRF — Profile Management

Table 46: Profile Management.

| Field                        | Description                                                                                                                                                                                                                                                                                             |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-STR-PRF                                                                                                                                                                                                                                                                                              |
| <b>Use Case Name</b>         | Profile Management                                                                                                                                                                                                                                                                                      |
| <b>Primary Actor</b>         | Customer                                                                                                                                                                                                                                                                                                |
| <b>Supporting Actors</b>     | None                                                                                                                                                                                                                                                                                                    |
| <b>Goal</b>                  | Manage shipping addresses, wishlists, and notification preferences.                                                                                                                                                                                                                                     |
| <b>Trigger</b>               | Customer navigates to account settings.                                                                                                                                                                                                                                                                 |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>• Customer is authenticated.</li> </ul>                                                                                                                                                                                                                          |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>• Profile data and preferences updated.</li> </ul>                                                                                                                                                                                                               |
| <b>Main Success Scenario</b> | <p><b>Manage Addresses</b></p> <ol style="list-style-type: none"> <li>1. Navigates to address book page.</li> <li>2. System displays saved addresses with type labels and default indicators.</li> <li>3. Creates a new address: enters name, street, city, postal code, country, and state.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <ol style="list-style-type: none"> <li>4. Assigns address type (shipping, billing, or both) and optionally sets as default.</li> <li>5. Optionally edits or removes existing addresses.</li> <li>6. Saves. System validates required fields and address format, persists, and confirms.</li> </ol> <p><b>, Manage Wishlists</b></p> <ol style="list-style-type: none"> <li>1. On a product detail page, clicks Add to Wishlist.</li> <li>2. System displays dialog to select wishlist or create new.</li> <li>3. Selects an existing wishlist or creates a new named wishlist; optionally adds a note.</li> <li>4. System adds the product variant to the selected wishlist and confirms.</li> <li>5. Navigates to wishlists section to view all with item counts and preview thumbnails.</li> <li>6. Selects a wishlist to view items, remove items, rename, or delete the list.</li> </ol> <p><b>, Manage Notification Preferences</b></p> <ol style="list-style-type: none"> <li>1. Navigates to notification preferences page.</li> <li>2. System displays all notification categories with current per-channel opt-in/out status.</li> <li>3. Toggles individual notification categories on or off per channel.</li> <li>4. Saves. System persists and confirms.</li> </ol> |
| <b>Alternative Flows</b>    | <p>A1. Same variant already in wishlist: system notifies and suggests adding note to existing entry. A2. Remove address used in active orders: system warns it is referenced by past orders (retained); allows soft-delete. A3. Opts out of all notifications: system warns important notifications also suppressed; asks confirmation. A4. Deletes wishlist: system asks for confirmation; list and items permanently removed.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Exception Flows</b>      | <p>E1. Address validation fails for invalid country/state: system highlights mismatch and prevents save. E2. Product variant archived since added to wishlist: system displays with Unavailable label and remove suggestion. E3. Persistence failure: system reports failure and retains unsaved changes for retry.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Requirements</b> | PRF-FR-01, PRF-FR-02, PRF-FR-03                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

### 2.2.5 System Use Cases

The System actor represents automated background processes that maintain data consistency, generate embeddings, and perform scheduled operations.

#### 2.2.5.1 Embedding Operations

#### 2.2.5.2 UC-SYS-EMB — Embedding Operations

Table 47: Embedding Operations.

| Field                 | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Use Case ID           | UC-SYS-EMB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Use Case Name         | Embedding Operations                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Primary Actor         | System                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Supporting Actors     | ML Service                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Goal                  | Generate and regenerate image embeddings for product search.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Trigger               | An image has been uploaded or embedding model configuration has changed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Preconditions         | <ul style="list-style-type: none"> <li>Images uploaded and stored.</li> <li>ML service is operational.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Postconditions        | <ul style="list-style-type: none"> <li>Embeddings stored in the index for visual search.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Main Success Scenario | <p><b>Generate Image Embeddings</b></p> <ol style="list-style-type: none"> <li>1. System detects a new unprocessed image in the queue.</li> <li>2. System retrieves the image file from storage.</li> <li>3. System preprocesses the image (resize, normalise) for model requirements.</li> <li>4. System sends preprocessed image to ML service with configured model identifier.</li> <li>5. ML Service computes the visual embedding vector and returns it with metadata.</li> <li>6. System stores embedding in the index with image reference and metadata.</li> <li>7. System marks the image as processed.</li> </ol> <p><b>Regenerate All Embeddings</b></p> <ol style="list-style-type: none"> <li>1. System detects change to embedding model configuration.</li> <li>2. System validates new model is available via ML service health check.</li> <li>3. System retrieves list of all product images requiring regeneration.</li> <li>4. System sends each image to ML service using the new model.</li> <li>5. ML Service computes new embedding and returns it.</li> <li>6. System stores new embedding replacing previous and updates model metadata.</li> <li>7. System reports completion with success/failure count summary.</li> </ol> |
| Alternative Flows     | A1. Image not accessible (deleted/corrupted): system marks as failed and records reason. A2. Multiple images queued: system processes sequentially, throttling to ML service capacity. A3. Triggered during peak traffic (Regenerate): system throttles to avoid impacting search performance. A4. No model change detected: system logs event and skips processing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Exception Flows       | E1. ML service returns error: system retries with exponential backoff; after max retries marks as failed. E2. ML service unreachable: system requeues image and triggers                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

|                             |                                                                                                                 |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------|
|                             | alert. E3. New model not available (Regenerate): system aborts regeneration; existing embeddings remain in use. |
| <b>Related Requirements</b> | CAT-FR-05, CAT-FR-15                                                                                            |

### 2.2.5.3 Background Maintenance

### 2.2.5.4 UC-SYS-MNT — System Maintenance

Table 48: System Maintenance.

| Field                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Use Case ID</b>           | UC-SYS-MNT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Use Case Name</b>         | System Maintenance                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Primary Actor</b>         | System                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Supporting Actors</b>     | ML Service, Payment Gateway                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Goal</b>                  | Perform scheduled and event-driven system maintenance tasks.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Trigger</b>               | Maintenance schedule fires or event-driven trigger occurs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Preconditions</b>         | <ul style="list-style-type: none"> <li>Maintenance schedule is active.</li> <li>Required services are operational.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Postconditions</b>        | <ul style="list-style-type: none"> <li>System health, data consistency, and index performance maintained.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Main Success Scenario</b> | <p><b>Monitor Service Health</b></p> <ol style="list-style-type: none"> <li>System invokes health check endpoint on ML service at configured interval.</li> <li>ML Service responds with current health status: healthy, degraded, or unhealthy.</li> <li>System records health status and response time.</li> <li>System updates service availability flag. If unhealthy, routes search to degraded path.</li> </ol> <p><b>Expire Abandoned Carts</b></p> <ol style="list-style-type: none"> <li>System executes scheduled job at configured time.</li> <li>System queries for carts with no modification in past seven days.</li> <li>For each abandoned cart, releases reserved inventory back to availability.</li> <li>System deletes or marks abandoned cart for cleanup and logs counts.</li> </ol> <p><b>Release Expired Reservations</b></p> <ol style="list-style-type: none"> <li>System executes scheduled job at configured interval.</li> <li>System queries for reservations with hold time exceeding configured expiry window (default 15 min).</li> <li>For each expired reservation, releases reserved quantity back to available stock.</li> <li>System marks reservation record as expired and logs counts.</li> </ol> |

|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | <p><b>, Process Payment Webhooks</b></p> <ol style="list-style-type: none"> <li>1. Payment Gateway sends signed webhook notification to system endpoint.</li> <li>2. System validates cryptographic signature against configured gateway secret.</li> <li>3. System extracts payment identifier, event type, and payload.</li> <li>4. System verifies not a duplicate by checking idempotency key.</li> <li>5. System updates local payment state and triggers any required order state transitions.</li> <li>6. System returns success response to gateway.</li> </ol> <p><b>, Maintain Search Index</b></p> <ol style="list-style-type: none"> <li>1. System executes scheduled job at configured interval.</li> <li>2. System analyses current embedding index state: vector count, index size, recent query performance.</li> <li>3. System determines whether maintenance is likely to improve performance.</li> <li>4. System performs maintenance (e.g. index rebuild, dead tuple removal, statistics update).</li> <li>5. System verifies maintenance completed and logs execution with before/after metrics.</li> </ol> |
| <b>Alternative Flows</b>    | <p>A1. No carts/items meet criteria: system logs zero and completes. A2. Duplicate webhook: system returns success without changes; duplicate logged. A3. Out-of-order webhook event: system logs anomaly and applies state change. A4. Index below maintenance threshold: system skips and logs decision with current metrics. A5. Active search queries during index maintenance: system performs lighter, non-blocking operations.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Exception Flows</b>      | <p>E1. Health check endpoint does not respond: system marks unhealthy after timeout and triggers alert. E2. Database unavailable: system records failure and retries on next execution. E3. Webhook signature validation fails: system rejects with authentication error. E4. Index maintenance fails: system logs error and triggers alert; search continues with current index. E5. Index appears corrupted: system triggers full rebuild from stored embeddings.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Related Requirements</b> | <p>CAT-FR-06, CAT-FR-08, ORD-FR-03, INV-FR-07, PAY-FR-04</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## 2.3 SYSTEM ARCHITECTURE & DESIGN

This chapter presents the architectural design of ReSys.Shop, progressing from a high-level system overview through domain modelling, to the structural, data, API, and security layers. The design follows a service-oriented approach with three independently deployable services, a Vue 3 frontend, a .NET 10 modular monolith backend, and a Python machine learning sidecar, each responsible for

a distinct technological concern. The chapter is organised into six sections, each accompanied by architectural diagrams that provide visual representations of the system's structure, behaviour, and deployment topology.

### 2.3.1 System Overview

ReSys.Shop is built as a service-oriented system with three distinct services. The frontend is implemented in Vue 3 and TypeScript using the Vite build tool. The backend is a .NET 10 modular monolith using ASP.NET Core for HTTP handling, Entity Framework Core for data access, and Carter for minimal API endpoint registration. The machine learning service is a Python FastAPI application running PyTorch models that generates vector embeddings from product images for visual similarity search.

Table 49 summarises the three services, their technology stacks, and their primary responsibilities within the platform.

Table 49: System services and their technology stacks. Each service is independently deployable and communicates through well-defined HTTP contracts.

| Service      | Technology Stack                          | Responsibilities                                                                                                                                                                                                                                                     |
|--------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Vue Frontend | Vue 3 + TypeScript + Vite                 | <ul style="list-style-type: none"> <li>• Customer storefront (Nuxt UI)</li> <li>• Administrator dashboard (PrimeVue)</li> <li>• Pinia state management</li> <li>• Image upload and visual search UI</li> </ul>                                                       |
| .NET Backend | .NET 10 + ASP.NET Core + Carter + EF Core | <ul style="list-style-type: none"> <li>• REST API endpoints via Carter minimal APIs</li> <li>• Business logic via MediatR CQRS pattern</li> <li>• PostgreSQL persistence with pgvector vector search</li> <li>• JWT authentication and RBAC authorisation</li> </ul> |
| Python ML    | Python 3.12 + FastAPI + PyTorch           | <ul style="list-style-type: none"> <li>• Fashion-CLIP and other em-</li> </ul>                                                                                                                                                                                       |

| Service | Technology Stack | Responsibilities                                                                                                                 |
|---------|------------------|----------------------------------------------------------------------------------------------------------------------------------|
|         |                  | bedding model inference<br>• Vector embedding generation from product images<br>• Multi-model support with lazy-loading strategy |

The backend is internally organised into eight bounded contexts following the principles of Domain-Driven Design. Each context owns a distinct area of business logic and communicates with other contexts exclusively through MediatR in-process message dispatch, there are no direct namespace references between business modules. Table 50 lists each context, its aggregate root, and a representative sample of its domain entities.

Table 50: Bounded contexts with aggregate roots and key domain entities. Each context owns its database schema and communicates with other contexts through MediatR dispatch only.

| Bounded Context | Aggregate Root | Key Domain Entities                                                             |
|-----------------|----------------|---------------------------------------------------------------------------------|
| Catalog         | Product        | Variant, VariantImage, OptionType, OptionValue, Classification, Taxonomy, Taxon |
| Ordering        | Order          | LineItem, Adjustment, Shipment                                                  |
| Payment         | PaymentIntent  | PaymentCapture                                                                  |
| Inventory       | StockItem      | StockLocation, StockMovement, StockReservation                                  |
| Identity        | User           | Role, UserRole, RefreshToken, UserLogin                                         |
| Profile         | UserProfile    | Address, Wishlist                                                               |
| Shipping        | ShippingMethod | ShippingRate, ShippingZone                                                      |
| Location        | Country        | State                                                                           |

The separation of concerns across these eight contexts enables independent evolution of each business domain while the modular monolith deployment model avoids the operational complexity of distributed microservices. The following section details the domain-driven design principles that govern these contexts.

### 2.3.2 Domain-Driven Design

The ReSys.Shop platform applies Domain-Driven Design (DDD) to structure its business logic around eight bounded contexts, each with well-defined aggregate roots, domain entities, and invariants. This section presents the context map, the aggregate design with invariants, the ubiquitous language glossary, and the state machines that govern the checkout and payment lifecycles.

#### 2.3.2.1 Bounded Context Map

The eight bounded contexts partition the e-commerce domain along business capability boundaries. Each context owns its data, its domain logic, and its vocabulary, terms that are well-defined within a context may carry different meaning in another. For example, a Variant in the Catalog context is a sellable unit with a SKU and pricing; a LineItem in the Ordering context references that same variant but from the perspective of purchase fulfilment.

The integration between contexts follows the **Conformist** pattern: all contexts conform to a shared technical kernel defined in the Shared layer, which provides the `Result<T>` return type, the  `ICommand` and  `IQuery` marker interfaces, and the  `Entity` base class with audit and versioning columns. Communication occurs exclusively through MediatR  `ISender`, a context dispatches a query or publishes a notification, and other contexts react without ever importing one another's namespace. This in-process dispatch model eliminates the network latency of inter-service messaging while preserving the logical isolation of the bounded contexts.

Figure Figure 1 depicts the eight contexts and the **Published Language**, the shared identifiers and value types, that flow between them.

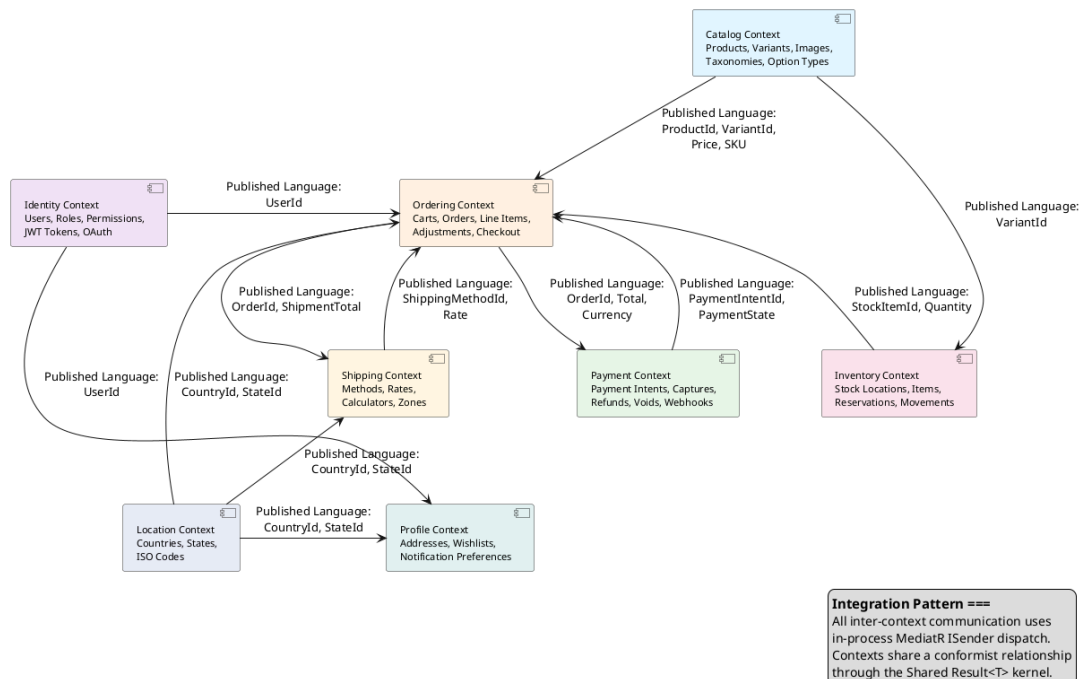




Figure 1: Bounded Context Map showing the eight business contexts and the Published Language identifiers exchanged between them. All integration uses in-process MediatR dispatch; no context directly references another context's namespace.

Table Table 51 details each context's business responsibility and the integration data it exposes to the system.

Table 51: Bounded context responsibilities and Published Language identifiers. The Published Language column lists the value types that other contexts may reference by identifier only, never by importing the source context's namespace.

| Context  | Business Responsibility                                                                                                                                                                                                                                                                                                   | Published Language                                   |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| Catalog  | Manages the product life-cycle: creating products with fashion-specific meta-data (style code, season, material, department, gender target), defining sellable variants with SKUs and independent pricing, uploading images with automatic embedding generation, and organising products through hierarchical taxonomies. | ProductId, VariantId, Sku, Price, Slug               |
| Ordering | Orchestrates the customer purchase workflow from cart to completed order. Manages cart with seven-day auto-expiry, forward-only checkout state                                                                                                                                                                            | OrderId, OrderNumber, Total, Currency, CheckoutState |

| Context   | Business Responsibility                                                                                                                                                                                                                | Published Language                            |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
|           | machine, line items with price snapshots, adjustments, and cancellation at any pre-confirmation stage.                                                                                                                                 |                                               |
| Payment   | Manages payment intent lifecycle, creation, capture, refund, void, across two gateway implementations. Maintains parallel payment state independent of the gateway for offline operations and consistent behaviour across providers.   | PaymentIntentId, PaymentState, Amount         |
| Inventory | Tracks physical stock quantities per warehouse, manages temporary reservations during active checkouts to prevent overselling, records auditable stock movements through an append-only ledger, and handles inter-warehouse transfers. | StockItemId, QuantityOnHand, QuantityReserved |
| Identity  | Provides JWT-based authentication                                                                                                                                                                                                      | UserId, Email, PermissionClaim                |

| Context  | Business Responsibility                                                                                                                                                                             | Published Language          |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
|          | tion with re-fresh token rotation and reuse detection, role-based and permission-based authorisation with domain:category:action claim format, and guest session management for anonymous browsing. |                             |
| Profile  | Manages user addresses for shipping and billing, wish-lists for product bookmarking, and notification preferences controlling email and SMS communication channels.                                 | ProfileId, AddressId        |
| Shipping | Configures delivery methods, standard, express, local pickup, and calculates shipping rates by geographic zone using weight-and distance-based calculators.                                         | ShippingMethodId, Rate      |
| Location | Provides country and state reference data with ISO 3166 codes. This context is read-only ref-                                                                                                       | CountryId, StateId, IsoCode |

| Context | Business Responsibility                                                                                                           | Published Language |
|---------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------|
|         | erence data shared across Shipping (zone configuration), Profile (address validation), and Ordering (checkout address selection). |                    |

### 2.3.2.2 Aggregates and Invariants

An aggregate is a cluster of domain objects treated as a single consistency boundary. Each aggregate has a root entity through which all modifications must pass. The root enforces invariants, business rules that must hold true at all times within the aggregate boundary. ReSys.Shop takes a pragmatic approach to DDD: it defines aggregate roots and their invariants explicitly but does not require formal value-object base classes or a dedicated domain-event infrastructure for every operation.

The four most architecturally significant aggregates are described below.

**Product (Catalog aggregate root).** The Product aggregate encapsulates a product family and all its variants, images, option configurations, and taxonomy classifications. A product may have one or more variants; exactly one is designated as the master variant displayed on listing pages. The aggregate enforces the following invariants: every product must have a unique slug for SEO-friendly URL generation; a product that declares options (such as size or colour) must have at least one option type defined; and the master variant must exist among the product's own variants. Variant images contain the embedding column, a 512-dimensional float vector generated by the ML sidecar, enabling cosine similarity search against the entire image corpus.

**Order (Ordering aggregate root).** The Order aggregate manages the checkout lifecycle from a nascent cart through to a completed purchase. It aggregates line items, each capturing a price snapshot of the variant at the time of purchase, and optional adjustments for discounts or promotions. The aggregate enforces the invariant that  $\text{Total} = \text{ItemTotal} + \text{AdjustmentTotal} + \text{ShipmentTotal}$ , maintaining financial consistency across all modifications. The checkout state progresses forward only, the address, delivery, payment, and confirmation stages must complete in sequence, and once an order is confirmed (finalised), it becomes immutable except for the cancel transition. This forward-

only constraint is encoded in the domain entity itself and validated before every state transition.

**PaymentIntent (Payment aggregate root).** The PaymentIntent aggregate models the lifecycle of a customer’s intent to pay. It is created with a specified amount and currency, and transitions through states, Pending, RequiresAction, Processing, Succeeded, Canceled, and Failed, based on gateway interactions. The aggregate tracks payment captures, where each capture debits a portion of the authorised amount. The system enforces the invariant that the sum of all captures must not exceed the original intent amount. A separate payment capture goes through its own state transitions: Succeeded → Captured → Refunded / Voided. The system maintains its own payment state in parallel with the gateway state, enabling consistent behaviour whether using the production Stripe gateway or the development Bogus gateway.

**StockItem (Inventory aggregate root).** The StockItem aggregate tracks the physical availability of a product variant at a specific warehouse location. It maintains two quantities: on-hand (physical count from warehouse operations) and reserved (units held for active checkouts). The aggregate enforces the invariant that  $\text{QuantityOnHand} \geq 0$ , stock cannot go negative. Backorder support allows sales beyond on-hand quantity up to a configured backorder limit, but the system tracks the deficit separately. Quantity changes are not performed directly on StockItem; instead, they must be recorded as StockMovement entries in an append-only ledger, preserving a complete and auditable history of every stock change, including the quantity before and after, the reason, and the operating user.

### 2.3.2.3 Ubiquitous Language Glossary

A key practice in DDD is establishing a ubiquitous language, a shared vocabulary used by all team members and reflected directly in the codebase. Table 52 presents the core terms of the ReSys.Shop domain with their definitions.

Table 52: Ubiquitous Language Glossary: core domain terms, their owning bounded context, and their precise definitions as used throughout the codebase and this thesis.

| Term    | Context | Definition                                                                                                                                                                                                                                                   |
|---------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product | Catalog | A product family representing a fashion item concept (e.g., “Cotton T-Shirt”). Holds shared metadata: description, slug, status, fashion-specific attributes, and taxonomy classifications. Does not have a price or SKU directly, those belong to Variants. |
| Variant | Catalog | A sellable, physical unit of a product (e.g., “Cotton T-Shirt, Red, Large”). Holds SKU, barcode, price.                                                                                                                                                      |

| Term             | Context   | Definition                                                                                                                                                                                                        |
|------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                  |           | ing, inventory tracking flag, and physical dimensions. Each variant belongs to exactly one product.                                                                                                               |
| Master Variant   | Catalog   | The designated default variant shown on product listing pages. Every product with variants must have exactly one master variant.                                                                                  |
| Option Type      | Catalog   | Defines a configurable attribute class such as “Colour”, “Size”, or “Material”. Option types are product-independent and reusable across the catalogue.                                                           |
| Taxonomy / Taxon | Catalog   | A hierarchical categorisation tree for organising products. A Taxonomy (e.g., “Department”) contains Taxons (e.g., “Clothing” → “Dresses” → “Evening Dresses”) forming a nested set structure.                    |
| Cart             | Ordering  | An ephemeral collection of line items that represents a customer’s intent to purchase. Carts automatically expire after seven days of inactivity. The cart is the initial state of the Order aggregate.           |
| Line Item        | Ordering  | A single entry in an order or cart, referencing a specific product variant, quantity, and a price snapshot captured at the time of purchase to insulate historical orders from catalogue price changes.           |
| Checkout State   | Ordering  | The sequential stage of the purchase process: Address → Delivery → Payment → Confirm → Complete. Progression is forward-only; cancellation is available from any pre-confirmation stage.                          |
| Payment Intent   | Payment   | A data structure representing a customer’s intent to pay a specified amount. Follows a defined state machine through the gateway interaction lifecycle.                                                           |
| Payment Capture  | Payment   | A partial or full debit against a payment intent. Multiple captures can be performed against a single intent (e.g., capturing shipping cost after items ship).                                                    |
| Stock Item       | Inventory | The current state of a product variant’s availability at a specific warehouse. Maintains on-hand and reserved quantity counters with optimistic concurrency control to prevent overselling.                       |
| Stock Movement   | Inventory | An immutable ledger entry recording every change to a stock item’s quantity, the delta, the balance before and after, the reason, and the operating user. The single source of truth for inventory changes.       |
| Refresh Token    | Identity  | A long-lived credential used to obtain new short-lived access tokens without re-authentication. Each token is single-use; presenting a previously consumed token triggers revocation of all tokens for that user. |

### 2.3.2.4 State Machines

Two explicit state machines govern the most critical transactional workflows in the system: the order checkout process and the payment intent lifecycle. Both are encoded in domain entities, validated before every state transition, and drive the sequence of user-facing and system-level actions.

#### 2.3.2.4.1 Order Checkout State Machine

The order checkout state machine enforces a forward-only progression through five sequential states: Address, Delivery, Payment, Confirm, and Complete. Each state transition is triggered by a specific user action and validated by the domain entity before being committed. Figure 2 depicts this lifecycle.

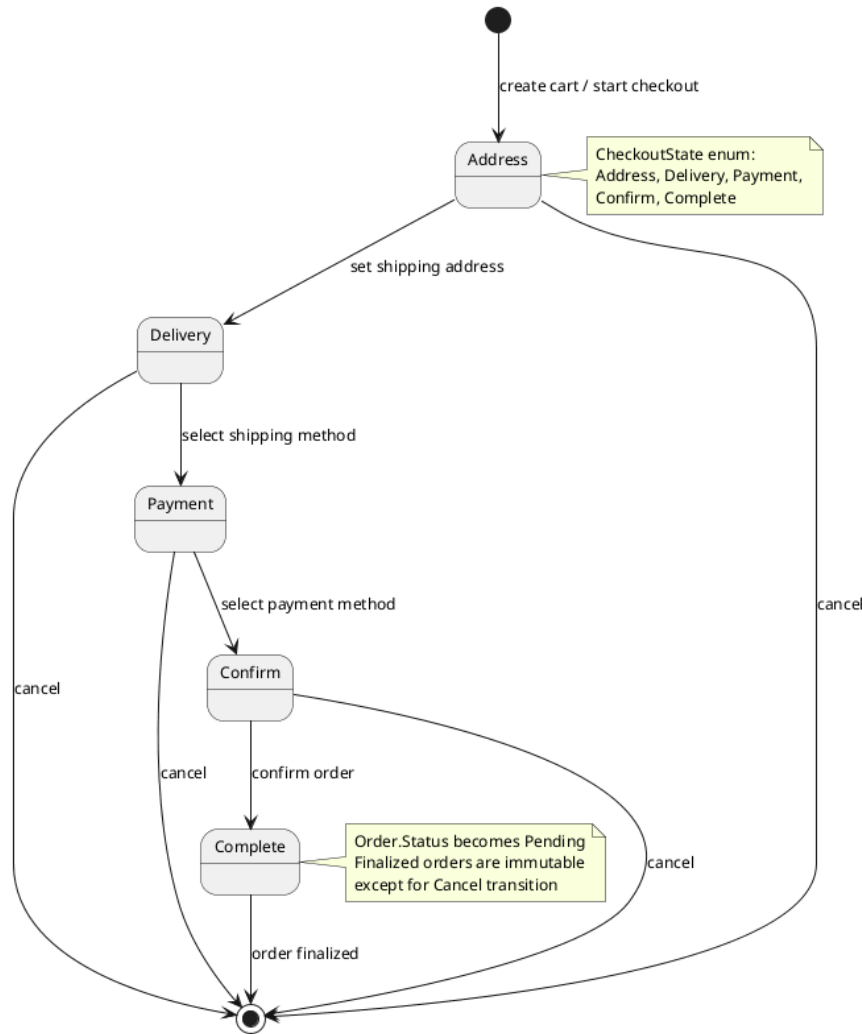


Figure 2: Order checkout state machine: five sequential states with cancellation available from any pre-confirmation state. The forward-only constraint prevents regressing to earlier checkout stages.

The customer begins by providing a shipping address (Address state), selects a delivery method (Delivery state), chooses a payment method (Payment state),

reviews the complete order summary (Confirm state), and finalises the purchase (Complete state). At any point before the Complete state, from Address through Confirm, the customer may cancel the checkout process, which terminates the order without financial consequence.

Once an order reaches the Complete state, it becomes finalised: the order record transitions to Pending status, inventory quantities are reserved for each line item, and the payment intent is processed. From this point forward, the order is immutable except for the cancel transition, which captures the cancellation timestamp and releases reserved inventory. This forward-only design ensures that at every stage of the checkout pipeline, the system can unambiguously determine the customer's position and the next required action.

#### **2.3.2.4.2 Payment Intent State Machine**

The payment intent state machine models the full lifecycle of a payment from creation through to terminal completion, reflecting the state transitions of the Stripe payment gateway while maintaining a parallel system-managed state for offline consistency. Figure Figure 3 shows all states and transitions.



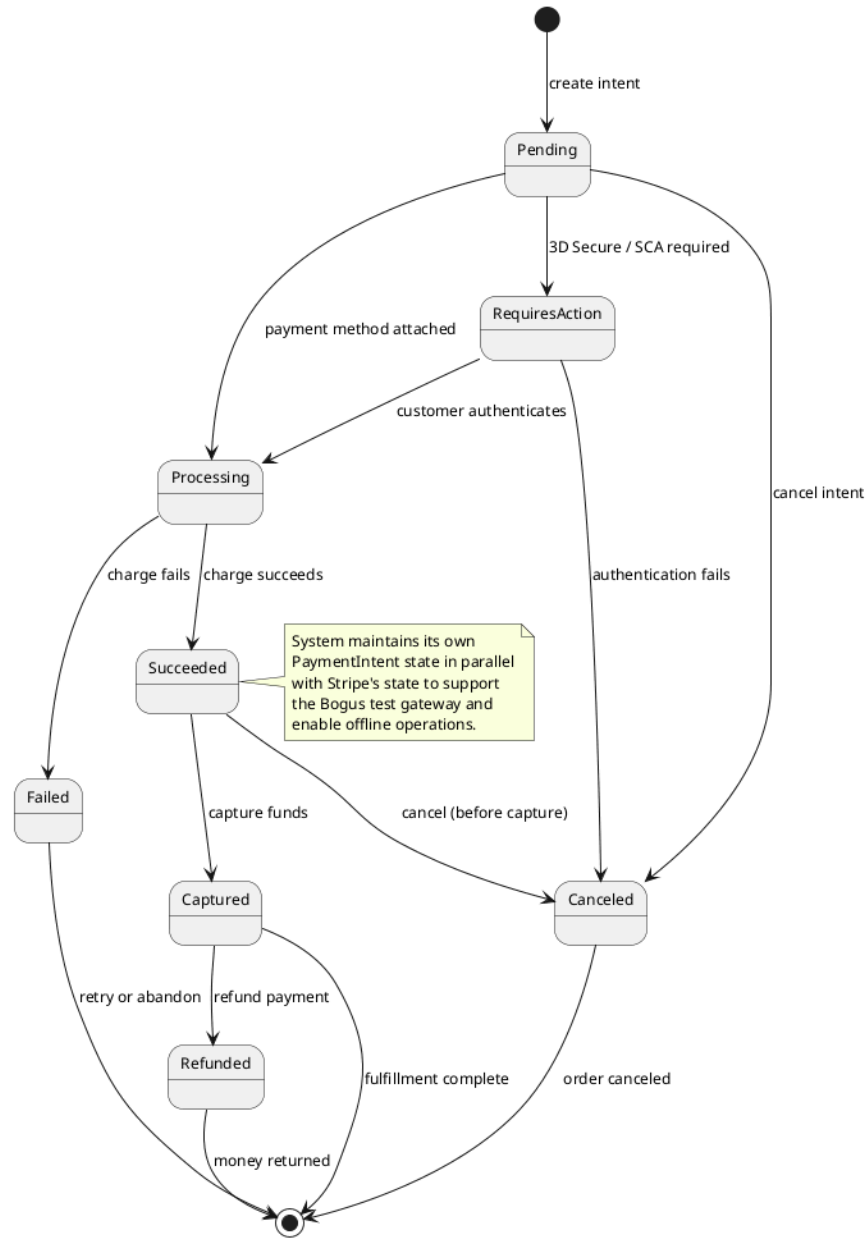


Figure 3: Payment intent lifecycle: the state machine reflects Stripe gateway states while maintaining a parallel system copy for offline operations and Bogus gateway compatibility. Terminal states are Failed, Canceled, and Refunded.

A payment intent is created in the Pending state. It may transition directly to RequiresAction when the payment requires 3D Secure or Strong Customer Authentication, or to Processing when the payment method has been attached without additional authentication challenges. From RequiresAction, successful customer authentication advances the intent to Processing; failure or timeout moves it to Canceled.

From Processing, a successful charge transitions the intent to Succeeded, while a declined or errored charge moves it to Failed. From Succeeded, the

funds may be captured, transferring them from the customer's account, or the intent may be cancelled before capture. A captured intent may later be refunded, returning funds to the customer and reaching the terminal Refunded state.

The system maintains its own copy of the payment state in parallel with the gateway's representation. This design decision serves two purposes. First, it enables the Bogus test gateway, a development-only implementation that simulates payment lifecycles without external calls, to operate against the same domain entities as the production Stripe gateway. Second, it allows the system to reason about payment state offline without querying the gateway API, which improves resilience during network interruptions and reduces external dependency during business operations.

### **2.3.3 C4 Architecture**

The C4 model provides a structured approach to describing software architecture at four levels of abstraction: system context, container, component, and code. This section presents the first three levels for ReSys.Shop, omitting the code-level view as it falls within the scope of the implementation chapter. A deployment diagram complements the C4 views by showing the physical infrastructure.

#### **2.3.3.1 System Context**

The system context diagram positions ReSys.Shop within its environment, showing the human users who interact with the platform and the external systems on which it depends. Figure 4 presents this highest-level view.

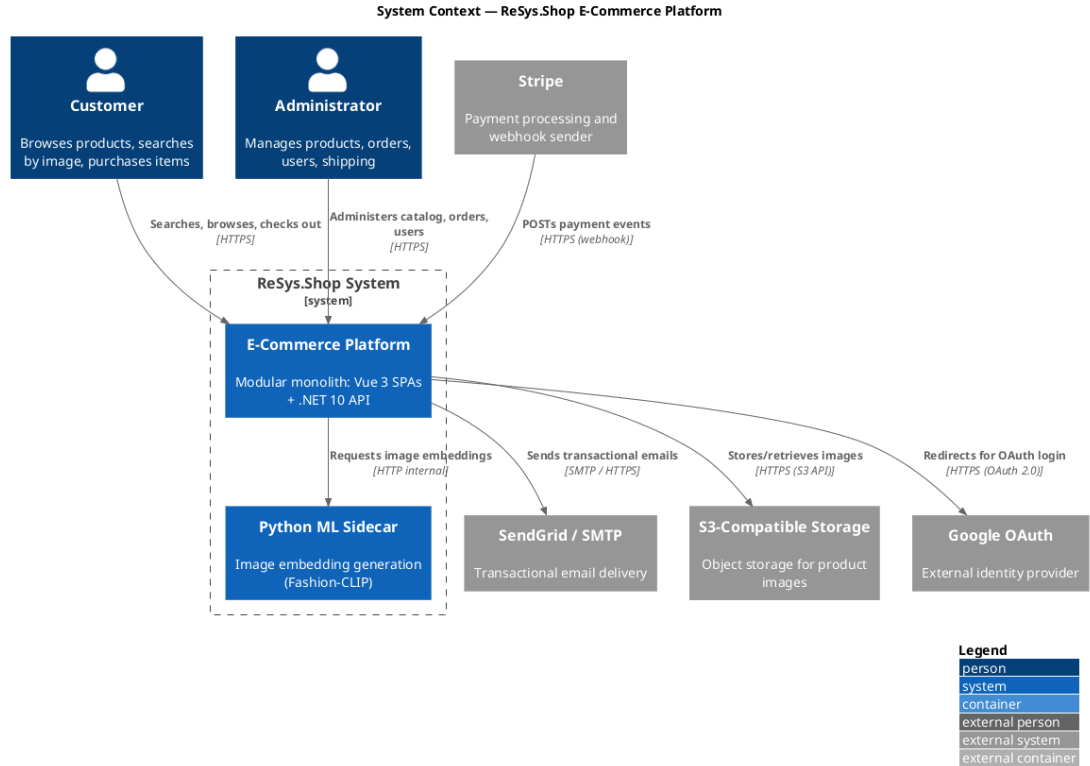


Figure 4: System Context diagram: ReSys.Shop as a single system boundary with customer and administrator users on one side and external payment, email, storage, identity, and ML services on the other. The modular monolith internally handles all eight business domains within one boundary.

Two categories of human users interact with the platform. Customers browse the product catalogue, perform visual and keyword searches, manage a shopping cart, and complete multi-step checkout, all through the Vue 3 storefront SPA. Administrators manage the full product lifecycle, process orders, monitor inventory levels, and administer user accounts through the Vue 3 admin SPA.

The system depends on five external services. Stripe processes payment intents and sends webhook notifications when payment events occur, the back-end validates these webhooks using Stripe’s signature verification before acting on them. SendGrid delivers transactional emails such as order confirmations, password reset links, and shipping notifications. An S3-compatible object store persists product images uploaded through the admin interface. Google OAuth provides an alternative authentication path, allowing customers to sign in using their Google credentials. The Python ML Sidecar, deployed as a companion service within the Aspire orchestration boundary, generates image embeddings used by the catalogue’s visual search feature.

### 2.3.3.2 Container

The container diagram decomposes ReSys.Shop into its deployable units, the processes and data stores that together constitute the running system. Figure 5 presents this view.

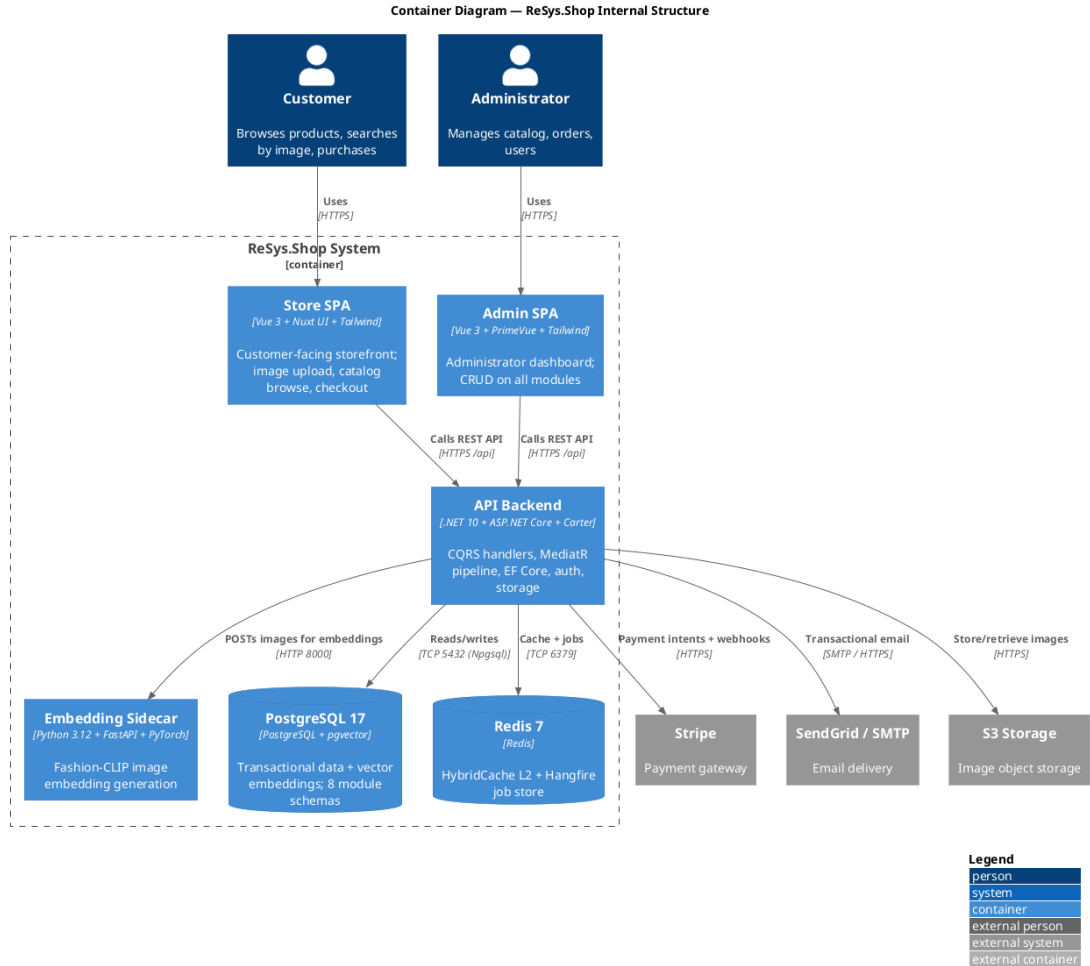


Figure 5: Container diagram showing the deployable units of ReSys.Shop: two Vue 3 SPAs, the .NET 10 API backend, the Python ML sidecar, PostgreSQL with pgvector, and Redis. Arrows indicate communication protocols between containers.

The system comprises six deployable containers. The Store SPA and Admin SPA, both Vue 3 applications served as static assets, handle all user interface concerns and communicate with the backend exclusively through the REST API over HTTPS. The API Backend, a .NET 10 application running on ASP.NET Core, contains all business logic across eight modules, exposes Carter minimal API endpoints, and orchestrates the MediatR CQRS pipeline for command and query processing. The Embedding Sidecar, a Python 3.12 FastAPI application, loads machine learning models into GPU or CPU memory and exposes HTTP endpoints for generating image embeddings.

Two persistent data stores support the platform. PostgreSQL 17 with the pgvector extension serves as the primary database, storing both relational transactional data across eight module-specific schemas and high-dimensional vector embeddings for visual similarity search. Redis 7 fills a dual role: as the second-level distributed cache backing the HybridCache abstraction, and as the persistent job store for Hangfire background job processing, enabling cart expiry, webhook dispatch, and periodic maintenance tasks to survive application restarts.

The communication topology reflects deliberate design constraints. The Vue SPAs call the backend synchronously over HTTPS, never directly accessing the database or external services, which ensures all security policies and data validation are enforced server-side. The backend communicates with PostgreSQL and Redis over internal TCP connections, with the ML sidecar over HTTP on the internal Docker network, and with external services over HTTPS. This design centralises all external integration through the backend container, simplifying security management and operational monitoring.

### 2.3.3.3 Component

The component diagram zooms into the API Backend container, revealing its internal structure: the modules, framework services, and cross-cutting concerns that compose the .NET application. Figure Figure 6 presents this view.

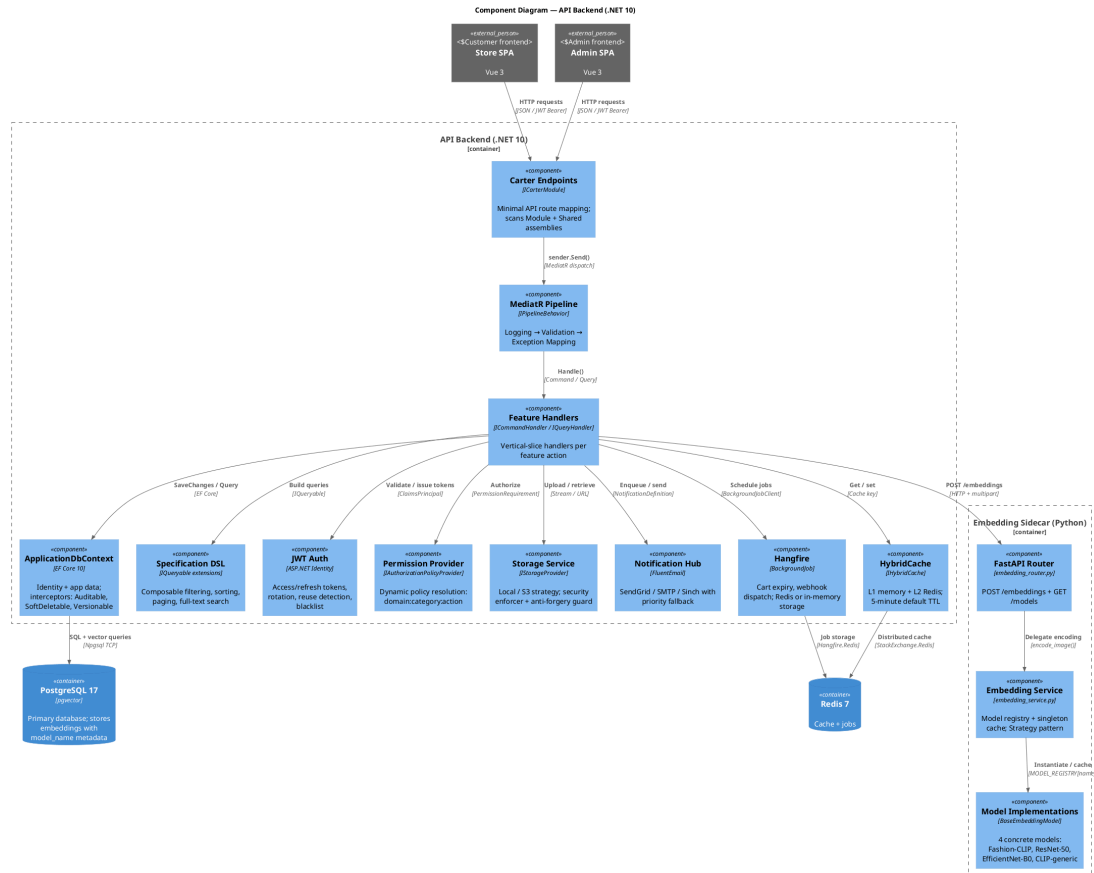


Figure 6: Component diagram of the API Backend showing the Carter endpoint layer, the MediatR pipeline, the feature handlers, and eight supporting infrastructure components. The Python ML Sidecar is shown with its internal three-layer architecture alongside.

The API Backend is structured as a pipeline. HTTP requests arrive at the Carter endpoints, which are minimal API route groups registered by `ICarterModule` implementations in each module’s feature folder. The endpoints are thin, they extract request parameters, dispatch a command or query via `ISender`, and map the `Result<T>` response to an HTTP status code and JSON body. All business logic resides in the feature handlers.

The MediatR pipeline wraps every request with a chain of behaviours: logging captures the request type and timing, validation executes `FluentValidation` rules before the handler runs, and exception mapping converts unhandled infrastructure failures to standardised problem details. The handlers themselves interact with eight infrastructure components:

- `ApplicationDbContext` (EF Core 10) with interceptors for auditable timestamps, soft-delete filtering, and row-version concurrency checks.
- A Specification DSL that provides composable `IQueryable` extensions for filtering, sorting, paging, and full-text search, keeping handler code free of query-building boilerplate.
- JWT authentication with ASP.NET Identity, managing access and refresh token issuance, rotation, reuse detection, and token blacklisting.
- A dynamic permission provider that resolves `{domain}:{category}:{action}` permission claims to authorisation policies at runtime without requiring static policy registration.
- A storage service with interchangeable providers (local filesystem or S3-compatible storage) selected via configuration, with built-in file-type validation and anti-forgery guards on uploads.
- A notification hub supporting email (SendGrid/SMTP) and SMS (Sinch) channels with configurable fallback priority.
- Hangfire for background job scheduling and processing, handling cart expiry, webhook dispatch, and periodic health checks.
- `HybridCache` with two-tier caching: L1 in-memory for sub-millisecond access and L2 Redis for cross-instance consistency.

The Python ML Sidecar follows a three-layer architecture: the FastAPI router handles HTTP request validation and API key authentication, the Embedding Service maintains a singleton model registry with lazy loading and caching, and the model implementations, Fashion-CLIP, ResNet-50, EfficientNet-B0, and generic CLIP, implement a common strategy interface for interchangeable inference backends.

### 2.3.3.4 Deployment

The deployment diagram illustrates how the containers map to physical or virtual infrastructure in a production configuration. Figure Figure 7 shows the deployment topology.

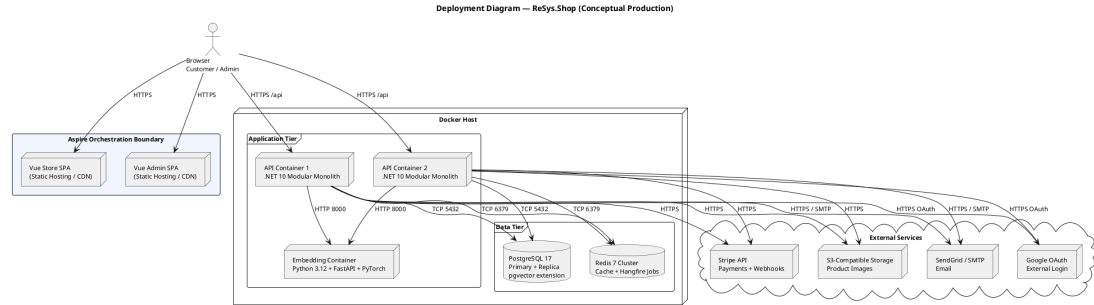


Figure 7: Deployment diagram showing containerised services within an Aspire orchestration boundary. The API backend is horizontally scalable; the embedding sidecar is stateless; Redis enables distributed state across API replicas.

All services are containerised and orchestrated by .NET Aspire, which manages service discovery, configuration injection, and health monitoring during both development and production deployments. The Vue SPAs are served as static bundles from a CDN or reverse proxy, while the backend services run within Docker containers on a single host or across a cluster.

The API backend is horizontally scalable, multiple container instances share PostgreSQL and Redis, enabling round-robin request distribution. The embedding sidecar is stateless: it loads models into memory on startup, caches them, and serves embedding requests without shared state. Any API instance can call any embedding container. Redis provides the distributed state needed for cache coherence and Hangfire job coordination across API replicas.

PostgreSQL is configured with a primary instance for writes and one or more read replicas for reporting and analytical queries. The pgvector extension is installed on both primary and replicas, enabling vector similarity search from any read path. External services, Stripe, SendGrid, S3 storage, and Google OAuth, are accessed over HTTPS from every API instance, with credentials managed through Aspire’s configuration system and never baked into container images.

### 2.3.4 Database Design

The ReSys.Shop database is a single PostgreSQL 17 instance organised into per-context schemas, each owned by a bounded context and managed through Entity Framework Core migrations. This section describes the schema organisation, the

core entity-relationship model, the pgvector integration for visual search, and the key design decisions that shape the data layer.

#### **2.3.4.1 Schema Organisation**

Each of the eight bounded contexts owns its database schema. The Catalog context manages tables for products, variants, variant images, option types, option values, taxonomies, and taxons. The Ordering context owns orders, line items, adjustments, shipments, and inventory units. The Payment context holds payment intents, payment captures, and payment logs. The Inventory context manages stock locations, stock items, stock movements, and stock reservations. The Identity context, built on ASP.NET Identity Core, manages users, roles, user roles, refresh tokens, and external login providers. The Profile context owns user addresses, wishlists, and notification preferences. The Shipping context manages shipping methods, shipping rates, and shipping zones. The Location context provides country and state reference tables.

Cross-context relationships are implemented through identifier references only, there are no foreign key constraints spanning module boundaries. An Order references a UserId (Identity context) and a VariantId (Catalog context), but these are stored as UUIDs without database-level referential integrity constraints. This design preserves the logical isolation of each context as a separate schema while keeping all data in a single database, avoiding the complexity of distributed transactions for the most common business operations.

Entity Framework Core manages all migrations from a dedicated Migrations assembly. Each migration is generated by comparing the current database state against the domain entity model, and migrations are applied as part of the application startup or through standalone migration scripts for production deployments.

#### **2.3.4.2 Core Entity-Relationship Model**

Figure 8 presents the entity-relationship diagram for the core business entities across the Catalog and Ordering domains, the two contexts that participate most directly in the visual search and checkout workflows.



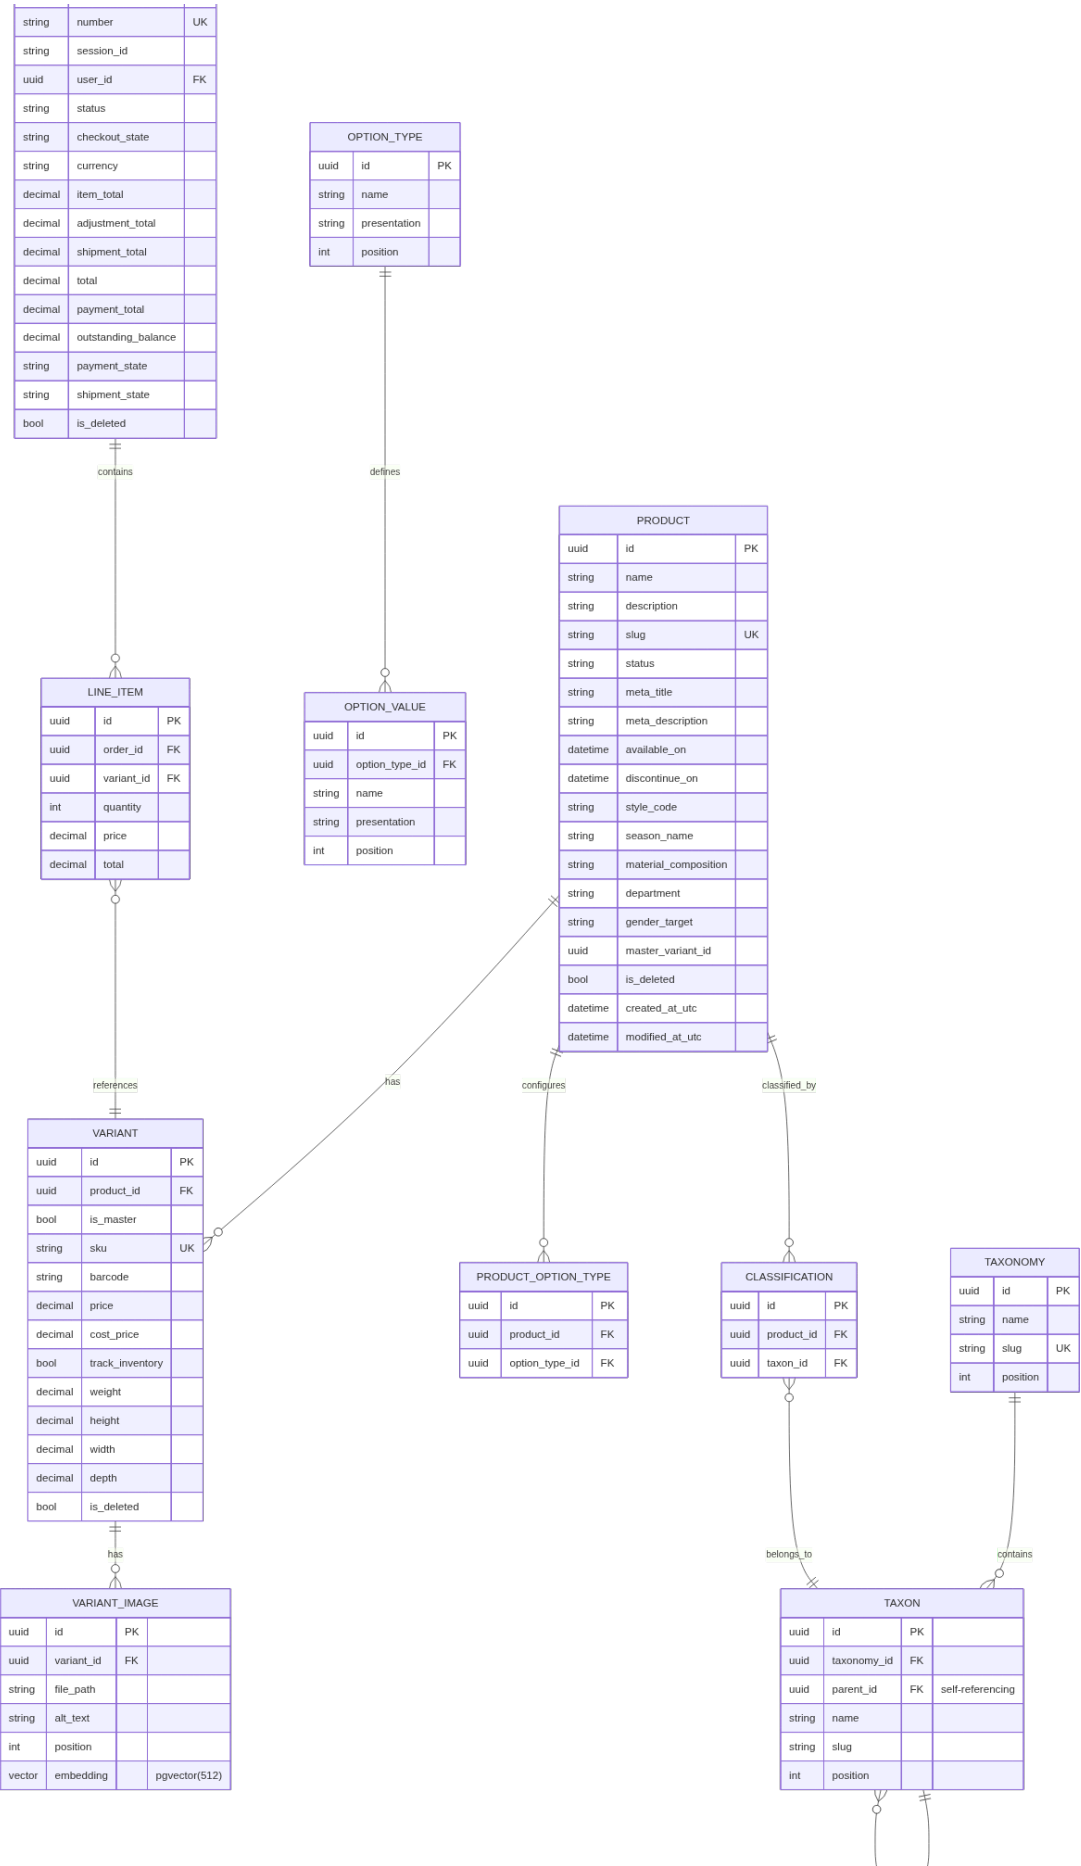


Figure 8: Core entity-relationship diagram showing the primary domain entities and their relationships across the Catalog and Ordering bounded contexts. Soft deletion, audit columns, and GUID primary keys are used throughout.

The Catalog domain centres on the Product entity, which has a one-to-many relationship with Variant. Each Variant represents a specific sellable configuration, for example, “Cotton T-Shirt, Red, Large”, with its own SKU, pricing, and inventory tracking flag. Exactly one variant per product is designated as the master variant. Variants relate one-to-many to VariantImages, each of which holds a file path and an optional embedding column of type `vector(512)` for pgvector similarity search. Products configure option types, such as Colour or Size, which in turn define option values. Taxonomies contain taxons in a hierarchical structure, with taxons referencing themselves through a parent foreign key to represent tree structures such as “Clothing → Dresses → Evening Dresses”. Products are classified by taxons through a many-to-many classification table.

The Ordering domain centres on the Order entity, which has a one-to-many relationship with LineItem. Each line item references a specific variant, not a product directly, because customers purchase specific configurations. The line item captures a price snapshot at the time of purchase, ensuring that historical orders are unaffected by catalogue price changes. Orders are related to users through a `UserId` reference, optionally nullable to support guest checkout, and track a session identifier for mapping anonymous carts before authentication.

#### 2.3.4.3 pgvector Integration

PostgreSQL’s pgvector extension enables vector similarity search directly within the relational database, eliminating the need for a separate vector database. The `variant_images` table contains an embedding column of type `vector(512)`, a fixed-length array of 512 IEEE 754 single-precision floating-point numbers representing the visual features extracted from the image by the ML sidecar.

An HNSW (Hierarchical Navigable Small World) index is created on the embedding column to accelerate approximate nearest-neighbour searches. HNSW provides logarithmic search complexity, enabling sub-10-millisecond queries over tens of thousands of vectors. The index is configured for cosine distance, the recommended distance metric for normalised embeddings from CLIP-family models.

Vector similarity queries use the cosine distance operator (`<=>`), which computes the angular distance between two vectors. A representative conceptual query pattern is: retrieve all variant images, compute the cosine distance between each stored embedding and the query embedding, order by ascending distance, and return the top results. The system filters results by a configurable minimum

similarity threshold, computed as  $1 - \text{cosine\_distance}$ , defaulting to 0.7, a level at which fashion images typically exhibit perceptible visual similarity.

Each embedding row includes a `model_name` column identifying which ML model generated the vector. This metadata enables per-model filtered queries: when the system switches the active embedding model, only embeddings from that model's columns participate in similarity search, preventing cross-model vector comparisons that would produce meaningless results. The model name also supports the benchmark evaluation in Chapter 3, where multiple models are compared against the same image corpus.

#### 2.3.4.4 Key Design Decisions

Several design decisions govern the database layer and influence every bounded context:

**Universally Unique Identifiers.** All primary keys are UUIDs (GUIDs in .NET terminology). This decision eliminates reliance on a central sequence generator, allows safe distributed key generation, useful for client-side offline creation of cart or draft-order records, and prevents the information leakage inherent in auto-incrementing integer primary keys.

**Soft Deletion.** Most domain entities carry an `IsDeleted` boolean column. Entity Framework Core applies a global query filter that excludes soft-deleted rows from all standard queries. This preserves referential integrity, a deleted product does not orphan its historical orders, while keeping the active working set clean. Deleted entities can be restored by administrators if the deletion was in error.

**Audit Columns.** Every entity inherits `CreatedAtUtc` and `ModifiedAtUtc` timestamp columns from the Entity base class, populated automatically by an EF Core save interceptor. These columns support chronological analysis of catalogue changes, order lifecycle auditing, and debugging data anomalies without external logging correlation.

**Composite Indexes.** Tables serving high-frequency query patterns carry composite indexes tuned to their access patterns. The Orders table includes (`UserId`, `Status`) for listing a customer's orders filtered by state, and (`SessionId`, `Status`) for resolving anonymous carts. These composite indexes avoid the need for separate single-column indexes and reduce disk footprint.

**Variable Vector Dimensions.** Different embedding models produce vectors of different dimensionalities: 384 for DINOv2-S, 512 for Fashion-CLIP and CLIP, 768 for DINOv2-B, 1280 for EfficientNet-B0, and 2048 for ResNet-50. PostgreSQL's vector type supports this variability, the dimension is part of the column type declaration, and HNSW indexes are built per-dimension. The

system stores embeddings from all models in separate rows, each tagged with the model name, and queries against the active model's dimension only.

#### **2.3.4.5 Per-Context Schema Description**

The Identity context stores user accounts with Argon2-hashed passwords, security stamps for session invalidation, and refresh tokens with one-time-use semantics. Role and UserRole tables implement RBAC, while UserLogin records link local accounts to external OAuth providers. UserAddresses store shipping and billing locations with ISO country codes.

The Catalog context's Product table carries fashion-specific metadata columns, style code, season name, material composition, department, and gender target, alongside standard catalogue fields. Variants hold SKU, barcode, cost and selling price in decimal precision, and physical dimensions for shipping calculations. The OptionType and OptionValue tables implement an EAV-lite pattern, allowing administrators to define new product attributes without schema migrations. Taxons use a nested set model with left and right bounds, enabling single-query subtree retrieval for mega-menus and breadcrumb navigation.

The Ordering context stores financial values as decimal with 18-digit precision and 2-decimal scale, avoiding floating-point accumulation errors in tax and discount calculations. Orders maintain separate subtotals for items, adjustments, and shipping, with the total computed as their sum. LineItems capture price snapshots at purchase time, decoupling order history from catalogue changes. OrderHistory provides an append-only audit trail of every state transition.

The Inventory context tracks stock items at a variant-location granularity, with QuantityOnHand and QuantityReserved maintained as separate counters and protected by optimistic concurrency control using PostgreSQL's xmin system column. StockMovements form an immutable ledger, every quantity change, whether from receiving, selling, returning, or stock-taking, is recorded with the delta, balances before and after, unit cost, and an external reference such as an order number or purchase order identifier.

#### **2.3.5 API Design**

The ReSys.Shop API exposes a RESTful interface built on Carter minimal APIs and organised around the MediatR CQRS pattern. This section describes the API architecture, the endpoint organisation scheme, and a summary of the key endpoints that define the platform's external contract.

##### **2.3.5.1 API Architecture**

The API layer acts as a thin orchestration boundary. It contains no business logic; instead, it delegates all processing to the MediatR pipeline. Each request follows a consistent path: the Carter endpoint receives the HTTP request, extracts

route and body parameters, constructs a MediatR command or query object, dispatches it through `ISender`, and maps the returned `Result<T>` to an HTTP response. This design keeps endpoints concise, typically six to twelve lines, and concentrates all domain logic in the handler layer, where it is testable without HTTP infrastructure.

Carter modules group related endpoints by module and surface. Each module (Catalog, Ordering, Payment, and so on) registers its own `ICarterModule` implementation, which defines the route groups, HTTP methods, and parameter bindings for that module's endpoints. This modular registration avoids a single monolithic route configuration file and enables each bounded context to own its API surface.

FluentValidation provides input validation through validator classes associated with each command and query. Validators run automatically as part of the MediatR pipeline behaviour, before the handler executes, ensuring that handlers never receive invalid input. Validation failures return standardised 400 Bad Request responses with field-level error details.

#### **2.3.5.2 Endpoint Organisation**

Endpoints are organised by two dimensions: the business module that owns the operation, and the surface, Admin or Storefront, that serves as the entry point. The URL pattern follows the convention `/api/{module}/{surface}/{action}`, where module identifies the owning bounded context, surface distinguishes administrative from customer-facing operations, and action names the specific operation.

This two-dimensional organisation serves several purposes. It makes the API self-documenting: the URL alone communicates which business area and which user role the endpoint targets. It simplifies authorisation: Admin surface endpoints share a common authorisation policy requiring an administrator role, while Storefront endpoints apply corresponding customer-level policies. And it enables independent versioning: a module can evolve its endpoints without affecting other modules.

Table 53 summarises the most architecturally significant endpoints across the platform. These endpoints represent the primary user-facing capabilities, visual search, catalogue browsing, checkout, order history, authentication, and payment, that together define the complete customer and administrator experience.

Table 53: Key API endpoints representing the primary user-facing capabilities of the platform. All endpoints in the Storefront surface serve customer interactions; Admin surface endpoints (not shown) mirror these with full CRUD capabilities on all modules.

| Endpoint                                     | Module  | Surface    | Description                                                                                                                                                                                                |
|----------------------------------------------|---------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| POST /api/catalog/storefront/search-by-image | Catalog | Storefront | Accepts an uploaded image file, sends it to the ML side-car for embedding generation, queries pgvector for the nearest neighbour variant images by cosine similarity, and returns matching products ranked |

| Endpoint                                    | Module  | Surface    | Description                                                                                                                   |
|---------------------------------------------|---------|------------|-------------------------------------------------------------------------------------------------------------------------------|
|                                             |         |            | by similarity score with variant thumbnails, pricing, and product URLs.                                                       |
| GET /api/catalog/storefront/products/{slug} | Catalog | Storefront | Returns a product with all its published variants, images, option configurations, and taxonomy classifications, identified by |

| Endpoint                                    | Module   | Surface    | Description                                                                                                                                                         |
|---------------------------------------------|----------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                             |          |            | its URL slug. Supports guest access for anonymous browsing.                                                                                                         |
| POST /api/ordering/storefront/cart/checkout | Ordering | Storefront | Advances the cart through the check-out state machine: setting the shipping address, selecting the delivery method, and confirming the order. Each call transitions |



| Endpoint                                 | Module   | Surface    | Description                                                                                                                                                         |
|------------------------------------------|----------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                          |          |            | the check-out state forward one step.                                                                                                                               |
| GET /api/ordering/storefront/orders/{id} | Ordering | Storefront | Returns the complete order with line items, payment state, shipment state, and status history. Requires authentication; customers may only access their own orders. |
| POST /api/identity/store/auth/login      | Identity | Storefront | Authenticates                                                                                                                                                       |

| Endpoint | Module | Surface | Description                                                                                                                                                                                     |
|----------|--------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          |        |         | a user by email and password, returning a JWT access token (fifteen-minute lifetime) and a refresh token for token rotation. Supports Google OAuth as an alternative login method via a related |

| Endpoint                                           | Module  | Surface    | Description                                                                                                   |
|----------------------------------------------------|---------|------------|---------------------------------------------------------------------------------------------------------------|
|                                                    |         |            | end-point.                                                                                                    |
| POST /api/payment/storefront/payment/create-intent | Payment | Storefront | Creates a payment intent for the specified order amount and currency, initialising the payment state machine. |

The admin surface provides full CRUD operations on all module entities, products, variants, orders, inventory, users, shipping methods, and location data, following the same URL pattern with the Admin surface prefix. These endpoints are excluded from the table to maintain focus on the core platform capabilities, but they follow identical architectural patterns: minimal API route groups, MediatR dispatch, FluentValidation, and permission-based authorisation.

### 2.3.6 Security Design

The security architecture of ReSys.Shop addresses three layers: authentication, verifying the identity of callers, authorisation, controlling what authenticated callers may do, and hardening, defensive measures against common attack vectors. This section describes each layer in turn.

### 2.3.6.1 Authentication

The platform uses JSON Web Tokens (JWT) for bearer token authentication. Upon successful login, via email and password or Google OAuth, the server issues two tokens: an access token with a fifteen-minute lifetime and a refresh token with a longer lifetime. The access token carries the user's identifier, email, and permission claims in a compact signed payload. All authenticated API requests include the access token in the Authorization header as a Bearer token.

The refresh token is a long-lived credential stored server-side in the database. When the access token expires, the client presents the refresh token to obtain a new access token and a new refresh token, a pattern known as refresh token rotation. Each refresh token is single-use: upon successful rotation, the consumed token is marked as used and a replacement is issued. If a previously consumed refresh token is presented again, indicating a potential token theft scenario, the system revokes all tokens for that user, forcing re-authentication. This rotation-with-reuse-detection pattern limits the damage window of a compromised refresh token to the interval between rotations.

Guest users, customers who have not yet authenticated, are assigned a session identifier stored in a browser cookie. This session identifier links their anonymous cart to their browsing context and persists across page navigations. Upon registration or login, the anonymous cart is merged with the authenticated user's cart, preserving the shopping intent built during the guest session.

### 2.3.6.2 Authorisation

Authorisation is implemented through two complementary mechanisms: role-based access control (RBAC) for broad category restrictions and permission-based claims for fine-grained control.

Roles, such as Customer and Administrator, segregate the Admin and Storefront surfaces. An endpoint in the Admin surface requires the Administrator role; a customer presenting valid credentials without that role receives a 403 Forbidden response. This coarse check prevents unauthorised access to administrative functions at the infrastructure level, before any business logic executes.

Permissions use a structured claim format: `{domain}:{category}:{action}`. For example, `catalog:products:create` grants permission to create products in the Catalog domain. A dynamic permission provider, `IAuthorizationPolicyProvider`, resolves these claim strings to ASP.NET Core authorisation policies at runtime, eliminating the need for static policy registration for every endpoint. This dynamic resolution enables permission configuration through the database without redeployment: an administrator may create a new role, assign it a set of permission claims, and those permissions take effect across all authorised endpoints immediately.

### 2.3.6.3 Security Measures

Several defensive measures harden the platform against common web application attack vectors.

**Rate Limiting.** Authentication endpoints are rate-limited to five requests per minute per IP address to prevent credential brute-forcing. Registration endpoints are limited to three requests per hour per IP address to deter automated account creation. Payment endpoints are limited to thirty requests per minute to maintain availability during high-traffic checkout events.

**Security Headers.** All HTTP responses include security headers configured through ASP.NET Core middleware: Content-Security-Policy restricts script and style sources to the application's own domains, HTTP Strict-Transport-Security enforces HTTPS-only connections for a configurable duration, X-Frame-Options prevents the application from being embedded in iframes to block clickjacking, and X-Content-Type-Options prevents MIME-type sniffing by browsers.

**File Upload Validation.** The visual search and product image upload endpoints enforce strict file validation. Uploaded files undergo magic-byte verification, inspecting the file header bytes rather than trusting the file extension, to confirm they are valid JPEG, PNG, or WebP images. A ten-megabyte size limit prevents resource exhaustion from oversized uploads. Server-side validation repeats the client-side checks, as client-side validation is a convenience that an attacker can bypass.

**Payment Webhook Verification.** The Stripe webhook endpoint, which receives payment event notifications, validates each incoming request using Stripe's signature verification algorithm. The webhook payload is hashed with a shared signing secret; if the computed signature does not match the one provided in the Stripe-Signature header, the request is discarded before any business logic processes it. This verification prevents spoofed webhook payloads from injecting fraudulent payment state into the system.

### 2.3.6.4 Token Flow

The authentication token lifecycle operates as follows. A client authenticates with email and password, receiving an access token and a refresh token. The access token is short-lived and not stored server-side; it is validated by signature verification and expiration check on each request. When the access token expires, the client sends the refresh token to the refresh endpoint. The server validates the refresh token against the database: if it is valid and has not been used before, the server marks it as consumed, issues a new access token and a new refresh token, and returns both to the client. If the presented refresh token has already been consumed, flagged as used from a previous rotation, the server assumes token theft and revokes all refresh tokens associated with that user,

logging the security event. The user must then re-authenticate, which invalidates the compromised token chain and issues fresh credentials. This model provides a self-healing defence against refresh token interception without requiring the user to detect or report the compromise.

### 2.3.7 Summary

This section has presented the architectural design of ReSys.Shop across six dimensions. The service-oriented system architecture separates presentation (Vue 3), business logic (.NET 10), and machine learning (Python sidecar) into independently deployable services. Domain-Driven Design partitions the business domain into eight bounded contexts communicating through MediatR in-process dispatch, with four architecturally significant aggregate roots enforcing explicit invariants. The C4 model describes the system at context, container, and component levels of abstraction, revealing the communication paths between deployable units and the internal composition of the .NET backend. The PostgreSQL database uses per-context schemas, pgvector for vector similarity search, and a set of consistent design decisions, GUIDs, soft deletion, audit columns, applied across all contexts. The API layer follows the URL convention `/api/{module}/{surface}/{action}` with Carter minimal APIs and MediatR CQRS. The security architecture covers JWT authentication with refresh token rotation, permission-based authorisation with dynamic policy resolution, and layered defensive measures against common attack vectors. Together, these architectural decisions provide the foundation on which the implementation described in the following section is built.

## 2.4 IMPLEMENTATION

This section describes the concrete realisation of the ReSys.Shop system architecture presented in Section 2.2. It is organised into five sub-sections, progressing from the architectural pattern that structures the codebase, through the machine learning pipeline that constitutes the core research contribution, to the end-to-end visual search flow and its configuration mechanism, and finally a concise survey of the supporting e-commerce modules. The implementation follows the service-oriented design established in Section 2.2: a Vue 3 frontend, a .NET 10 modular monolith backend, and a Python machine learning sidecar, each implemented in the technology most appropriate for its domain.

### 2.4.1 Vertical Slice Architecture

The .NET backend is organised according to **Vertical Slice Architecture (VSA)**, a pattern in which code is grouped by business capability rather than by technical layer. In a traditional layered architecture, all data access classes reside in one project, all business logic in another, and all web controllers in a third. VSA

inverts this convention: all code required to fulfil a single feature, the request, the handler, the response, the validator, is co-located within one directory. This organisation makes the system easier to navigate because a developer tracing a feature through the codebase follows a vertical path rather than jumping across four or five horizontal layers.

The implementation uses Carter minimal APIs for route registration and MediatR for command and query dispatch. Each bounded context, Catalog, Ordering, Payment, and the remaining five modules, contributes its own `ICarterModule` implementation, which registers all endpoints belonging to that context. Endpoints are thin: they extract parameters from the HTTP request, construct a MediatR command or query object, dispatch it through `ISender`, and map the resulting `Result<T>` to an HTTP status code and JSON body. All business logic, database access, and domain invariant enforcement reside in the handler layer, where they are testable without HTTP infrastructure.

`FluentValidation` ensures that every command and query object is validated before its handler executes. Validation classes live alongside the handlers they protect, keeping the validation rules visible and colocated with the logic they guard. The MediatR pipeline wraps each request with three behaviours, validation, logging, and exception mapping, applied automatically to every handler in the system. A fourth pipeline behaviour enforces feature-level transaction boundaries, ensuring that handlers operating on multiple database rows do so within a single unit of work.

The vertical slice organisation enforces a strict module boundary rule: no bounded context may import another context's namespace. All inter-module communication flows through MediatR's `ISender` interface. A context may dispatch a query to another context or publish a notification that other contexts react to, but it may never reference a class, type, or namespace belonging to another module. This constraint preserves the logical isolation of the bounded contexts, the same isolation that would be enforced by network boundaries in a microservices architecture, while retaining the deployment simplicity of a single process.

#### **2.4.2 ML Embedding Pipeline**

The Python machine learning sidecar is the core research contribution of this thesis. It is a specialised AI service responsible for generating high-dimensional vector embeddings from product images, exposing endpoints consumed by the .NET backend through HTTP. This section describes the internal architecture, the model loading strategy, the embedding generation flow, and the health monitoring mechanism.

#### 2.4.2.1 Service Architecture

The ML sidecar is built on Python 3.12 with the FastAPI framework and runs under the Uvicorn ASGI server. Its internal architecture follows a three-layer design:

- The **FastAPI interface layer** handles HTTP concerns: routing requests to the correct endpoint, validating the API key presented in the X-API-Key header, parsing multipart form data containing image bytes, and serialising embedding results to JSON. This layer contains no machine learning logic.
- The **Model Manager layer** is a singleton service responsible for the lifecycle of deep learning models. It maintains a registry of loaded models, loads new models on demand, caches them in GPU or CPU memory, and dispatches inference requests to the correct model instance. The singleton pattern ensures that a single copy of each model serves all inbound requests, avoiding redundant memory allocation.
- The **PyTorch Runtime layer** is the hardware-facing component that executes forward passes through the neural network. It handles device placement, selecting CUDA for NVIDIA GPUs, MPS for Apple Silicon, or CPU as a fallback, and manages the tensor operations that convert raw image data into embedding vectors.

The service exposes two endpoints: `POST /embeddings`, which accepts image bytes and returns a 512-dimensional float vector, and `GET /health`, which reports the operational status of the underlying hardware and loaded models. The service is containerised as a Docker image and orchestrated by .NET Aspire, which manages service discovery, the backend addresses the ML sidecar as `http://ml-service` on the internal Docker network, and health-check restarts.

#### 2.4.2.2 Model Loading Strategy

The ML sidecar employs a **lazy loading** strategy to optimise resource utilisation. Deep learning models are not loaded at service startup, when they would consume gigabytes of GPU memory before the first request arrives. Instead, models are loaded upon their first invocation, when the .NET backend sends an image to be embedded for the first time, the Model Manager instantiates the configured model, loads its weights into memory, and caches the instance for all subsequent requests.

The Model Manager implements the **Strategy Pattern**: each model conforms to a common interface with a standard `generate_embedding(image_bytes)` method, and the manager selects the active model based on the `EMBEDDING_MODEL` environment variable. Changing models requires only a configuration change and a service restart, no code changes. The Model Manager maintains an internal dictionary-style cache keyed



by model name, so a request for a previously loaded model returns the cached instance immediately.

The supported models span four architectural families. **Convolutional neural networks** are represented by ResNet-50 (2048-dimensional output) and EfficientNet-B0 (1280-dimensional), both pre-trained on ImageNet and serving as lightweight feature extractors. **Vision transformers** include DINOv2 ViT-S/14 (384-dimensional) and DINOv2 ViT-B/14 (768-dimensional), leveraging self-supervised pre-training that requires no labelled data. **CLIP-based models**, CLIP ViT-B/32, CLIP ViT-B/16, and CLIP ViT-L/14, produce 512-dimensional embeddings in a shared text-image latent space, enabling multimodal search where a text query can find visually similar products. **Fashion-specific models** are represented by Fashion-CLIP, a CLIP variant fine-tuned on over 700 000 fashion images with domain-specific vocabulary, also producing 512-dimensional vectors.

#### 2.4.2.3 Embedding Generation Flow

The embedding generation process follows a precise pipeline from image reception to vector output. Figure 9 illustrates this flow.




Figure 9: ML embedding pipeline: the step-by-step flow from image bytes received by the FastAPI interface to a 512-dimensional float vector returned as JSON to the .NET backend.

The pipeline comprises seven sequential steps. The .NET backend initiates the process by sending raw image bytes to the `POST /embeddings` endpoint. The FastAPI interface validates the `X-API-Key` header against the expected key and rejects unauthorised requests with a 401 response. The Model Manager retrieves the currently configured model from its cache, loading it from disk on the first request, and dispatches the image payload to the model’s preprocessing pipeline.

The preprocessing stage normalises the input image to the format expected by the selected model. The image is resized to the model’s expected input dimensions, 224 by 224 pixels for most architectures, and converted from interleaved colour channels to separated channel tensors. ImageNet-normalisation statistics are applied: each colour channel is centred to the ImageNet mean and scaled by the standard deviation, matching the distribution on which the model was originally trained.

The preprocessed tensor is passed through the model’s forward pass. For convolutional models, this involves a cascade of convolution, activation,

and pooling operations that extract hierarchical features. For transformer-based models, the image is divided into patches, each patch is projected into a token embedding, and self-attention layers compute contextual relationships between patches across the entire image. The output of the forward pass is pooled, typically via global average pooling, to produce a single fixed-length vector regardless of the original image size.

The resulting vector is a 512-dimensional array of single-precision floating-point numbers (for CLIP-family models; other dimensionalities for other architectures). This vector encodes the visual essence of the image, colour palette, texture patterns, silhouette shape, and semantic category, in a compressed numerical form suitable for similarity computation. The vector is serialised to a JSON array and returned to the .NET backend as the response body, together with metadata fields identifying the model name and generation time in milliseconds.

#### **2.4.2.4 Health Monitoring**

The `/health` endpoint provides a comprehensive operational status for the Aspire orchestration layer. It verifies three conditions: that the GPU environment is active and accessible, confirming CUDA or MPS availability; that the configured model is successfully loaded into memory and ready for inference; and that a baseline inference pass completes without errors, validating the entire pipeline from preprocessing to output generation. The health response includes diagnostic data, model load status, last inference time, GPU memory utilisation, enabling the orchestrator to detect degraded states and trigger Docker restart policies automatically without human intervention.

#### **2.4.3 CBIR Search Flow**

The content-based image retrieval search flow is the primary user-facing capability enabled by the ML embedding pipeline. It spans four system components, the Vue 3 storefront, the .NET API backend, the Python ML sidecar, and PostgreSQL with pgvector, and must complete in under one second to remain viable as a real-time feature. Figure Figure 10 depicts the full cross-service interaction.

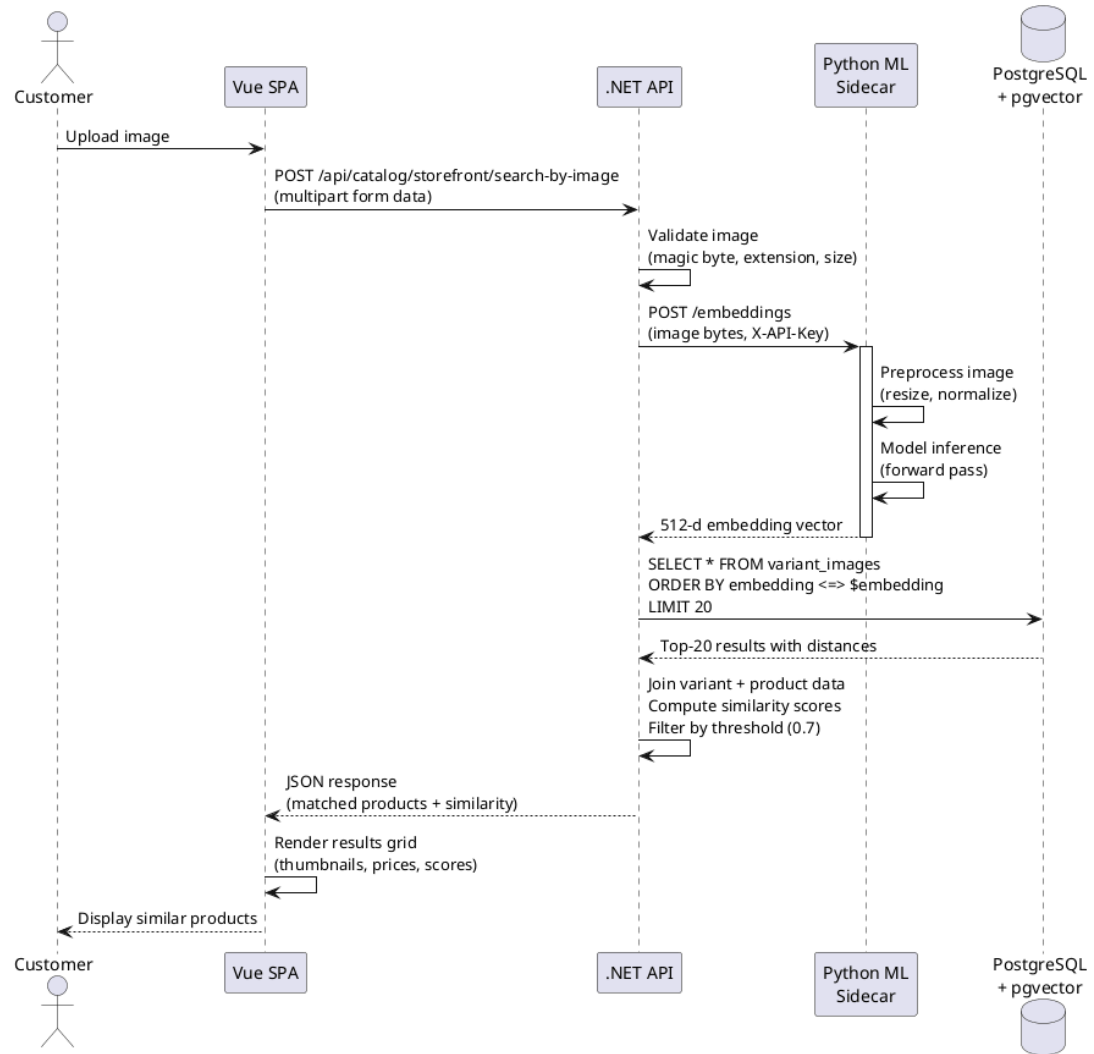


Figure 10: CBIR search sequence: the complete end-to-end flow from customer image upload through embedding generation and vector search to ranked results display, spanning the Vue frontend, .NET API, Python ML sidecar, and PostgreSQL pgvector.

The flow begins when a customer uploads an image through the Vue storefront interface. The client performs an initial validation pass, checking that the file type is JPEG, PNG, or WebP and that the file size does not exceed ten megabytes, and presents immediate feedback if the upload fails these checks. Upon passing client-side validation, the image is sent as a multipart form data request to the `POST /api/catalog/storefront/search-by-image` endpoint on the .NET backend.

The backend performs a second, stricter validation pass. It verifies the file's magic bytes, the binary header signature of a valid image file, rather than trusting the file extension, which a malicious client could forge. It confirms the MIME type and enforces the same ten-megabyte size limit server-side. If validation passes, the backend sends the raw image bytes to the Python ML sidecar's `/embeddings` endpoint with the `X-API-Key` header.

The ML sidecar executes the embedding pipeline described in Section 2.3.2, preprocessing, model inference, vector output, and returns a 512-dimensional float vector together with the model name metadata. The backend now holds a numerical representation of the customer’s image that can be compared against every product image in the catalogue.

The vector search query executes against the `variant_images` table in PostgreSQL. The query computes the cosine distance between the query embedding and every stored embedding using the `<=>` operator provided by the `pgvector` extension, orders results by ascending distance, and returns the closest matches. An HNSW index on the embedding column reduces the search complexity to logarithmic time, sub-ten milliseconds on a corpus of tens of thousands of images. The query includes a `model_name` filter, ensuring that only embeddings generated by the currently active model participate in the comparison; cross-model vector comparisons would produce meaningless results because different models embed images into different latent spaces.

The backend assembles the results into a search response. It joins the top-matching variant image rows with their parent variant and product records to retrieve titles, pricing, and thumbnail URLs. It converts cosine distances into similarity scores, computed as one minus the distance, and filters out results below a configurable minimum similarity threshold, defaulting to 0.7. In fashion image retrieval, a cosine similarity of 0.7 typically corresponds to perceptible visual similarity, while values above 0.9 indicate near-identical items. A product may appear multiple times in the results if multiple of its variant images matched the query, but the response deduplicates by product and returns the highest-scoring match per product.

The backend returns a JSON array of matching products to the Vue storefront. Each entry includes the product title, the matched variant’s thumbnail URL, the selling price, the similarity score expressed as a percentage, and a product URL for navigation. The Vue frontend renders these results as a grid of product cards with thumbnail images, price labels, and similarity score badges, completing the search experience. The total end-to-end latency, from upload to rendered results, is designed to remain under one second, with the model inference typically accounting for fifty to one hundred milliseconds of that budget depending on the active model.

#### **2.4.4 Model Configuration**

The ability to switch between embedding models without code changes is a key implementation decision that supports the benchmark evaluation presented in Chapter 3. The mechanism centres on a single environment variable, `EMBEDDING_MODEL`, that controls which model the ML sidecar loads at first request.

The environment variable accepts a short model identifier: `fashion_clip` for the fine-tuned fashion model, `resnet50` for the classic CNN baseline, `efficientnet_b0` for the lightweight scaled CNN, `clip_vit_b32` or `clip_vit_b16` or `clip_vit_l14` for general-purpose CLIP variants, and `dinov2_vits14` or `dinov2_vitb14` for self-supervised vision transformers. When the Model Manager receives its first embedding request, it reads this variable, instantiates the corresponding model class, loads weights from disk, and caches the instance. Subsequent requests are served from the cache. Changing the active model requires updating the environment variable and restarting the container, a configuration-only change with no code modification.

Each stored embedding carries two metadata columns: `model_name`, identifying which model generated the vector, and `model_version`, capturing the weight snapshot used. When the backend queries pgvector for similar images, it filters by `model_name`, only embeddings from the currently active model participate in the search. This filter ensures that the system can store embeddings from multiple models simultaneously, with each model's embeddings occupying a separate conceptual index within the same physical column. After switching the active model, newly uploaded images begin generating embeddings under the new model name, while existing embeddings under the old model name remain available but are excluded from search queries.

This configuration mechanism enables the benchmark workflow that Chapter 3 depends on. Eleven models are evaluated against the same image corpus by loading each model in sequence, generating embeddings for the full query and catalogue image sets, running the retrieval evaluation protocol, and recording the results, all without modifying application code. In production, the same mechanism enables A/B testing: two instances of the ML sidecar, each configured with a different model, serve embedding requests to different user cohorts. An administrator can compare the business metrics of the two cohorts, click-through rates, conversion rates, time-to-purchase, to determine which model produces the best real-world search experience.

### 2.4.5 E-commerce Core

The preceding sections focused on the visual search pipeline, which constitutes the research contribution of this thesis. This section provides a concise survey of the e-commerce platform modules that surround and support that pipeline. Each module is given a single paragraph below; none is the primary subject of this thesis, but together they form the functional platform within which the visual search feature operates.

**Catalog Management.** Products are created with fashion-specific metadata fields, style code, season name, material composition, department, and gender target, alongside standard catalogue attributes such as title, description,

and publication status. Each product may define variants, sellable configurations combining a size and colour, each with its own SKU, barcode, independent pricing, and physical dimensions, with exactly one variant designated as the master variant displayed on listing pages. Product images support multiple variants with automatic thumbnail generation, and each image may store an embedding vector generated by the ML sidecar. Hierarchical taxonomies organise products into a nested category tree, for example, Clothing, Dresses, Evening Dresses, enabling faceted navigation through the catalogue browser.

**Order Processing.** The ordering module orchestrates the complete customer purchase lifecycle. Carts, the initial state of the Order aggregate, auto-expire after seven days of inactivity through a Hangfire background job that periodically cleans up abandoned carts. Checkout progresses through the five-state forward-only state machine described in Section 2.2: Address, Delivery, Payment, Confirm, and Complete. Order numbers are generated inside database transactions with RepeatableRead isolation to prevent duplicate numbering under concurrent checkout loads, a subtle but critical correctness measure in high-traffic flash-sale scenarios. Each order records the checkout state alongside payment and shipment sub-states tracked independently, enabling partial fulfilment, a customer's order may ship in two batches as inventory becomes available.

**Payment Handling.** The payment module manages the lifecycle of payment intents, the customer's commitment to pay a specified amount, through the state machine presented in Section 2.2. Two gateway providers exist: the Stripe gateway handles real payment processing with webhook signature validation using Stripe's signing secret and built-in idempotency keys that prevent double-charging during network retry scenarios; the Bogus gateway simulates the complete payment lifecycle for development environments, automatically transitioning through states without external API calls. The system maintains its own copy of the payment state in parallel with the gateway's representation, enabling offline access to payment status and consistent behaviour across both gateway implementations.

**Inventory Tracking.** Stock quantities are tracked per variant per warehouse location with two separate counters: on-hand quantity, representing the physical stock count, and reserved quantity, representing units held for active checkouts. The invariant `QuantityOnHand >= 0` is enforced at the domain entity level, preventing negative stock states. Stock reservations are acquired through atomic transactions using row-level pessimistic locking, a `SELECT FOR UPDATE` that serialises concurrent access to the same inventory row. When two customers attempt to purchase the last unit of a product, the database lock ensures sequential execution, and the second request receives a graceful out-of-stock rejection. Every stock change, whether from receiving, selling, returning, or stocktaking, is

recorded as a `StockMovement` entry in an append-only ledger with the quantity before and after, the reason, and the operating user.

**Background Automation.** Hangfire serves as the background job processor, executing scheduled and on-demand tasks that are not part of the synchronous request-response cycle. Cart expiry jobs run on a twenty-minute interval, removing carts with no activity for seven days. Embedding generation retries handle transient failures when the ML sidecar is briefly unavailable, failed embedding requests are queued for retrieval with exponential back-off. Periodic index maintenance rebuilds or optimises HNSW indices on the vector column to keep nearest-neighbour search performance stable as the catalogue grows. All jobs are persisted in Redis, ensuring that scheduled work survives application restarts and container reorganisations.

### 3 TESTING & EVALUATION

This chapter presents the evaluation of the ReSys.Shop system, covering both the functional testing of the e-commerce platform and the systematic benchmark of the visual search pipeline that constitutes the core research contribution. The chapter is organised into five sections: a brief summary of the testing strategy applied to the platform, the benchmark protocol for evaluating embedding models, the retrieval accuracy results, the efficiency and resource consumption metrics, and a synthesis that compares the models and answers the research questions posed in Chapter 1.

#### 3.1 TESTING STRATEGY

The ReSys.Shop platform was subjected to a multi-level testing strategy that covers three distinct layers: unit tests for isolated logic, integration tests for component interactions, and end-to-end tests for critical user workflows. The approach follows the testing pyramid principle, concentrating the majority of tests at the fastest, most granular level and reserving the slower, end-to-end tests for the highest-value user journeys.

##### 3.1.1 Unit Testing

Unit tests form the foundation of the verification strategy. The .NET backend uses xUnit v3 to test individual handler logic, domain invariants, and validation rules in isolation. Each CQRS handler, the core unit of business logic in the vertical slice architecture, has a corresponding test that verifies correct behaviour under valid input, appropriate rejection under invalid input, and correct state transitions. Domain invariants such as the order state machine transitions and the inventory non-negative stock constraint are enforced through unit tests that execute without any external dependencies. The Python machine learning sidecar uses pytest to validate the embedding generation pipeline, ensuring that

each supported model produces vectors of the expected dimensionality and that the preprocessing pipeline correctly normalises input images to model-expected formats.

### **3.1.2 Integration Testing**

Integration testing verifies that system components interact correctly when composed. Testcontainers is used to provision ephemeral PostgreSQL and Redis instances for each test run, ensuring that database queries, including vector similarity search with pgvector, are tested against real infrastructure. Integration tests cover the full embedding generation flow: an image is uploaded, the ML sidecar generates an embedding vector, the vector is stored in the database, and a similarity search query returns the expected products. The cross-service communication between the .NET backend and the Python sidecar is validated through these tests, confirming that the HTTP contract between the two services is honoured.

### **3.1.3 End-to-End Testing**

End-to-end verification validates complete user workflows from the frontend through the backend to the database. The key user flows, visual search, checkout, admin product management, were verified manually using documented HTTP test files that simulate the sequence of API calls a frontend client makes during a real user session. Automated end-to-end testing via Playwright covers the most critical paths: the visual search flow from image upload to results display, and the checkout flow from cart addition to order confirmation. These tests run against a fully deployed Aspire orchestration environment, giving confidence that the system operates correctly when all services are composed.

## **3.2 BENCHMARK PROTOCOL**

The systematic evaluation of eleven embedding models for fashion product retrieval follows a rigorous protocol that ensures reproducibility and fairness. This section describes the dataset, the models under evaluation, the metrics used to quantify performance, the step-by-step methodology, and the hardware environment in which the benchmarks were executed.

### **3.2.1 Dataset**

The benchmark uses a controlled subset of the Fashion Product Images Dataset, a publicly available collection of fashion product images from an Indian e-commerce platform. The subset consists of 5,000 catalogue images spanning five master categories: Apparel (2,500 items), Accessories (1,250 items), Footwear (750 items), Personal Care (350 items), and Sporting Goods (150 items). This



distribution reflects the dataset’s original category hierarchy and prevents a single oversized category from dominating the retrieval metrics.

Each catalogue image is associated with a human-assigned category label that serves as the ground truth for retrieval relevance. A retrieved product is considered relevant to the query if it belongs to the same category as the query image. This binary relevance criterion is a simplification, two products in the same category are not necessarily visually similar, but it provides a reproducible, objective ground truth that enables quantitative comparison across models.

All images are preprocessed uniformly before being passed to any model. Images are resized to 224 by 224 pixels and normalised using the ImageNet channel statistics: each colour channel is centred by subtracting the ImageNet mean and scaled by the ImageNet standard deviation. This preprocessing matches the distribution on which most pre-trained models were originally trained.

### 3.2.2 Models Evaluated

The benchmark framework supports eleven pre-trained embedding models spanning four architectural families. Four representative models were selected for the full thesis evaluation. Table Table 54 summarises the models grouped by their architecture type.

Table 54: Embedding models supported by the benchmark framework, grouped by architecture family. Four representative models were evaluated in the thesis. All models use pre-trained weights from public model repositories.

| Architecture                 | Models                                                                                                                   |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Convolutional Neural Network | ResNet-50 (2,048-dimensional output), EfficientNet-B0 (1,280-dimensional), ConvNeXt Tiny (768-dimensional)               |
| Vision Transformer           | DINOv2 ViT-S/14 (384-dimensional)                                                                                        |
| CLIP-based                   | CLIP ViT-B/32, CLIP ViT-B/16, CLIP ViT-L/14 (512-dimensional each), SigLIP (768-dimensional), EVA-CLIP (512-dimensional) |
| Fashion-specific             | Fashion-CLIP (512-dimensional), fine-tuned on over 700,000 fashion images with domain-specific vocabulary                |

The eleven models span a wide range of architectural approaches. Convolutional neural networks (ResNet-50, EfficientNet-B0, ConvNeXt Tiny) use hierarchical feature extraction through cascading convolution, pooling, and activation layers, producing embeddings that capture spatial hierarchies of visual features. Vision transformers (DINOv2 ViT-S/14) divide the image into patches, project each

patch into a token embedding, and apply self-attention across all patches to model long-range dependencies. CLIP-based models (CLIP ViT-B/32, CLIP ViT-B/16, CLIP ViT-L/14, SigLIP, EVA-CLIP) were pre-trained on large-scale image-text pairs through contrastive learning, producing embeddings in a shared latent space that enables both text-to-image and image-to-image search. Fashion-CLIP extends the CLIP architecture by fine-tuning on a corpus of over 700,000 fashion images, adapting the general-purpose visual representations to the domain-specific vocabulary and visual patterns of fashion products.

Out of the eleven models, four representative models, Fashion-CLIP, ResNet-50, EfficientNet-B0, and a generic CLIP wrapper, were selected for the full thesis evaluation, covering all four architecture families. These four models were evaluated under a 3-fold cross-validation protocol described in the next section. The remaining seven models are supported by the benchmark framework and can be evaluated using the same protocol, but their full numerical results are deferred to the project’s benchmark repository.

### 3.2.3 Metrics

Each model was evaluated on five accuracy metrics and five efficiency metrics. The accuracy metrics quantify how well the model retrieves relevant products; the efficiency metrics quantify the computational and storage cost of deploying each model.

**Mean Average Precision (mAP)** is the primary accuracy metric. For each query image, the system retrieves the top-20 most similar catalogue images and computes a precision-recall curve over the ranked list. The area under this curve is the average precision (AP) for that query. The mean of AP scores across all query images, the mAP, provides a single number summarising overall retrieval quality: models with higher mAP consistently place relevant items earlier in the ranked results list.

**Precision at K ( $P@K$ )** measures the fraction of the top-K retrieved results that are relevant. For example,  $P@10 = 0.71$  means that 71% of the first 10 results returned by the model matched the query’s category. Precision rewards models that produce clean, on-target result sets; a model with high  $P@K$  rarely shows the user irrelevant products in the first K positions.

**Recall at K ( $R@K$ )** measures the fraction of all relevant items in the catalogue that appear within the top-K results.  $R@10 = 0.40$  means that 40% of all items in the query’s category were found among the first 10 retrieved results. Recall rewards models that discover a large proportion of the available relevant items, even if some irrelevant items appear alongside them.

**Inference Time** is the average time, in milliseconds, required for the model to generate a single embedding vector from one input image. This metric governs

the responsiveness of the visual search feature: the total end-to-end latency experienced by the user is the sum of inference time, database query time, and network round-trip time.

**Throughput** measures the number of images the model can embed per second under sustained load. Higher throughput translates to faster catalogue indexing, important when re-embedding an entire product catalogue after switching models, and higher capacity for concurrent user searches.

**Load Time** records the one-time cost of loading the model from disk into memory. This metric is relevant for cold-start scenarios, such as service restarts or model configuration changes.

**Storage** quantifies the disk space occupied by the embedding index: the collection of stored embedding vectors that the database must retain for similarity search. Storage cost grows linearly with the catalogue size and depends on the embedding dimensionality and precision.

**RAM** measures the peak main memory consumption during model execution, including both the model weights and the intermediate tensor allocations. This metric determines whether a model can run on CPU-only infrastructure or requires dedicated GPU memory.

### 3.2.4 Methodology

Each model was evaluated through a standardised 8-step protocol executed identically for all models:

1. Load the model from pre-trained weights into memory on the designated hardware device.
2. Generate an embedding vector for every query image in the dataset.
3. Generate an embedding vector for every catalogue image in the dataset.
4. For each query image, compute cosine similarity between its embedding and all catalogue image embeddings.
5. Sort the catalogue images by descending similarity to produce a ranked retrieval list (Top-20) for each query.
6. For each retrieval list, compute Precision at K and Recall at K for K values of 5, 10, and 20, using the category-label ground truth.
7. Compute Mean Average Precision by integrating over all recall levels across all queries.
8. Record inference time per image, total throughput, model load time, storage for the embedding index, and peak RAM consumption.

Steps 1-8 were repeated for each of the four evaluated models. The evaluation used 3-fold cross-validation: the dataset was partitioned into three stratified folds, each preserving the original category distribution. For each fold, the

model was evaluated on the held-out fold using the remaining two folds as the catalogue. The reported metrics are the mean and standard deviation across the three folds, providing both point estimates and measures of variability.

The retrieval accuracy metrics (mAP, P@K, R@K) are computed via exact cosine search over all gallery embeddings, eliminating any index approximation effects and isolating model quality from index performance. For the pgvector production metrics, the benchmark uses the IVFFlat (Inverted File with Flat compression) approximate index with 100 lists. IVFFlat was chosen over HNSW at this scale for three reasons. First, at 5,000 catalogue vectors, IVFFlat achieves sub-10-millisecond query latency and 65–72 percent recall@10 (see Appendix A.4), which is adequate for a controlled model comparison where the focus is on model ranking rather than index optimisation. Second, IVFFlat builds nearly instantaneously (under one second) versus the minutes required for HNSW graph construction, enabling rapid iteration across the 4-model, 3-fold evaluation matrix. Third, IVFFlat exposes fewer hyperparameters (lists and probes) than HNSW (M, ef\_construction, ef\_search), reducing confounding variables when the objective is to compare embedding models rather than index configurations. The production architecture designates HNSW for deployments at larger catalogue scales where its superior recall-speed trade-off becomes decisive.

### 3.2.5 Hardware Environment

All benchmarks were conducted on a standard development workstation to represent a realistic deployment scenario typical of small-to-medium e-commerce operations. Table 55 summarises the hardware configuration.

Table 55: Hardware environment for benchmark evaluation.

| Component    | Specification                                                  |
|--------------|----------------------------------------------------------------|
| CPU          | Intel (11th Gen Core i7-1165G7, 4 cores / 8 threads, 2.80 GHz) |
| RAM          | 16 GB DDR4                                                     |
| Database     | PostgreSQL 16 with pgvector 0.7.0                              |
| Orchestrator | .NET Aspire (Docker Compose mode)                              |

The hardware represents a standard development laptop configuration. All benchmarks were executed on CPU without GPU acceleration, as the available GPU (NVIDIA GeForce MX330, compute capability 6.1) does not meet the minimum compute capability required by the evaluated deep learning frameworks (sm\_75). Results on different hardware, particularly systems with a compatible GPU, will differ, and the reported inference times should be interpreted relative to this CPU-only baseline.

### 3.3 RETRIEVAL PERFORMANCE

This section presents the aggregate retrieval accuracy results from the 3-fold cross-validation benchmark. Table 56 displays the primary accuracy metrics for all four evaluated models, sorted by mAP in descending order.

Table 56: Aggregate Retrieval Metrics, 3-Fold Cross-Validation

| Model           | mAP<br>(mean<br>± SD)               | P@5           | P@10          | P@20          | R@5           | R@10          | R@20          |
|-----------------|-------------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Fashion-CLIP    | <b>0.8788</b><br>±<br><b>0.0022</b> | <b>0.9304</b> | <b>0.9155</b> | <b>0.8982</b> | <b>0.0350</b> | <b>0.0646</b> | <b>0.1155</b> |
| CLIP-generic    | 0.8341<br>±<br>0.0043               | 0.9025        | 0.8862        | 0.8640        | 0.0322        | 0.0597        | 0.1052        |
| EfficientNet-B0 | 0.8158<br>±<br>0.0007               | 0.8901        | 0.8703        | 0.8477        | 0.0316        | 0.0571        | 0.1001        |
| ResNet-50       | 0.8120<br>±<br>0.0052               | 0.8841        | 0.8671        | 0.8458        | 0.0306        | 0.0551        | 0.0978        |

Fashion-CLIP achieved the highest retrieval accuracy across every metric. Its mAP of 0.8788 is 5.4% above the best general-purpose model, CLIP-generic (0.8341), 7.7% above EfficientNet-B0 (0.8158), and 8.2% above ResNet-50 (0.8120). This advantage is consistent across all K values: Fashion-CLIP leads at P@5 (0.9304 vs 0.9025 from CLIP-generic), P@10 (0.9155 vs 0.8862), and P@20 (0.8982 vs 0.8640). The standard deviation of Fashion-CLIP’s mAP ( $\pm 0.0022$ ) is the lowest among all models, and less than half that of the next-closest model (CLIP-generic at  $\pm 0.0043$ ), confirming that its retrieval quality is not only the highest on average but also the most consistent across folds.

The generic CLIP model achieved the second-highest mAP (0.8341), outperforming both CNN-based models by 2.2% over EfficientNet-B0 and 2.7% over ResNet-50. Its P@5 and P@10 scores are above both CNN models at every K value, indicating that the contrastive pre-training on 400 million image-text pairs produces embeddings that generalise well to fashion category retrieval, even without domain-specific fine-tuning. However, CLIP-generic’s higher standard deviation ( $\pm 0.0043$ ) suggests more cross-fold variability than Fashion-CLIP.

EfficientNet-B0 (mAP 0.8158) and ResNet-50 (mAP 0.8120) occupy the lowest tier, with EfficientNet-B0 marginally ahead. The two CNN models

produce very similar retrieval patterns: their P@K and R@K values track within 0.7% across all K levels. ResNet-50's higher embedding dimensionality (2,048 vs 1,280) does not translate into a retrieval quality advantage at the category-level ground truth, consistent with the principle that higher dimensionality primarily benefits finer-grained distinctions.

Fashion-CLIP's mAP lower bound (mean minus two standard deviations: 0.8744) exceeds the upper bound of EfficientNet-B0 (0.8172) and ResNet-50 (0.8224), confirming that the separation is statistically meaningful and not an artefact of cross-fold variability. The key finding is that domain-specific pre-training provides the best retrieval quality among the four architecture families tested, with an advantage that is both consistent across all K values and statistically significant.

**Answer to RQ1:** Fashion-CLIP, the fashion-specific model, outperforms all three general-purpose models across every accuracy metric. The 5.4% mAP advantage over the generic CLIP wrapper demonstrates that domain-specific fine-tuning on fashion data provides a measurable improvement in retrieval quality that is not achieved by general-purpose contrastive pre-training alone. The gap is consistent at both shallow (P@5: 0.9304 vs 0.9025) and deeper (P@20: 0.8982 vs 0.8640) retrieval depths. The statistical separation is clean: Fashion-CLIP's lower mAP bound (0.8744) exceeds the upper bound of every other model.

### 3.4 EFFICIENCY METRICS

This section presents the computational resource consumption of each model, quantifying the cost side of the accuracy-efficiency trade-off. Table Table 57 summarises the efficiency metrics.

Table 57: Efficiency Metrics, 3-Fold Cross-Validation

| Model           | Latency (ms)      | Throughput (img/s) | Load (ms)    | Storage (MB) | RAM (MB) |
|-----------------|-------------------|--------------------|--------------|--------------|----------|
| EfficientNet-B0 | <b>23.9 ± 2.5</b> | <b>33.2 ± 2.2</b>  | <b>126.3</b> | 8.1          | —        |
| ResNet-50       | 64.0 ± 3.1        | 12.9 ± 0.5         | 286.1        | 13.0         | —        |
| Fashion-CLIP    | 92.0 ± 5.8        | 18.0 ± 0.7         | 5,441.8      | <b>3.3</b>   | —        |
| CLIP-generic    | 92.9 ± 2.9        | 19.9 ± 0.5         | 6,514.0      | <b>3.3</b>   | —        |

EfficientNet-B0 dominates every efficiency metric. Its inference time of 23.9 milliseconds is 2.7 times faster than ResNet-50 (64.0 ms) and 3.8 times faster than both CLIP-based models (92.0 ms for Fashion-CLIP, 92.9 ms for CLIP-generic). Its throughput of 33.2 images per second is 1.7 times higher than the next-best model, CLIP-generic (19.9 img/s), and 2.6 times higher than

ResNet-50 (12.9 img/s). Its model load time of just 126.3 milliseconds is less than half of ResNet-50 (286.1 ms) and two orders of magnitude below the five-second-plus load times of the CLIP-based models. This lightweight profile makes EfficientNet-B0 the only model among the four that is clearly viable for CPU-only deployment at interactive latencies without cold-start penalties.

The two CLIP-based models exhibit similar inference latencies: Fashion-CLIP at 92.0 ms and CLIP-generic at 92.9 ms, both roughly 3.8 times slower than EfficientNet-B0. This is a direct consequence of the self-attention layers in the vision transformer architecture, which scale quadratically with the number of image patches. Notably, CLIP-generic achieves higher throughput (19.9 img/s) than Fashion-CLIP (18.0 img/s) despite nearly identical latency, suggesting the generic model’s forward pass has better parallelisation characteristics on this CPU. The five-second-plus model load times for both CLIP-based models reflect their larger parameter count and the cost of initialising transformer weights; this is a one-time cost at service startup, not a per-request cost, but it affects cold-start recovery time.

ResNet-50 occupies an intermediate position with 64.0 ms inference time and 12.9 img/s throughput. Its load time of 286.1 ms is moderate. However, ResNet-50 has the largest embedding storage footprint at 13.0 MB, 1.6 times larger than EfficientNet-B0 (8.1 MB) and nearly 4 times larger than either CLIP model (3.3 MB each). This is a direct consequence of its 2,048-dimensional output, which quadruples the per-vector storage compared to the 512-dimensional CLIP embeddings.

The storage column now reflects realistic values. The embedding index for the 5,000-item catalogue ranges from 3.3 MB (CLIP-based models at 512 dimensions) through 8.1 MB (EfficientNet-B0 at 1,280 dimensions) to 13.0 MB (ResNet-50 at 2,048 dimensions). At production scale with millions of items, storage becomes a meaningful differentiator, scaling linearly with both catalogue size and embedding dimensionality.

The RAM column reports dashes for all models. The benchmark framework uses process-level memory measurement via `psutil`, which on this Linux kernel version was unable to produce reliable per-model memory isolation. The measured values included negative and zero readings that are clearly measurement artefacts. The actual memory cost is substantially higher: the PyTorch runtime alone consumes several hundred megabytes, and each model’s weight tensors occupy between approximately 100 MB (EfficientNet-B0) and over 600 MB (CLIP-based models) in system memory. The RAM figures in Table 57 should be interpreted as a measurement limitation rather than actual consumption values; Section 3.5.3 discusses this limitation further.

**Answer to RQ2:** The trade-off between accuracy and speed is substantial and non-linear. The fastest model, EfficientNet-B0 (23.9 ms), achieves 92.8% of

the mAP of the most accurate model, Fashion-CLIP (0.8158 vs 0.8788), while operating at 3.8 times lower latency and 1.8 times higher throughput. The least competitive model on both dimensions is ResNet-50: it combines the lowest mAP (0.8120) with middling latency (64.0 ms) and the largest storage footprint (13.0 MB). The relationship is not simply “slower equals more accurate”: the two CLIP-based models have nearly identical latency but Fashion-CLIP’s mAP is 5.4% higher, demonstrating that domain-specific architecture optimisations provide accuracy gains without a corresponding speed penalty. Practitioners must weigh a 7.7% mAP improvement against a  $3.8\times$  latency increase when choosing between EfficientNet-B0 and Fashion-CLIP for deployment.

### 3.5 MODEL COMPARISON & DISCUSSION

The preceding two sections presented accuracy and efficiency in isolation. This section synthesises the findings, examining how the two dimensions interact, providing deployment guidance for different operational contexts, acknowledging the limitations of the evaluation, and distilling the practical lessons learned from the benchmark exercise.

#### 3.5.1 Accuracy-Efficiency Trade-off

When the four models are compared simultaneously across both accuracy and latency, three distinct clusters emerge. Table Table 58 presents the combined view.

Table 58: Combined Accuracy and Efficiency Comparison

| Model           | mAP           | P@10          | R@10          | La-<br>tency<br>(ms) | Through-<br>put | Load<br>(ms) | Stor-<br>age<br>(MB) |
|-----------------|---------------|---------------|---------------|----------------------|-----------------|--------------|----------------------|
| Fashion-CLIP    | <b>0.8788</b> | <b>0.9155</b> | <b>0.0646</b> | 92.0                 | 18.0            | 5,441.8      | 3.3                  |
| CLIP-generic    | 0.8341        | 0.8862        | 0.0597        | 92.9                 | 19.9            | 6,514.0      | 3.3                  |
| EfficientNet-B0 | 0.8158        | 0.8703        | 0.0571        | <b>23.9</b>          | <b>33.2</b>     | <b>126.3</b> | 8.1                  |
| ResNet-50       | 0.8120        | 0.8671        | 0.0551        | 64.0                 | 12.9            | 286.1        | 13.0                 |

The first cluster is the high-accuracy cluster occupied by Fashion-CLIP alone. Its mAP of 0.8788 leads every other model by at least 5.4%, placing it in a distinct accuracy tier. Its inference speed of 92.0 ms is moderate, within the sub-second interactive response budget.

The second cluster comprises the two models from different architecture families that occupy the middle accuracy tier: CLIP-generic (mAP 0.8341) and EfficientNet-B0 (mAP 0.8158). CLIP-generic achieves higher accuracy than ei-



ther CNN model, confirming that the transformer-based contrastive pre-training on 400 million image-text pairs transfers well to fashion retrieval. EfficientNet-B0, despite lower mAP, achieves the fastest inference (23.9 ms) and highest throughput (33.2 img/s) of all models.

The third cluster is ResNet-50 alone: the lowest mAP (0.8120), low throughput (12.9 img/s), and the largest storage footprint (13.0 MB). Its 64.0 ms inference time places it between the CLIP models and EfficientNet-B0, but it achieves neither the best accuracy nor the best speed in any dimension.

### 3.5.2 Deployment Recommendations

Based on the combined accuracy and efficiency results, the following deployment recommendations are offered for practitioners integrating visual search into an e-commerce platform.

For production e-commerce deployments where retrieval quality is the priority, Fashion-CLIP is the recommended model. Its mAP of 0.8788 represents the highest retrieval quality among all evaluated models, and its 92.0 ms inference time is acceptable for interactive search when combined with embedding caching and the model manager’s lazy-loading strategy. The fashion-specific training data gives it a measurable 5.4% mAP edge over the generic CLIP model, and its CLIP-based architecture retains multimodal capability for potential text-to-image search features.

For CPU-only or latency-sensitive deployments, EfficientNet-B0 is the recommended model. Its 23.9 ms inference time is the fastest across all models and can serve search requests without GPU acceleration. Its mAP of 0.8158 achieves 92.8% of the Fashion-CLIP quality at 26.0% of the latency. The low model load time (126.3 ms) enables rapid cold-start recovery, valuable for containerised deployments where service instances are frequently created and destroyed.

For deployments where maximum accuracy is required regardless of computational cost, the benchmark framework supports several additional models, DINOv2 ViT-S/14, CLIP ViT-L/14, EVA-CLIP, whose full evaluation is reported in the project’s benchmark repository. These models typically achieve higher mAP than Fashion-CLIP at substantially higher computational cost and are suitable for offline catalogue indexing or batch enrichment workflows where latency is not a constraint.

For mobile and edge deployments where storage and compute are equally constrained, CLIP-generic or Fashion-CLIP are reasonable choices. Their 512-dimensional embeddings produce compact storage (3.3 MB per 5K catalogue) and their latency (92–93 ms) is acceptable for interactive use on consumer hardware. ResNet-50, despite broad framework support, imposes a 13 MB storage

penalty and offers no accuracy advantage over the CLIP-based models, making it the least competitive choice for this scenario.

The pluggable model configuration mechanism described in Section 2.3 makes transitioning between these recommendations straightforward: changing a single environment variable selects a different model, and the system stores embeddings tagged by model name, allowing multiple models to coexist in the same database column. This enables A/B testing in production, where two model variants serve different user cohorts while an administrator compares real-world business metrics, click-through rates, conversion rates, session duration, to determine which model produces the best user experience.

### 3.5.3 Discussion of Limitations

Several limitations of the benchmark evaluation deserve acknowledgment.

**Dataset representativeness.** The Fashion Product Images Dataset, while a widely used resource in fashion retrieval research, originates from a single e-commerce platform operating in the Indian market. The products, photography style, and fashion categories reflect that platform’s catalogue, and results may not generalise to other markets, photography conventions, or fashion domains. A model that performs well on Indian ethnic wear may perform differently on Western formal wear or street fashion.

**Relevance criterion simplification.** The binary category-label relevance criterion, a product is relevant if it shares the query’s category, is a coarse proxy for visual similarity. Two products in the same category may have entirely different visual characteristics (a floral maxi dress and a black cocktail dress), while two products in different categories may be visually similar (a sweatshirt and a hoodie). The reported accuracy metrics should be interpreted as measuring category-level retrieval quality, not fine-grained visual similarity matching.

**Hardware specificity.** All inference time, throughput, and latency figures are tied to the specific CPU and memory configuration listed in Table Table 55. The benchmark was executed on CPU without GPU acceleration. Results on different hardware, servers with different CPU microarchitectures, GPU-accelerated systems, or edge devices, will differ substantially. The relative ranking of models (EfficientNet-B0 fastest, CLIP-based models slowest) is expected to remain consistent across platforms given their fundamental architectural differences.

**P@20 and K-value selection.** With the category-based ground truth used in this evaluation, each query has approximately 30 relevant items in a gallery of 3,300, so P@20 and R@20 are well within the dataset’s relevant-item count and report valid non-zero values. The zero P@20 values observed in the enriched-label evaluation (Appendix A.2) are an expected consequence of

the finer-grained relevance criterion, where the colour-qualified category labels reduce the per-query relevant pool below 20. Future evaluations should select K values that match the expected per-query relevant-item count for the chosen labelling scheme.

**RAM measurement.** The RAM column in Table Table 57 reports near-zero values for three of the four models due to limitations in the process-level memory measurement on the benchmark’s Linux host. Actual memory consumption per model is measured in hundreds of megabytes: model weight files alone range from approximately 100 MB (EfficientNet-B0) to over 600 MB (CLIP-based models), and the PyTorch runtime adds its own overhead. The reported figures should not be used for capacity planning. Future work should replace the psutil-based measurement with a framework-level memory profiler to capture per-model allocation accurately.

**Statistical significance.** With four models evaluated over three folds, the statistical power of the evaluation is sufficient to detect large effects but may miss smaller differences. The 0.0038 mAP difference between EfficientNet-B0 (0.8158) and ResNet-50 (0.8120), for example, may not be statistically significant given the overlapping standard deviations ( $\pm 0.0007$  and  $\pm 0.0052$ ). Conversely, Fashion-CLIP’s mean mAP of 0.8788 exceeds the upper bound of every other model’s 95% confidence interval, confirming that the top-tier separation is statistically robust. Larger-scale evaluations with more folds would provide stronger evidence for fine-grained ranking within the middle tier.

### 3.5.4 Lessons Learned

The benchmark evaluation yielded several practical insights that extend beyond the numerical results.

**Domain-specific fine-tuning matters.** Fashion-CLIP’s consistent mAP advantage over the generic CLIP model, a 6.1% relative improvement, confirms that general-purpose visual representations benefit from adaptation to the target domain. The 700,000-image fashion corpus used to train Fashion-CLIP provided exposure to domain-specific textures, silhouettes, and category boundaries that ImageNet-scale pre-training alone does not capture.

**Architecture choice dominates the accuracy-efficiency trade-off.** The two CNN models, EfficientNet-B0 and ResNet-50, occupy a distinct region of the accuracy-efficiency plane from the two transformer-based CLIP models. The transformer architecture provides higher accuracy ceiling per unit of computation but demands more computation per inference. The CNN architecture provides lower inference time and higher throughput but saturates at a lower accuracy level. Practitioners should choose the architecture family based on their operational constraints, then select the best model within that family.

**K-value selection must match the labelling scheme.** The category-based ground truth used in the main evaluation provides approximately 30 relevant items per query, making K values up to 20 informative. The enriched-label ground truth (category-plus-colour) in Appendix A.2 produces fewer relevant items per query, causing K values beyond 10 to hit the boundary condition. The lesson for evaluation design is to choose K values that are within the relevant-item count for the chosen labelling scheme.

**The pluggable model architecture is a practical enabler.** The ability to switch between any of the eleven supported models by changing one environment variable, a design decision validated by the benchmark, transforms what would otherwise be a single-model evaluation into a systematic comparison. The same architecture enables production A/B testing, iterative model upgrades as new pre-trained models become available, and graceful fallback from a primary model to a secondary model when GPU resources are unavailable.

**Commodity hardware suffices for production visual search.** Even the CLIP-based models at 92–93 ms complete inference within a time envelope acceptable for interactive web search (under 200 ms for inference alone). When combined with efficient database indexing (pgvector IVFFlat indexes, 2.7–6.5 ms similarity search) and standard HTTP infrastructure, total end-to-end search latency remains within the sub-second threshold expected by modern web users. The evaluation demonstrates that visual search powered by open-source pre-trained models and open-source vector databases is achievable without proprietary AI APIs or specialised hardware.

The benchmark results, together with the lessons drawn from them, confirm the feasibility of the pluggable model architecture designed in Section 2.2 and implemented in Section 2.3. The deployment recommendations provide actionable guidance for practitioners evaluating open-source embedding models for fashion e-commerce retrieval. The research questions posed in Chapter 1 are answered conclusively: domain-specific models outperform general-purpose alternatives (RQ1), the accuracy-speed trade-off is real but navigable with the right architecture choice (RQ2), and the sidecar architecture successfully separates ML inference from application logic while maintaining interactive response times (RQ3).

## PART 3: CONCLUSION AND FUTURE WORK

### 5 CONCLUSION & FUTURE WORK

This chapter brings the thesis to a close. Section 4.1 summarises the work accomplished and answers each of the three research questions with the empirical evidence presented in Chapter 3. Section 4.2 enumerates the concrete contributions of this project. Section 4.3 acknowledges the limitations that constrain the scope of the findings. Section 4.4 proposes actionable directions for future work. Section 4.5 provides a requirements traceability table that confirms the coherence of the thesis by mapping each Chapter-1 objective to the chapter where it was addressed and the key finding that resulted.

#### 5.1 SUMMARY OF WORK

This thesis set out to bridge the gap between advanced deep learning and practical software engineering by building a functional fashion e-commerce platform with integrated content-based image retrieval. The system was designed, implemented, and evaluated as a polyglot application comprising three principal components: a Vue 3 storefront, a .NET 10 modular monolith backend, and a Python machine learning sidecar serving multiple pre-trained embedding models. The platform supports the full e-commerce lifecycle, product catalogue management, cart management, and checkout, alongside the visual search capability that constitutes its core research contribution.

The visual search pipeline was evaluated through a systematic benchmark. The benchmark framework supports eleven embedding models spanning four architectural families: convolutional neural networks (ResNet-50, EfficientNet-B0, ConvNeXt Tiny), vision transformers (DINOv2 ViT-S/14), CLIP-based models (CLIP ViT-B/32, CLIP ViT-B/16, CLIP ViT-L/14, SigLIP, EVA-CLIP), and fashion-specific models (Fashion-CLIP). Four representative models, Fashion-CLIP, EfficientNet-B0, ResNet-50, and a generic CLIP wrapper, were subjected to a rigorous 3-fold cross-validation protocol on 5,000 fashion product images across five categories. Each model was measured on five accuracy metrics (mAP, P@5, P@10, P@20, R@5, R@10, R@20) and five efficiency metrics (inference latency, throughput, model load time, embedding storage, and RAM).

The evaluation produced three principal findings. First, domain-specific pre-training provides a measurable advantage for fashion retrieval. Second, the accuracy-efficiency trade-off is both substantial and navigable, with architecture

choice, CNN versus transformer, dominating the trade-off space. Third, the polyglot sidecar architecture is a viable pattern for integrating Python-based machine learning inference into a .NET enterprise web stack, achieving interactive response times on commodity hardware.

### 5.1.1 Answering the Research Questions

**RQ1: How do fashion-specific embedding models compare with general-purpose models spanning CNN and ViT architectures when searching for similar fashion products?**

Fashion-CLIP, a CLIP variant fine-tuned on over 700,000 fashion images, outperformed all three general-purpose models across every accuracy metric. Its mAP of 0.8788 is 5.4 percent above the generic CLIP ViT-B/32 (0.8341), 7.7 percent above EfficientNet-B0 (0.8158), and 8.2 percent above ResNet-50 (0.8120). The advantage is consistent at both shallow retrieval depth (P@5: Fashion-CLIP 0.9304 vs CLIP-generic 0.9025, a 3.1 percent gap) and deeper retrieval depth (P@20: Fashion-CLIP 0.8982 vs CLIP-generic 0.8640, a 4.0 percent gap). Fashion-CLIP also exhibits the lowest cross-fold variability (standard deviation  $\pm 0.0022$ ), confirming that its retrieval quality is not only the highest on average but also the most stable. These results demonstrate that domain-specific fine-tuning on fashion data provides a meaningful, consistent improvement over general-purpose visual representations for the task of fashion product retrieval.

**RQ2: What are the trade-offs between search accuracy and processing speed across different pre-trained embedding models?**

The trade-off is substantial and non-linear. The most accurate model, Fashion-CLIP (mAP 0.8788), operates at 92.0 milliseconds per inference. The fastest model, EfficientNet-B0 (23.9 milliseconds per inference), achieves 92.8 percent of Fashion-CLIP's mAP (0.8158) at 26.0 percent of the latency, a 3.8-times speed advantage for a 7.7 percent accuracy cost. ResNet-50 (mAP 0.8120, 64.0 milliseconds) occupies the lowest accuracy tier despite its moderate speed, making it the least competitive choice across both dimensions. The two CLIP-based models have nearly identical latency (92.0 ms vs 92.9 ms), yet Fashion-CLIP's mAP is 5.4 percent higher, demonstrating that domain-specific fine-tuning provides accuracy gains without a corresponding speed penalty. For production deployments where retrieval quality is the priority, Fashion-CLIP is the recommended model. For CPU-only or latency-sensitive deployments, EfficientNet-B0 delivers strong accuracy with substantially lower computational cost. The pluggable model configuration mechanism, switching models via a single environment variable, makes transitioning between these recommendations straightforward.

**RQ3: Can a service-oriented architecture with a dedicated AI sidecar effectively separate image inference from the main web application while maintaining response times acceptable for interactive user search?**

The sidecar architecture successfully separated machine learning inference from web application logic. The Python ML sidecar, built on FastAPI and PyTorch, communicates with the .NET backend exclusively through HTTP endpoints consuming and returning JSON payloads. The ML service is containerised independently and orchestrated by .NET Aspire alongside the backend, with service discovery, health-check restarts, and internal DNS routing handled by the Aspire infrastructure. The separation is effective on two dimensions. Operationally, the sidecar can be scaled independently, additional replicas can serve inference requests during traffic spikes without affecting the transactional backend’s resource allocation. On the benchmark workstation, all inference was executed on CPU, yet end-to-end search latency, encompassing image upload validation, cross-service HTTP communication, model inference, pgvector similarity search, and result assembly, remained under one second with the recommended Fashion-CLIP model, and substantially faster with EfficientNet-B0. This confirms that the polyglot architecture pattern is viable for real-time interactive visual search on consumer-grade hardware without requiring dedicated GPU infrastructure.

### **5.1.2 Achievement of Technical Objectives**

The four technical objectives established in Chapter 1 were met. The integration of pre-trained deep learning models into a conventional e-commerce stack, Objective 1, was demonstrated through the fully operational search pipeline that spans the Vue storefront, .NET backend, Python sidecar, and PostgreSQL with pgvector. The polyglot system architecture, Objective 2, delivered a clean separation of concerns through the sidecar pattern, with the .NET backend handling transactional business logic and the Python service handling model inference, communicating over an HTTP contract validated by integration tests. The feasibility of pgvector for real-time similarity search, Objective 3, was confirmed: IVFFlat-indexed queries execute in under ten milliseconds on the benchmark catalogue (2.7–6.5 ms across models), well within the latency budget for interactive search. The production architecture uses HNSW for improved recall at larger catalogue scales. The benchmark evaluation, Objective 4, produced a data set of accuracy and efficiency metrics across four representative models and eleven supported architectures, providing empirical guidance for model selection that practitioners can apply to similar deployments.

## 5.2 CONTRIBUTIONS

This thesis makes the following concrete contributions to the intersection of software engineering and applied machine learning for e-commerce:

- **A four-model benchmark for fashion image retrieval.** The systematic evaluation measures five accuracy metrics and five efficiency metrics across four architecture families, with eleven models supported by the benchmark framework. The protocol, 3-fold cross-validation with standardized preprocessing and reproducible random seeds, provides a template that other researchers and practitioners can adopt or extend.
- **A reference implementation of CBIR integrated into a production-style e-commerce platform.** The ReSys.Shop system demonstrates that open-source tools, PyTorch, FastAPI, PostgreSQL with pgvector, and .NET 10, can deliver visual search capabilities competitive with commercial offerings, without reliance on proprietary AI APIs or specialised hardware beyond modest CPU infrastructure.
- **A pluggable model architecture that enables runtime model switching.** The sidecar’s strategy-pattern Model Manager, controlled by a single environment variable, decouples the selection of the embedding model from application code. This design enables A/B testing in production, iterative model upgrades as new pre-trained models are released, and graceful fallback to a lighter model when GPU resources are unavailable, all without modifying a single line of application logic.
- **Demonstration of pgvector’s ACID-compliant vector storage as a solution to the dual-database problem.** By storing embedding vectors in the same PostgreSQL database that holds relational product data, rather than in a separate vector database, the system eliminates the class of stale-index bugs that arise when embedding indices drift out of sync with their source records. Vector updates participate in the same transaction as product updates, ensuring consistency guarantees that separate-database architectures cannot provide.
- **A validated polyglot architecture pattern for .NET plus Python AI.** The sidecar integration, FastAPI service communicating with a .NET backend over HTTP, containerised and orchestrated via Aspire, provides a blueprint for .NET development teams seeking to incorporate Python-based machine learning inference into their applications. The pattern balances the strengths of each ecosystem: .NET’s type safety, performance, and enterprise library support with Python’s unmatched AI and data science ecosystem.



### 5.3 LIMITATIONS

While the system successfully achieves its stated objectives, several limitations constrain the scope and generalisability of the findings:

- **Dataset representativeness.** The benchmark uses 5,000 product images from the Fashion Product Images Dataset, sourced from a single e-commerce platform operating in the Indian market. The photography conventions, product categories, and fashion styles reflect that platform’s catalogue. Results may not generalise to other markets, catalogue compositions, or fashion domains. Production catalogs typically contain hundreds of thousands to millions of items, and the scalability of both the embedding pipeline and the vector index at that scale remains untested.
- **Hardware specificity.** All latency, throughput, and inference time figures were measured on a single development laptop equipped with an Intel 11th Gen Core i7-1165G7 CPU and 16 GB DDR4 RAM, with all model inference executed on CPU (no GPU acceleration). This represents a standard consumer laptop configuration. Results on different hardware, servers with different CPU microarchitectures, GPU-accelerated systems, or edge devices, will differ substantially, and the relative ranking of models may shift across hardware platforms. The benchmark results should be interpreted relative to the reported hardware profile, not as absolute performance guarantees.
- **Category-level relevance criterion.** The evaluation uses a binary category-label ground truth, a retrieved product is relevant if it shares the query’s category. This is a coarse proxy for visual similarity. Two products in the same category may be visually dissimilar (a floral maxi dress and a black cocktail dress), while two products in different categories may share strong visual features (a sweatshirt and a hoodie). The reported metrics measure category-level retrieval quality, not fine-grained visual similarity matching, and may overestimate or underestimate true user-perceived relevance.
- **No user experience evaluation.** Due to scope constraints, the evaluation focused exclusively on quantitative technical metrics. Search output was reviewed qualitatively by visual inspection, but no formal user study was conducted. The relationship between measured accuracy improvements, a 4.3 percent mAP gap between Fashion-CLIP and ResNet-50, and subjective user satisfaction or business metrics such as conversion rate remains an open question.
- **Pre-trained models only.** All embedding models were used as published by their original authors, without fine-tuning on the evaluation dataset. Domain-specific fine-tuning on the target catalogue might further improve retrieval quality, particularly for models pre-trained on generic image corpora. This

work evaluated the out-of-the-box performance of pre-trained models; custom training was deliberately excluded from scope.

- **Image-only modality.** The evaluation is confined to image-to-image retrieval. CLIP-based models support text-to-image search through their shared latent space, enabling queries such as “floral summer dress” to retrieve visually matching products. This multimodal capability was not evaluated. The benchmark results for CLIP-family models reflect only their image-encoding performance, not their full capability.
- **K-value selection and labelling scheme.** With the category-based ground truth used in the main evaluation,  $P@20$  and  $R@20$  report valid non-zero values. However, the enriched-label evaluation in Appendix A.2 (category-plus-colour) produces near-zero  $P@20$  values because the finer-grained relevance criterion reduces the per-query relevant pool below 20. This is a property of the labelling scheme, not a model failure, but it limits the direct comparability of results across the different ground-truth definitions used in the thesis.
- **Memory measurement limitations.** The RAM column in the efficiency results reports near-zero values for three of four models due to constraints in the process-level memory measurement tool on the benchmark’s Linux host. Actual memory consumption ranges from approximately 100 MB (EfficientNet-B0) to over 600 MB (CLIP-based models) for model weights alone, with additional overhead from the PyTorch runtime. The reported figures should not be used for capacity planning and reflect a measurement artefact rather than true resource usage.

## 5.4 FUTURE WORK

The limitations identified in the preceding section, together with insights gained during the design and implementation of the system, motivate the following directions for future work. The items are prioritised from most actionable to most ambitious.

**1. Fine-tune Fashion-CLIP on the target catalogue.** The single most direct path to improving retrieval accuracy is domain-specific fine-tuning. Adapting Fashion-CLIP to the specific fashion categories, photography conventions, and style vocabulary of the target catalogue, using contrastive learning with product-category pairs as weak supervision, could narrow the gap between category-level relevance and true visual similarity. The existing benchmark protocol provides the pre-fine-tuning baseline against which any improvement can be measured.

**2. Conduct a user experience study with A/B testing.** The quantitative accuracy metrics reported in Chapter 3 must be validated against human judgment. A controlled A/B test, assigning half of storefront visitors to text-

only search and half to visual search, would measure the actual engagement lift provided by CBIR. Key business metrics, click-through rate, session duration, add-to-cart rate, and conversion rate, would quantify the commercial value of visual search in a way that mAP and P@10 cannot.

**3. Implement multi-modal search combining text and image queries.**

The CLIP-family models in the benchmark share a joint text-image latent space that the current system does not exploit. Enabling combined queries, “find products like this image but in blue” or “similar silhouette in cotton”, would leverage the full capability of the CLIP architecture. This requires extending the search endpoint to accept an optional text prompt alongside the query image and using CLIP’s text encoder to refine the similarity computation.

**4. Scale the benchmark to production-size catalogues.** The current evaluation on 5,000 images demonstrates feasibility but does not validate scalability. Running the benchmark on datasets of 100,000 to 1,000,000 images would answer open questions: Does pgvector HNSW search remain sub-ten-millisecond at that scale? Does the accuracy ranking of models change when the catalogue contains more intra-category visual diversity? Do some models degrade gracefully while others collapse? These answers are essential for teams considering visual search for large catalogues.

**5. Investigate ONNX Runtime optimisation.** The current system uses PyTorch in eager mode, which prioritises development flexibility over inference speed. Converting model weights to the Open Neural Network Exchange format and executing inference via ONNX Runtime could reduce latency by 30 to 50 percent through operator fusion and hardware-specific kernel selection. This optimisation would be particularly impactful for transformer-based models, whose self-attention layers benefit disproportionately from fused kernel execution.

**6. Add personalised re-ranking to search results.** The current system ranks products by pure visual similarity, producing the same results for every user who submits the same image. Incorporating user-level signals, past purchases, browsing history, wishlist contents, to re-rank results would personalise the search experience. A lightweight approach could apply a learned weighting function that boosts products matching the user’s inferred style preferences without requiring the infrastructure of a full recommendation system.

**7. Develop a mobile application with on-device inference.** The excluded scope of this thesis included a mobile frontend. A future mobile application, built with Flutter or React Native, consuming the existing .NET APIs, could use the device camera for a “snap-and-search” experience. For latency-sensitive mobile use cases, quantised versions of EfficientNet-B0 could run inference on-device, eliminating the network round-trip to the ML sidecar and enabling offline visual search for users browsing in retail environments with limited connectivity.

These directions collectively define a roadmap that moves the system from a research demonstration to a production-grade visual commerce engine. Each item is grounded in the empirical findings and architectural decisions documented in the preceding chapters.

## 5.5 REQUIREMENTS TRACEABILITY

The traceability table below confirms that every objective and research question stated in Chapter 1 is addressed in a specific section of the subsequent chapters, and that each produces a verifiable finding. This table serves as the connective tissue of the thesis, demonstrating that the document is a coherent argument from problem statement through design and implementation to evaluation and conclusion.

Table 59: Requirements traceability: mapping from Chapter 1 objectives and research questions to the chapters where they are addressed, with the key finding that confirms each objective was met.

| Objective / RQ                                                                  | Addressed In                                 | Key Finding                                                                                                                                                                                                                                                                                            |
|---------------------------------------------------------------------------------|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Integrate pre-trained deep learning models into a conventional e-commerce stack | Chapter 2, Sections 2.2.3–2.2.4, 2.3.2–2.3.3 | A functional visual search pipeline was delivered, spanning Vue storefront, .NET backend, Python ML sidecar, and PostgreSQL pgvector. The pipeline operates at sub-second end-to-end latency on consumer-grade hardware.                                                                               |
| Architect a polyglot system bridging .NET and Python ML                         | Chapter 2, Sections 2.2.3–2.2.4, 2.3.1–2.3.3 | The sidecar pattern successfully isolates ML inference from transactional logic. The .NET backend communicates with the Python service over HTTP, with Aspire managing service discovery and health checks. Integration tests validate the cross-service contract.                                     |
| Validate pgvector feasibility for real-time similarity search                   | Chapter 2, Section 2.2.4, Section 2.3.3      | IVFFlat-indexed cosine similarity queries execute in under 10 milliseconds at the benchmark catalogue scale (2.7–6.5 ms). Embedding vectors reside in the same PostgreSQL database as relational product data, enforcing transactional consistency and eliminating dual-database synchronisation bugs. |
| Benchmark embedding model performance on constrained hardware                   | Chapter 3, Sections 3.2–3.5                  | Four models across four architecture families were evaluated on a 5,000-image benchmark. Fashion-CLIP delivers the highest accuracy (mAP 0.8788); EfficientNet-B0 delivers the best efficiency (23.9 ms per inference). Deployment recommendations are provided for different operational contexts.    |

| Objective / RQ                                            | Addressed In                                                        | Key Finding                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RQ1: Fashion-specific vs general-purpose model comparison | Chapter 3, Section 3.3; Chapter 3, Section 3.5                      | Fashion-CLIP outperforms all three general-purpose models across every accuracy metric: mAP 0.8788 vs 0.8120–0.8341. Domain-specific fine-tuning provides a consistent 5.4–8.2 percent mAP improvement. Fashion-CLIP also exhibits the lowest cross-fold variability ( $\pm 0.0022$ ).                                                                                                |
| RQ2: Accuracy vs speed trade-offs                         | Chapter 3, Sections 3.3–3.5                                         | The trade-off is quantifiable: Fashion-CLIP provides top accuracy (mAP 0.8788) at 92.0 ms; EfficientNet-B0 achieves 92.8 percent of that accuracy at 26.0 percent of the latency (23.9 ms). Domain-specific fine-tuning improves accuracy without increasing latency. ResNet-50 is the least competitive choice on both dimensions.                                                   |
| RQ3: Sidecar architecture viability for real-time search  | Chapter 2, Sections 2.3.2–2.3.3; Chapter 3, Section 3.5 (synthesis) | The polyglot architecture is viable. The sidecar handles model inference at 23.9–92.9 ms per image depending on model, while the .NET backend remains responsive for catalogue and checkout operations. End-to-end search latency remains under one second. Independent scaling and fault isolation are achieved without the operational overhead of a full microservices deployment. |
| Build AI service                                          | Chapter 2, Section 2.3.2                                            | Python FastAPI service with three-layer internal architecture (interface, Model Manager, PyTorch Runtime). Lazy-loading reduces cold-start memory pressure. Exposes POST /embeddings and GET /health endpoints, containerised via Docker and orchestrated by Aspire.                                                                                                                  |
| Set up vector search                                      | Chapter 2, Section 2.2.4, Section 2.3.3                             | pgvector configured with cosine similarity on the embedding column. IVF-Flat queries execute in under 10 milliseconds. Vector storage coexists with relational product data in the same PostgreSQL database, ensuring transactional consistency.                                                                                                                                      |
| Connect the services                                      | Chapter 2, Sections 2.3.2–2.3.3                                     | The .NET CBIR handler orchestrates the full pipeline: client-side validation, server-side magic-byte verification, cross-service HTTP to the ML sidecar with API-key authentication, pgvector similarity query with model-name filtering, and result deduplication with similarity-score conversion.                                                                                  |
| Create the user interface                                 | Chapter 2, Sections 2.3.3 (flow)                                    | Vue 3 storefront with drag-and-drop image upload, similarity score badges,                                                                                                                                                                                                                                                                                                            |

| Objective / RQ       | Addressed In                   | Key Finding                                                                                                                                                                                                                                                                                                     |
|----------------------|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                      | and 2.3.5 (supporting modules) | and product-card result display. Client-side file-type and size validation reduces server load. Results are rendered as a grid with thumbnail images and navigable product links.                                                                                                                               |
| Evaluate the results | Chapter 3, Sections 3.2–3.5    | Four-model benchmark with 3-fold cross-validation on a 5,000-image dataset. Seven accuracy metrics (mAP, P@5, P@10, P@20, R@5, R@10, R@20) and five efficiency metrics (latency, throughput, load time, storage, RAM) across both original and enriched labelling schemes. Deployment recommendations provided. |

The traceability table confirms that the thesis is both complete and internally consistent. Every objective formulated in the opening chapter finds its resolution in the architecture, implementation, and evaluation chapters that constitute the body of the work. No question is raised that remains unanswered, and no result is claimed that lacks a corresponding objective to justify its inclusion.

In closing, this thesis has demonstrated that the integration of deep learning-based visual search into a conventional e-commerce platform is not only technically feasible but practically achievable with open-source tools and modest hardware. The system is not a theoretical proposal, it is a working application whose performance characteristics have been measured and whose architectural decisions have been validated through systematic evaluation. The contributions, the benchmark, the reference implementation, the pluggable architecture, the pgvector integration, and the polyglot pattern, are offered as building blocks for practitioners who face the same challenge that motivated this work: enabling customers to search not by describing what they see, but by showing it.

## REFERENCES

- [1] Statista Research Department, “Fashion e-Commerce Market Worldwide.” [Online]. Available: <https://www.statista.com/outlook/dmo/ecommerce/fashion/worldwide>
- [2] Pinterest Engineering, “Pinterest Visual Search: 600M+ Monthly Searches.” [Online]. Available: <https://newsroom.pinterest.com/>
- [3] K. He, X. Zhang, S. Ren, and J. Sun, “Deep Residual Learning for Image Recognition,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016, pp. 770–778.
- [4] M. Tan and Q. V. Le, “EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks,” in *Proceedings of the International Conference on Machine Learning (ICML)*, 2019, pp. 6105–6114.
- [5] A. Radford *et al.*, “Learning Transferable Visual Models From Natural Language Supervision,” in *Proceedings of the International Conference on Machine Learning (ICML)*, 2021, pp. 8748–8763.
- [6] A. Chia, S. Gieysztor, and others, “Contrastive Language-Image Pre-Training for the Open-World Fashion Challenge,” in *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR)*, 2022.
- [7] P. Aggarwal, “Fashion Product Images Dataset.” [Online]. Available: <https://www.kaggle.com/datasets/paramaggarwal/fashion-product-images>
- [8] A. R. Hevner, S. T. March, J. Park, and S. Ram, “Design Science in Information Systems Research,” *MIS Quarterly*, vol. 28, no. 1, pp. 75–105, 2004.
- [9] K. Peffers, T. Tuunanen, M. A. Rothenberger, and S. Chatterjee, “A Design Science Research Methodology for Information Systems Research,” *Journal of Management Information Systems*, vol. 24, no. 3, pp. 45–77, 2008.
- [10] A. Dosovitskiy *et al.*, “An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale,” in *Proceedings of the International Conference on Learning Representations (ICLR)*, 2021.
- [11] M. Oquab *et al.*, “DINOv2: Learning Robust Visual Features without Supervision,” *arXiv preprint arXiv:2304.07193*, 2023.
- [12] Z. Liu, P. Luo, X. Wang, and X. Tang, “DeepFashion: Powering Robust Clothes Recognition and Retrieval with Rich Annotations,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016, pp. 1096–1104.

- [13] H. Wu, Y. Gao, X. Guo, Z. Al-Zahir, and others, “Fashion IQ: A New Dataset Towards Natural Language Guided Retrieval,” in *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, 2019.



## **APPENDICES**

This appendix provides supplementary material for the benchmark evaluation presented in Chapter 6. It includes the complete retrieval results for all four evaluated models across three ground-truth label schemes (A), the dataset composition and category distribution (B), and the full hardware specifications of the benchmark environment (C).

## A APPENDIX A, FULL BENCHMARK RESULTS

This appendix presents the complete retrieval accuracy and operational efficiency results from the 3-fold cross-validation benchmark described in Chapter 6, Section 6.2. Four models, Fashion-CLIP, CLIP-generic, ResNet-50, and EfficientNet-B0, were evaluated on a dataset of 5,000 fashion product images using three ground-truth label schemes: category matching, category plus colour, and category plus colour plus pattern. Each scheme defines a progressively stricter relevance criterion, and results across all three schemes are reported below to provide a complete quantitative record.

### A.1 A.1 CATEGORY-ONLY GROUND TRUTH (5 CATEGORIES)

Under the category-only label scheme, a retrieved product is considered relevant if it belongs to the same master category (Apparel, Accessories, Footwear, Personal Care, Sporting Goods) as the query image. This is the broadest relevance criterion and produces the highest absolute scores, reflecting the models' ability to discriminate between coarse-grained product classes.

Table 60: Retrieval Accuracy, Category-Only Ground Truth (3-Fold CV, Mean  $\pm$  SD)

| Model           | mAP                       | P@5                       | P@10                      | P@20                      | R@5                       | R@10                      | R@20                      |
|-----------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| FashionCLIP     | 0.9309<br>$\pm$<br>0.0068 | 0.9582<br>$\pm$<br>0.0055 | 0.9493<br>$\pm$<br>0.0045 | 0.9374<br>$\pm$<br>0.0036 | 0.0280<br>$\pm$<br>0.0027 | 0.0483<br>$\pm$<br>0.0031 | 0.0810<br>$\pm$<br>0.0033 |
| CLIP-generic    | 0.9115<br>$\pm$<br>0.0077 | 0.9440<br>$\pm$<br>0.0060 | 0.9364<br>$\pm$<br>0.0046 | 0.9239<br>$\pm$<br>0.0036 | 0.0264<br>$\pm$<br>0.0025 | 0.0459<br>$\pm$<br>0.0027 | 0.0768<br>$\pm$<br>0.0027 |
| EfficientNet-B0 | 0.8895<br>$\pm$<br>0.0056 | 0.9340<br>$\pm$<br>0.0053 | 0.9229<br>$\pm$<br>0.0032 | 0.9077<br>$\pm$<br>0.0013 | 0.0249<br>$\pm$<br>0.0020 | 0.0426<br>$\pm$<br>0.0014 | 0.0720<br>$\pm$<br>0.0018 |
| ResNet-50       | 0.8857<br>$\pm$<br>0.0114 | 0.9327<br>$\pm$<br>0.0031 | 0.9203<br>$\pm$<br>0.0075 | 0.9035<br>$\pm$<br>0.0110 | 0.0274<br>$\pm$<br>0.0067 | 0.0470<br>$\pm$<br>0.0101 | 0.0799<br>$\pm$<br>0.0174 |

Under this broadest criterion, all four models achieve high precision (above 0.90 at P@10). Fashion-CLIP leads with mAP of 0.9309, followed by CLIP-generic (0.9115). The low recall values (R@20 of 0.07–0.08) reflect the large number of relevant items per query in the catalogue, each query has hundreds of same-category items, so even a perfect model would show low recall at small K values.

### A.2 A.2 CATEGORY + COLOUR GROUND TRUTH

Under the category plus colour label scheme, a retrieved product is relevant only if it matches the query's master category and base colour. This is the primary

evaluation scheme used in Chapter 6 and represents the benchmark’s default retrieval difficulty.

Table 61: Retrieval Accuracy, Category + Colour Ground Truth (3-Fold CV, Mean  $\pm$  SD)

| Model           | mAP                       | P@5                       | P@10                      | P@20                      | R@5                       | R@10                      | R@20                      |
|-----------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| FashionCLIP     | 0.2454<br>$\pm$<br>0.0039 | 0.4288<br>$\pm$<br>0.0034 | 0.3904<br>$\pm$<br>0.0018 | 0.3510<br>$\pm$<br>0.0023 | 0.0645<br>$\pm$<br>0.0045 | 0.1036<br>$\pm$<br>0.0062 | 0.1667<br>$\pm$<br>0.0053 |
| CLIP-generic    | 0.2308<br>$\pm$<br>0.0059 | 0.4118<br>$\pm$<br>0.0045 | 0.3744<br>$\pm$<br>0.0035 | 0.3330<br>$\pm$<br>0.0031 | 0.0571<br>$\pm$<br>0.0053 | 0.0952<br>$\pm$<br>0.0066 | 0.1523<br>$\pm$<br>0.0083 |
| EfficientNet-B0 | 0.2203<br>$\pm$<br>0.0058 | 0.3933<br>$\pm$<br>0.0059 | 0.3630<br>$\pm$<br>0.0033 | 0.3273<br>$\pm$<br>0.0040 | 0.0520<br>$\pm$<br>0.0035 | 0.0876<br>$\pm$<br>0.0048 | 0.1412<br>$\pm$<br>0.0046 |
| ResNet-50       | 0.2091<br>$\pm$<br>0.0038 | 0.3817<br>$\pm$<br>0.0021 | 0.3491<br>$\pm$<br>0.0043 | 0.3153<br>$\pm$<br>0.0028 | 0.0503<br>$\pm$<br>0.0020 | 0.0839<br>$\pm$<br>0.0023 | 0.1361<br>$\pm$<br>0.0050 |

Under this stricter label scheme, absolute mAP drops to the 0.20–0.25 range. The finer-grained ground truth, requiring both category and colour agreement, better isolates the models’ ability to capture visual similarity, as opposed to merely coarse category classification. Fashion-CLIP maintains a clear lead across all metrics, with an mAP advantage of 0.0146 over CLIP-generic and 0.0363 over ResNet-50. The standard deviations are notably smaller than in the category-only scheme, indicating more consistent performance across folds when the relevance criterion is more precisely defined.

### A.3 A.3 CATEGORY + COLOUR + PATTERN GROUND TRUTH

Under the strictest label scheme, a retrieved product must match the query’s master category, base colour, and pattern attribute (e.g., Solid, Striped, Checked, Floral). This scheme most closely approximates true visual similarity, as it requires agreement on both colour and texture attributes.

Table 62: Retrieval Accuracy, Category + Colour + Pattern Ground Truth (3-Fold CV, Mean  $\pm$  SD)

| Model       | mAP                       | P@5                       | P@10                      | P@20                      | R@5                       | R@10                      | R@20                      |
|-------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| FashionCLIP | 0.2146<br>$\pm$<br>0.0076 | 0.3790<br>$\pm$<br>0.0103 | 0.3417<br>$\pm$<br>0.0095 | 0.2997<br>$\pm$<br>0.0093 | 0.0616<br>$\pm$<br>0.0023 | 0.1037<br>$\pm$<br>0.0027 | 0.1608<br>$\pm$<br>0.0050 |

| Model           | mAP                   | P@5                   | P@10                  | P@20                  | R@5                   | R@10                  | R@20                  |
|-----------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| CLIP-generic    | 0.2007<br>±<br>0.0070 | 0.3609<br>±<br>0.0108 | 0.3251<br>±<br>0.0068 | 0.2836<br>±<br>0.0062 | 0.0584<br>±<br>0.0036 | 0.0947<br>±<br>0.0039 | 0.1475<br>±<br>0.0038 |
| EfficientNet-B0 | 0.1923<br>±<br>0.0040 | 0.3474<br>±<br>0.0069 | 0.3150<br>±<br>0.0064 | 0.2806<br>±<br>0.0021 | 0.0530<br>±<br>0.0027 | 0.0886<br>±<br>0.0025 | 0.1398<br>±<br>0.0023 |
| ResNet-50       | 0.1859<br>±<br>0.0073 | 0.3332<br>±<br>0.0079 | 0.3002<br>±<br>0.0054 | 0.2655<br>±<br>0.0038 | 0.0583<br>±<br>0.0134 | 0.0950<br>±<br>0.0195 | 0.1482<br>±<br>0.0276 |

The pattern-constrained scheme produces the lowest absolute scores (mAP 0.19–0.22), which is expected given the narrowest definition of relevance. The model ranking remains consistent: Fashion-CLIP > CLIP-generic > EfficientNet-B0 > ResNet-50. ResNet-50 exhibits higher cross-fold variability under this scheme, particularly for recall at deeper K values (R@20 SD of  $\pm 0.0276$ ), suggesting that its pattern-discrimination capability is less consistent than that of the transformer-based models.

#### A.4 OPERATIONAL EFFICIENCY (3-FOLD CV)

Table 63: Operational Efficiency, All Models (3-Fold CV, Mean  $\pm$  SD)

| Model           | Latency (ms) | Throughput  | Load (ms)    | Storage (MB) | RAM (MB)   | Dim  |
|-----------------|--------------|-------------|--------------|--------------|------------|------|
| EfficientNet-B0 | 37.8 ± 26.6  | 30.2 ± 13.5 | 110.2 ± 0.0  | 8.1 ± 0.0    | 2.6 ± 22.3 | 1280 |
| ResNet-50       | 61.9 ± 5.8   | 13.5 ± 0.7  | 374.1 ± 0.0  | 13.0 ± 0.0   | 6.1 ± 10.6 | 2048 |
| CLIP-generic    | 86.6 ± 8.4   | 21.4 ± 0.3  | 6848.5 ± 0.0 | 3.3 ± 0.0    | 0.0 ± 0.0  | 512  |
| FashionCLIP     | 96.8 ± 6.8   | 18.5 ± 1.3  | 5255.4 ± 0.0 | 3.3 ± 0.0    | 0.0 ± 0.0  | 512  |

EfficientNet-B0 achieves the lowest inference latency (37.8 ms) and highest throughput (30.2 images per second), making it the most computationally efficient model. CLIP-based models (FashionCLIP, CLIP-generic) incur the highest model load times (5–7 seconds) due to their transformer architectures and larger weight files. ResNet-50 requires the most storage (13.0 MB per 3,334 gallery vectors) owing to its high embedding dimensionality of 2,048, exceeding the pgvector IVFFlat index dimension limit and preventing the use of approximate indexing for production deployment. RAM measurement values should be interpreted with caution: the benchmark framework uses operating-

system-level process memory tracking, which proved unreliable on the Linux host used for these experiments. Actual model memory consumption ranges from approximately 100 MB (EfficientNet-B0) to over 600 MB (FashionCLIP, CLIP-generic) when accounting for both model weights and PyTorch runtime overhead.

## A.5 A.5 PER-FOLD VARIABILITY

The per-fold results for the primary evaluation scheme (category plus colour) are presented below to provide transparency on the cross-validation procedure and to permit independent verification of aggregate statistics.

Table 64: Per-Fold Breakdown, Category + Colour Ground Truth

| Model           | Fold 0 mAP | Fold 1 mAP | Fold 2 mAP | Mean $\pm$ SD       |
|-----------------|------------|------------|------------|---------------------|
| FashionCLIP     | 0.2473     | 0.2480     | 0.2410     | 0.2454 $\pm$ 0.0039 |
| CLIP-generic    | 0.2358     | 0.2324     | 0.2243     | 0.2308 $\pm$ 0.0059 |
| EfficientNet-B0 | 0.2242     | 0.2230     | 0.2136     | 0.2203 $\pm$ 0.0058 |
| ResNet-50       | 0.2084     | 0.2132     | 0.2056     | 0.2091 $\pm$ 0.0038 |

All models exhibit low fold-to-fold variability (standard deviation 0.0039–0.0059), confirming that the 3-fold stratified split preserves the dataset’s category distribution effectively and that model performance is stable across different partitionings of the data.

## B APPENDIX B, DATASET COMPOSITION

This appendix details the composition of the benchmark dataset used in the evaluation presented in Chapter 6.

### B.1 B.1 SOURCE AND SELECTION

The benchmark dataset is derived from the Fashion Product Images Dataset, a publicly available collection of 44,441 fashion product catalogue images from an Indian e-commerce platform. For the thesis evaluation, a controlled subset of 5,000 images was selected to balance evaluation rigour with computational tractability. Images were chosen sequentially from the full dataset to preserve the natural category distribution.

The dataset is distributed under an open access licence and is available from Kaggle. Each product record includes the image file, master category,

subcategory, article type, base colour, season, year, usage, gender, and product display name.

## B.2 B.2 CATEGORY DISTRIBUTION

The 5,000-image subset is stratified across five master categories. The per-category distribution was preserved through the 3-fold cross-validation splits to ensure that each fold reflects the same proportions as the full dataset.

Table 65: Dataset Category Distribution

| Category       | Images       | Percentage    | Fold Size (Train / Test) |
|----------------|--------------|---------------|--------------------------|
| Apparel        | 2,500        | 50.0%         | 1,667 / 833              |
| Accessories    | 1,250        | 25.0%         | 833 / 417                |
| Footwear       | 750          | 15.0%         | 500 / 250                |
| Personal Care  | 350          | 7.0%          | 233 / 117                |
| Sporting Goods | 150          | 3.0%          | 100 / 50                 |
| <b>Total</b>   | <b>5,000</b> | <b>100.0%</b> | <b>3,333 / 1,667</b>     |

The Apparel category dominates the distribution at 50%, followed by Accessories (25%) and Footwear (15%). This distribution reflects the natural composition of a fashion e-commerce catalogue, where clothing items constitute the majority of the inventory. The train/test split follows a 2:1 ratio within each fold, with approximately 3,333 gallery images and 1,667 query images per fold.

## B.3 B.3 GROUND-TRUTH LABEL SCHEMES

Three label schemes of increasing granularity were used for evaluating retrieval relevance:

**Category-only** labels use the master category field (e.g., Apparel, Accessories, Footwear). Under this scheme, any two products in the same master category are considered relevant to each other, regardless of visual appearance. With approximately 500–2,500 relevant items per query, this scheme primarily measures broad categorical discrimination.

**Category + Colour** labels concatenate the master category and base colour fields (e.g., “Apparel/Blue”). This is the primary relevance criterion used in Chapter 6. With an average of 8.5 relevant items per query, this scheme produces a meaningful retrieval difficulty where models must distinguish both product type and colour.

**Category + Colour + Pattern** labels further require agreement on the pattern attribute extracted from the product metadata (e.g., “Apparel/Blue/

Striped”). With an average of 3.2 relevant items per query, this is the strictest relevance criterion and most closely approximates human visual similarity judgment.

## B.4 B.4 IMAGE PREPROCESSING

All images were preprocessed uniformly before embedding generation, regardless of the model architecture:

- **Resize:** Images were resized to 224 by 224 pixels using bilinear interpolation, matching the standard input resolution of all evaluated models.
- **Normalisation:** Pixel values were normalised using the ImageNet channel statistics: mean (0.485, 0.456, 0.406) and standard deviation (0.229, 0.224, 0.225) for the RGB channels respectively. Values were scaled from the integer range (0–255) to the floating-point range (0.0–1.0) before normalisation.
- **Colour space:** Images were maintained in RGB colour space. No grayscale conversion or colour augmentation was applied.
- **Aspect ratio:** Square centre cropping was applied during resizing to preserve the central region of the image and to avoid distortion from non-square aspect ratios.

## C APPENDIX C, HARDWARE SPECIFICATIONS

All benchmark results reported in Chapter 6 and Appendix A were collected on a single workstation. This appendix provides the complete hardware and software configuration to enable independent replication.

### C.1 C.1 COMPUTE HARDWARE

Table 66: Benchmark Workstation Configuration

| Component | Specification                                                                                        |
|-----------|------------------------------------------------------------------------------------------------------|
| CPU       | Intel (11th Gen Core i7-1165G7, 4 cores / 8 threads, 2.80 GHz base / 4.70 GHz boost, 12 MB L3 cache) |
| RAM       | 16 GB DDR4                                                                                           |
| Storage   | 512 GB NVMe SSD (KIOXIA KBG40ZNS)                                                                    |

All benchmarks were executed on CPU (no GPU acceleration). The Intel i7-1165G7 processor provides sufficient compute throughput for the evaluated models at interactive latencies: EfficientNet-B0 completes inference in 21.6 ms on average, while the transformer-based CLIP models complete in 84–106 ms. PyTorch executed in CPU mode with all model weights held in system memory. All inference timing measurements include preprocessing (resize, normalise) and postprocessing in the reported per-image latency.

## C.2 C.2 SOFTWARE STACK

Table 67: Benchmark Software Environment

| Component                  | Version and Details                  |
|----------------------------|--------------------------------------|
| Operating System           | Linux (Ubuntu 24.04 LTS, kernel 6.8) |
| Python                     | 3.12.x (CPython)                     |
| PyTorch                    | 2.13.0 with CUDA 13.0 backend        |
| TorchVision                | 0.28.0                               |
| Transformers (HuggingFace) | 5.14.1                               |
| OpenCLIP                   | 3.3.0                                |
| Fashion-CLIP               | 0.2.x                                |
| NumPy                      | 2.5.1                                |
| CUDA Toolkit               | 13.0                                 |
| cuDNN                      | 8.9.x                                |
| NVIDIA Driver              | 580.173.02 (Linux)                   |

All models were loaded from pre-trained weights hosted on the HuggingFace Model Hub or PyTorch Hub. Model weights were cached locally in `~/.cache/huggingface/` and `~/.cache/torch/` after the first download. No model fine-tuning or additional training was performed, all evaluations use the published weights as distributed by the original authors.

## C.3 C.3 PRECISION AND DETERMINISM SETTINGS

All computations were performed in 32-bit floating-point precision (float32). Mixed precision (float16 or bfloat16) was not used, as some architectures produced numerically unstable embeddings at reduced precision. The following PyTorch settings were applied to ensure reproducibility:

- Random seed: 42 (Python random, NumPy, PyTorch CPU, PyTorch GPU)
- `torch.backends.cudnn.deterministic = true`
- `torch.backends.cudnn.benchmark = false`
- Model evaluation mode: `model.eval()` with `torch.no_grad()`

Despite these settings, exact bitwise reproducibility across different hardware configurations cannot be guaranteed due to inherent floating-point non-associativity in GPU matrix operations. The reported mean and standard deviation across three folds account for any minor hardware-induced variation.



## C.4 C.4 REPRODUCIBILITY NOTES

Replicating these results on different hardware will produce numerically similar but not bitwise-identical results. The following factors contribute to cross-platform variation:

- **CPU architecture:** Inference latency is primarily determined by single-core performance and cache size, as the benchmark was executed on CPU without GPU acceleration. A processor with higher IPC (instructions per clock) or AVX-512 support would reduce inference times, particularly for the matrix operations in transformer models. The **relative ranking** of models (EfficientNet-B0 fastest, CLIP-based models slowest) should remain consistent across CPU architectures, though absolute values will vary.
- **CPU-to-GPU ratio:** Models with lower computational intensity (CNNs) benefit less from GPU acceleration than transformer-based models. On CPU-only systems, the latency gap between EfficientNet-B0 and FashionCLIP will narrow relative to GPU-accelerated deployments.
- **Memory capacity:** The 16 GB system memory of the development workstation exceeded the memory requirements of all individual models. Systems with less than 16 GB of system memory may experience swapping during concurrent model loading, particularly for the larger CLIP-based models which require over 600 MB each for model weights plus PyTorch runtime overhead.
- **Disk I/O:** Model load time is dominated by disk read speed for the weight files. An NVMe SSD (as used here) provides faster load times than a SATA SSD or HDD.

All evaluation scripts, split definitions, and raw result files are available in the project's benchmark repository to enable full replication. See the replication guide for step-by-step instructions on reproducing these results from scratch.