

# Translation Guidelines for Qiskit Textbook

IBM Quantum / © 2021 IBM Corporation



#### Translation Guidelines

- 1. If you want to add a new language and become a translation lead, you can open a GitHub issue to start a discussion with the Qiskit community team and recruit translation project members. Please refer to the criteria on the next page to receive official support from the administrators for new languages.
- 2. Open the LOCALIZATION\_CONTRIBUTORS file. Look for the language header that you'd like to contribute to and sign up under there. If you do not find the language, please add it by yourself.
- 3. Create a pull request (PR) to add your name to the list. Make sure to follow the template to open a Pull Request.
  - Each contributor has to create their own PR and sign the CLA (see #4 below).
  - If you have an open issue for a language request, add the issue link to the PR.
- 4. If you have not contributed to Qiskit before, you will be prompted to sign the Qiskit Contributors License Agreement (CLA) in your PR.
- 5. After you meet the criteria, the administrator will make a new branch for the new language so that you can start translation.
  - The documents in the `content` folder of `stable` branch are the latest original English documents. Please translate the latest documents and save them in the `i18n/locales/xx` folder of your language branch with the same directory structure.
  - Please also translate `messages.yml` and `toc.yml` under `\_data/xx`.
- 6. When 80% of the translation is completed on your language branch, you can send a merge Pull Request to the master branch.



## What is the criteria for adding a new language?

We want to make sure that translated languages have enough community support to ensure quality and consistency.


- 1. A minimum of **three contributors** is necessary for any new languages to be added and receive official support from the administrators of the localization project.
- 2. In addition to translators, we will need dedicated **proof-readers** to review the translations and approve accuracy of content in that language, to ensure the translations can be released in that language.
- 3. Among the group of contributors, **a translation lead** must be identified to serve as a liaison with the administrators of the localization project. The lead must contact Kifumi Numata (kifumi@jp.ibm.com) by email.

If you have further questions, please feel free to contact Kifumi Numata. Thank you.



#### Step 1: Open a GitHub issue


If you want to add a new language and become a translation lead, you can open a GitHub issue to start a discussion with the Qiskit community team and recruit translation project members. Please refer to the criteria to receive official support from the administrators for new languages.

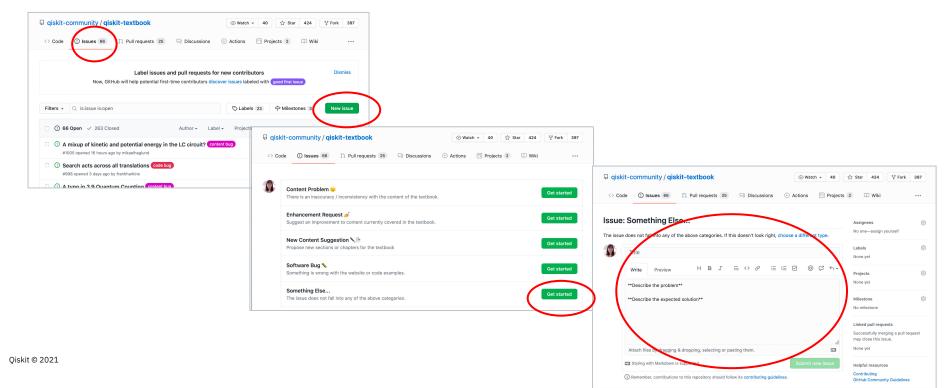



#### Step 2: Sign up

Open the LOCALIZATION\_CONTRIBUTORS file. Look for the language header that you'd like to contribute to and sign up under there. If you do not find the language, please add it by yourself.

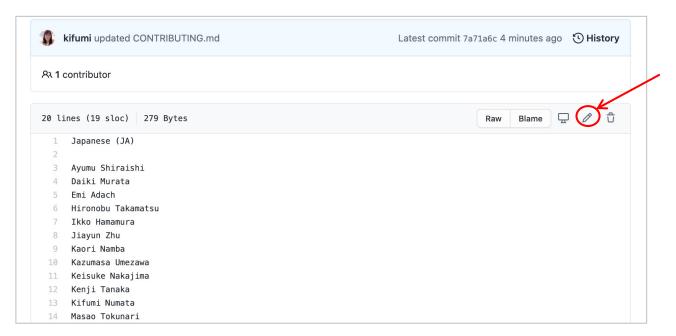




#### Step 3: Create a pull request (PR)

Create a pull request (PR) to add your name to the list. Make sure to follow the template to open a Pull Request.

- Each contributor has to create their own PR and sign the CLA (see Step 4).
- If you have an open issue for a language request, add the issue link to the PR.

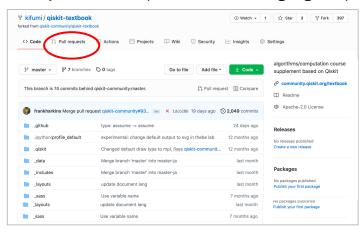

### Step 4: Sign the CLA

If you have not contributed to Qiskit before, you will be prompted to sign the Qiskit Contributors License Agreement (CLA) in your PR.




#### Step 5: Start translation

After you meet the criteria, the administrator will make a new branch for the new language so that you can start translation.

- The documents in the `content` folder of `stable` branch are the latest original English documents. Please translate the latest documents and save them in the `i18n/locales/xx` folder of your language branch with the same directory structure.
- Please also translate `messages.yml` and `toc.yml` under `\_data/xx`.

The directory structure of the document looks like below.





### Step 6: Send PR after 80% of the translation

When 80% of the translation is completed on your language branch, you can send a merge Pull Request to the master branch.

Qiskit © 2021 8