Iteration 65 | Joint rank-4 noise budget and new physical inputs

A Actual finite-word program error

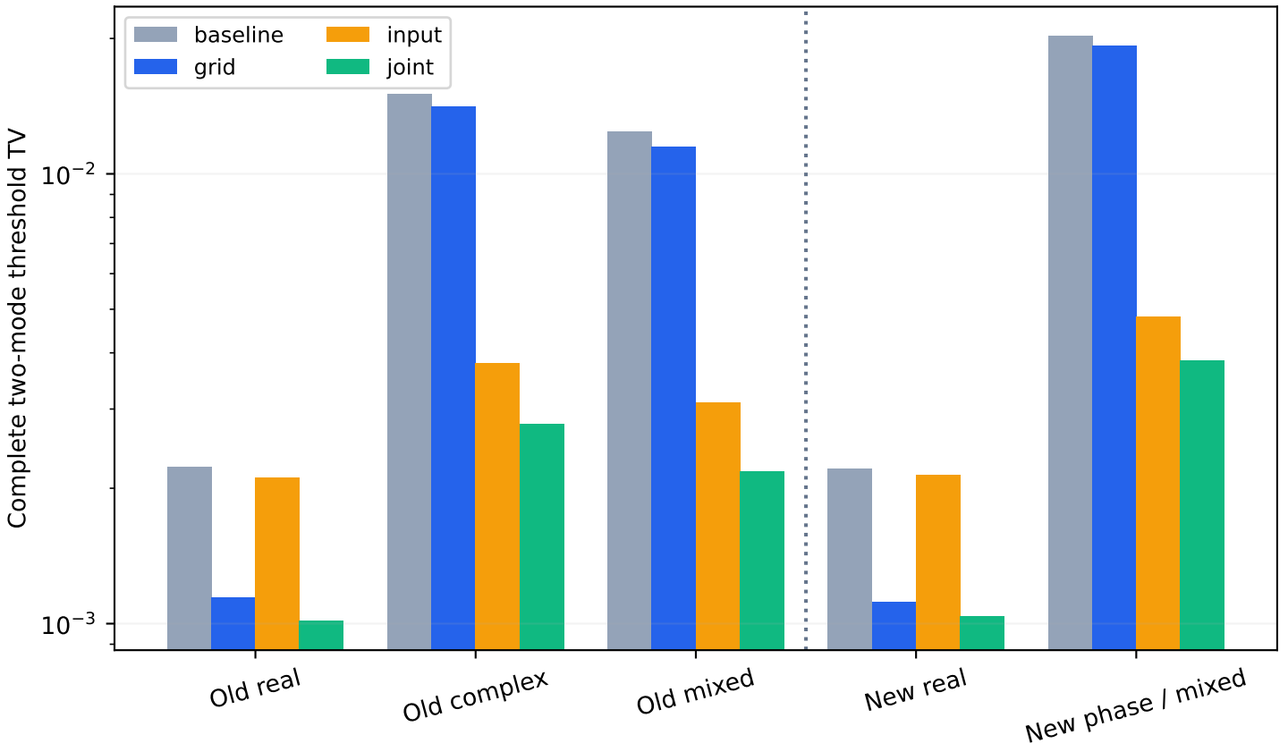

B Input + noise + selector + arithmetic budget

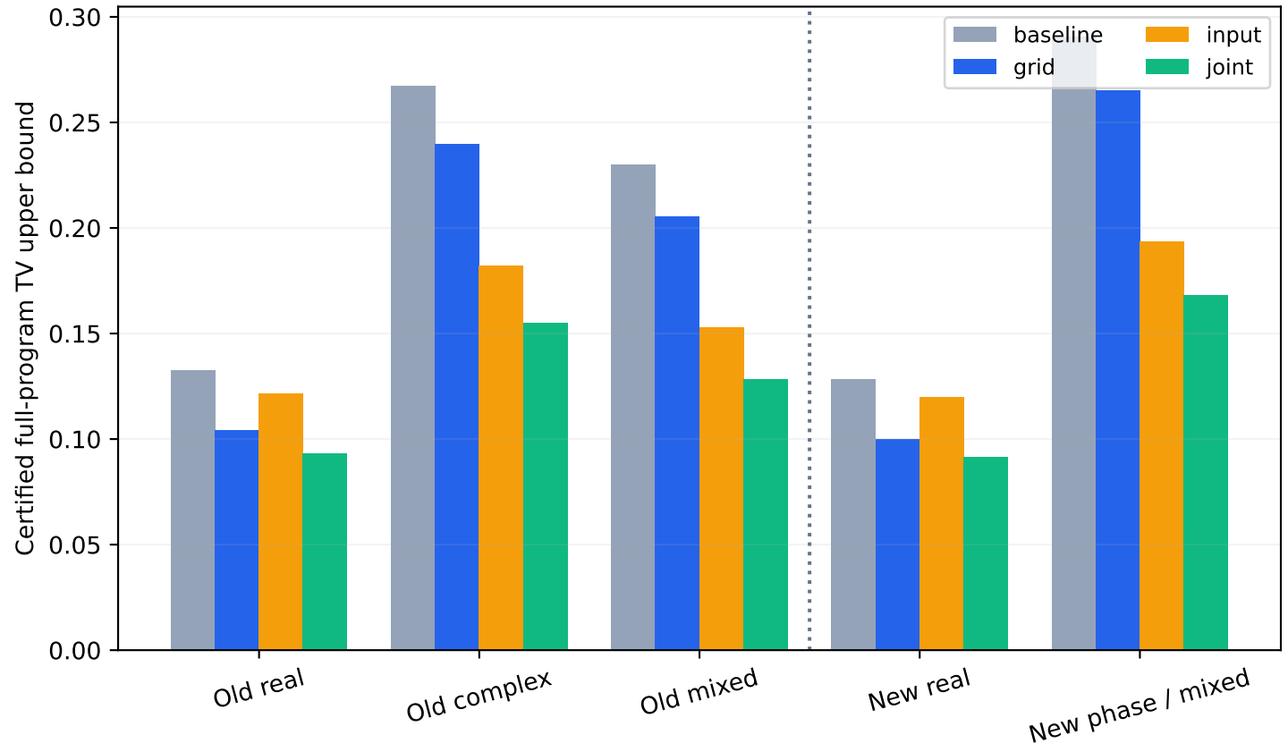

C Improvement factors; costs differ

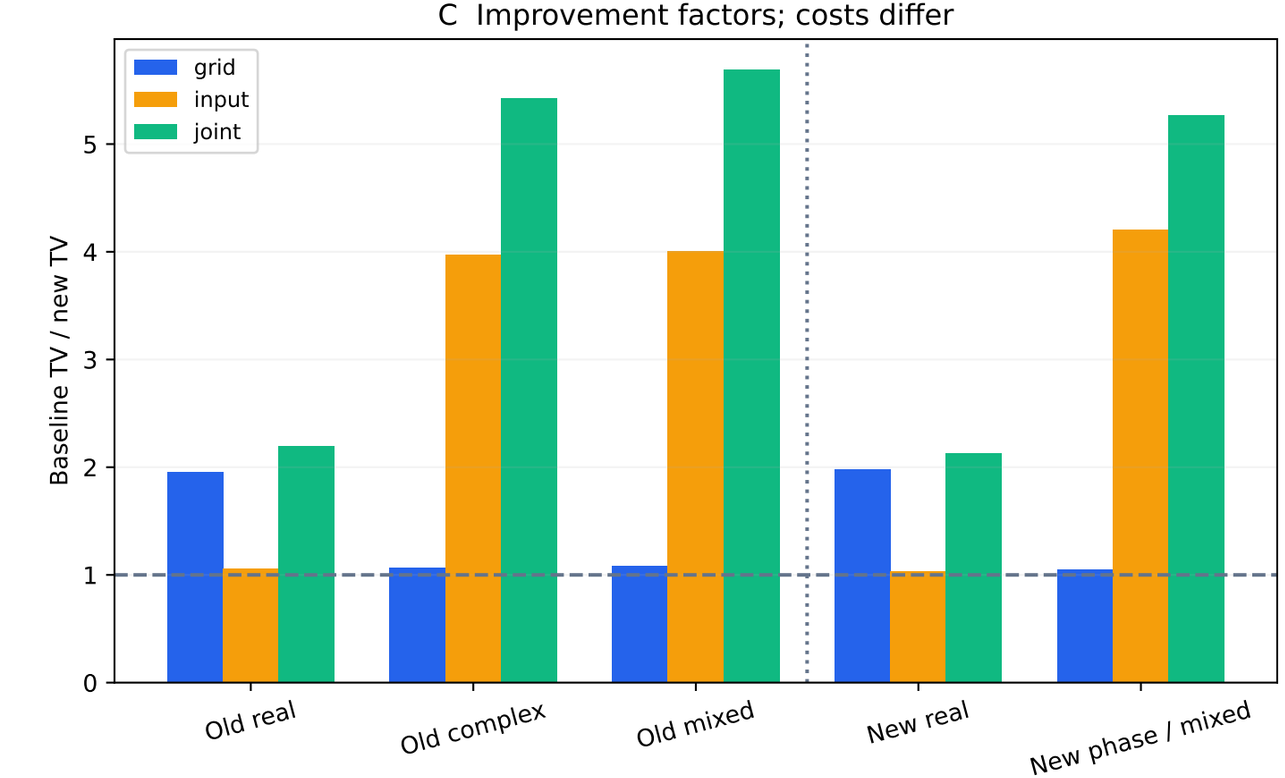

D Frozen grid-vs-input prediction, all outcomes

Input	Axis	Proxy choice	Actual choice	Joint best?
Old real	2	grid	grid	yes
Old complex	2	input	input	yes
Old mixed	2	input	input	yes
New real	3	grid	grid	yes
New phase / mixed	0	input	input	yes

Two physical modes with four independent real drives. Three old-input joint runs + eight new-holdout runs; nine prior cases reused by hashes.
Coarse/fine grids: 1,296/3,888 nodes. Local dimensions: 4/6. Proxy chooses from state+coupling bounds before full-program execution.