


— d6 — d7 — d8 — d9 — d10
 ● C=2 ■ C=3 ▲ C=4 ◆ C=5
 ▼ C=6 ◀ C=7 + C=8

— K=1 — K=2 — K=3 — K=4 — K=6
 ✖ d4 ● d6 ■ d8 ▲ d10
 ◆ d12 + d14 ▼ d16 ◀ d18
 -- compute slice


— B=2 — B=2.5 — B=3
 — B=3.5 — B=4
 ○ fixed K

● d8 ● d9 ● d10
 ● d11 ● d12


Where should layers be allocated?

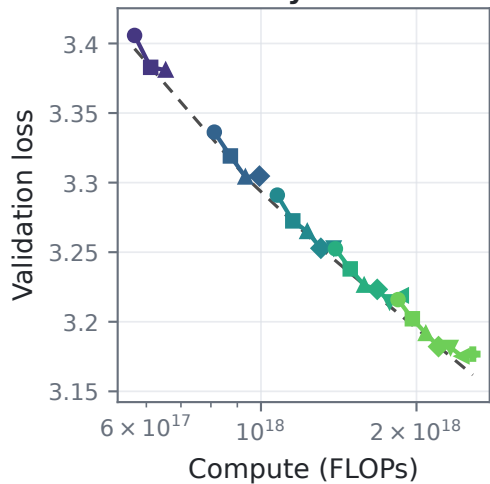


How much recurrence?

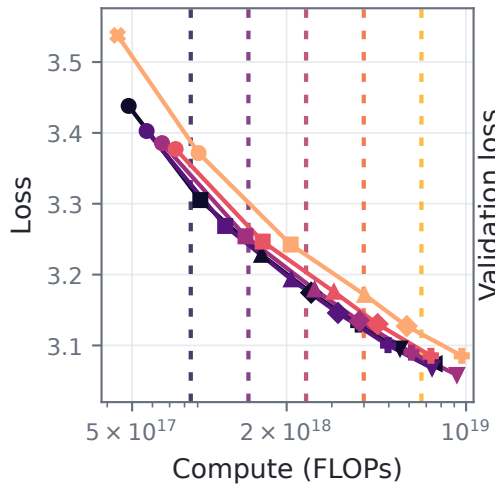


What should recurrence grow to?

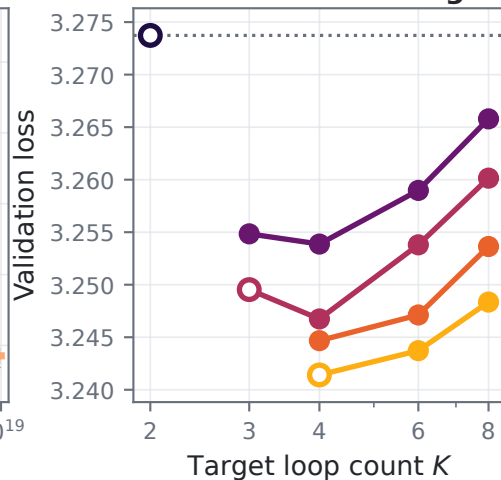


When should we grow?

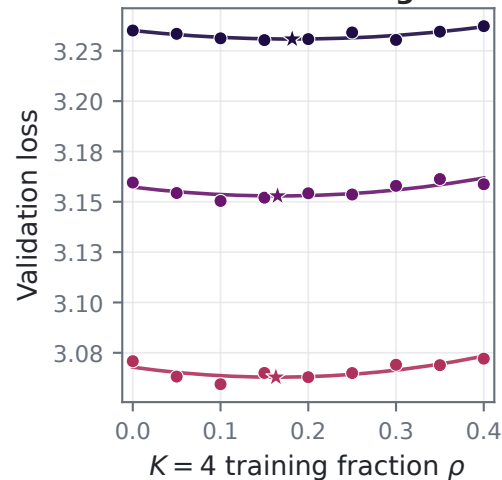


Frontier regret

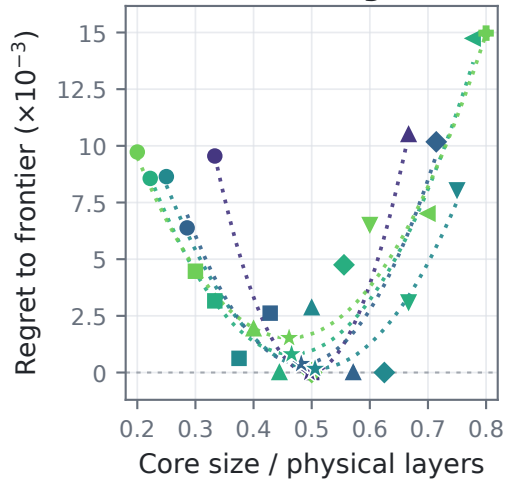

Fixed-compute optima

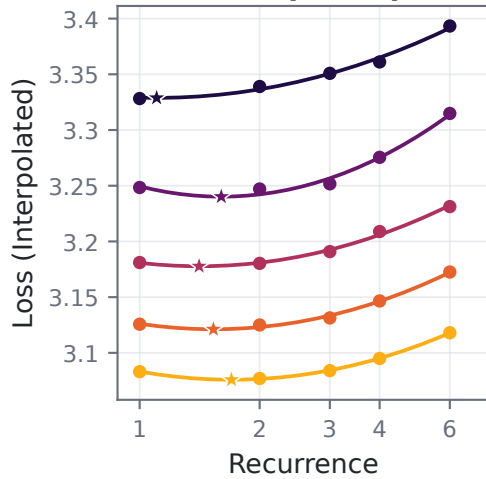

KL effective depth $L_{\text{eff}}^{\text{KL}}$

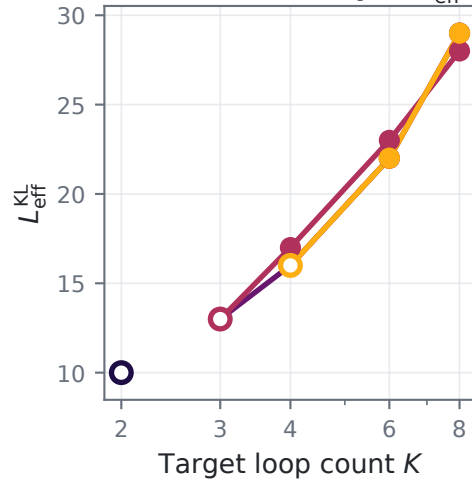

Loop-2 TPP refit

