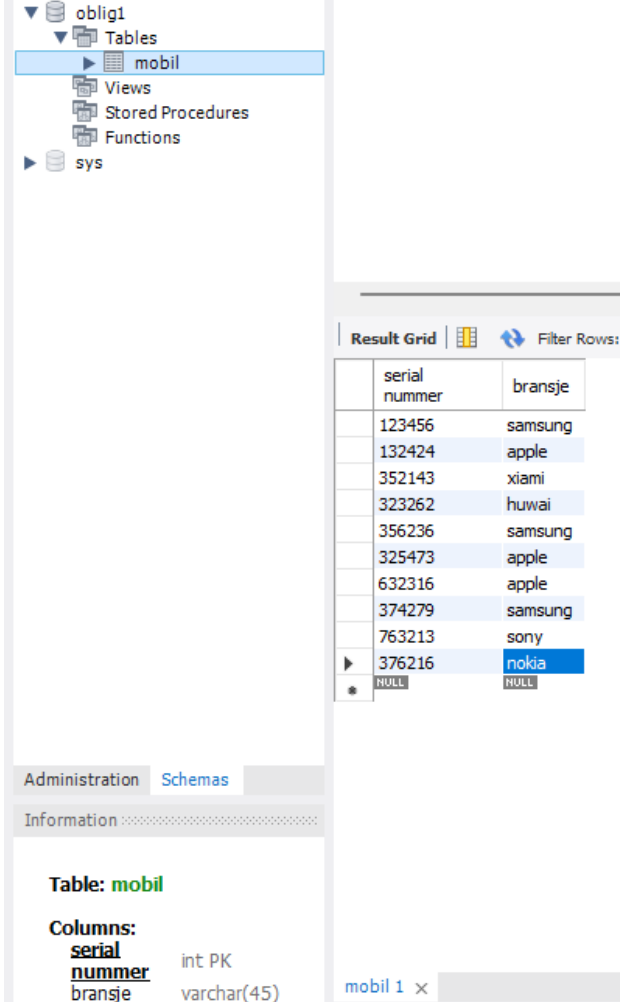


- Jeg bruker int på første kolonne i min tabell som også er satt til primærnøkkel, for primærnøkkel bruker jeg serial nummere (random tall), varchar er andre kolonnen som brukes for bransjer av telefoner.
- Jeg valgte å ta data for populære telefon bransjer på markedet, kan se flere veier jeg kan utvikle det videre.

- 

The screenshot shows a database management interface. On the left, a tree view displays the database structure: 'oblig1' contains 'Tables', 'Views', 'Stored Procedures', and 'Functions'. The 'mobil' table is selected under 'Tables'. Below the tree, the 'Information' tab is active, showing details for the 'mobil' table. The table has two columns: 'serial nummer' (int PK) and 'bransje' (varchar(45)).

On the right, the 'Result Grid' displays the data for the 'mobil' table. The grid shows 11 rows of data, including serial numbers and brand names. The 'nokia' row is highlighted in blue.

serial nummer	bransje
123456	samsung
132424	apple
352143	xiami
323262	huwai
356236	samsung
325473	apple
632316	apple
374279	samsung
763213	sony
376216	nokia
NULL	NULL

At the bottom of the interface, the 'Administration' and 'Schemas' tabs are visible. The 'Information' tab is currently selected, showing the table details for 'mobil'.