

# Analysis of CSV File Reading in R

Quang Nguyen\* and Robert Tedesco\*

\* Loyola University Chicago

STAT 407 Fall 2021

# Outline

- Background
- Experiment
- ANOVA
- Additional Analysis
- Discussion

# Background

- Statisticians struggle with reading in large dataset (Matthews, 2021)
- `read.csv()`, part of base R (R Core Team, 2021), is old and slow.
- There are better and more efficient data I/O algorithms in R (Gillespie & Lovelace, 2021)
  - `rio::import()` (Chan et al., 2021)
  - `readr::read_csv()` (Wickham & Hester, 2021) - part of `tidyverse` (Wickham et al., 2019)
  - `data.table::fread()` (Dowle & Srinivasan, 2021)


# Experiment

- $3^3$  factorial design (Montgomery, 2012)
  - File size: low ( $\sim 0.5\text{GB}$ ), medium ( $\sim 1.2\text{GB}$ ), high ( $\sim 2\text{GB}$ )
  - Computer: Lenovo, Dell, MacBook
  - Function: `rio::import()`, `readr::read_csv()`,  
`data.table::fread()`
- $n = 20$  replicates
- $y_{ijkl} = \mu + \alpha_i + \beta_j + \gamma_k + (\alpha\beta)_{ij} + (\alpha\gamma)_{ik} + (\beta\gamma)_{jk} + (\alpha\beta\gamma)_{ijk} + \epsilon_{ijkl}$ 
  - $i, j, k = 1, 2, 3$
  - $l = 1, 2, \dots, 20$




# Data Understanding


## ● Interaction plots

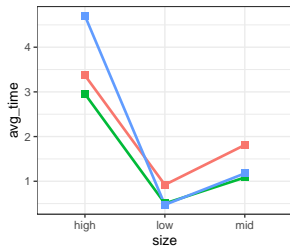

package — fread — import — readr

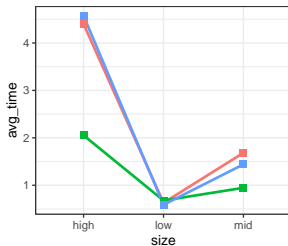

computer — dell — lenovo — mac

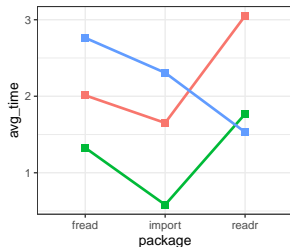

computer — dell — lenovo — mac

# ANOVA



- All model terms are significant. . .

Term	df	SS	MS	F	p-value
size	2	908.9852	454.4926	98.1034	0.0000
computer	2	118.6155	59.3078	12.8017	0.0000
package	2	38.4974	19.2487	4.1549	0.0162
size:computer	4	136.3553	34.0888	7.3582	0.0000
size:package	4	87.9878	21.9970	4.7481	0.0009
computer:package	4	114.5762	28.6441	6.1829	0.0001
size:computer:package	8	144.3655	18.0457	3.8952	0.0002
Residuals	513	2376.6214	4.6328	NA	NA

- However . . .

# ANOVA

- There are issues with both **normality** and **homoscedasticity**

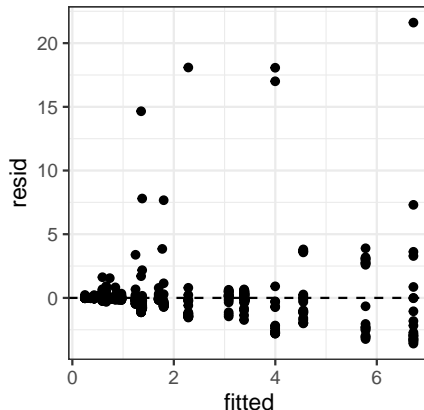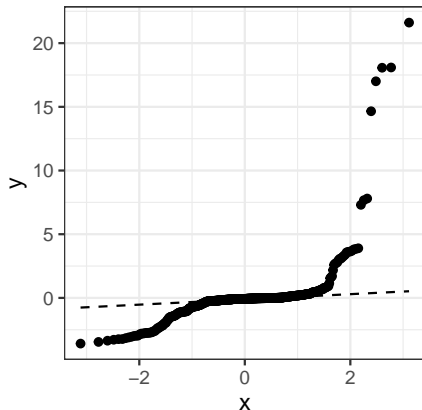

- Confirmed by Shapiro-Wilk and Levene tests (both with  $p$ -value  $\approx 0$ )



- Transforming the data (log, Box-Cox) did not fix issues with model assumptions
- This leads us to consider a nonparametric approach,
  - No distribution assumption about the data
  - Permutation test for a three way factorial designs
  - `asbio::perm.fact.test()` (Aho, 2021)

# ANOVA


- A permutation test gives significant results

Term	Initial F	df	p-value
size	98.1034	2	0.0001
computer	12.8017	2	0.0001
package	4.1549	2	0.0123
size:computer	7.3582	4	0.0001
size:package	4.7481	4	0.0007
computer:package	6.1829	4	0.0002
size:computer:package	3.8952	8	0.0003
Residual	NA	513	NA

- Post-hoc analysis: pairwise permutation tests
- Use False Discovery Rate (Benjamini & Hochberg, 1995) as  $p$ -value adjustment method
- Which pairs differ in mean reading time?
  - Speed: all pairs
  - Computer: Lenovo-Dell, Lenovo-Mac
  - Package/Function: `data.table::fread()` - `rio::import()`,  
`rio::import()` - `readr::read_csv()`


# ANOVA

- Univariate effects plot of the factors

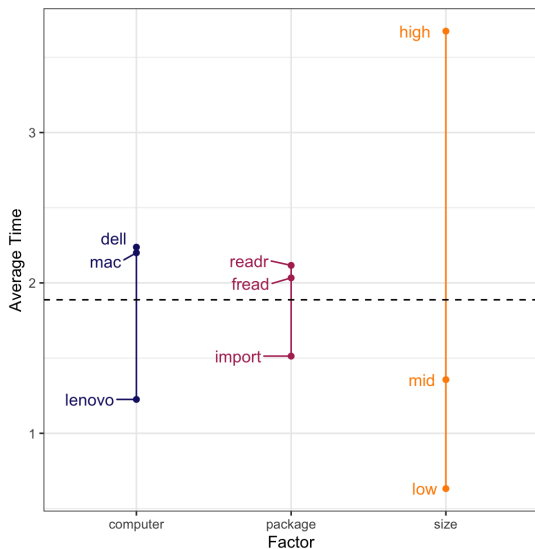

# Additional Analysis

- Investigate reading method (package/function) for MacBook only

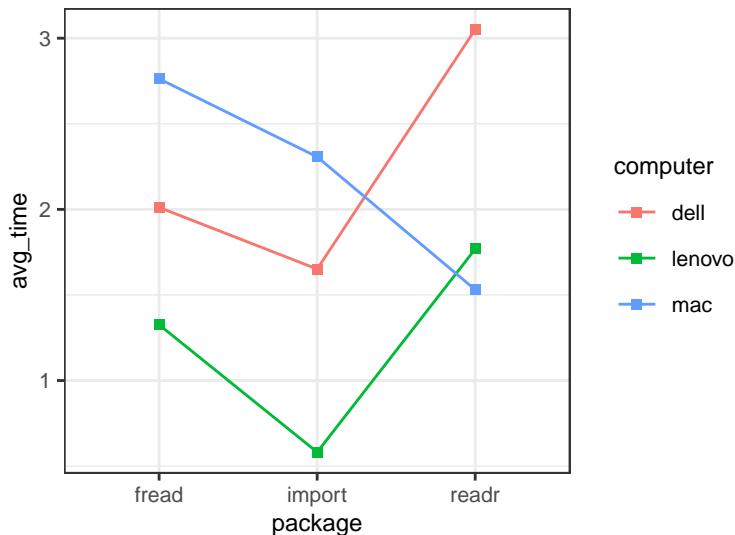


# Additional Analysis

- A simulation study
- Simulate more data, in addition to the existing 3 data files
- Consider 10 file sizes (in GB)
  - **0.49, 1.22**, 1.51, 1.73, **1.96**, 2.16, 2.36, 2.61, 2.94, 3.32
- Use MacBook to read in each file using the 3 functions, and record the time elapsed

# Additional Analysis

- Clearly there's a difference in algorithm reading time when using Mac

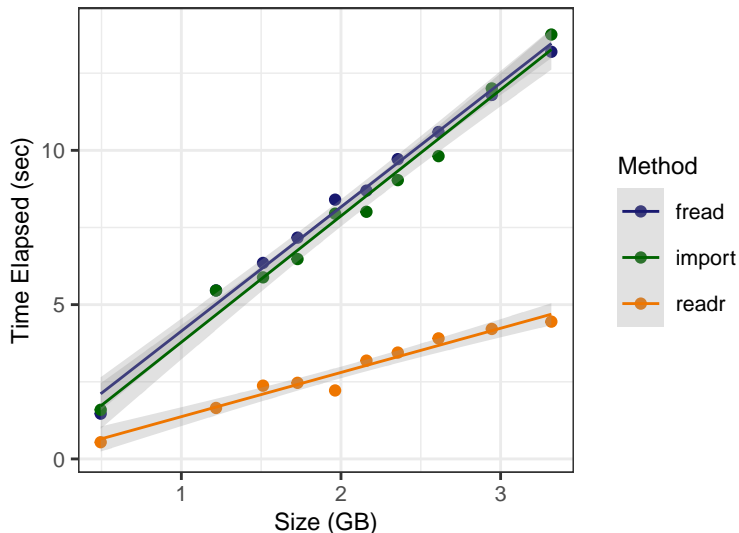

# Additional Analysis

- ANCOVA
  - Response: time elapsed (in seconds)
  - Treatment: function (3 levels)
  - Covariate: file size (in GB)

Term	SS	df	F	p-value
(Intercept)	10.5154	1	8.4657	0.0073
meth	187.3580	2	75.4188	0.0000
size	192.4662	1	154.9502	0.0000
Residuals	32.2950	26	NA	NA



## Additional Analysis

- Model assumptions are met.

statistic	p.value	method
0.9732	0.6286	Shapiro-Wilk normality test

statistic	p.value	df	df.residual	method
2.3633	0.1133	2	27	Levene test

# Additional Analysis

- Multiple comparisons - Tukey contrasts

contrast	estimate	se	statistic	adj p-value
import - fread	-0.2873	0.4984	-0.5764	0.8338
readr - fread	-5.4391	0.4984	-10.9127	0.0000
readr - import	-5.1518	0.4984	-10.3362	0.0000

- readr significantly differs from the other 2 methods when using Mac.

# Discussion

- Take advantage of more efficient algorithms!!!
- Extend to other file formats (.tsv, .json...) and other forms of data (images, audio, ...)
- Other variables to consider
  - On battery vs charging
  - Amount of RAM stored in the R environment
  - Different environments: RStudio Desktop, RStudio Cloud, Colab Notebook, Terminal/Command Line...
  - Reading files in locally vs from a DropBox/Google Drive link
  - R (`readr::read_csv()`) vs python (`pandas.read_csv()`)

# Cheers.

- Acknowledgments
  - Lance Davis
  - Mike Perry
  - Greg Matthews
- Greg's YouTube video: [youtu.be/E5KJkooW4RY](https://youtu.be/E5KJkooW4RY)
- GitHub: [github.com/qntkhvn/read\\_speed](https://github.com/qntkhvn/read_speed)
- Question?

# References I

- Aho, K. (2021). *Asbio: A collection of statistical tools for biologists*.  
<https://CRAN.R-project.org/package=asbio>
- Benjamini, Y., & Hochberg, Y. (1995). Controlling the false discovery rate: A practical and powerful approach to multiple testing. *Journal of the Royal Statistical Society. Series B (Methodological)*, 57(1), 289–300.  
<http://www.jstor.org/stable/2346101>
- Chan, C., Chan, G. C., Leeper, T. J., & Becker, J. (2021). *Rio: A swiss-army knife for data file i/o*.  
<https://CRAN.R-project.org/package=rio>
- Dowle, M., & Srinivasan, A. (2021). *Data.table: Extension of 'data.frame'*.  
<https://CRAN.R-project.org/package=data.table>
- Gillespie, C., & Lovelace, R. (2021). *Efficient r programming*.  
<https://csgillespie.github.io/efficientR>
- Matthews, G. (2021). *Old dog (statistician) learns new trick (read\_csv)*.  
<https://youtu.be/E5KJkooW4RY>.

# References II

- Montgomery, D. C. (2012). *Design and analysis of experiments, 8th edition*. John Wiley & Sons.
- R Core Team. (2021). *R: A language and environment for statistical computing*. R Foundation for Statistical Computing.  
<https://www.R-project.org/>
- Wickham, H., Averick, M., Bryan, J., Chang, W., McGowan, L. D., François, R., Grolemund, G., Hayes, A., Henry, L., Hester, J., Kuhn, M., Pedersen, T. L., Miller, E., Bache, S. M., Müller, K., Ooms, J., Robinson, D., Seidel, D. P., Spinu, V., ... Yutani, H. (2019). Welcome to the tidyverse. *Journal of Open Source Software*, 4(43), 1686.  
<https://doi.org/10.21105/joss.01686>
- Wickham, H., & Hester, J. (2021). *Readr: Read rectangular text data*.  
<https://CRAN.R-project.org/package=readr>