

# TRIK Studio: Technical Introduction

Dmitry Mordvinov  
Department of Software Engineering  
St.-Petersburg State University  
St.Petersburg, Russia  
Email: mordvinov.dmitry@gmail.com

Yurii Litvinov  
Department of Software Engineering  
St.-Petersburg State University  
St.Petersburg, Russia  
Email: y.litvinov@spbu.ru

Timofey Bryksin  
Department of Software Engineering  
St.-Petersburg State University  
St.Petersburg, Russia  
Email: t.bryksin@spbu.ru

**Аннотация**—This paper presents TRIK Studio — an environment for visual (and textual) programming of robotic kits, which is used in educational organizations across Russia and Europe. First part of the article provides overview of the system — its purpose, features, differences from similar programming environments, general difficulties of robot programming and solutions proposed by TRIK Studio. Second part presents implementation details of TRIK Studio and its most interesting components. This article combines five fields of study: robotics, domain-specific visual modeling, education, formal methods and methods of program analysis. Main contribution of this article is detailed technical description of TRIK Studio as a complex and successful open-source cross-platform robot programming environment written in C++/Qt, and first part of the article can also be interesting for teachers as it provides an overview of existing robot programming tools and related problems.

## I. Introduction

Current state of school education in computer science turned out to be quite like Seymour Papert predicted it to be. In 1967 he introduced a virtual Logo turtle, that is used to teach students programming at schools even nowadays. It is less known that Papert in his experiments also used a mechanical robot turtle, that was controlled from a computer [1], and it made educational process much more entertaining. Today Papert's ideas are widely spread, a lot of schools are using robots to teach programming (for instance, in Russia robotics is a part of compulsory education program within the Technology course [2], [3]). Several robotics educational kits are used, including Lego Mindstorms NXT, Lego Mindstorms EV3<sup>1</sup>, TRIK<sup>2</sup> etc.

The task of programming a robot is more complex than programming a virtual turtle: the program will be composed of manipulating motors power and sensor values instead of simple movements and turns. Therefore a lot of attention is paid to robot programming environments. Many of them are based on visual, diagram languages since they are more intuitive and easy to learn than textual ones. Programming in such visual environments is performed via drag-and-dropping blocks using mouse, and it makes programming available to small kids, that cannot even read yet.

Popularity of visual languages in educational robotics is proven by a number of diagram-based programming environments in this field. The most known are Robolab [4], NXT-G [5] and EV3-G [6], Scratch [7] and Scratch-based

environments (S4A [8], mBlock [9], Enchanting [10], ScratchDuino [11], Blockly [12] and App Inventor [13], 12Blocks [14], Open Roberta [15], Ardublock [16]), less known are Robo PRO [17] for programming robots created with fischertechnik robotics kits or Program Maker for Scribbler robots and several tools for preschoolers: Lego WeDo Software [18], Create [19], Wonder [20].

For the last decade educational robotics has been and still is a very promising scientific field, so in 2010s almost every major university in the world invested in development of own projects in robotics. For example, in 2016 Harvard University presented Root platform [21], Carnegie Mellon University develops and promotes its Arts&Bots project [19], MIT contributed delivering Scratch environment [7] and so on. Detailed overview in Russian could be found in [22], and the author concludes there that despite the variety of tools in this field there is no single one that can satisfy the needs of all educational organizations. Vast majority of such tools implement only the basic functionality (visual editor for diagrams and an ability to run programs on a robot autonomously or in a controlled manner from the computer), but they lack more advanced tools for teaching programming. Examples of such tools could be generation of readable textual code from created diagrams (that will help students to migrate from diagram-based to code-based programs), tools for debugging the program using virtual robot simulator or embedded tools for checking correctness of created programs (which could help teachers checking students' tasks). Some tools do have some of these advanced features, but often only some of them, and most of such programming environments are proprietary (which puts their users into a vendor lock-in situation) and pretty expensive for lots of schools.

Almost all aforementioned visual languages are based on control-flow computational model. Such a model is easier to understand, so it suits the purpose of education well. Nevertheless this model is not the best for programming robots since they are highly reactive by their nature: the program controlling the robot is basically a transformation of sensor signals into motor impulses. Reactive models are best expressed in data-flow languages [23], where the program consists of a number of «black boxes», connected with data channels. Each such «box» (we will call it *block*) has a fixed number of inputs and outputs, and its job is to transform input data into output data (we will call data transferring through channels *tokens*). For instance, each robot's sensor is represented by a single block, that simply sends tokens with sensors data to its output. Many researchers note usability of visual data-flow languages comparing to textual ones [23], in particular because of clear visualization of data flows.

<sup>1</sup>LEGO Mindstorms homepage, URL: <http://www.lego.com/en-us/mindstorms> (accessed: 07.02.2017)

<sup>2</sup>TRIK robotics platform homepage, URL: <http://www.trikset.com/> (accessed: 07.02.2017)

The idea of using data-flow programming languages in robotics is not a novel one, they are implemented in almost every toolset for programming industrial and laboratory automation system. Among them are LabVIEW by National Instruments [24], Simulink [25], and Microsoft Robotics Developer Studio [26]. All of them solve the automation task very well and have very powerful tools inside (for example, Microsoft Robotics Developer Studio is run on MySpace social network servers [27]), but are very complex and hard to learn, so even if they are used in education, only in universities [28], [29]. School experiments with LabVIEW were popular in the late 1990s [30], [31], which resulted in adaptations of this environment (like Robolab), where data-flow model was replaced with control-flow model. So, a gap between simplified languages suitable for education and more elegant, but complex industrial languages exists. Some researchers are trying to adapt the data-flow model for educational robotics, for example a research group from New Zealand introduced the RuRu [32] language. Nevertheless to our best knowledge there are still no production-ready data-flow based programming environments for educational purpose today.

Current paper describes TRIK Studio programming environment, an attempt to solve the problem mentioned above. The success in solving them is indirectly acknowledged by its applications: currently TRIK Studio is widely used in Russian education organizations (almost a hundred of schools and robotic clubs), several cases of TRIK Studio usage in organizations in Great Britain and France are known, there are TRIK Studio users on every inhabited continent. This paper presents technical overview of the programming environment, educational and methodical issues are not discussed in detail.

## II. General description

TRIK Studio is an environment that allows to program robots using diagram-based and textual languages. It emerged as a further evolution of QReal:Robots [33] project, developed at Software Engineering chair of Saint-Petersburg State University. The official release supports Lego Mindstorms NXT, Lego Mindstorms EV3 and TRIK robotic kits. Each one of these kits can be programmed using one of two visual languages (the more simple control-flow and more complex data-flow language) or one of a number of textual ones. For Lego NXT the programmer can choose from NXT OSEK C and Russian version of C language (simplified for teaching textual programming), for TRIK — JavaScript, F# [34] or PascalABC.NET [35], for Lego EV3 the single official language for standard firmware, EV3 virtual byte code, is supported.

A program created using one of visual languages (*a visual program*) could be executed in one of three modes:

- debugging using virtual simulator,
- debugging on a PC while sending commands to a robot via USB, Bluetooth or Wi-Fi (see VI),
- textual code generation mode with subsequent upload and execution of the program on the robot.

The the first mode the program is being interpreted on a two-dimensional robot model (see Section X). Users are able to create 2D-model of the world surrounding the robot from walls,

colored elements and floor markup. According to TRIK Studio users this feature is very useful for initial program debugging, before any interaction with real robots. Our experience shows that this virtual model editor allows to recreate most of fields and obstacle courses used in competitions in robotics. Having such a simulation environment makes possible learning robotics and programming even without having the real robotic kits. There is also an experimental support for V-Rep 3D visual simulation environment [36].

Debugging using a PC (so called *interpretation mode*) is useful as a next step to see how the program behaves on a robot in real time. In this mode program variables' values can be observed in a special window (similar to how it is done in Watch list windows in almost all textual IDEs) and sensor data can be displayed in a form of graphs.

Code generation mode enables users to move from visual to textual programs. Generated code is displayed in an embedded QScintilla-based <sup>3</sup> text editor, that provides a set of common features of a code editor: syntax highlighting, code autocompletion, undo/redo, brackets highlighting etc. TRIK Studio installation contains everything needed for building and uploading programs into a robot (a number of cross-compilers, WinSCP, Putty, etc.), and it allows to make compilation process and communication with robots transparent to TRIK Studio users.

TRIK Studio's user interface is shown on Fig. 1. It displays process of debugging a program that passes the maze using virtual simulation model.

In 2D simulation mode the automatic task checking feature is available (see Section XI). Task checking program is written in internal event-based textual language, the file containing virtual world model and task checking program can be distributed as a task for students. Based on this feature a remote course has been launched on Stepik platform<sup>4</sup> containing video lectures on cybernetics and robotics, numerous small tests and more that 20 tasks on educational robotics. Each task can be downloaded, solved, checked within TRIK Studio on a student's computer, and uploaded to the server where the checking system will run it on its own tests (similar to ACM ICPC coding contests).

TRIK Studio is written in C++ using cross-platform Qt<sup>5</sup> framework, there are installers for Windows, Linux and Mac OS X operating systems. Because of the fact that official Lego NXT drivers are not available on Linux and Mac OS X x64, TRIK Studio contains our own implementation for them (see Section VI for details). The programming environment is completely free to use, open-source and is distributed under Apache License 2.0<sup>6</sup>.

Aforementioned features distinguish TRIK Studio from all other such tools. In fact among all mentioned in Section I tools only 12Blocks have a comparable feature set, but it generates complex and unreadable code (for Lego NXT), does not have tools for checking tasks, is not free to use and does not have Russian localization in it. Among the TRIK Studio drawbacks

<sup>3</sup><https://riverbankcomputing.com/software/qscintilla/intro> (accessed: 07.02.2017)

<sup>4</sup><https://stepik.org/s/7qe3xj4Z> (accessed: 07.02.2017)

<sup>5</sup><https://www.qt.io/ru/> (accessed: 14.05.2016)

<sup>6</sup><http://www.apache.org/licenses/LICENSE-2.0> (accessed: 07.02.2017)

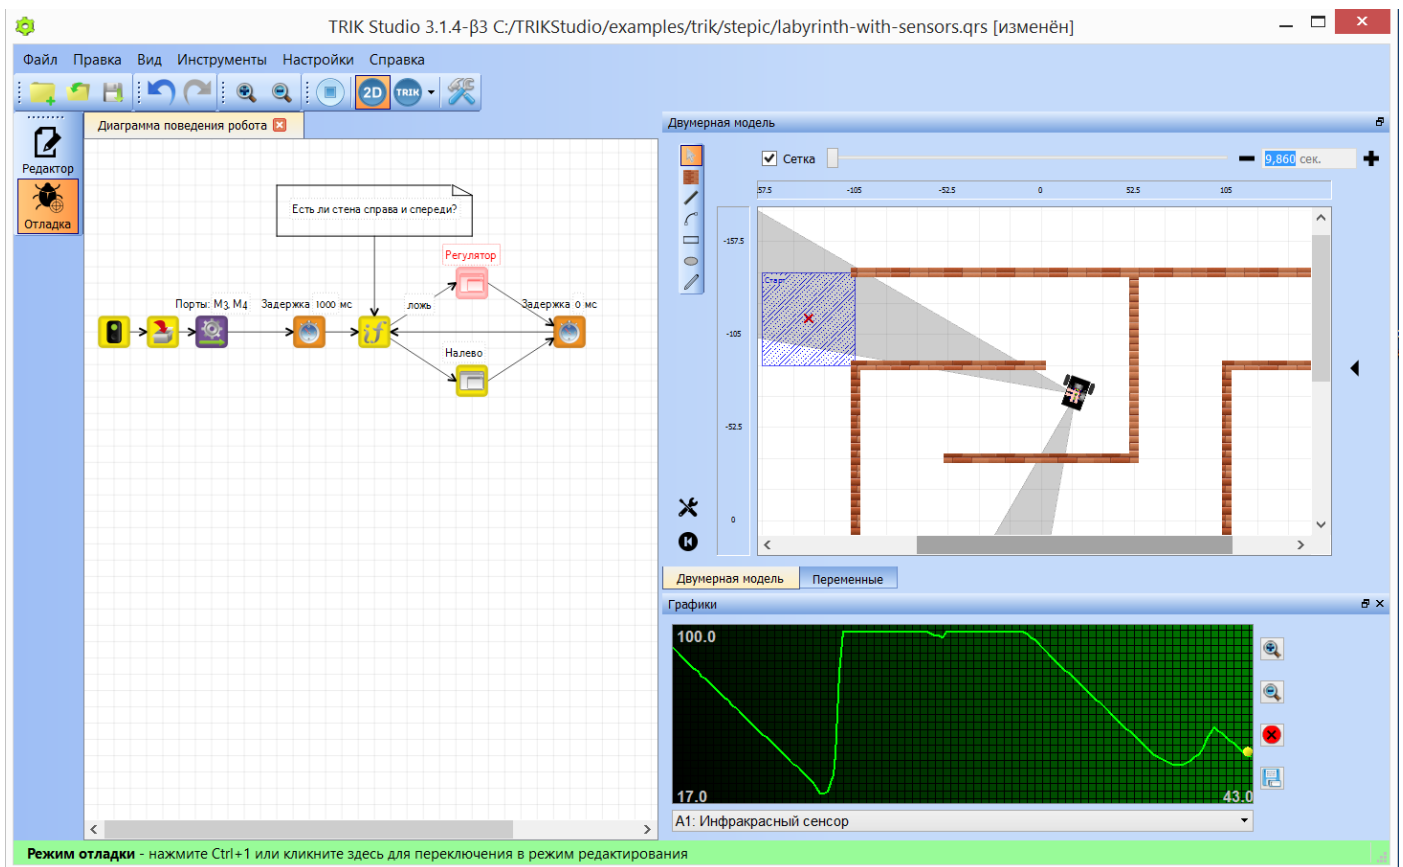


Рис. 1: TRIK Studio's user interface

we should mention weak methodological support, limited only by embedded reference guide in Russian, a set of examples and the remote video course. Less important drawbacks will be mentioned in the following sections.

The rest of the paper is structured as follows. Sections III and IV briefly present TRIK Studio visual languages and their interpreters. Section V overviews the system architecture. Further sections describe separate TRIK Studio subsystems. Section VI presents robots communication infrastructure. Section VII describes visual language interpreters. The most interesting implementation details of code generators from control-flow language are provided in Section VIII. Section IX presents textual languages parsing subsystem. Section X presents implementation details of 2D simulation model subsystem. Section XI describes task checking language and Section XII concludes the paper.

### III. Visual language for beginners

The simplified control-flow based language (see Fig. 2) is the most often used one in TRIK Studio. It is a graph language, i.e. the program consists of nodes (*blocks*) and edges, organizing the nodes into a control flow. To create a program users drag-and-drop necessary blocks onto the editor's scene, sets their properties and connects them with arrows. While being run each block executes a sequence of basic commands and passed control to outgoing edges (to all or some of them depending on the block semantics).

All language blocks could be divided into four groups.

- The first group is for blocks supporting basic algorithmic expressions, like the start and the end of a program or a subprogram, conditions, switches, arithmetic loops, blocks for parallel execution and for working with concurrent tasks (e.g. for merging and interrupting tasks), subprogram call and a block for textual programming.
- The second group combines blocks working with robot peripherals. These are actions that don't require waiting. For example, they are blocks for setting motor powers, playing sounds, accessing robot video processing capabilities, synthesizing speech by given text, controlling motor encoders and LEDs, sending messages to other robots (a part of multi-agent interaction support), working with robot file system, etc.
- The third group consists of blocks, that «freeze» the control flow. They are a timer block waiting for a given number of milliseconds (similar to `msleep` function), blocks waiting for a given value from a given sensor or from an operator game pad, and a block waiting for receiving a message from another robot.
- And finally, the fourth group contains blocks that provide drawing functions for basic primitives (the drawing is being performed on a robot's screen). Such primitives are lines, rectangles, ellipses, arcs, text,

images. There are parameters to change color and width of pen and brush used in drawing. There are also special blocks that control robot model marker in a 2D simulation environment. It allows robot model to leave a trace on a ground while moving, similar to the Logo turtle.

Properties of each block can be set both within the diagram editor's scene and using special property editor window. All block properties (where applicable) support computable expressions written in TRIK Studio embedded textual language – a statically typed Lua<sup>7</sup> dialect. The parsing module for this language is written using a parser combinator library for C++11, also created within TRIK Studio project. Type inference of the resulting abstract syntax tree is performed using slightly simplified Hindley-Milner algorithm [37].

The domain-specific approach (*DSM-approach*) [38] was employed to create the described visual language. An editor was created using QReal DSM platform [39], [40]. Language metamodel was defined using QReal's metaeditor, and a plug-in implementing the editor was automatically generated using QReal's tools. Plugging this module into the QReal's platform core a complete visual IDE based on the given language is obtained. This IDE «inherits» all tools and features of the DSM platform, including modern user interface, mouse gestures recognition support for creating diagram elements [41], [42], copy-pasting and undo/redo frameworks, zooming tools, tools for creating several types of edges on diagrams, model explorers, touch screens support and many more. According to its users TRIK Studio's user interface is much more usable and ergonomic than in any other such programming environment, and we spent about three man-days on it. We believe that it acknowledges the choice of QReal DSM platform as an underlying technology, but we have to note that while creating tool support for TRIK Studio numerous improvements were made to the QReal platform itself.

#### IV. Visual language for advanced users

Users that mastered the control-flow language can move on to more complex, but more convenient data-flow visual language. Unlike control-flow programs where control is passed according to edges between nodes, in data-flow programs blocks are executed simultaneously and communicate with each other by sending data tokens via channels. For instance, a data-flow program can have several entry points (most often they are robot sensors that send data each other for processing in a chain), while a control-flow program must always have a single entry point. This language also has block for basic algorithmic expressions, blocks for interaction with all robot devices, drawing blocks, etc. Almost always data-flow programs turn out to be more concise than their control-flow analogues. For example, Fig. 3 shows proportional controller implemented in control-flow language is compared with proportional-derivative controller implemented in data-flow language.

To make transition to this «advanced» language simpler it maintains some kind of conceptual compatibility with the control-flow language. Blocks can also be organized in a chain with explicit passing of control, to make it possible most blocks have a special activation port, that ignores all input data and just executes the block like it was in control-flow case. So users can

write programs like they used to and move on to using smaller number of blocks as they gain more experience.

Expressive power of the language allows to use it for creating well-known complex robot control systems like Rodney Brooks's categorical architecture [43], Johnathan Connell's «colony» architecture [44], Ronald Arkin's behavioral navigation [45], or DAMN distributed navigation approach [46]. Proof of this statement worth a separate paper and is not given here. Another ideas on this matter could be found, for example, in [47] or [48].

It worth noting that in the time of writing this paper TRIK Studio has only experimental support for data-flow language and it is not included in the official distributed package. The source code of the editor and all appropriate tool support is freely available<sup>8</sup> and could be compiled with the TRIK Studio's source code.

#### V. General architecture

This section aims to structure the information given previously describing TRIK Studio's architecture: most of the features described here were already mentioned above. All diagrams presented here are distilled of numerous architectural and implementation details that though could be interesting in a context of such a paper, still left aside limited by the paper size.

Fig. 4 presents high-level architecture of TRIK Studio. The system has a number of layers, each one implementing specific set of functionality and having strictly defined API. The lowest layer is libraries implementing interaction with real robots and virtual robot models. They are used to implement a hierarchy of robot devices (sensors, motors, displays, speakers, game pads, control buttons, etc.), which in their turn are used to specify high-level robot models for different robotic kits. Such robot model specifications are grouped into modules that are plugged into TRIK Studio's core, where they are used by other subsystems (e.g. interpreters and code generators that are structured as plug-in modules too).

TRIK Studio core in its turn is a plug-in module for QReal DSM platform. It modifies QReal's user interface, adding several toolbars and windows, like 2D simulation window, sensor configuration window, variable watch list and graphs window, etc. The core load all robot model specifications and provides them for all other subsystems, provides user with information about interpretation and code generation processes, etc. Along with modules implementing TRIK Studio tools, visual language modules (that are created using the QReal platform itself) are also plugged into the QReal core. Implementation details of lower layers from Fig. 4 are provided in the subsequent sections.

Making the architecture highly modular allowed to provide flexible customization of the installation process: users can explicitly select which components they are interested in and install only them (for example, if someone has only Lego EV3 kit, he or she does not need support for Lego NXT and TRIK robots, and the target installation will not contain such files). Furthermore, such an approach is highly compatible with packet-based software install systems in Linux. The architecture also benefits from such separation since the components become very low coupled: TRIK Studio's core, for example, is very minimalistic, it does not «know» about all features that the IDE

<sup>7</sup><http://www.lua.ru/> (accessed: 07.02.2017)

<sup>8</sup><https://github.com/ZiminGrigory/qreal/tree/DFVPL> (accessed: 07.02.2017)



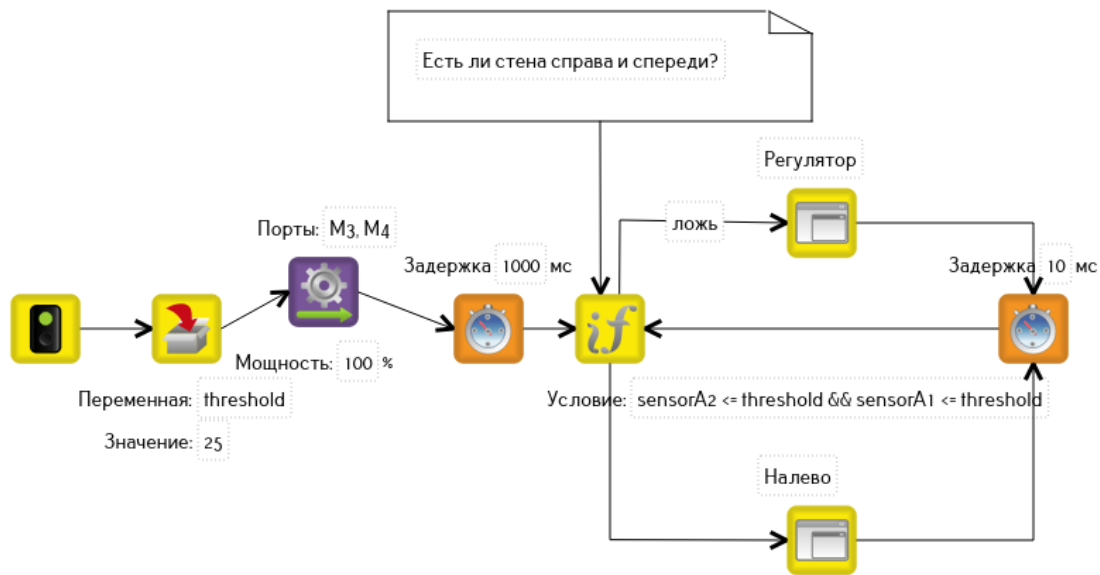


Рис. 2: The program of traversing the maze using right-hand rule. The first four blocks initialize the program: set the wall proximity variable, turn the robot motors on, after that the robot moves for one second to enter the maze. The second four blocks define the main control loop. Each ten milliseconds the robot checks using its infrared sensors if it can move forward or right (the  $\text{sensorA2} \leq \text{threshold} \ \&\& \ \text{sensorA1} \leq \text{threshold}$  condition). If it can move forward, the movement will be performed using proportional control over the right sensor data («Регулятор» subprogram). If there are walls in front of the robot and to the right, it turn 90 degrees left («Налево» subprogram)

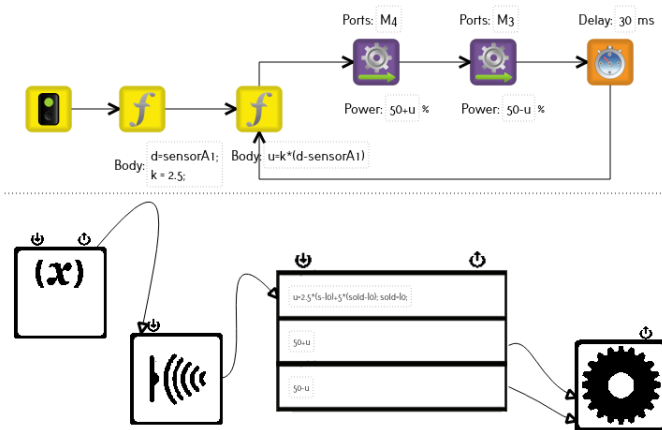


Рис. 3: Controllers implemented in different visual languages

provides and contains only objects and interfaces common to all robotic kits and models. API of each layer is fixed and well-documented, so it allows independent community developers to create extension modules supporting new languages, robotic kits and tools.

## VI. Communications with robot controllers

This section discusses the subsystem handling TRIK Studio interaction with robots over different protocols. It is one of the lowest abstraction layers shown in Fig. 4. Its API provides the following operations:

- changing current transmission medium (currently

Bluetooth, Wi-Fi and USB are supported),

- setting device address in terms of a chosen medium (e.g. COM port number in case of Bluetooth, IP address or host name in case of Wi-Fi),
- connecting to and disconnect from a remote device,
- transferring byte arrays to a remote device,
- handling receiving data from a remote device,
- handling connection status change (i.e. connection setup or termination events),
- handling errors.

USB communication is implemented using [libusb](http://libusb.org/)<sup>9</sup> library, Bluetooth communication is based on [QextSerialPort](http://qextserialport.com/)<sup>10</sup> library, Wi-Fi communication is implemented over TCP and UDP protocols using QtNetwork library, complex communication protocols (like configuring TRIK robots before running programs) are built upon Qt State Machine Framework. The communication process is run in a separate thread to prevent freezing the main user interface. Particular implementations of communication mechanisms could be extended and replaced with other components. For examples, it is done for integrating TRIK Studio with the official Lego NXT driver. It worth noting that using this driver is not the only way to communicate with Lego NXT controllers over USB, TRIK Studio contains our own implementation of such a driver. Unlike the official one our driver works over libusb on all supported operating systems.

<sup>9</sup><http://libusb.org/> (accessed: 07.02.2017)

<sup>10</sup><http://github.com/qextserialport/> (accessed: 07.02.2017)

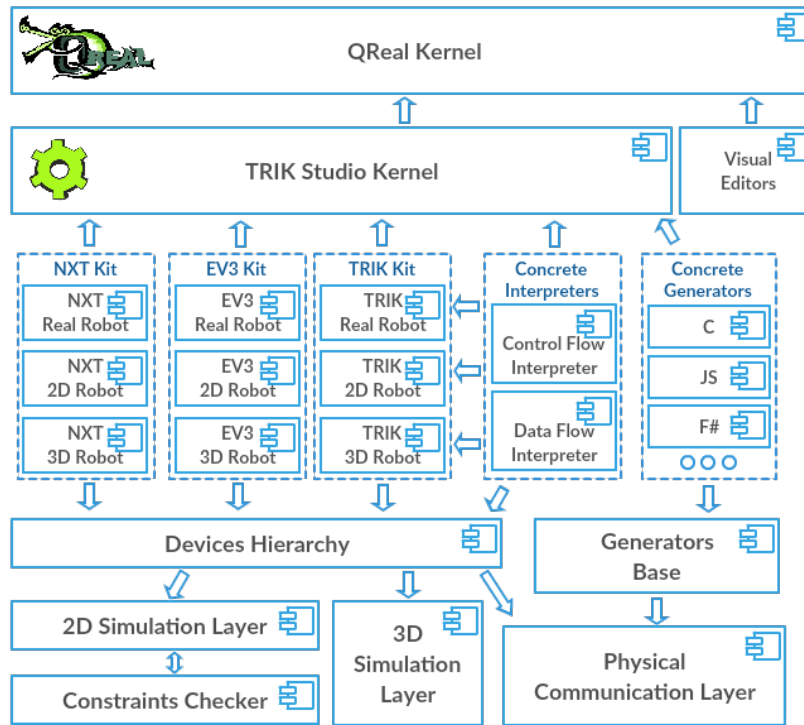


Рис. 4: High-level TRIK Studio architecture

## VII. Interpreters

An interpreter is translating visual diagrams into a sequence of command for a target device (see Fig. 5). The hierarchy of devices is build in a way that it does not matter to an interpreter if it works with a real device or a virtual one (see Fig. 6). Each device is represented by a C++ class containing code for interaction with this device. These device classes are grouped according to robotic kits they belong to and put in plug-in modules. Device classes use communication subsystem for data interchange over physical channels (see Section VI) and 2D and 3D simulators API when working with virtual robot models.

All interpreters, like all the rest of the environment, is written in C++/Qt. As input data they receive created diagrams in some external representation format. There are two interpreters implemented in TRIK Studio now: one for control-flow programs and one for data-flow programs.

The interpreter of control-flow programs firstly starts with finding initial block of the program and then iterates according to the control flow defined by the diagram arrows. Currently executed block is highlighted in the editor to show users the execution process. For each block visited special factories create objects that implement the behavior of this block. In general such an object searches for a ready-to-work robot device that it needs, runs appropriate commands and passes execution to one of the blocks that the current block has outgoing links to (depending of the block's semantics). In this process no difference is made if the device is a real one or a virtual one, so the same interpretation code works for execution of the program in two out of three modes (see Section II).

If on any step of the interpretation process a fork block is

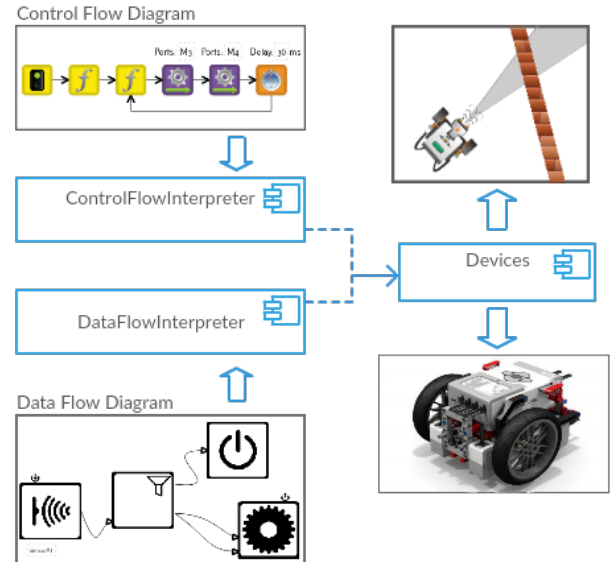


Рис. 5: Diagram interpretation workflow

met, the interpreter launches new threads of execution, creating a new call stack for each of them. If a subprogram call block is met, its arguments are computed and put into the current call stack, and the interpretation process is repeated recursively. When processing any type of final block the interpreter removes the frame from the call stack and the execution is being continued from the proper point of the previous diagram. If we get an empty call stack after removing the frame, the current execution thread

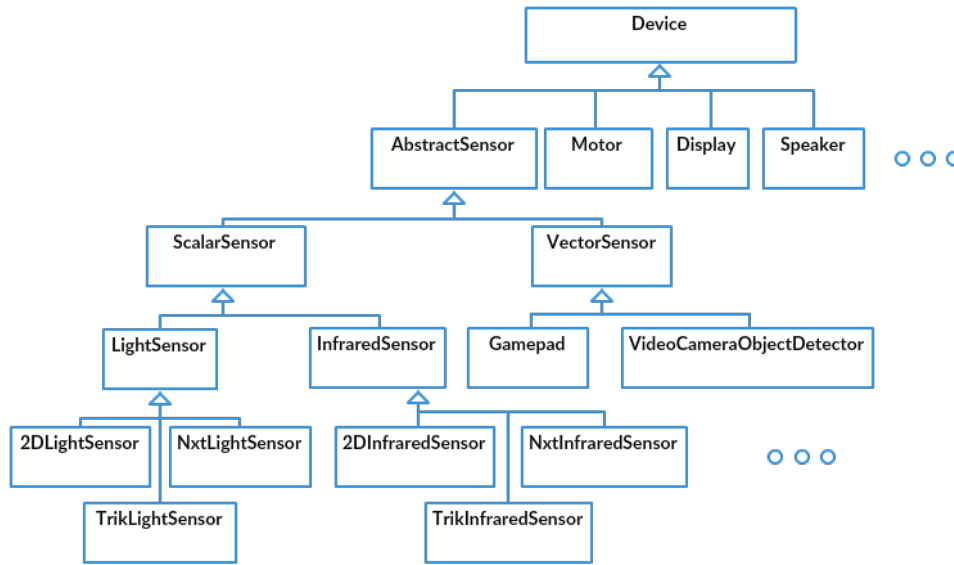


Рис. 6: TRIK Studio's device classes hierarchy

is considered finished. In this way the interpretation process is going on while the interpreter can find new blocks to process.

An interesting feature of this implementation is that users can change the diagram during its interpretation and the changes will be applied «on the fly». It is a convenient behavior, for example, for selecting parameters of a PID controller in a program. Meanwhile, the execution of unchanged diagram parts is optimized: block implementation objects are cached, the same is true for abstract syntax trees and type inference information for textual programs. Thus, if the program remains unchanged while being interpreted, subsequent control flow to the same parts of the diagram will employ already created objects. Diagrams validation is also performed «on the fly». If some incorrect fragment is found, an error message is shown. It could be seen as a drawback since users get their error messages only when such errors are reached during interpretation, but this behavior is typical for all widely used interpreted textual languages.

The data-flow interpreter works in two steps. First, the interpreted diagram is being validated, implementation objects for diagram blocks are created (they are used to translate the diagram into a sequence of robot commands similar to as it was discussed for the control-flow programs interpreter). Implementation objects are connected with each other via Qt signals and slots in the same order as corresponding blocks are connected on a diagram («Publisher-subscriber» design pattern is used here). On the second step the interpreter executes each block that does not have any incoming data flows, and then each such block in its turn activates blocks that it has outgoing data flows to when the data tokens are ready. Blocks execution is performed in a pseudo-parallel way over a centralized message queue (see Fig. 7). This implementation detail distinguishes this language from all other industrial solutions (e.g. in Microsoft Robotics Developer Studio diagrams are deployed as a set of independent web services [26]). We choose this approach because this programming environment targets low-performance controllers of educational robots, that don't embrace true

parallel execution of multiple programs at once. Nevertheless, the language has a process fork block that is useful while implementing complex control models mentioned above. This block should be used as a low-level tool for execution control.

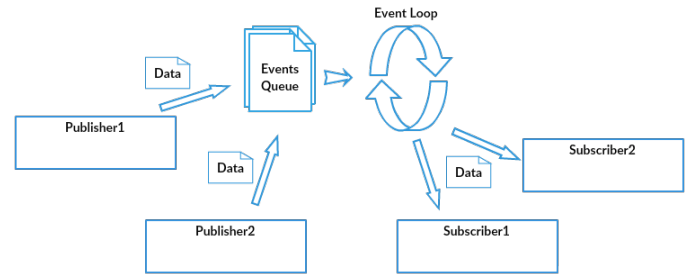


Рис. 7: Data-flow programs execution workflow

## VIII. Generators

One of the most interesting and demanded TRIK Studio features is generation of well-readable textual code from created diagrams. At the moment of writing several languages are supported for code generation: C, JavaScript, F#, Pascal, Russian version of C [49] and byte code for Lego EV3 virtual machine. In this section we describe only code generators for control-flow programs.

A visual diagram is built from blocks and arrows, defining program's *control flow graph* [50]. All algorithmic operators like conditions, loops, switches, etc. are defined by arrows. For instance, to create an infinite loop one should create an arrow from a block to one of the previous ones, to create *while-do* and *do-while* loops or loops with *break* statement inside it is enough to simply connect one block inside a loop with a block from the outside. It is obvious that each arrow on the diagram corresponds to a *goto* statement in the code. But the code containing *goto* statements is very hard to understand, and especially in not

suitable for teaching the basics of programming, so we decided to avoid using them in generated code as much as possible. We cannot eliminate `goto` statements at all because it is possible to create a TRIK Studio diagram that could not be expressed using standard algorithmic operators (there are algorithms for automatic translation of `goto`-containing programs into structural programs, but the result is not much better from the teaching programming point of view). On the other hand, not all modern textual programming languages support `goto` statements (for example, JavaScript does not). We call *structural* diagrams that could be expressed using structural algorithmic statements (`if-then`, `if-then-else`, `while-do` loop, `do-while` loop, `while-break` loop, `switch`). Textual code generated from them we also call *structural*. Otherwise we say that the diagram (and the code generated from it) is *not structural*. If structural code could not be generated from a given diagram, users are notified with a warning.

Considering these issues implementation of code generation subsystem in TRIK Studio required solving two non-trivial tasks, given below in a form of requirements.

- Code generation subsystem should be organized in such a way to minimize time and effort for adding of a new generator. Preferably it should be possible even for an external developer to do it.
- For each language (where applicable) the subsystem should support two generation modes: structural diagrams should be translated into structural code, not structural diagrams – into not structural code. The success of structuring the diagram should not depend on its size and complexity.

The first task is purely architectural one. The way to solve it is shown on Fig. 8. The main idea here is to divide code generation process into two steps. First, the diagram is translated into a representation independent of a target language — a *semantic tree*. Semantic trees reorder graph model of the control flow into a tree model regardless of whether the diagram is structural or not. If it is, a parent node in a semantic tree always corresponds to an execution block in generated code, and its children nodes correspond to statements of this block, which exclude `goto`. Let's outline the code generation process shown in Fig. 8.

A code generator gets a diagram as input data. First, the diagram is traversed in depth-first order by a validation component (build based on the «Visitor» design pattern). Then, for each computable expression used inside block property values parsing and type inference procedure is performed. If the diagram or any code in any property value contains an error, users are notified and the code generation process terminates. If the diagram is syntactically correct, it is passed to a control flow analyzer, that is described below. Depending on if the diagram can be translated into structural code or not, an intermediate generator of code-independent diagram representation is selected, which extracts the semantic tree from the control flow graph. Finally, the semantic tree is printed into a target textual language. To achieve it, a template-based approach is used, so to create a new generator a programmer have to provide a set of such code templates and define generator specification. For example, generation templates for condition expression if C looks like this:

```
if (@@CONDITION@@) {
    @@THEN_BODY@@
} else {
    @@ELSE_BODY@@
}
```

The second task is solved by a control flow analyzer module. In terms of textual language the task is rephrased like this: by a given program containing `goto` statements create an equivalent structured program. This problem was solved by researchers in a field of code decompilation [50], [51]. For example, such an algorithm based on interval analysis of control flow graph is presented in [50]. With minor modifications it was implemented in TRIK Studio. Let's describe it briefly.

Informally speaking, an *interval* is a part of a control flow graph with one input and one output. The algorithm aims to build a nesting tree for all graph intervals and is based on recursive ascend of depth-first search. On each step the algorithm tries to match a subgraph, outgoing from the current node, with each of basic interval templates (algorithmic statements that are used to structure the program). If such a template is found, the whole subgraph is folded into a single node and the process continues. The most simple example of such a template — two intervals connected with an only one edge, which matches with sequential composition. If on any step no template could be found, the diagram is considered not structural.

One obvious limitation of the target textual language for code generation is that it should be an imperative one: the chain of blocks must be translated into a sequence of target language expressions, which is better achieved using sequential composition. Nevertheless, an approach with intermediate step with generation into intermediate representation could work here too. For example, to support code generation into pure functional language we could add a continuation element into intermediate representation and add intermediate generator from visual diagrams into continuation passing style (CPS) representation. After that code generation templates should be updated to support all necessary languages.

## IX. Textual language parser and interpreter

TRIK Studio uses visual languages for robots programming, but arithmetic expressions, intrinsic function calls and so on are better represented with textual strings (in fact, NXT-G tries to use visual blocks even for arithmetic expressions, representing them as syntax trees, it is very inconvenient). As a textual part of a language for both visual languages TRIK Studio uses a subset of Lua 5.3<sup>11</sup>, customized for our needs. Decision to implement our own parser and interpreter of a textual language was made under these considerations:

- we needed a small textual language with lightweight syntax and without explicit typing since it shall be used by non-programmers;
- we needed explicit abstract syntax tree and the ability to run type inference on it since we were going to generate code on C or EV3 bytecode, which is strongly typed;
- we needed to be able to customize language syntax if the

<sup>11</sup><https://www.lua.org/>



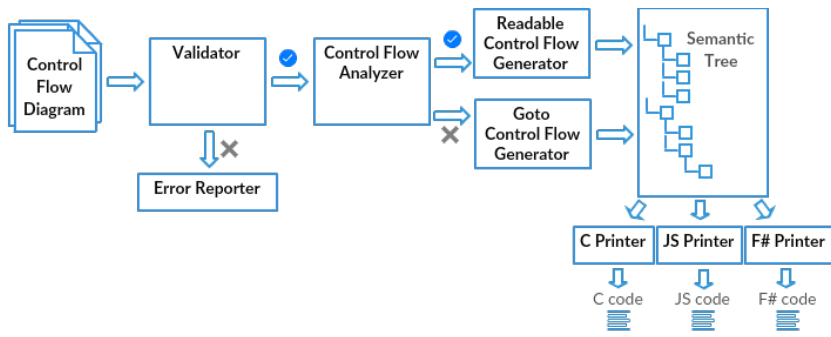


Рис. 8: Code generation subsystem's architecture

need will arise;

- all existing implementations for such languages had interpreter without access to a syntax tree or a parser that was not reusable from C++ code;
- since we needed only a subset of a language (arithmetic expressions, without statements, custom function and type definitions), writing custom parser was not a difficult task.

Parser and interpreter were implemented as a separate library in QReal core, so the resulting textual language is available not only in TRIK Studio, but in all other domain-specific solutions based on QReal. Parser implementation consists of two parts — general-purpose parser combinator library and Lua parser library implemented using parser combinators. Many projects use ANTLR<sup>12</sup>, boost.spirit<sup>13</sup>, yacc<sup>14</sup> as tools for parser development, but we once again created our custom solution, mainly to avoid additional external dependencies and complication of a build process — QReal and TRIK Studio are developed by a large community, and not everyone is happy to install additional tools and learn how to use them, especially if their work has nothing to do with syntax analysis and they are students who do not took formal languages course yet.

QReal parser combinator library supports recursive-descent parsers which are able to parse a subset of LL(1) grammars. FOLLOW( $\alpha$ ) set is not calculated, so it limits the expressiveness of resulting grammars, but we were still able to use Lua 5.3 grammar almost as it is specified, with only minor modifications related to factorization and left recursion elimination, which shall be done anyway for LL parsers. For arithmetic expressions Precedence Climbing<sup>15</sup> algorithm was used, and it also required some minor alterations in Lua grammar. Custom modifications were made mainly on lexer level to allow, for example, to use '!=' for inequality in addition to '~=' used in Lua. Here is a quick example<sup>16</sup> of production written in C++ with our library ("statement is ';' or a list of expressions, optionally followed by '=' and other list of expressions"):

```
// stat ::= ';' | explist ['=' explist]
```

<sup>12</sup><http://www.antlr.org/>

<sup>13</sup><http://boost-spirit.com/home/>

<sup>14</sup><http://dinosaur.compilertools.net/yacc/>

<sup>15</sup>[http://www.engr.mun.ca/theo/Misc/exp\\_parsing.htm](http://www.engr.mun.ca/theo/Misc/exp_parsing.htm)

<sup>16</sup>full specification of our parser with many irrelevant technical details see at <https://github.com/qreal/qreal/tree/master/qtext/src/lu>

```
stat = (-LuaTokenTypes::semicolon
| (explist & ~(-LuaTokenTypes::equals & explist)))
```

LuaTokenTypes::semicolon is a token corresponding to ';', operator '~' creates a simple parser that can parse only semicolons and excludes semicolon from AST, "explist" is a reference parser object, like "stat", defined elsewhere, '&' combines two parsers into a parser which accepts concatenation of their corresponding strings, '|' combines two parsers into a parser that accepts alternative, '~' creates optional parser from its argument, which shall also be a parser. There are also operators for adding semantic actions to productions and assigning parser a name for debug purposes. When all parsers are combined in such a way, it is enough to call 'parse()' method of a resulting parser object, giving it a token stream. Parser combinator library was used for another language in QReal [52], so it is general enough to support not only Lua.

Parser returns abstract syntax tree on which type inference algorithm is executed, providing types for all variables and expressions. Type inference uses Hindley-Milner-style [37] algorithm, simplified for performance reasons and extended to support overloading and coercion. Type inference is also generalised and Lua type inferer only defines inference rules for Lua-specific AST nodes, core type inference functionality is available for all QReal textual languages.

After type inference is complete, expression is ready to be evaluated by an interpreter. Interpreter allows to register intrinsic functions, also it allows to add custom variables with their values, to support using current sensor values in calculations — robot communication subsystem receives telemetry data from a robot and injects sensor readings into interpreter, which uses them to calculate expressions.

Last notable feature of parsing/interpreting subsystem is extensive use of caching to avoid parsing or reevaluating expressions as much as possible. Program shall be interpreted in real-time, so reparsing and reevaluating expressions every several milliseconds, as required by many control algorithms, would be severe performance problem. But program can be changed by user during interpretation, values for some variables may be changed by external code, such as sensor readings changed by communication subsystem — so the interpreter keeps track of changes and uses previously calculated values if possible.

## X. Simulator

2D robot simulation environment is the most stand-alone TRIK Studio subsystem. Its window is a part of TRIK Studio's user interface, but it also can be used separately. The main part of this environment is an editor for virtual world model. Using a special menu one can select one of supported drawing tools (similar to how it is done in most graphical editors). There are two main drawing tools: drawing walls (solid objects that robots cannot move through and that are detected by robots' ultrasound and infrared sensors) and colored markers on the floor (elements that are detected by color, light sensors and virtual robots' cameras). Colored markers could be drawn in a shape of lines, cubic Bézier curves, rectangles, ellipses or any shape drawn using mouse pointer. For each marker users are able to set their width, color and fill type.

The robot model itself is a differential two-wheeled truck. Robot model is always shown in this editor, users can place sensors onto it where they prefer. The regions where sensors scan for objects are highlighted. A separate panel is showing an image of the chosen controller (Lego NXT, EV3 or TRIK), which users can interact with: clicking on an image of a button emulates controller's button click event, users can manipulate LEDs placed on controller's top or output some text or images onto the controller's screen, for example, drawing shapes on it using drawing blocks (see Section III).

Running the program in the simulation environment is performed in the same editor where users created their models. World model can be changed even during program execution, putting additional walls or colored markers will take immediate effect of virtual robot's sensors. Positions and directions of the sensors themselves can also be changed in any time, which conforms with changing real robot's configuration while it is moving.

The simulation environment is built based on Model-View-Controller design pattern. The Model contains serialized specification of the robot and the world, and it notifies all other components if any property of any object is changed. The View is subscribed to these events, all updates are immediately displayed in the editor or other simulator windows. All user actions are handled by the Controller component, which uses an intermediate command stack to be able to undo such commands on demand.

The simulation environment has two implementations of robot behavior models: «ideal» and «realistic». Within the ideal model all friction forces (for floor and walls) are ignored, and having constant motor powers the robot continues to move without any acceleration or slowdown. Any, even slightest collision with a wall will stop the robot. The realistic model takes care of thrust and friction force, when crashing into a wall the robot tries to behave like the real device. Users is also have an ability to add Gaussian noise to sensor data and motor impulses. Changing between these models is done using a checkbox in simulation settings window and could be done even during the execution of a program.

Time in the simulation environment does not equal computer's time: there is a special centralized timeline, the speed of which can be controlled from a special panel. The same timeline is used in the diagram interpreters to match the work of timer blocks with virtual time independently of CPU's time.

## XI. Automatic checking of solution correctness

Last important subsystem which is described in this paper is automatic checker of constraints for TRIK Studio programs. This system allows to turn a world model in a simulator to an exercise with specified success and failure conditions, which can be shared among students and solutions (in a form of visual programs) can be automatically checked against these success conditions in simulator, thus providing feedback without an intervention from a teacher. To create an exercise one needs to specify two things:

- what parts of a simulated worlds are fixed and can not be changed by a student (walls and figures on a floor, robot starting position, sensors and their orientations and so on);
- program on a special constraints definition language which specifies success and failure conditions for a solution.

Constraints are described on a special XML-based definition language. Program on this language is a set of events  $\{e_1, e_2, \dots, e_n\}$ , where each event  $e_i$  is a triple  $(id_i, c_i, T_i)$ :

- $id_i$  — event id: internal label by which other parts of a program may refer to this event, can be empty;
- $c_i$  — condition, under which the event is raised, a formula in a first-order predicate calculus without quantification;
- $T_i$  — ordered set of triggers  $[t_{i_1}, t_{i_2}, \dots, t_{i_n}]$ . Each trigger specifies an action that shall be done when event condition  $c_i$  becomes true.

Each event is specified by its XML node in a program. Event can be specified in a *canonical* form, or in a form of a *constraint*. Event in canonical form — already described triple  $(id_i, c_i, T_i)$ . Event in constraint form is a triple  $(id_j, c_j, message_j)$ . Constraint is interpreted as an event  $(id_i, \neg c_i, [fail(message_j)])$ , where  $fail(message_j)$  — trigger that stops simulation and reports error message  $message_j$ . In other words, constraint in an event that is raised when given condition is violated and reports this violation to an user. Events in a form of constraints are added to a language for pragmatistical reasons only, because it is much more convenient to specify conditions like "robot  $x$  shall not leave area  $a$ " or "robot  $x$  shall have a set of sensors  $s$  connected" as constraints instead of events. Special case of such constraint — time limit. Time limit shall be specified for each constraint definition program so that constraints checker will not run simulation indefinite amount of time if all constraints are satisfied but success event is never triggered. Checker verifies that time limit is set before execution of program, and if not, considers it as semantic error.

Let's briefly describe predicates, functional symbols and elementary triggers used in a language. Predicate symbols can be divided into these groups.

- Comparison predicates  $>, <, \leq, \geq, =, \neq$ .
- Spatial predicates. They have form "item  $x$  is located inside area  $y$ ".
- Event state predicates  $settedUp(id_i)$  and

*dropped(id<sub>i</sub>)*, denoting active and inactive events accordingly. Active events can be raised when their corresponding condition is satisfied, events in inactive state will not be raised (and their triggers will not be executed) even when condition is satisfied.

- Time predicate *timer(t)*, which is initially false, becomes true after *t* ticks of model time and stays true afterwards.
- Other predicates that can be expressed by already described predicates, they are introduced for pragmatical reasons only.

Functional symbols can be the following.

- Constants of different types (integer, floating-point, string, colour, geometrical and so on).
- Symbol *variableValue(id)* that denotes a value of a variable with identifier *id*. Variables are internal to the constraints checking program (i.e. do not represent simulation state) and can be useful for implementing complex conditions like counting of times that robot does some action.
- Arithmetical and geometrical operations over other values — absolute value of a number, for example, or a distance between two points.
- Comparison of forms of two figures using Levenshtein distance. It is useful to compare images drawn on robot display to an ideal image specified in exercise.
- Symbol *objectState(path)* allows to get state of a simulated robot devices or objects of a simulated world. *path* argument shall contain a path to a desired property in a hierarchy of objects in world model. Such path will be translated into a sequence of C++ object property references using Qt Reflection mechanism, so this symbol provides a bridge between constraints definition and simulator.

Finally, elementary triggers can be the following:

- *success, fail(message)* control checker state. First trigger reports exercise as successfully checked, second reports error and marks simulation result as a failure;
- triggers that set variable values and change properties of a simulated world or a robot devices (complementary to *objectState* function), they allow, for example, to set random number generator seed to make possible testing of solution which uses random number generator;
- triggers that control event state — every state can activate or deactivate every other state (including itself), it allows to specify rather complex checking scenarios, like visiting waypoints in a correct order within given amount of time.

An example of a simple program in constraints description language is given in 1.

Architecturally constraints checking system is a standalone module which uses TRIK Studio core and simulator model as shared libraries. Simulator model and robotic kit support in

TRIK Studio are frequently extended with new devices, options and features, so Qt Reflection mechanism is used to access objects and their properties from constraint specifications. It allows to extend TRIK Studio core without modifications in constraints checking system itself, new properties immediately become available from constraints description language. Constraints checker subscribes to events from simulation model as another view (in MVC pattern sense) and checks constraints on every tick of model time. It may seem very ineffective, but only active constraints are checked and only a few constraints are active at any given time, so a simulation with constraints checking has almost the same performance as without it.

Described language proven to be quite effective at specifying spatial and temporal constraints on a system state. It is more expressive than, for example, temporal logic or topological temporal logic languages which are used for specification of formal constraints on robot behaviour in recent works [53], [54], [55], [56]. And this language is not Turing-complete (for example, it can not express Markov algorithms due to absence of means to work with arbitrary length collections, so it can not express string replacement), it opens a possibility to statically analyse non-trivial properties of programs on it. In addition to this, a subset of a language can be used for specification of requirements for a program to be used in formal verification. Plans for next versions of TRIK Studio include creating visual editor for constraints, which, combined with some verification engine, will possibly allow to formally prove correctness of visual programs without the need to actually write temporal logic formulae. Investigation of this idea is a promising future work direction.

Constraints checking system is also used for functional testing of TRIK Studio on continuous integration server. More on this (and other details of TRIK Studio testing) see in [57] (in Russian).

This functionality is also used as an automatic checker of exercises for MOOC on Stepik platform<sup>17</sup>. Without such checker it would be impossible to provide feedback to possibly large number of students, making course much less interactive. From a technical point of view checker is a set of scripts which launch “headless” interpreter (i.e. interpreter without GUI) on a correct field with correct constraints. Checker is hooked up into Stepik infrastructure and runs in a separate Docker<sup>18</sup> container when new solution is submitted. Checker has several fields and corresponding constraint descriptions for each task (from one to five), each solution is checked against all those fields to test that it works in different situations and is not hardcoded. Fields are hidden from the user but error reporter output does gets displayed, so students can guess what went wrong (well, theoretically. But it’s better than traditional ACM ICPC system, where only a number of incorrect test and a general type of error are reported).

Checker can also send a visual representation of a field with a trace of a robot to a client. Trace consists of points of a robot trajectory and values reported by its sensors, and this trace can be played back by a web application described in [58] (in Russian). This web application also allows to actually create solutions for almost all tasks from the course right in the browser, form a

<sup>17</sup><https://stepik.org/s/7qe3xj4Z>

<sup>18</sup><https://www.docker.com/>

```

<!-- Root element, contains all constraints -->
<constraints>

  <!-- Mandatory time limit constraint -->
  <timelimit value="2000"/>

  <!-- Constraint on robot location -->
  <constraint failMessage="Robot left the allowed area!">
    <inside objectId="robot1" regionId="myspace"/>
  </constraint>

  <!-- Success criteria for a program: robot must say "Hello" using speech synthesis
  and draw a smile on a screen -->
  <event settedUpInitially="true">
    <conditions glue="and">
      <equals>
        <objectState object="robot1.shell.lastPhrase"/>
        <string value="Hello"/>
      </equals>
      <equals>
        <objectState object="robot1.display.smiles"/>
        <bool value="true"/>
      </equals>
    </conditions>
    <trigger>
      <success/>
    </trigger>
  </event>

</constraints>

```

Listing 1: Example of constraints specification in TRIK Studio simulator model.

correct TRIK Studio save file and run it on a server on checker, playing back the result, so a student perceives this as "TRIK Studio in a browser". This application works standalone, but is not integrated into Stepik course yet due to technical difficulties related to Stepik infrastructure.

### Conclusion

Technical description of TRIK Studio robots programming system was presented. TRIK Studio now has about ten thousand users across the globe, according to Google Analytics data. Now it supports English, Russian and French languages. It is open source<sup>19</sup> and has large and active community developing it. TRIK Studio has about 100K lines of code (excluding QReal core, which also has size of about 120K LOC), written in C++ with Qt.

Future work consists of two major development vectors: improvements of an existing system and new research projects based on it. Improvement tasks are gathered from teachers, pupils and students which use TRIK Studio, and there is already several hundreds of such tasks tracked. For example, support for new robotic platforms (such as Arduino, STM32), improvements for simulator (more precise physics simulation, multiagent systems simulation and so on), support for more textual languages (like Python, Pascal). Research projects that are currently using TRIK Studio as a technical base

include research in domain-specific visual languages field and formal methods field of study. For example, we are creating technology to automatically generate visual domain-specific language using metainformation from packages of robotic middleware (ROS [59] is currently considered), that visual language will be able to link middleware nodes together thus configuring environment for a particular robot. Research in formal methods aims to formalize semantics of used visual languages to be able to apply formal verification and synthesis methods to diagrams.

### Список литературы

- [1] Papert Seymour. Mindstorms: Children, Computers, and Powerful Ideas. New York, NY, USA: Basic Books, Inc., 1980. С. 230.
- [2] Черёмухин Пётр Сергеевич. Внедрение робототехники в образовательное пространство школы с целью формирования инновационного мышления учащихся // статья в сборнике материалов IX международной научно-практической конференции «Актуальные вопросы развития образовательной области «Технология». 2014. С. 175–182.
- [3] Лучин Роман Михайлович. Платформа ТРИК: новые задачи и новые возможности // VI Всероссийская конференция «Современное технологическое обучение: от компьютера к роботу» (сборник тезисов). ЗАО «Полиграфическое предприятие № 3», 2016. С. 36–38.
- [4] Erwin Ben, Cyr Martha, Rogers Chris. Lego engineer and robolab: Teaching engineering with labview from kindergarten to graduate school // International Journal of Engineering Education. 2000. Т. 16, № 3. С. 181–192.
- [5] Kelly James Floyd. Lego Mindstorms NXT-G Programming Guide. Apress, 2007. С. 336.

<sup>19</sup><https://github.com/qreal/qreal> (accessed: 08.02.2017)



- [6] Valk Laurens. LEGO MINDSTORMS EV3 Discovery Book: A Beginner's Guide to Building and Programming Robots. No Starch Press, 2014.
- [7] Scratch: programming for all / Mitchel Resnick, John Maloney, Andrés Monroy-Hernández [и др.] // Communications of the ACM. 2009. Т. 52, № 11. С. 60–67.
- [8] S4A. 2016. URL: <http://s4a.ca/>.
- [9] mBlock. 2016. URL: <http://www.mblock.cc/>.
- [10] Enchanting. 2016. URL: <http://enchanting.robotclub.ab.ca/tiki-index.php>.
- [11] СкетчДуино — образовательная робототехника. 2016. URL: <http://www.scratchduino.ru/>.
- [12] Программирование на Blockly. 2016. URL: <http://blockly.ru/>.
- [13] Wolber David. App inventor and real-world motivation // Proceedings of the 42nd ACM technical symposium on Computer science education / ACM. 2011. С. 601–606.
- [14] 12Blocks | OneRobot. 2016. URL: <http://onerobot.org/products/12blocks/>.
- [15] Graphical Programming Environments for Educational Robots: Open Roberta-Yet Another One? / Beate Jost, Markus Ketterl, Reinhard Budde [и др.] // Multimedia (ISM), 2014 IEEE International Symposium on / IEEE. 2014. С. 381–386.
- [16] Ardublock | A Graphical Programming Language for Arduino. 2016. URL: <http://blog.ardublock.com/>.
- [17] Incorporating the Fischertechnik bricks into undergraduate mechatronics courses / GK Chang, SY Fan, RL Shue [и др.] // EE 2006, International Conference on Innovation, Good Practice and Research in Engineering Education. 2006.
- [18] Mayerová Karolina. Pilot activities: LEGO WeDo at primary school // 3rd International Workshop, Teaching Robotics, Teaching with Robotics. 2012. С. 32–39.
- [19] A visual robot-programming environment for multidisciplinary education / James Dorian Cross, Christopher Bartley, Emily Hamner [и др.] // 2013 IEEE International Conference on Robotics and Automation (ICRA) / IEEE. 2013. С. 445–452.
- [20] Wonder Workshop | Wonder. 2016. URL: <https://www.makewonder.com/apps/wonder>.
- [21] Root : Wyss Institute at Harvard. 2016. URL: <http://http://wyss.harvard.edu/viewpage/629/>.
- [22] Мордвинов Дмитрий Александрович, Литвинов Юрий Викторович. Сравнение образовательных сред визуального программирования роботов // Компьютерные инструменты в образовании. СПб., 2016. Т. 3. С. 32–49. URL: <http://github.com/qreal/articles/tree/master/2016-robotsVisualProgrammingTools/robotsVisualProgrammingTools.pdf>.
- [23] Johnston Wesley M, Hanna JR, Millar Richard J. Advances in dataflow programming languages // ACM Computing Surveys (CSUR). 2004. Т. 36, № 1. С. 1–34.
- [24] Kodosky Jeffrey, MacCrissen Jack, Rymar Gary. Visual programming using structured data flow // Visual Languages, 1991., Proceedings. 1991 IEEE Workshop on / IEEE. 1991. С. 34–39.
- [25] Dabney James B, Harman Thomas L. Mastering simulink. Pearson/Prentice Hall, 2004.
- [26] Jackson Jared. Microsoft robotics studio: A technical introduction // Robotics & Automation Magazine, IEEE. 2007. Т. 14, № 4. С. 82–87.
- [27] Michael S. Scherotter. CCR at MySpace. 2009. URL: <http://channel9.msdn.com/Shows/Communicating/CCR-at-MySpace>.
- [28] A LabVIEW-based remote laboratory experiments for control engineering education / Miladin Stefanovic, Vladimir Cvijetkovic, Milan Matijevic [и др.] // Computer Applications in Engineering Education. 2011. Т. 19, № 3. С. 538–549.
- [29] Yi Zhou, Jian-Jun Jiang, Shao-Chun Fan. A LabVIEW-based, interactive virtual laboratory for electronic engineering education // International Journal of Engineering Education. 2005. Т. 21, № 1. С. 94–102.
- [30] A low-cost, innovative methodology for teaching engineering through experimentation / M. Cyr, V. Miragila, T. Nocera [и др.] // Journal of Engineering Education. Washington, 1997. Т. 86. С. 167–172.
- [31] Portsmore M. ROBOLAB: Intuitive Robotic Programming Software to Support Life Long Learning // APPLE Learning Technology Review. 1999.
- [32] Diprose James P, MacDonald Bruce A, Hosking John G. Ruru: A spatial and interactive visual programming language for novice robot programming // Visual Languages and Human-Centric Computing (VL/HCC), 2011 IEEE Symposium on / IEEE. 2011. С. 25–32.
- [33] Терехов Андрей Николаевич, Брыксин Тимофей Александрович, Литвинов Юрий Викторович. Среда визуального программирования роботов QReal:Robots // III Всероссийская конференция “Современное технологическое обучение: от компьютера к роботу”(сборник тезисов). СПб., 2013. С. 2–5.
- [34] Kirsanov Alexander, Kirilenko Iakov, Melentyev Kirill. Robotics reactive programming with F#/Mono // Proceedings of the 10th Central and Eastern European Software Engineering Conference in Russia / ACM. 2014. С. 16.
- [35] Долинер ЛИ. Основы программирования в среде PascalABC. NET: учебное пособие. Издательство Уральского университета, 2014.
- [36] Rohmer Eric, Singh Surya PN, Freese Marc. V-REP: A versatile and scalable robot simulation framework // Intelligent Robots and Systems (IROS), 2013 IEEE/RSJ International Conference on / IEEE. 2013. С. 1321–1326.
- [37] Damas Luis, Milner Robin. Principal type-schemes for functional programs // Proceedings of the 9th ACM SIGPLAN-SIGACT symposium on Principles of programming languages / ACM. 1982. С. 207–212.
- [38] Кознов Дмитрий Владимирович. Основы визуального моделирования // М.: Изд-во Интернетуниверситета информационных технологий, ИНТУИТ. ру, БИНОМ, Лаборатория знаний. 2008.
- [39] Средства быстрой разработки предметно-ориентированных решений в metaCASE-средстве QReal / АС Кузнецова, АО Дерипаска, КС Таран [и др.] // Научно-технические ведомости СПбГПУ. С. 142.
- [40] QReal DSM platform-An Environment for Creation of Specific Visual IDEs / Anastasiia Kuzenkova, Anna Deripaska, Timofey Bryksin [и др.] // ENASE 2013 — Proceedings of the 8th International Conference on Evaluation of Novel Approaches to Software Engineering. Setubal, Portugal: SciTePress, 2013. С. 205–211.
- [41] Поддержка жестов мышью в мета-CASE-системах / М.С. Осечкина, Т.А. Брыксин, Ю.В. Литвинов [и др.] // Системное программирование. СПб., 2010. № 5. С. 52–75.
- [42] Osechkina Maria, Litvinov Yuri, Bryksin Timofey. Multistroke Mouse Gestures Recognition in QReal metaCASE Technology // SYRCoSE 2012: Proceedings of the 6th Spring/Summer Young Researchers' Colloquium on Software Engineering. Perm: ISPRAS, 2012. С. 194–200.
- [43] Brooks R. A robust layered control system for a mobile robot // IEEE J. Robot. Automat. 1986. Т. 2, № 1. С. 14–23.
- [44] Connell Jonathan H. A colony architecture for an artificial creature: Tech. Rep.: DTIC Document, 1989.
- [45] Arkin Ronald C. Motor schema based navigation for a mobile robot: An approach to programming by behavior // Robotics and Automation. Proceedings. 1987 IEEE International Conference on / IEEE. Т. 4. 1987. С. 264–271.
- [46] Rosenblatt Julio K. DAMN: A distributed architecture for mobile navigation // Journal of Experimental & Theoretical Artificial Intelligence. 1997. Т. 9, № 2-3. С. 339–360.
- [47] Simpson Jonathan, Ritson Carl G. Toward Process Architectures for Behavioural Robotics. // CPA. 2009. С. 375–386.
- [48] Banyasad Omid. A Visual Programming Environment for Autonomous Robots: Master's thesis: DalTech, Dalhousie University. Halifax, Nova Scotia, 2000.
- [49] Терехов Андрей Николаевич. Отечественные инструментальные средства обучения программированию // Информационные технологии для Новой школы. Мат.-лы VI Ме. С. 64.
- [50] Muchnick Steven S. Advanced compiler design implementation. Morgan Kaufmann, 1997.
- [51] Деревенец Егор Олегович, Трошина Екатерина Николаевна. Структурный анализ в задаче декомпиляции // Прикладная информатика. 2009. № 4.
- [52] Тихонова М.В., Литвинов Ю.В. Генерация кода в режиме мета-моделирования на лету в системе QReal // Материалы научно-

- практической конференции студентов, аспирантов и молодых учёных "Современные технологии в теории и практике программирования". СПб., 2015. С. 53–54.
- [53] Мордвинов Дмитрий Александрович, Литвинов Юрий Викторович. Обзор применения формальных методов в робототехнике // Научно-технические ведомости СПбГПУ Информатика. Телекоммуникации. Управление. 2016. Т. 2016. 1236. С. 84–107.
- [54] Kress-Gazit Hadas, Fainekos Georgios E, Pappas George J. Where's Waldo? Sensor-based temporal logic motion planning // 2007 IEEE International Conference on Robotics and Automation (ICRA) / IEEE. 2007. С. 3116–3121.
- [55] Бугайченко Дмитрий Юрьевич. Разработка и реализация методов формально-логической спецификации самонастраивающихся мультиагентных систем с временными ограничениями // Сайт математикомеханического факультета СПбГУ.–Санкт-Петербургский государственный университет. 2007. Т. 2010.
- [56] Дмитриев АС. Адаптация комбинированной пространственно-темпоральной логики для обработки в системах машинного обучения // Известия Волгоградского Государственного Технологического Университета. 2013. Т. 16, № 8 (111).
- [57] Мордвинов Дмитрий Александрович, Литвинов Юрий Викторович. Тестирование среды программирования роботов // Инструменты и методы анализа программ, материалы международной научно-практической конференции 12-14 ноября 2015 года. СПб.: Издательство Политехнического университета, 2015. С. 176–185.
- [58] Захаров В.А. QReal-web: онлайн-среда обучения программированию роботов // VI Всероссийская конференция "Современное технологическое обучение: от компьютера к роботу"(сборник тезисов). СПб., 2016. С. 38–39.
- [59] ROS: an open-source Robot Operating System / Morgan Quigley, Ken Conley, Brian Gerkey [и др.] // ICRA workshop on open source software. Т. 3. 2009. С. 5.