

Name: Robin E. Valenzuela	Date Performed: 9/17/2022
Course/Section: CPE31S2	Date Submitted:
Instructor: Engr.	Semester and SY:
Activity 5: Consolidating Playbook plays	
1. Objectives: 1.1 Use when command in playbook for different OS distributions 1.2 Apply refactoring techniques in cleaning up the playbook codes	
2. Discussion: <p>We are going to look at a way that we can differentiate a playbook by a host in terms of which distribution the host is running. It's very common in most Linux shops to run multiple distributions, for example, Ubuntu shop or Debian shop and you need a different distribution for a one off-case or perhaps you want to run plays only on certain distributions.</p> <p>It is a best practice in ansible when you are working in a collaborative environment to use the command git pull. git pull is a Git command used to update the local version of a repository from a remote. By default, git pull does two things. Updates the current local working branch (currently checked out branch) and updates the remote-tracking branches for all other branches. git pull essentially pulls down any changes that may have happened since the last time you worked on the repository.</p> <p>Requirement: In this activity, you will need to create a CentOS VM. Likewise, you need to activate the second adapter to a host-only adapter after the installations. Take note of the IP address of the CentOS VM. Make sure to use the command ssh-copy-id to copy the public key to CentOS. Verify if you can successfully SSH to CentOS VM.</p>	
Task 1: Use when command for different distributions	
1. In the local machine, make sure you are in the local repository directory (CPE232_yourname). Issue the command git pull. When prompted, enter the correct passphrase or password. Describe what happened when you issue this command. Did something happen? Why?	
<pre>valenzuela@workstation:~\$ cd CPE232_Valenzuela valenzuela@workstation:~/CPE232_Valenzuela\$ git pull Already up to date.</pre>	

Nothing happened, the command git pull allows users to update the remote repository, in this case, it is already updated.

2. Edit the inventory file and add the IP address of the Centos VM. Issue the command we used to execute the playbook (the one we used in the last activity): `ansible-playbook --ask-become-pass install_apache.yml`. After executing this command, you may notice that it did not become successful in the Centos VM. You can see that the Centos VM has failed=1. Only the two remote servers have been changed. The reason is that Centos VM does not support "apt" as the package manager. The default package manager for Centos is "yum."

```
GNU nano 6.2 inventory *
[Default]
192.168.56.102
192.168.56.103
192.168.56.104
[Ubuntu IPs]
192.168.56.102
192.168.56.103
[CentOS]
192.168.56.104
```

```
00020727.4877464 - MATH -> MATH
valenzuela@workstation:~/CPE232_Valenzuela$ ansible-playbook --ask-become-pass
install_apache.yml
BECOME password:

PLAY [all] *****
*

TASK [Gathering Facts] *****
*
fatal: [192.168.56.104]: UNREACHABLE! => {"changed": false, "msg": "Failed to c
onnect to the host via ssh: no such identity: /home/valenzuela/.ssh/ansible: No
such file or directory\r\nvalenzuela@192.168.56.104: Permission denied (public
key,gssapi-keyex,gssapi-with-mic,password).", "unreachable": true}
fatal: [192.168.56.103]: UNREACHABLE! => {"changed": false, "msg": "Failed to c
onnect to the host via ssh: ssh: connect to host 192.168.56.103 port 22: No rou
te to host", "unreachable": true}
ok: [192.168.56.102]

TASK [update repository index] *****
*
changed: [192.168.56.102]

TASK [install apache2 package] *****
```

In this case, I only opened Server 1 that is why Server 2 wasn't reachable.

3. Edit the `install_apache.yml` file and insert the lines shown below.

```
---
- hosts: all
  become: true
  tasks:

    - name: update repository index
      apt:
        update_cache: yes
        when: ansible_distribution == "Ubuntu"

    - name: install apache2 package
      apt:
        name: apache2
        when: ansible_distribution == "Ubuntu"

    - name: add PHP support for apache
      apt:
        name: libapache2-mod-php
        when: ansible_distribution == "Ubuntu"
```

Make sure to save the file and exit.

```
GNU nano 6.2                                install_apache.yml
---
- hosts: all
  become: true
  tasks:

    - name: update repository index
      apt:
        update_cache: yes
        when: ansible_distribtuion == "Ubuntu"

    - name: install apache2 package
      apt:
        name: apache2
        when: ansible_distribution == "Ubuntu"
    - name: add PHP support for apache
      apt:
        name: libapache2-mod-php
        when: ansible_distribution == "Ubuntu"
```

Run *ansible-playbook --ask-become-pass install_apache.yml* and describe the result.

If you have a mix of Debian and Ubuntu servers, you can change the configuration of your playbook like this.

- name: update repository index
apt:
 update_cache: yes
 when: ansible_distribution in ["Debian", "Ubuntu"]

Note: This will work also if you try. Notice the changes are highlighted.

```
valenzuela@workstation:~/CPE232_Valenzuela$ ansible-playbook --ask-become-pass
install_apache.yml
BECOME password:

PLAY [all] *****
*

TASK [Gathering Facts] *****
*
Fatal: [192.168.56.104]: UNREACHABLE! => {"changed": false, "msg": "Failed to c
onnect to the host via ssh: no such identity: /home/valenzuela/.ssh/ansible: No
such file or directory\r\nvalenzuela@192.168.56.104: Permission denied (public
key,gssapi-keyex,gssapi-with-mic,password).", "unreachable": true}
Fatal: [192.168.56.103]: UNREACHABLE! => {"changed": false, "msg": "Failed to c
onnect to the host via ssh: ssh: connect to host 192.168.56.103 port 22: No rou
te to host", "unreachable": true}
ok: [192.168.56.102]

TASK [update repository index] *****
*
changed: [192.168.56.102]

TASK [install apache2 package] *****
*
ok: [192.168.56.102]
```

4. Edit the *install_apache.yml* file and insert the lines shown below.

```
---
- hosts: all
  become: true
  tasks:

    - name: update repository index
      apt:
        update_cache: yes
        when: ansible_distribution == "Ubuntu"

    - name: install apache2 package
      apt:
        name: apache2
        state: latest
        when: ansible_distribution == "Ubuntu"

    - name: add PHP support for apache
      apt:
        name: libapache2-mod-php
        state: latest
        when: ansible_distribution == "Ubuntu"

    - name: update repository index
      dnf:
        update_cache: yes
        when: ansible_distribution == "CentOS"

    - name: install apache2 package
      dnf:
        name: httpd
        state: latest
        when: ansible_distribution == "CentOS"

    - name: add PHP support for apache
      dnf:
        name: php
        state: latest
        when: ansible_distribution == "CentOS"
```

Make sure to save and exit.

Run *ansible-playbook --ask-become-pass install_apache.yml* and describe the result.

```
valenzuela@workstation:~/CPE232_Valenzuela$ ansible-playbook --ask-become-pass
install_apache.yml
BECOME password:

PLAY [all] *****
*

TASK [Gathering Facts] *****
*
fatal: [192.168.56.104]: UNREACHABLE! => {"changed": false, "msg": "Failed to c
onnect to the host via ssh: no such identity: /home/valenzuela/.ssh/ansible: No
such file or directory\r\nvalenzuela@192.168.56.104: Permission denied (public
key,gssapi-keyex,gssapi-with-mic,password).", "unreachable": true}
ok: [192.168.56.102]
fatal: [192.168.56.103]: UNREACHABLE! => {"changed": false, "msg": "Failed to c
onnect to the host via ssh: ssh: connect to host 192.168.56.103 port 22: No rou
te to host", "unreachable": true}

TASK [update repository index] *****
*
changed: [192.168.56.102]
```

The result is unreachable for the centos

5. To verify the installations, go to CentOS VM and type its IP address on the browser. Was it successful? The answer is no. It's because the httpd service or the Apache HTTP server in the CentOS is not yet active. Thus, you need to activate it first.

5.1 To activate, go to the CentOS VM terminal and enter the following:

systemctl status httpd

The result of this command tells you that the service is inactive.

5.2 Issue the following command to start the service:

sudo systemctl start httpd

(When prompted, enter the sudo password)


sudo firewall-cmd --add-port=80/tcp

(The result should be a success)

```
[qrevalenzuelacentos@workstationCent ~]$ systemctl status httpd
● httpd.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/httpd.service; disabled; vendor pre
   bled)
   Active: active (running) since Sat 2022-09-17 10:16:43 PST; 3s ago
     Docs: man:httpd(8)
           man:apachectl(8)
  Main PID: 3226 (httpd)
    Status: "Processing requests..."
     Tasks: 6
    CGroup: /system.slice/httpd.service
            └─3226 /usr/sbin/httpd -DFOREGROUND
              └─3231 /usr/sbin/httpd -DFOREGROUND
                └─3232 /usr/sbin/httpd -DFOREGROUND
                  └─3233 /usr/sbin/httpd -DFOREGROUND
                    └─3234 /usr/sbin/httpd -DFOREGROUND
                      └─3235 /usr/sbin/httpd -DFOREGROUND

Sep 17 10:16:42 workstationCent systemd[1]: Starting The Apache HTTP Server..
Sep 17 10:16:43 workstationCent httpd[3226]: AH00558: httpd: Could not reliab
Sep 17 10:16:43 workstationCent systemd[1]: Started The Apache HTTP Server.
Hint: Some lines were ellipsized, use -l to show in full.
[qrevalenzuelacentos@workstationCent ~]$ sudo firewall-cmd --add-port=80/tcp
success
```

5.3 To verify the service is already running, go to CentOS VM and type its IP address on the browser. Was it successful? (Screenshot the browser)

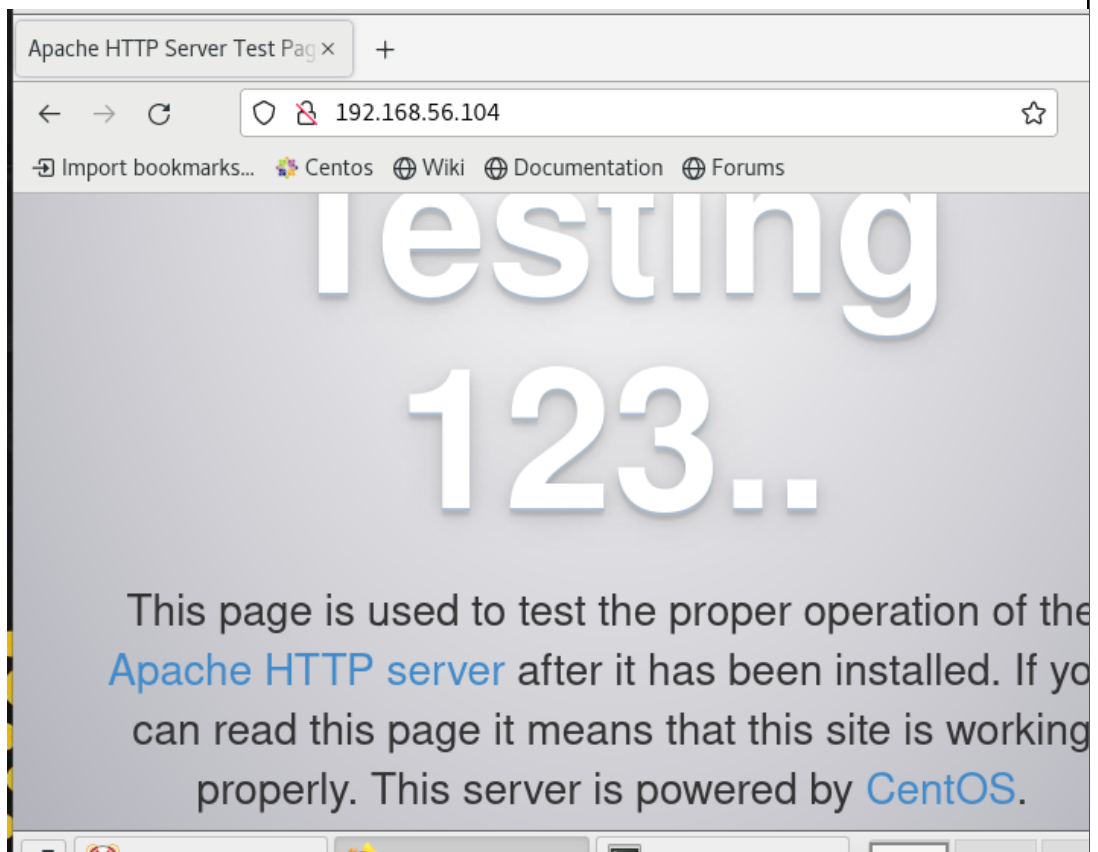

Task 2: Refactoring playbook

This time, we want to make sure that our playbook is efficient and that the codes are easier to read. This will also makes run ansible more quickly if it has to execute fewer tasks to do the same thing.

1. Edit the playbook *install_apache.yml*. Currently, we have three tasks targeting our Ubuntu machines and 3 tasks targeting our CentOS machine. Right now, we try to consolidate some tasks that are typically the same. For example, we can consolidate two plays that install packages. We can do that by creating a list of installation packages as shown below:

```
---
- hosts: all
  become: true
  tasks:

    - name: update repository index Ubuntu
      apt:
        update_cache: yes
      when: ansible_distribution == "Ubuntu"

    - name: install apache2 and php packages for Ubuntu
      apt:
        name:
          - apache2
          - libapache2-mod-php
        state: latest
      when: ansible_distribution == "Ubuntu"

    - name: update repository index for CentOS
      dnf:
        update_cache: yes
      when: ansible_distribution == "CentOS"

    - name: install apache and php packages for CentOS
      dnf:
        name:
          - httpd
          - php
        state: latest
      when: ansible_distribution == "CentOS"
```



```
---
- hosts: all
  become: true
  tasks:

    - name: update repository index Ubuntu
      apt:
        update_cache: yes
      when: ansible_distribution == "Ubuntu"

    - name: install apache2 and php packages for Ubuntu
      apt:
        name:
          - apache2
          - libapache2-mod-php
        state: latest
      when: ansible_distribution == "Ubuntu"

    - name: update repository index
      dnf:
        update_cache: yes
      when: ansible_distribution == "CentOS"

    - name: install apache and php packages for CentOS
```

Make sure to save the file and exit.

Run *ansible-playbook --ask-become-pass install_apache.yml* and describe the result.

```
valenzuela@workstation:~/CPE232_Valenzuela$ ansible-playbook --ask-become-
install_apache.yml
BECOME password:

PLAY [all] *****
*

TASK [Gathering Facts] *****
*
ok: [192.168.56.102]
fatal: [192.168.56.103]: UNREACHABLE! => {"changed": false, "msg": "Failed
connect to the host via ssh: ssh: connect to host 192.168.56.103 port 22: N
te to host", "unreachable": true}
ok: [192.168.56.104]

TASK [update repository index Ubuntu] *****
*
skipping: [192.168.56.104]
changed: [192.168.56.102]

TASK [install apache2 and php packages for Ubuntu] *****
*
skipping: [192.168.56.104]
ok: [192.168.56.102]

TASK [update repository index] *****
*
skipping: [192.168.56.102]
```

The centos ran because of the configuration to httpd in the terminal

2. Edit the playbook *install_apache.yml* again. In task 2.1, we consolidated the plays into one play. This time we can actually consolidated everything in just 2 plays. This can be done by removing the update repository play and putting the command *update_cache: yes* below the command *state: latest*. See below for reference:

```

---
- hosts: all
  become: true
  tasks:

    - name: install apache2 and php packages for Ubuntu
      apt:
        name:
          - apache2
          - libapache2-mod-php
        state: latest
        update_cache: yes
      when: ansible_distribution == "Ubuntu"

    - name: install apache and php packages for CentOS
      dnf:
        name:
          - httpd
          - php
        state: latest
        update_cache: yes
      when: ansible_distribution == "CentOS"

```

```

hosts: all
become: true
tasks:

  - name: install apache2 and php packages for Ubuntu
    apt:
      name:
        - apache2
        - libapache2-mod-php
      state: latest
      update_cache: yes
    when: ansible_distribution == "Ubuntu"

  - name: install apache and php packages for CentOS
    dnf:
      name:
        - httpd
        - php
      state: latest
      update_cache: yes
    when: ansible_distribution == "CentOS"

```

Make sure to save the file and exit.

Run *ansible-playbook --ask-become-pass install_apache.yml* and describe the result.

```
valenzuela@workstation:~/CPE232_Valenzuela$ ansible-playbook --ask-become-pass
install_apache.yml
BECOME password:

PLAY [all] *****
*

TASK [Gathering Facts] *****
*
ok: [192.168.56.102]
fatal: [192.168.56.103]: UNREACHABLE! => {"changed": false, "msg": "Failed to c
onnect to the host via ssh: ssh: connect to host 192.168.56.103 port 22: No rou
te to host", "unreachable": true}
ok: [192.168.56.104]

TASK [install apache2 and php packages for Ubuntu] *****
*
skipping: [192.168.56.104]
ok: [192.168.56.102]

TASK [install apache and php packages for CentOS] *****
*
skipping: [192.168.56.102]
ok: [192.168.56.104]

PLAY RECAP *****
*
192.168.56.102      : ok=2    changed=0    unreachable=0    failed=0
skipped=1    rescued=0    ignored=0
```

The code worked fine, since it was just the cleaner or shorter version of the yml code that we did.

3. Finally, we can consolidate these 2 plays in just 1 play. This can be done by declaring variables that will represent the packages that we want to install. Basically, the `apache_package` and `php_package` are variables. The names are arbitrary, which means we can choose different names. We also take out the line `when: ansible_distribution`. Edit the playbook *install_apache.yml* again and make sure to follow the below image. Make sure to save the file and exit.

```

---
- hosts: all
  become: true
  tasks:

    - name: install apache and php
      apt:
        name:
          - "{{ apache_package }}"
          - "{{ php_package }}"
        state: latest
        update_cache: yes

```

Run `ansible-playbook --ask-become-pass install_apache.yml` and describe the result.

4. Unfortunately, task 2.3 was not successful. It's because we need to change something in the inventory file so that the variables we declared will be in place. Edit the `inventory` file and follow the below configuration:

```

192.168.56.120 apache_package=apache2 php_package=libapache2-mod-php
192.168.56.121 apache_package=apache2 php_package=libapache2-mod-php
192.168.56.122 apache_package=httpd php_package=php

```

Make sure to save the `inventory` file and exit.

Finally, we still have one more thing to change in our `install_apache.yml` file. In task 2.3, you may notice that the package is assign as `apt`, which will not run in CentOS. Replace the `apt` with `package`. Package is a module in ansible that is generic, which is going to use whatever package manager the underlying host or the target server uses. For Ubuntu it will automatically use `apt`, and for CentOS it will automatically use `dnf`. Make sure to save the file and exit. For more details about the ansible package, you may refer to this documentation: [ansible.builtin.package – Generic OS package manager — Ansible Documentation](#)

```

---
- hosts: all
  become: true
  tasks:

    - name: install apache and php
      package:
        name:
          - "{{ apache_package }}"
          - "{{ php_package }}"
        state: latest
        update_cache: yes

```

Run *ansible-playbook --ask-become-pass install_apache.yml* and describe the result.

```

valenzuela@workstation:~/CPE232_Valenzuela$ nano inventory
valenzuela@workstation:~/CPE232_Valenzuela$ nano install_apache.yml
valenzuela@workstation:~/CPE232_Valenzuela$ ansible-playbook --ask-become-pass
install_apache.yml
BECOME password:

PLAY [all] *****
*

TASK [Gathering Facts] *****
*
ok: [192.168.56.102]
fatal: [192.168.56.103]: UNREACHABLE! => {"changed": false, "msg": "Failed to c
onnect to the host via ssh: ssh: connect to host 192.168.56.103 port 22: No rou
te to host", "unreachable": true}
ok: [192.168.56.104]

TASK [install apache and php] *****
*
ok: [192.168.56.102]
ok: [192.168.56.104]

PLAY RECAP *****
*
192.168.56.102      : ok=2    changed=0    unreachable=0    failed=0
skipped=0    rescued=0    ignored=0
192.168.56.103      : ok=0    changed=0    unreachable=1    failed=0
skipped=0    rescued=0    ignored=0
192.168.56.104      : ok=2    changed=0    unreachable=0    failed=0

```

The result is that it works because we edited the inventory and yml file to match the installation process.

Supplementary Activity:

1. Create a playbook that could do the previous tasks in Red Hat OS.

Reflections:

Answer the following:

1. Why do you think refactoring of playbook codes is important?
 - To make it easier to read and easier to manage.
2. When do we use the “when” command in playbook?
 - When there is a conditional situation in the terminal.