DIMNS MARKED DENOTES (S) SAFETY/REGULATION (F) CRITICAL FIT/FUNCTION (M) MAJOR FIT/FUNCTION (M2) MINOR FIT/FUNCTION

PART NO.	DIM 'A' (28)	DIM 'B'	FINISH GRIND Ø	PLATING THK. BEFORE POST CHROME GRINDING (F)	PLATING THK. AFTER POST CHROME GRINDING (F)	Ø 'C'	MODEL
34040315-1	167.5	125.5 (28)	Ø10.938-10.948	18±4 µm	15±4 µm	Ø10.960-10.986	30001167,1337,1497,1397,1377,2034,2054,2074,2097,1357,3237
34040315-2	164.1	122.1	Ø10.938-10.948	18±4 µm	15±4 µm	Ø10.960-10.986	30001347
34040315-3	155	113.0	Ø10.938-10.948	18±4 µm	15±4 µm	Ø10.960-10.986	30001154,1387,1564
34040315-4	174.5	132.5	Ø10.938-10.948	18±4 µm	15±4 µm	Ø10.960-10.986	30001294,3477 (28)
34040315-5	184.5	142.5	Ø10.938-10.948	18±4 µm	15±4 µm	Ø10.960-10.986	30001617,1637,1757,1667,2137,2497,2517,2617,2637
34040315-7	170.5	128.5	Ø10.928-10.938	24±4 µm	20±4 µm	Ø10.960-10.986	30001837,30001857,30003037,30003377
34040315-8	187.3	145.3	Ø10.938-10.948	18±4 µm	15±4 µm	Ø10.960-10.986	30002457
34040315-12	180.5	138.5	Ø10.938-10.948	18±4 µm	15±4 µm	Ø10.960-10.986	30002977
34040315-11	141	99	Ø10.938-10.948	18±4 µm	15±4 µm	Ø10.960-10.986	40000127
34040315-14	178.2	136.2	Ø10.938-10.948	18±4 µm	15±4 µm	Ø10.960-10.986	30003057
34040315-17	182.5	140.5	Ø10.938-10.948	18±4 µm	15±4 µm	Ø10.960-10.986	30003067

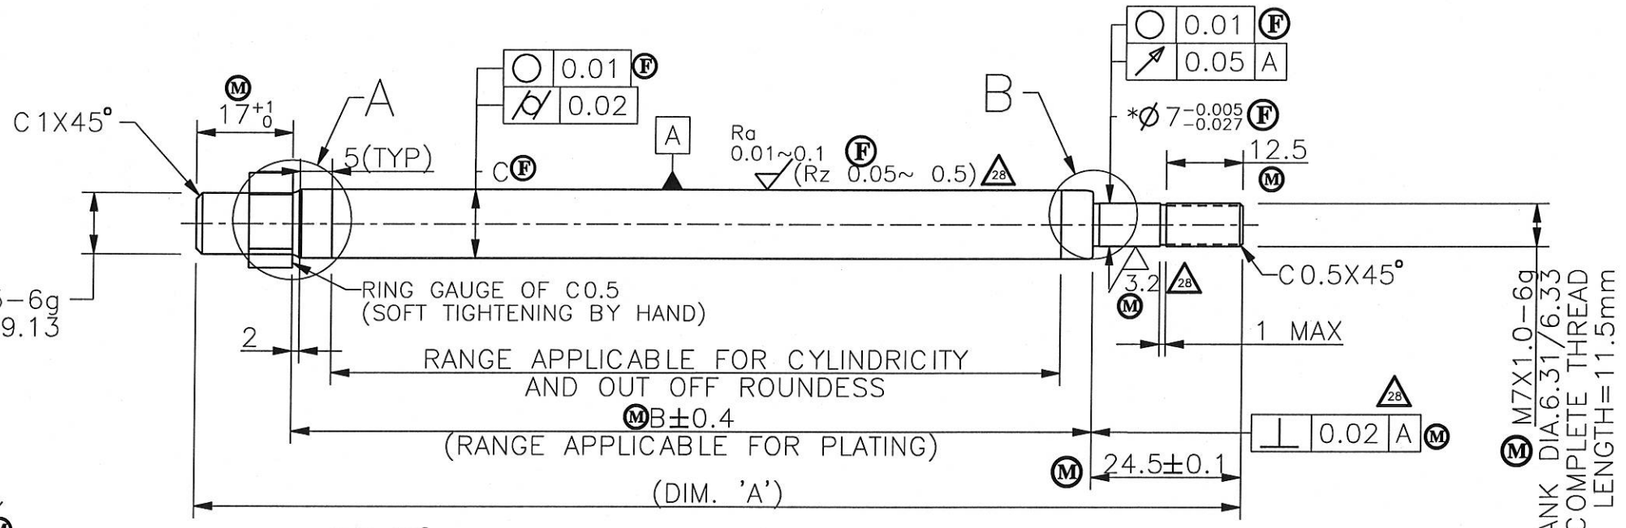

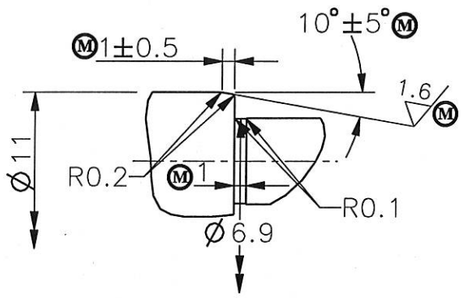

DETAIL "B"
(PROFILE AT FINISH GRINDING)

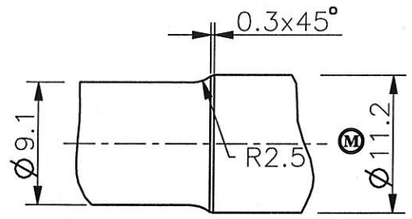

DETAIL "A"
(PROFILE AT MACHINING STAGE)

NOTE:-
1. TO BE GROUND TO FINISH SIZE AFTER PLATING.
   MATERIAL REMOVAL 3~5µ ON DIAMETER.
(M) 2. MUST BE NO CHATTER, SCRATCH, ABRASION AND BRUISE ON SURFACE OF Ø11
(M) 3. MUST BE FREE FROM PINHOLE, ROUGH SURFACE AND BLISTER AFTER PLATING
(M) 4. CHROME HARDNESS :HV 800MIN. / 25gms LOAD.
5. PARTING PIP NOT PERMITTED
(F) 6a.COROSION RESISTANCE : UP TO 48Hrs. CASS TEST. RATING NO.7 MIN.
6b.CORROSION RESISTANCE FOR APPLICATION 30003377 : CASS TEST: 1 CYCLE
ACCEPTANCE CRITERIA : RATING NO. 8MIN
NOTE: 1 CYCLE= 16Hrs SPRAY + 8Hrs NO SPRAY
6c. PLATING VALIDATION : CORROSION RESISTANCE AS MENTIONED.OTHER PARAMETERS AS PER GSP 0103.
(M) 7. '*' MARKED DIMENSION SHOULD BE CHECKED WITH GO & NO GO RING GAUGE. (28)

DATE	REV	ALTERATION	E.C.N.NO
5.12.16	28	Ra & Rz tol MENTIONED,DIM 'A' 167.5 WAS 167, 164.1 WAS 163.6,155 WAS 154.5, 174.5 WAS 174, 184.5 WAS 184,170.5 WAS 170,187.3 WAS 186.8, 180.5 WAS 180,141 WAS 140.5,178.2 WAS 177.7, 182.5 WAS 182.DIM. 125.5 WAS 125.1,NOTE 7, ⊥, SURFACE FINISH & 30003477 PART NO.MENTIONED.	65/16
18.10.12	27	APPLICATION 30003377 ADDED. CORROSION RESISTANCE DETAILS ADDED. PLATING VALIDATION NOTE ADDED.	60/12
07.08,12	26	FOR PART NO.34040315 7 PLATING THK IS CAHNGED TO 20µm FROM 15µm, ACCORDINGLY ALL OTHER PARAMETER MODIFIED,	11/12

SUPERSEDES :25
GENERAL TOLERANCE ASPER : -
DESIGN SOURCE REF.
RELEASE FOR
☐ COSTING ☐ PROTOTYPE ☐ OTS ☐ PRE PRODUCTION ■ PRODUCTION

GABRIEL INDIA LTD.

SCALE	SHEETS	FINISH:	MASS:
1:1	1 / 1	HARD CHROME PLATING	–

DRAWN BY: Machly DATE: 7/12/16
CHECKED BY: Vishali DATE: 7/12/16
APPROVED BY: [illegible] DATE: 7/12/16

NAME:- PISTON ROD

MATERIAL:- BAR 3404010 (S) AS PER GP 136-5

PART NO:- 34040315 REV. 28

ALL DIMENSIONS ARE IN MM. | NO MANUAL ALTERATION | DO NOT SCALE | IF IN DOUBT PLEASE ASK | SIZE : A3

MASTER COPY ONLY IF RED

CONFIDENTIAL: THIS DRAWING AND THE INFORMATION THEREIN ARE THE PROPERTY OF GABRIEL INDIA LTD., AND SHALL NOT BE REPRODUCED, COPIED RECORDED IN ANY MEDIA, USED FOR ANY OTHER PURPOSE OR DELIVERED AND/OR DISCLOSED TO ANY THIRD PARTY WITHOUT WRITTEN CONSENT OF GABRIEL.