DIMNS MARKED DENOTES AS PER STD GWP 0101 : SAFETY/REGULATION | CRITICAL FIT/FUNCTION | MAJOR FIT/FUNCTION | MINOR FIT/FUNCTION

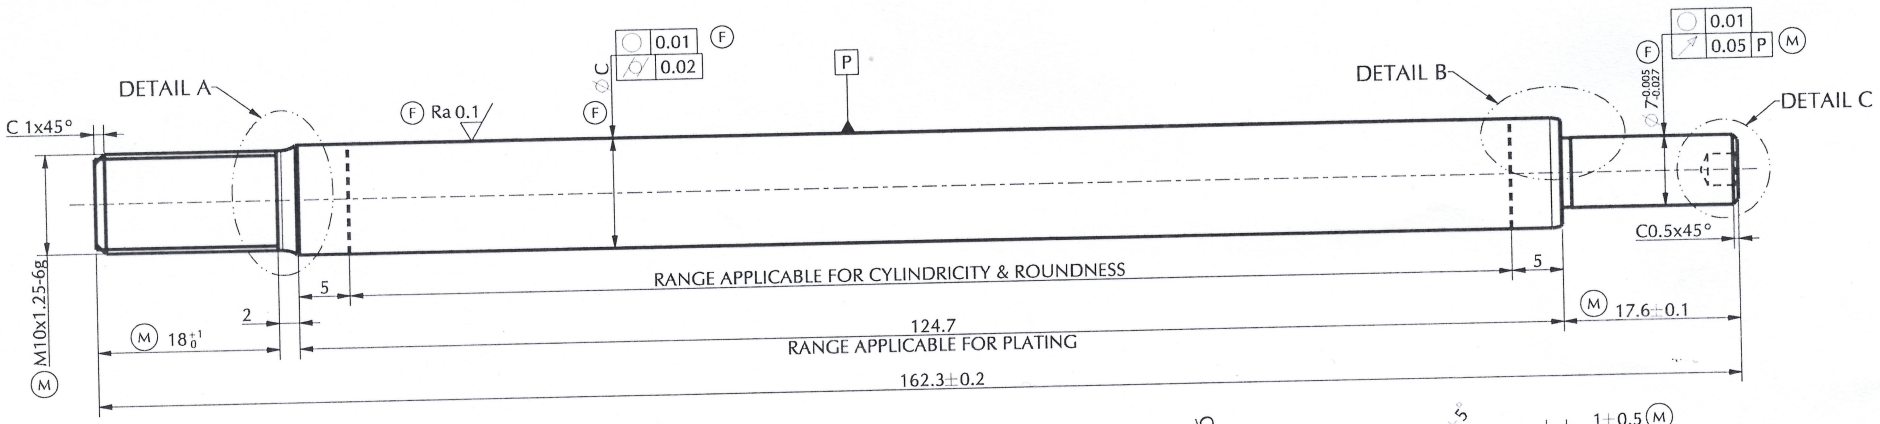





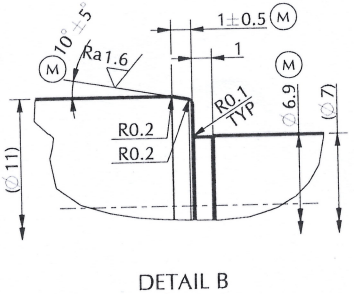

MASTER COPY ONLY IF RED GABRIEL NASHIK

TABLE 1 :

PARAMETER	VALUE
FINISH GRINDING	∅10.938~∅10.948
PLATING THK. BEFORE POST CHROME GRINDING	18±4 μm
PLATING THK. AFTER POST CHROME GRINDING	15±4 μm
∅C	∅10.960 ~∅10.986

NOTE :
1) TO BE GROUND TO FINISH SIZE AFTER PLATING & MATERIAL REMOVAL SHALL BE 3 TO 5 μm ON DIAMETER
2) PART TO BE FREE FROM BURR, CHATTER, SCRATCHES, ABRASION & BRUISE ON SURFACE ∅11
3) PART TO BE FREE FROM PIN HOLES, ROUGH SURFACE & BLISTER AFTER PLATING
4) UNSPECIFIED TOLERANCE FOR MACHINING AREA SHALL BE AS PER TABLE 2
5) PLATING VALIDATION & SURFACE DEFECT QUALITY CHECK AS PER GSP0103 HARDNESS : MIN 800 HV / 25 gm LOAD
6) PARTING PIP NOT PERMITTED
7) CORROSION RESISTANCE : UPTO 24 HOURS CASS TEST, RATING 7 MIN
8) THREAD LENGTH TO BE CHECKED BY TIGHTENING NUT OF M10x1.25-6H

DATE	REV	ALTERATION	E.C.N.NO
04.10.17	D0	NEW RELEASE FOR DEVELOPMENT	D626

SUPERSEDES : -
GENERAL TOLERANCE ASPER : - PE/GT/010
DESIGN SOURCE REF.
RELEASE FOR: COSTING, PROTOTYPE, OTS, PRE-PRODUCTION, PRODUCTION

GABRIEL INDIA LTD.

SCALE	SHEETS	FINISH:	MASS:
NTS	1 / 1	HARD CHROME PLATING	(TBD)

DRAWN BY: MVA DATE: 04.10.17
CHECKED BY: JSN DATE: 04.10.17
APPROVED BY: SAT DATE: 04.10.17

NAME:- PISTON ROD SYM CROX 125 RR
MATERIAL:- BAR 3404010 AS PER GP 136-5
PART NO:- 34040985 REV. D0

ALL DIMENSIONS ARE IN mm. | NO MANUAL ALTERATION | DO NOT SCALE | IF IN DOUBT PLEASE ASK | SIZE : A3

FILE ARCHIVE LOCATION: -

CONFIDENTIAL: THIS DRAWING AND THE INFORMATION THEREIN ARE THE PROPERTY OF GABRIEL INDIA LTD., AND SHALL NOT BE REPRODUCED, COPIED RECORDED IN ANY MEDIA, USED FOR ANY OTHER PURPOSE OR DELIVERED AND/OR DISCLOSED TO ANY THIRD PARTY WITHOUT WRITTEN CONSENT OF GABRIEL.