

Section 3: APS.Net Core development: Routing, navigations, Layout và Render Body

1. Routing

- Routing like a map for a website
- When someone types www.websitename.com/about, routing directs the browser to display the “about” page.
- For the URL www.website.com/product. It displays the “product” page.

2. Product Detail

Open **ProductsController.cs**, add code

```
public IActionResult Detail(int id)
{
    var product = productRepository.GetProductDetail(id);
    if (product != null)
    {
        return View(product);
    }
    return NotFound();
}
```

In **Views/Products**, we add a new View named **Detail.cshtml**

```
@model coffeeshop.Models.Product
<!DOCTYPE html>
<html>
<head>
    <title>Coffee Shop</title>
</head>
<body>
    
    <h3>@Model.Name</h3>
    <p>@Model.Detail</p>
    <h5>@Model.Price.ToString("c")</h5>
</body>
</html>
```

Show result on Browser <https://localhost:port/Products/Detail/1>

3. Navigations with Tag Helpers

Traditional HTML

```
<a href="link.html" ></a>
```

Navigation with Tag Helpers

Instead of using the “href” attribute, we’ll utilize tag helpers such as:

```
<a asp-controller="Controller_name" asp-action="Action_name"></a>
```

Open **Shop.cshtml**, edit product name that link to single product page.

```
@addTagHelper *, Microsoft.AspNetCore.Mvc.TagHelpers
<!DOCTYPE html>
<html>
    <head>
        <title>Coffee Shop</title>
    </head>
```

```

<body>
  <h1>Shop Coffee</h1>
  <div class="container">
    @foreach (var item in Model)
    {
      <div class="single-product">
        
        <a asp-controller="Products" asp-action="Detail" asp-route-
id="@item.Id" target="_blank"><h3> @item.Name</h3></a>
        <p> @item.Price.ToString("C") </p>
      </div>
    }
  </div>
</body>
</html>


```

4. Render Body, View Imports, View Start & Layout File

Add folder Shared in Views -> add a View layout- Razor View Empty – Razor Layout



Source code in file `_Layout.cshtml`

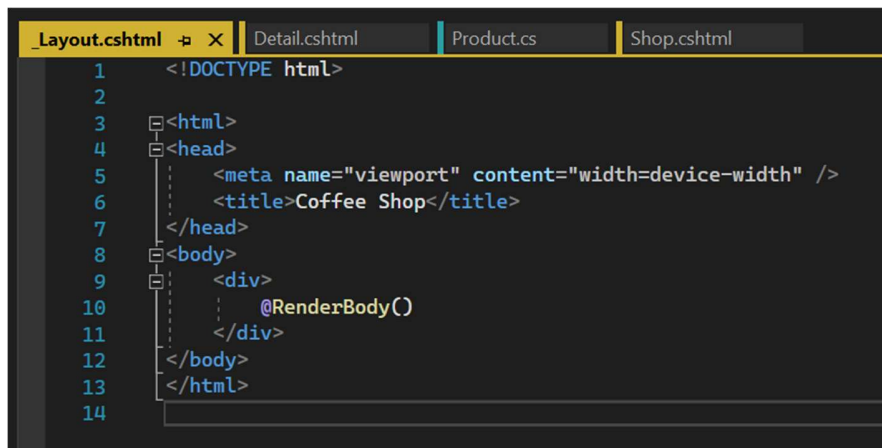

Edit **Detail.cshtml**



Rewrite the file

```
@model coffeeshop.Models.Product

<h3>@Model.Name</h3>
<p>@Model.Detail</p>
<h5>@Model.Price.ToString("c")</h5>
```

Add ViewImports and Add ViewStart

Add a Razor view import and Razor view start in View folder with named **_ViewStart.cshtml** and **_ViewImports.cshtml**

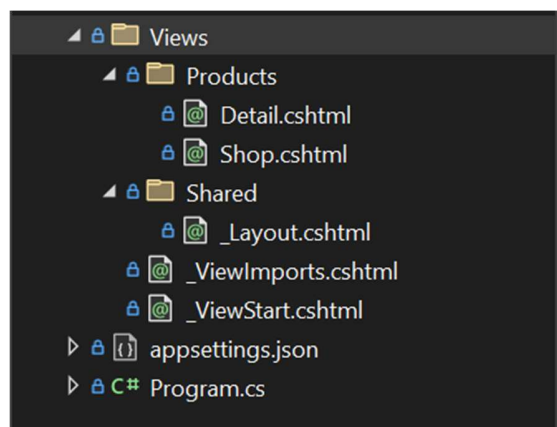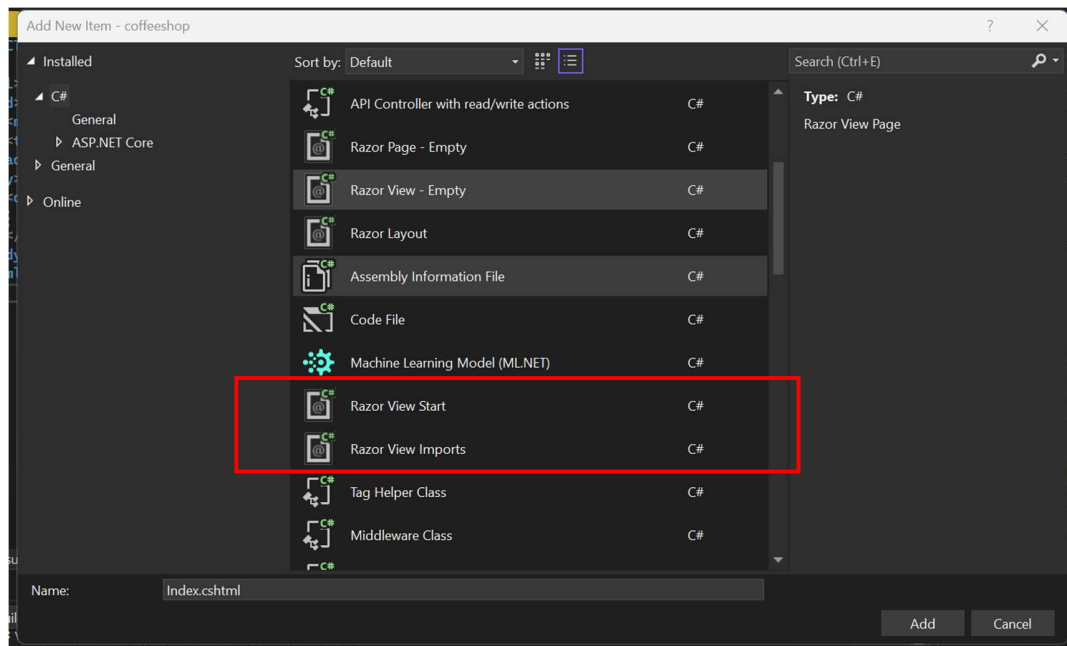

Source code in **_ViewImports.cshtml**

```
@using coffeeshop.Models  
@addTagHelper *, Microsoft.AspNetCore.Mvc.TagHelpers
```

Source code in **_ViewStart.cshtml**

```
@{  
    Layout = "_Layout";  
}
```

Section 4: Template integration in Asp.net Core

1. What is template? How to get templates?

Besides designing your own templates using HTML, CSS and Javascript, you can also use available templates, which help you create a professional-looking website without spending much effort. Templates help us quickly create a website with a consistent design without having to create a layout and design from scratch.

There are many available templates that we can use (both free and paid). To get a template, we can search and download it directly online. Or you can also use drag and drop tools (eg mobirise,..) to create your own templates.

These templates are typically in the form of HTML, CSS, and JavaScript files and can be integrated into an ASP.NET Core project using a variety of techniques.

2. Understanding about template

Using the template in Coffee shop below:

Name	Date modified	Type	Size
assets	03/11/2023 09:38	File folder	
cart.html	03/11/2023 09:56	Chrome HTML Doc...	6 KB
contact.html	03/11/2023 09:56	Chrome HTML Doc...	8 KB
detail.html	03/11/2023 09:55	Chrome HTML Doc...	8 KB
index.html	03/11/2023 09:53	Chrome HTML Doc...	14 KB
shipping.html	30/01/2023 23:04	Chrome HTML Doc...	8 KB
shop.html	03/11/2023 09:55	Chrome HTML Doc...	14 KB
shopping-cart.html	28/01/2023 00:51	Chrome HTML Doc...	12 KB


Files in folder assets

Name	Date modified	Type
bootstrap	03/11/2023 09:38	File folder
dropdown	03/11/2023 09:38	File folder
formoid	03/11/2023 09:38	File folder
images	03/11/2023 09:38	File folder
mobirise	03/11/2023 09:38	File folder
parallax	03/11/2023 09:38	File folder
smoothscroll	03/11/2023 09:38	File folder
socicon	03/11/2023 09:38	File folder
theme	03/11/2023 09:38	File folder
web	03/11/2023 09:38	File folder
ytplayer	03/11/2023 09:38	File folder



3. Intergrate template in .Net Core

We build the homepage using the template.


Copy Assets folder in the template and put in the wwwroot folder

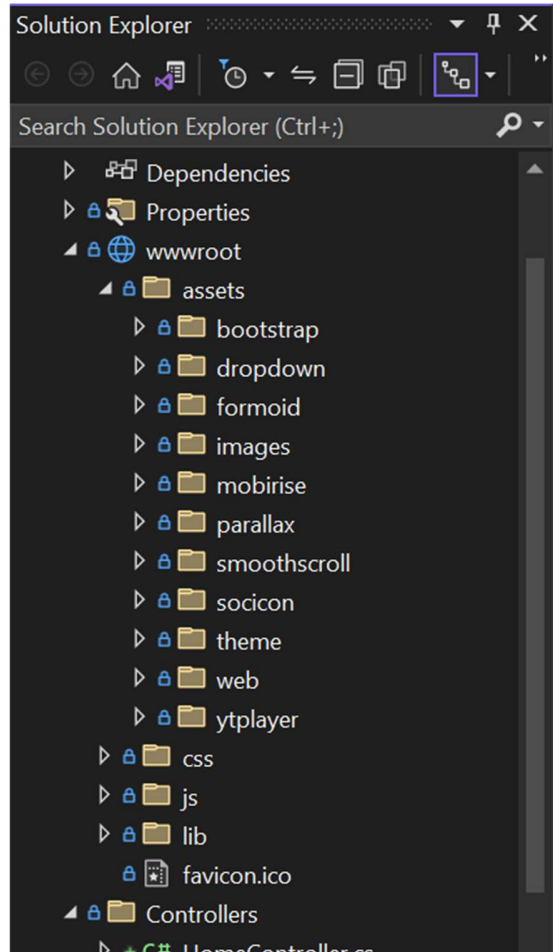


Next we create a new controller that named **HomeController.cs** to handle the request

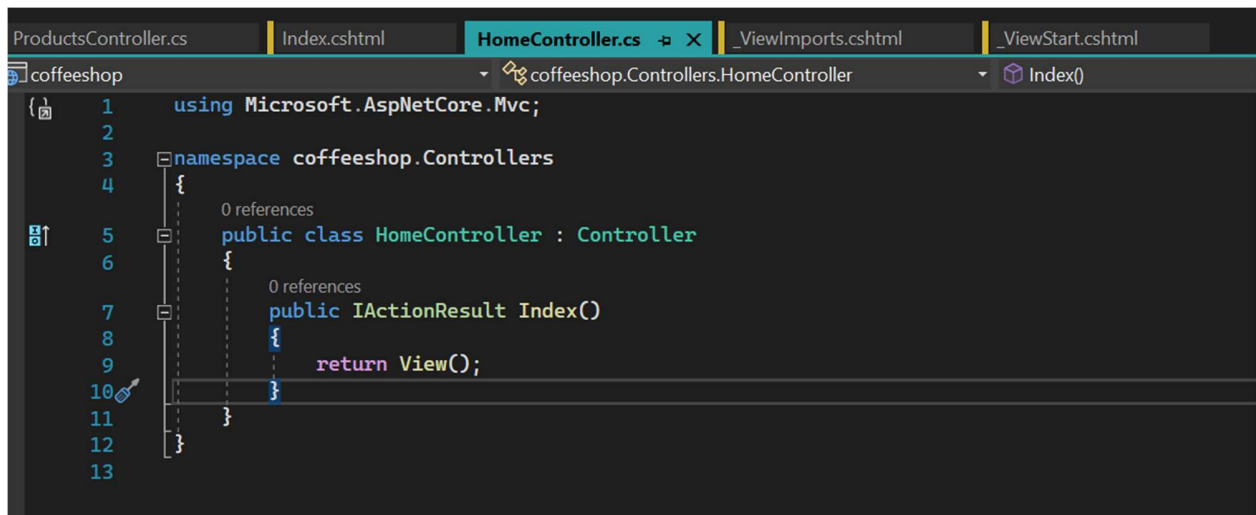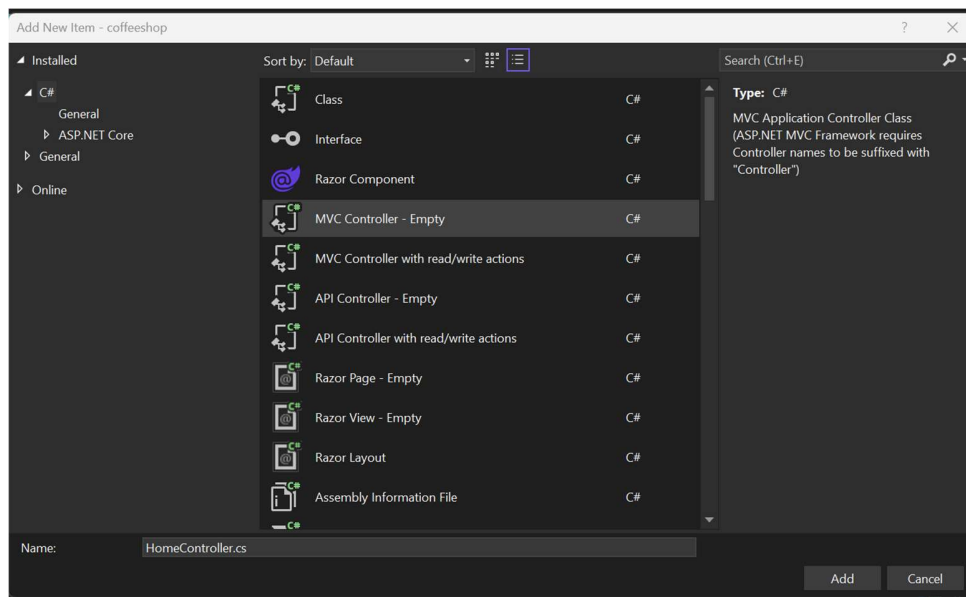

Then we add a View by click on the Action **Index()** -> **Add View**

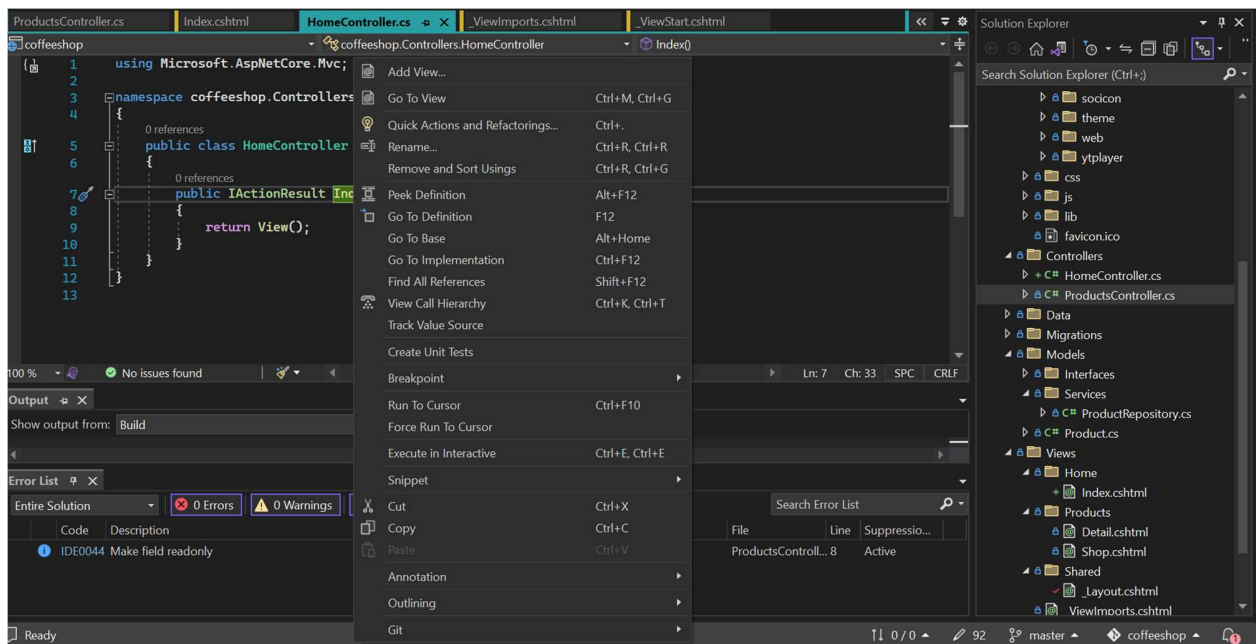

A new view name **Index.cshtml** will be created automatically in **View /Home** folder

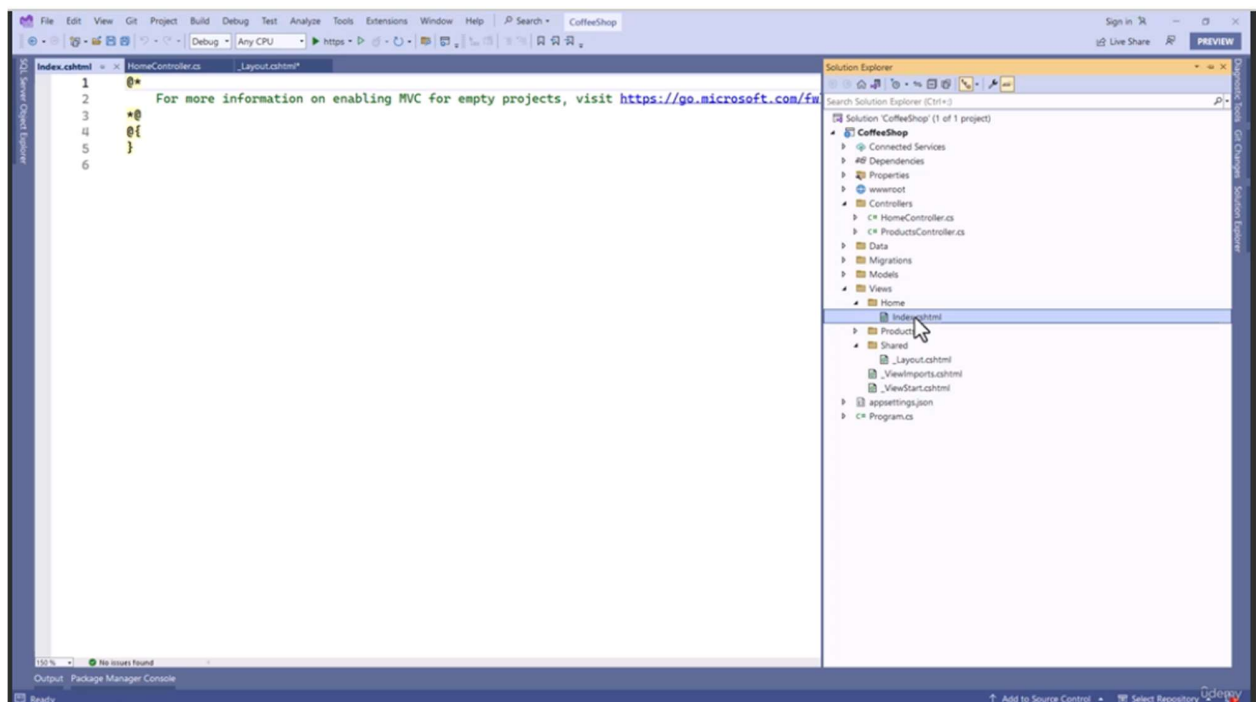

In this view, we want to show the Index page so we use the Index.html in the template. Copy the code from Index.html and paste it to Index.cshtml in **View** folder.

In this step, we noted that the **index.cshtml** have the same layout header and footer with the other page so we put the code <head>, menu navigation to the **_Layout.cshtml**. We replace the code in <body> by **@RenderBody()** in **_Layout.cshtml**. The source code in tag <body>, we put in the **Index.html**.

We also change the file directory in href="**~/assets/....**" by add "**~**"

Source code `_Layout.cshtml`:

```
<!DOCTYPE html>
<html>
  <head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="generator" content="Mobirise v5.7.8, mobirise.com">
    <meta name="viewport" content="width=device-width, initial-
scale=1, minimum-scale=1">
    <link rel="shortcut icon" href="assets/images/coffee-icon-sign-
symbol-design-free-png.webp" type="image/x-icon">
    <meta name="description" content="">

    <title>Home</title>
    <link rel="stylesheet" href="~/assets/web/assets/mobirise-
icons2/mobirise2.css">
    <link rel="stylesheet" href="~/assets/web/assets/mobirise-icons-
bold/mobirise-icons-bold.css">
    <link rel="stylesheet"
href="~/assets/bootstrap/css/bootstrap.min.css">
    <link rel="stylesheet" href="~/assets/bootstrap/css/bootstrap-
grid.min.css">
    <link rel="stylesheet" href="~/assets/bootstrap/css/bootstrap-
reboot.min.css">
    <link rel="stylesheet" href="~/assets/parallax/jarallax.css">
    <link rel="stylesheet" href="~/assets/dropdown/css/style.css">
    <link rel="stylesheet" href="~/assets/socicon/css/styles.css">
    <link rel="stylesheet" href="~/assets/theme/css/style.css">
    <link rel="preload"
href="https://fonts.googleapis.com/css?family=Jost:100,200,300,400,500,600
,700,800,900,100i,200i,300i,400i,500i,600i,700i,800i,900i&display=swap"
as="style" onload="this.onload=null; this.rel='stylesheet'">
    <noscript>
      <link rel="stylesheet"
href="https://fonts.googleapis.com/css?family=Jost:100,200,300,400,500,600
,700,800,900,100i,200i,300i,400i,500i,600i,700i,800i,900i&display=swap"
/>
    <link rel="preload" as="style" href="~/assets/mobirise/css/mbr-
additional.css">
    <link rel="stylesheet" href="~/assets/mobirise/css/mbr-
additional.css" type="text/css">
  </head>

  <body>
    <section data-bs-version="5.1" class="menu menu3 cid-tsEQosCCDP"
once="menu" id="menu3-0">...
  </section>
  @RenderBody()
```

```

<section data-bs-version="5.1" class="footer7 cid-tsQdrs3Vrj"
once="footers" id="footer7-13"> ... //source code
</section>

<script
src=~/assets/bootstrap/js/bootstrap.bundle.min.js"></script>
<script src=~/assets/parallax/jarallax.js"></script>
<script src=~/assets/smoothscroll/smooth-scroll.js"></script>
<script src=~/assets/ytplayer/index.js"></script>
<script src=~/assets/dropdown/js/navbar-dropdown.js"></script>
<script src=~/assets/theme/js/script.js"></script>
</body>
</html>

```


Source code in **Index.cshtml**

```

<section data-bs-version="5.1" class="header18 cid-tsEQyIZRcx mbr-
fullscreen mbr-parallax-background"
id="header18-1">...//source code
</section>

```

Run the application, the app will run the default route: <https://localhost:7278/> with controller=Home, action=Index (~ <https://localhost:7278/Home/index>)

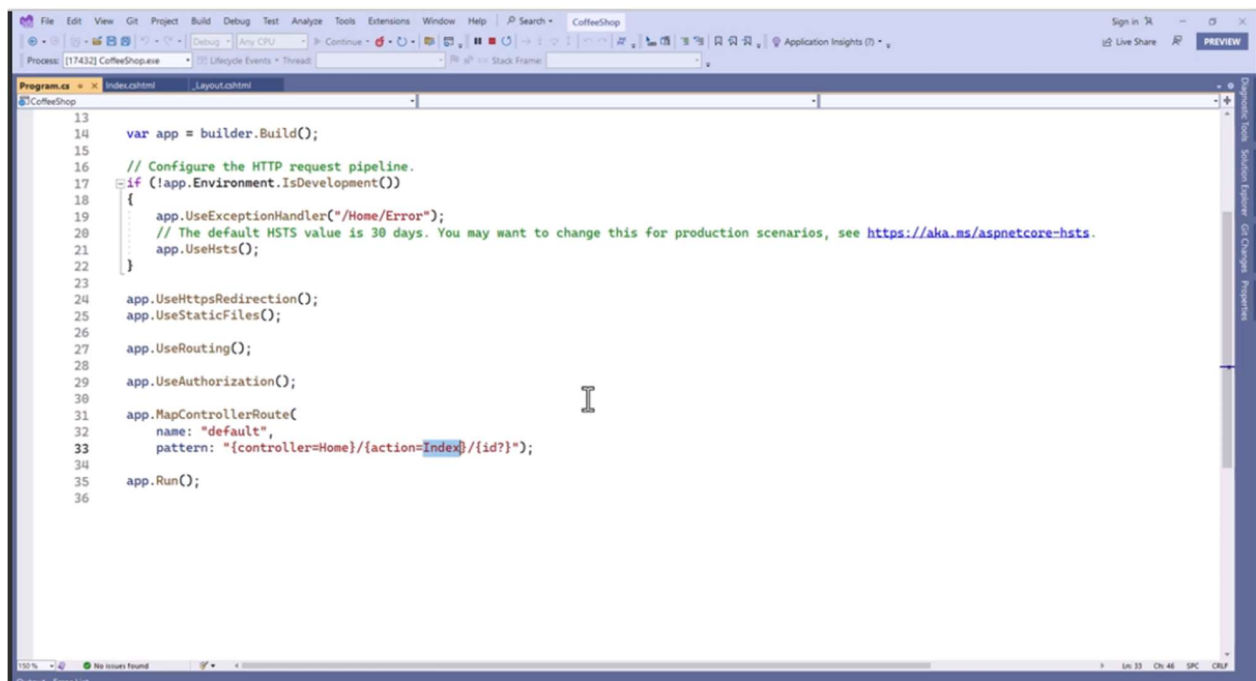

Show result in web browser

[Home](#)[Shop](#)[Contact](#)[User icon](#)[Cart icon \(0\)](#)

The daily grind coffee house

Where every cup is a fresh brew of perfection

[Shop now](#)

4. Populate Trending Products data

In Top selling product part in Index.cshtml, we query a list of products (ImageUrl, Name, Price) that are sold in the top from database and show them in this page.

```
IPProductRepository.cs | ProductsController.cs | Index.cshtml* | HomeController.cs | _ViewImports.cshtml
31 | <div class="container">
32 |   <div class="mbr-section-head">
33 |     <h4 class="mbr-section-title mbr-fonts-style align-center mb-0 display-2">
34 |       <strong>Top Selling</strong>
35 |     </h4>
36 |     <h5 class="mbr-section-subtitle mbr-fonts-style align-center mb-0 mt-2 display-5">
37 |       Make your mornings
38 |       better with our top-selling product.
39 |     </h5>
40 |   </div>
41 |   <div class="row mt-4">
42 |     <div class="item features-image col-12 col-md-6 col-lg-4">...
66 |     <div class="item features-image col-12 col-md-6 col-lg-4">...
89 |     <div class="item features-image col-12 col-md-6 col-lg-4">...
110 |     <div class="item features-image col-12 col-md-6 col-lg-4">...
129 |     <div class="item features-image col-12 col-md-6 col-lg-4">...
148 |     <div class="item features-image col-12 col-md-6 col-lg-4">...
169 |   </div>
170 | </div>
171 | </section>
172 |
173 | <section data-bs-version="5.1" class="footer7 cid-tsQdrs3Vrj" once="footers" id="footer7-13">
174 |   <div class="container">
00 % | No issues found | Ln: 42 | Ch: 13 | SPC | CRLF
```

In **HomeController.cs**, we add a data that query Trending products to View

```

Product.cs | IProductRepository.cs | ProductsController.cs | Index.cshtml | HomeController.cs | _ViewImports.cshtml
coffeeshop
1 using coffeeshop.Models.interfaces;
2 using Microsoft.AspNetCore.Mvc;
3
4 namespace coffeeshop.Controllers
5 {
6     1 reference
7     public class HomeController : Controller
8     {
9         private IProductRepository productRepository;
10        0 references
11        public HomeController(IProductRepository productRepository)
12        {
13            this.productRepository = productRepository;
14        }
15
16        0 references
17        public IActionResult Index()
18        {
19            return View(productRepository.GetTrendingProducts());
20        }
21    }

```

Look at the code in the **Index.cshtml**, we will remove the static product's list and show only the first product in top. Then we replace the image's link, Name and the Price from model Product that we query from database.


We remember declare `@model IEnumerable<Product>` on the top of View

```

<div class="row mt-4">
    @foreach (var item in Model){
        <div class="item features-image col-12 col-md-6 col-lg-4">
            <div class="item-wrapper">
                <div class="item-img">
                    
                </div>
                <div class="item-content">
                    <h6 class="item-subtitle mbr-fonts-style mt-1 display-7">
                        <strong>@item.Name</strong>
                    </h6>
                    <p class="mbr-text mbr-fonts-style mt-3 display-7">@item.Price.ToString("c")</p>
                </div>
                <div class="mbr-section-btn item-footer mt-2">
                    <a href=""
                        class="btn item-btn btn-primary display-4 target="_self">
                        <span class="mbr-iconfont mbr-iconfont-btn"></span>Add to cart
                    </a>
                </div>
            </div>
        </div>
    }
</div>

```

Run app show page:

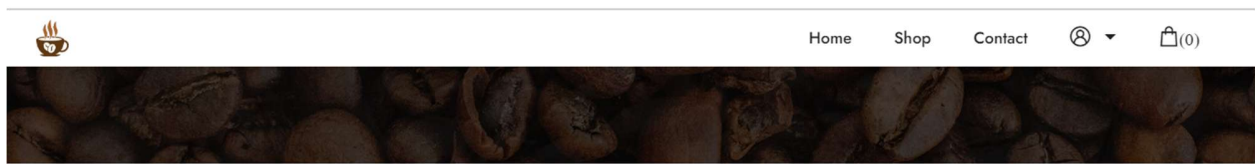

Top Selling

Make your mornings better with our top-selling product.



America

\$25.00

Add to cart 



Vietnam

\$20.00

Add to cart 



United Kingdom

\$15.00

Add to cart 

5. Intergrate Shop Page

Next we edit the Shop page. Follow the step below:

1. Modify the route Index and Shop in Index.cshtml

Because the link href="index.html" in `<a>` in templates is linking to a static page which is not exist in localhost, so we must edit the link with controller and action

```

dex.html | _Layout.cshtml | Shop.cshtml | Product.cs | IProductRepository.cs | ProductsController.cs
32 | <body>
33 | <section data-bs-version="5.1" class="menu menu3 cid-tsEQosCCDP" once="menu" id="menu3-0">
34 | <nav class="navbar navbar-dropdown navbar-fixed-top navbar-expand-lg">
35 | <div class="container">
36 | <div class="navbar-brand">
37 | <span class="navbar-logo">
38 | <a href="index.html">
39 | 
42 | </span>
43 | </div>
44 | <button class="navbar-toggler" type="button" data-toggle="collapse" data-bs-toggle="collapse"
45 | data-target="#navbarSupportedContent" data-bs-target="#navbarSupportedContent"
46 | aria-controls="navbarNavAltMarkup" aria-expanded="false" aria-label="Toggle navigation">
47 | <div class="hamburger">
48 | <span></span>
49 | <span></span>
50 | <span></span>
51 | <span></span>
52 | </div>

```

The `<a>` is edited with parameter `asp-controller="Home"` and `asp-action="Index"`


```

<body>
<section data-bs-version="5.1" class="menu menu3 cid-tsEQosCCDP" once="menu" id="menu3-0">
  <nav class="navbar navbar-dropdown navbar-fixed-top navbar-expand-lg">
    <div class="container">
      <div class="navbar-brand">
        <span class="navbar-logo">
          <a asp-controller="Home" asp-action="Index">
            
          </a>
        </span>
      </div>
    </div>
  </nav>
</section>

```

Now we can click to the **Logo** or the **Home** in menu bar.

Similar to **Shop** link, we edit link **<a>** that can link to Shop page with controller="Products" action="Shop"

```

<div class="mbr-section-btn mt-3">
  <a class="btn btn-primary display-4" asp-controller="Products" asp-action="Shop">
    <span class="mobi-mbri mobi-mbri-shopping-bag mbr-iconfont mbr-iconfont-btn"></span>Shop
  </a>
</div>

```

Now we can click to the Shop link.

2. Modify the Shop page

```

Layout.cshtml | Shop.cshtml | IRepository.cs | ProductsController.cs | HomeController.cs | Index.cshtml
1  @model IEnumerable<CoffeeShop.Models.Product>
2
3  <h1>Shop Coffee</h1>
4  <div class="container">
5    @foreach (var item in Model)
6    {
7      <div class="single-product">
8        
9        <a asp-controller="Products" asp-action="Detail" asp-route-id="@item.Id" target="_blank"><h3>@item
10       <p>@item.Price.ToString("C")</p>
11      </div>
12    }
13  </div>
14
15

```

Copy source code HTML from **Shop.html** in template to **Shop.cshtml**

```

<section data-bs-version="5.1" class="info3 cid-tsEY2vwh5a mbr-parallax-background" id="info3-b">
<section data-bs-version="5.1" class="content2 cid-tsEZVFGbrL" id="content2-g">
  <div class="container">
    <div class="mbr-section-head">
      <h5 class="mbr-section-subtitle mbr-fonts-style align-center mb-0 mt-2 display-5">
        The secret to a
        perfect cup , every time...
      </h5>
    </div>
    <div class="row mt-4">
      <div class="item features-image col-12 col-md-6 col-lg-4">
      <div class="item features-image col-12 col-md-6 col-lg-4">
      <div class="item features-image col-12 col-md-6 col-lg-4">
      <div class="item features-image col-12 col-md-6 col-lg-4">
      <div class="item features-image col-12 col-md-6 col-lg-4">
    </div>
  </div>
</section>

```

```

<div class="item features-image col-12 col-md-6 col-lg-4">
  <div class="item-wrapper">
    <div class="item-img">
      
    </div>
    <div class="item-content">
      <h6 class="item-subtitle mbr-fonts-style mt-1 display-7"><strong>Americano</strong></h6>
      <p class="mbr-text mbr-fonts-style mt-3 display-7">35 $</p>
    </div>
    <div class="mbr-section-btn item-footer mt-2">
      <a href=""
        class="btn item-btn btn-primary display-4" target="_self">
        <span class="mbriconfont mbriconfont-btn"></span>Add to cart&nbsp;
      </a>
    </div>
  </div>
</div>

```

Replace the static data by the data that query from database using **@foreach (var item in Model)**

```

<div class="row mt-4">
  @foreach (var item in Model)
  {
    <div class="item features-image col-12 col-md-6 col-lg-4">
      <div class="item-wrapper">
        <div class="item-img">
          
        </div>
        <div class="item-content">
          <a asp-controller="Products" asp-action="Detail" asp-route-id="@item.Id" target="_self"><h6 class="item-subtitle mbr-fonts-style mt-1 display-7">
            <strong>Americano</strong></h6>
          <p class="mbr-text mbr-fonts-style mt-3 display-7">@item.Price.ToString("C")</p>
        </div>
        <div class="mbr-section-btn item-footer mt-2">
          <a href="" class="btn item-btn btn-primary display-4" target="_self">
            <span class="mbriconfont mbriconfont-btn"></span>Add to cart&nbsp;
          </a>
        </div>
      </div>
    </div>
  }
</div>

```

Source code Shop.cshtml

```

@model IEnumerable<coffeeshop.Models.Product>

<section data-bs-version="5.1" class="info3 cid-tsEY2vwh5a mbr-parallax-background" id="info3-b">

  <div class="mbr-overlay"
    style="opacity:0.9; background-image: url('https://images.unsplash.com/photo-1580933073521-dc49ac0d4e6a?ixlib=rb-4.0.3&ixid=MnwxMjA3fDB8MHxwaG90by1wYWdlfHx8fGVufDB8fHx8&auto=format&fit=crop&w=2000&q=80');">

  </div>

  <div class="mbr-overlay" style="opacity: 0.7; background-color: rgb(0, 0, 0);"></div>

  <div class="container">

    <div class="row justify-content-center">

      <div class="card col-12 col-lg-10">

        <div class="card-wrapper">

          <div class="card-box align-center">

            <h4 class="card-title mbr-fonts-style align-center mb-4 display-1">

              <strong>Shop</strong>

            </h4>

```

```

        </div>
    </div>
</div>
</div>
</div>
</section>


<section data-bs-version="5.1" class="content2 cid-tsEZVFGbrL" id="content2-g">
    <div class="container">
        <div class="mbr-section-head">
            <h5 class="mbr-section-subtitle mbr-fonts-style align-center mb-0 mt-2 display-5">
                The secret to a
                perfect cup , every time...
            </h5>
        </div>
        <div class="row mt-4">
            @foreach (var item in Model)
            {
                <div class="item features-image col-12 col-md-6 col-lg-4">
                    <div class="item-wrapper">
                        <div class="item-img">
                            
                        </div>
                        <div class="item-content">
                            <a asp-controller="Products" asp-action="Detail" asp-route-id="@item.Id"
target="_self"><h6 class="item-subtitle mbr-fonts-style mt-1 display-
7"><strong>@item.Name</strong></h6></a>
                            <p class="mbr-text mbr-fonts-style mt-3 display-
7">@item.Price.ToString("C")</p>
                        </div>
                        <div class="mbr-section-btn item-footer mt-2">
                            <a href="" class="btn item-btn btn-primary display-4" target="_self">
                                <span class="mbrib-cart-add mbr-iconfont mbr-iconfont-btn"></span>Add
to cart&nbsp;
                            </a>
                        </div>
                    </div>
                </div>
            }
        </div>
    </div>

```




```
</div>
</section>
```

Show result on Browser

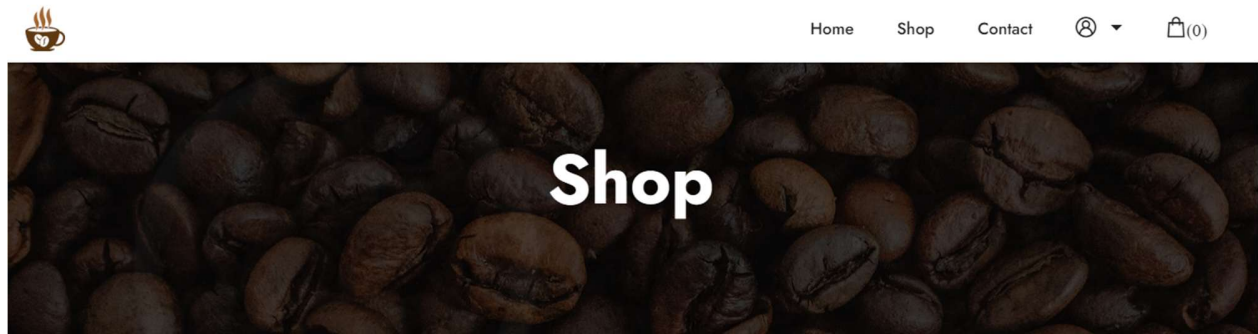

The secret to a perfect cup , every time...

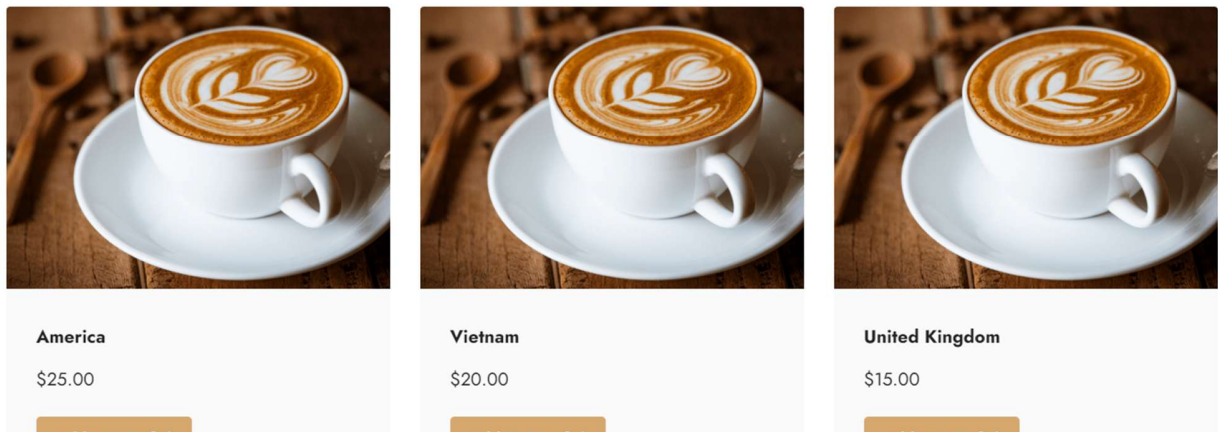

6. Intergrate Page detail

Similarity to code the Page detail.

Source code **Detail.cshtml**

```
@model coffeeshop.Models.Product
<br />
<div class="container">
  <div class="card-wrapper">
    <div class="row align-items-center">
      <div class="col-12 col-lg-6">
        <div class="image-wrapper">
          
        </div>
      </div>
      <div class="col-12 col-lg">
        <div class="text-box">
          <h5 class="mbr-title mbr-fonts-style display-2">
            <strong>@Model.Name</strong>
          </h5>
        </div>
      </div>
    </div>
  </div>
</div>
```

```

</h5>
<p class="mbr-text mbr-fonts-style display-7">
    @Model.Detail
</p>
<div class="cost">
    <span class="currentcost mbr-fonts-style pr-2
display-2">@Model.Price.ToString("c")</span>
</div>
<div class="mbr-section-btn pt-3">
    <a href="" class="btn btn-primary display-4">
        <span class="mbrib-cart-add mbr-iconfont mbr-
iconfont-btn"></span>Add to cart&nbsp;
    </a>
</div>
</div>
</div>
</div>
</div>
<br />
Show result

```



[Home](#)
[Shop](#)
[Contact](#)



 (0)



United Kingdom

Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book. It has survived not only five centuries, but also the leap into electronic typesetting, remaining essentially unchanged. It was popularised in the 1960s with the release of Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

\$15.00

Add to cart


© Copyright 2025 - All Rights Reserved

7. Partial View trong .NET Core

Using partview reuses the code that repeated in many places or many pages.


Example in **Shop.cshtml**

```

28 <section data-bs-version="5.1" class="content2 cid-tsZVFGbri id="content2-g">
29   <div class="container">
30     <div class="mbr-section-head">
31       <h5 class="mbr-section-subtitle mbr-fonts-style align-center mb-0 mt-2 display-5">
32         The secret to a
33         perfect cup , every time...
34       </h5>
35     </div>
36     <div class="row mt-4">
37       @foreach (var item in Model)
38       {
39         <div class="item features-image col-12 col-md-6 col-lg-4">
40           <div class="item-wrapper">
41             <div class="item-img">
42               
44             </div>
45             <div class="item-content">
46               <a asp-controller="Products" asp-action="Detail" asp-route-id="@item.Id" target="_self"><h6 class="item-subtitle mbr-fonts-style mt-1
47               <p class="mbr-text mbr-fonts-style mt-3 display-7">@item.Price.ToString("C")</p>
48             </div>
49             <div class="mbr-section-btn item-footer mt-2">
50               <a href="" class="btn item-btn btn-primary display-4" target="_self">
51                 <span class="mbrri-cart-add mbr-iconfont mbr-iconfont-btn"></span>Add to cart&nbsp;
52               </a>
53             </div>
54           </div>
55         </div>
56       }
57     </div>
58   </div>
59 </section>
60
61

```

The pieces code in `<div class="row mt-4">...</div>` is repeated in `Index.cshtml`. So we use `<partial>` to call to this code in `Shop.cshtml`. The pieces will be put in a file in **View/ Shared** folder with named `_Product.cshtml`.

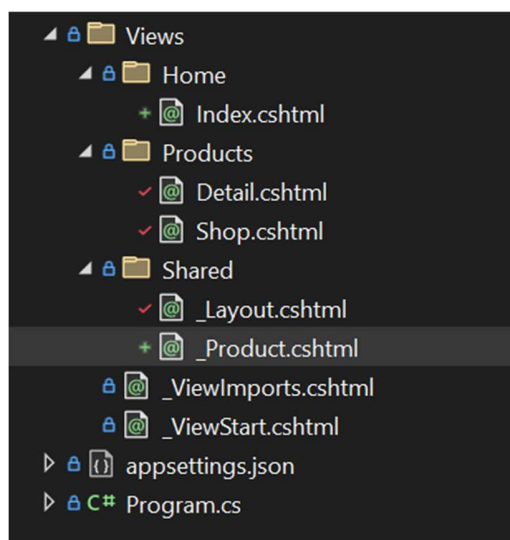

Source code in `_Product.cshtml`

```

1 <div class="row mt-4">
2   @foreach (var item in Model)
3   {
4     <div class="item features-image col-12 col-md-6 col-lg-4">
5       <div class="item-wrapper">
6         <div class="item-img">
7           
9         </div>
10        <div class="item-content">
11          <a asp-controller="Products" asp-action="Detail" asp-route-id="@item.Id" target="_self"><h6 class="item-subtitle mbr-fonts-style mt-1 display-7
12          <p class="mbr-text mbr-fonts-style mt-3 display-7">@item.Price.ToString("C")</p>
13        </div>
14        <div class="mbr-section-btn item-footer mt-2">
15          <a href="" class="btn item-btn btn-primary display-4" target="_self">
16            <span class="mbrri-cart-add mbr-iconfont mbr-iconfont-btn"></span>Add to cart&nbsp;
17          </a>
18        </div>
19      </div>
20    </div>
21  }
22 </div>

```

Source code in Shop.cshtml

```
@model IEnumerable< coffeeshop.Models.Product>
<section data-bs-version="5.1" class="info3 cid-tsEY2vwh5a mbr-parallax-
background" id="info3-b">
    <div class="mbr-overlay"
        style="opacity:0.9; background-image:
url('https://images.unsplash.com/photo-1580933073521-
dc49ac0d4e6a?ixlib=rb-
4.0.3&ixid=MnwxMjA3fDB8MHxwaG90by1wYWdlfHx8fGVufDB8fHx8&auto=format&fit=cr
op&w=2000&q=80');">
        </div>

        <div class="mbr-overlay" style="opacity: 0.7; background-color: rgb(0,
0, 0);"></div>
        <div class="container">
            <div class="row justify-content-center">
                <div class="card col-12 col-lg-10">
                    <div class="card-wrapper">
                        <div class="card-box align-center">
                            <h4 class="card-title mbr-fonts-style align-center
mb-4 display-1">
                                <strong>Shop</strong>
                            </h4>
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
</section>

<section data-bs-version="5.1" class="content2 cid-tsEZVFGbrL"
id="content2-g">
    <div class="container">
        <div class="mbr-section-head">

            <h5 class="mbr-section-subtitle mbr-fonts-style align-center
mb-0 mt-2 display-5">
                The secret to a
                perfect cup , every time...
            </h5>
        </div>
        <partial name="_Product"></partial>
    </div>
</section>
```

Run app to check result