

# Quarkus Workshop

Emmanuel Bernard, Clement Escoffier, Antonio Goncalves

# Contents

Welcome .....	1
Presenting the Workshop .....	2
Installing Software .....	6
Preparing for the Workshop .....	15
Creating a REST/HTTP Microservice .....	19
Hero Microservice .....	20
Transactions and ORM .....	28
Configuring the Hero Microservice .....	43
Open API .....	45
Quarkus .....	57
What's Quarkus? .....	57
Quarkus Augmentation .....	58
Application Lifecycle .....	61
Configuration Profiles .....	63
Building Native Images .....	64
One Microservice is no Microservices .....	73
Villain Microservice .....	74
Fight Microservice .....	91
User Interface .....	108
CORS .....	111
HTTP communication & Fault Tolerance .....	113
REST Client .....	114
Fallbacks .....	121
Timeout .....	124
Observability .....	126
Health Check .....	127
Metrics .....	132
Loading the Microservices .....	135
Displaying Metrics on Prometheus .....	137
Event-driven and Reactive microservices .....	140
Sending Messages to Kafka .....	142
Receiving Messages from Kafka .....	146
Sending Events on WebSockets .....	153
Unifying Imperative and Reactive Programming .....	160
Writing a Quarkus Extension .....	161
The extension framework .....	161
Structure of an extension .....	161
The banner extension .....	166

The Runtime module .....	167
The deployment module .....	167
Packaging the extension .....	170
Using the extension .....	170
Conclusion .....	171
Containers & Cloud .....	172
From bare metal to containers .....	172
Building containers .....	173
Deploying on Kubernetes .....	173
Conclusion .....	179
References .....	180

# Welcome

---

Let's start from the beginning... Quarkus. What's Quarkus? That's a pretty good question, and probably a good start. If you go on the [Quarkus web site](#), Quarkus is "A Kubernetes Native Java stack tailored for OpenJDK HotSpot & GraalVM, crafted from the best of breed Java libraries and standards". This description is rather unclear, but does a very good job at using bankable keywords, right? It's also written: "Supersonic Subatomic Java". Still very foggy. In practice, Quarkus is an Open Source stack to write Java applications, specifically backend applications. In this lab, we are going to explain what Quarkus is, and, because the best way to understand Quarkus is to use it, build a set of microservices with it. Don't be mistaken, Quarkus is not limited to microservices, and we are going to learn about this in the workshop.

This lab offers attendees an intro-level, hands-on session with Quarkus, from the first line of code to making services, to consuming them, and finally to assembling everything in a consistent system. But, what are we going to build? Well, it's going to be a set of microservices (we want to be trendy):

- using Quarkus
- using HTTP and events (Kafka)
- with some parts of the dark side of microservices (monitoring (Prometheus), resilience)
- answer the ultimate question: are super-heroes stronger than super-villains?

This workshop is a BYOL (Bring Your Own Laptop) session, so bring your Windows, OSX, or Linux laptop. You need JDK 8+ on your machine, Apache Maven (3.6+), and Docker. On Windows, some parts may be qualified as *experimental*.

What you are going to learn:

- What is Quarkus and how you can use it
- How to build an HTTP endpoint (REST API) with Quarkus
- How to access a database
- How you can use Swagger and OpenAPI
- How you test your microservice
- How you improve the resilience of your service
- How to build event-driven and reactive microservices with Kafka
- How to build native executable
- How to extend Quarkus with extensions
- And many more...

Ready? Here we go!

# Presenting the Workshop

## What Is This Workshop About?

This workshop should give you a practical introduction to Quarkus. You will first install all the needed tools to then develop an entire microservice architecture, mixing classical HTTP microservices and event-based microservices. You will finish by extending the capabilities of Quarkus and learn more about the ability to create native executables.

The idea is that you leave this workshop with a good understanding of what Quarkus is, what it is not, and how it can help you in your projects. Then, you'll be prepared to investigate a bit more and, hopefully, contribute.


**NOTE**

Get this workshop from <https://github.com/quarkusio/quarkus-workshops/tree/master/quarkus-workshop-super-heroes>

## What Will You Be Developing?

In this workshop you will develop an application that allows super-heroes to fight against villains. Being a workshop about microservices, you will be developing several microservices communicating either synchronously via REST or asynchronously using Kafka:

- *Super Hero UI*: an Angular application allowing you to pick up a random super-hero, a random villain and makes them fight. The Super Hero UI is exposed via Quarkus and invokes the Fight REST API
- *Hero REST API*: Allows CRUD operations on Heroes which are stored in a Postgres database
- *Villain REST API*: Allows CRUD operations on Villains which are stored in a Postgres database
- *Fight REST API*: This REST API invokes the Hero and Villain APIs to get a random super-hero and a random villain. Each fight is stored in a Postgres database
- *Statistics*: Each fight is asynchronously sent (via Kafka) to the Statistics microservice. It has a HTML + JQuery UI displaying all the statistics.
- *Prometheus* polls metrics from the three microservices Fight, Hero and Villain

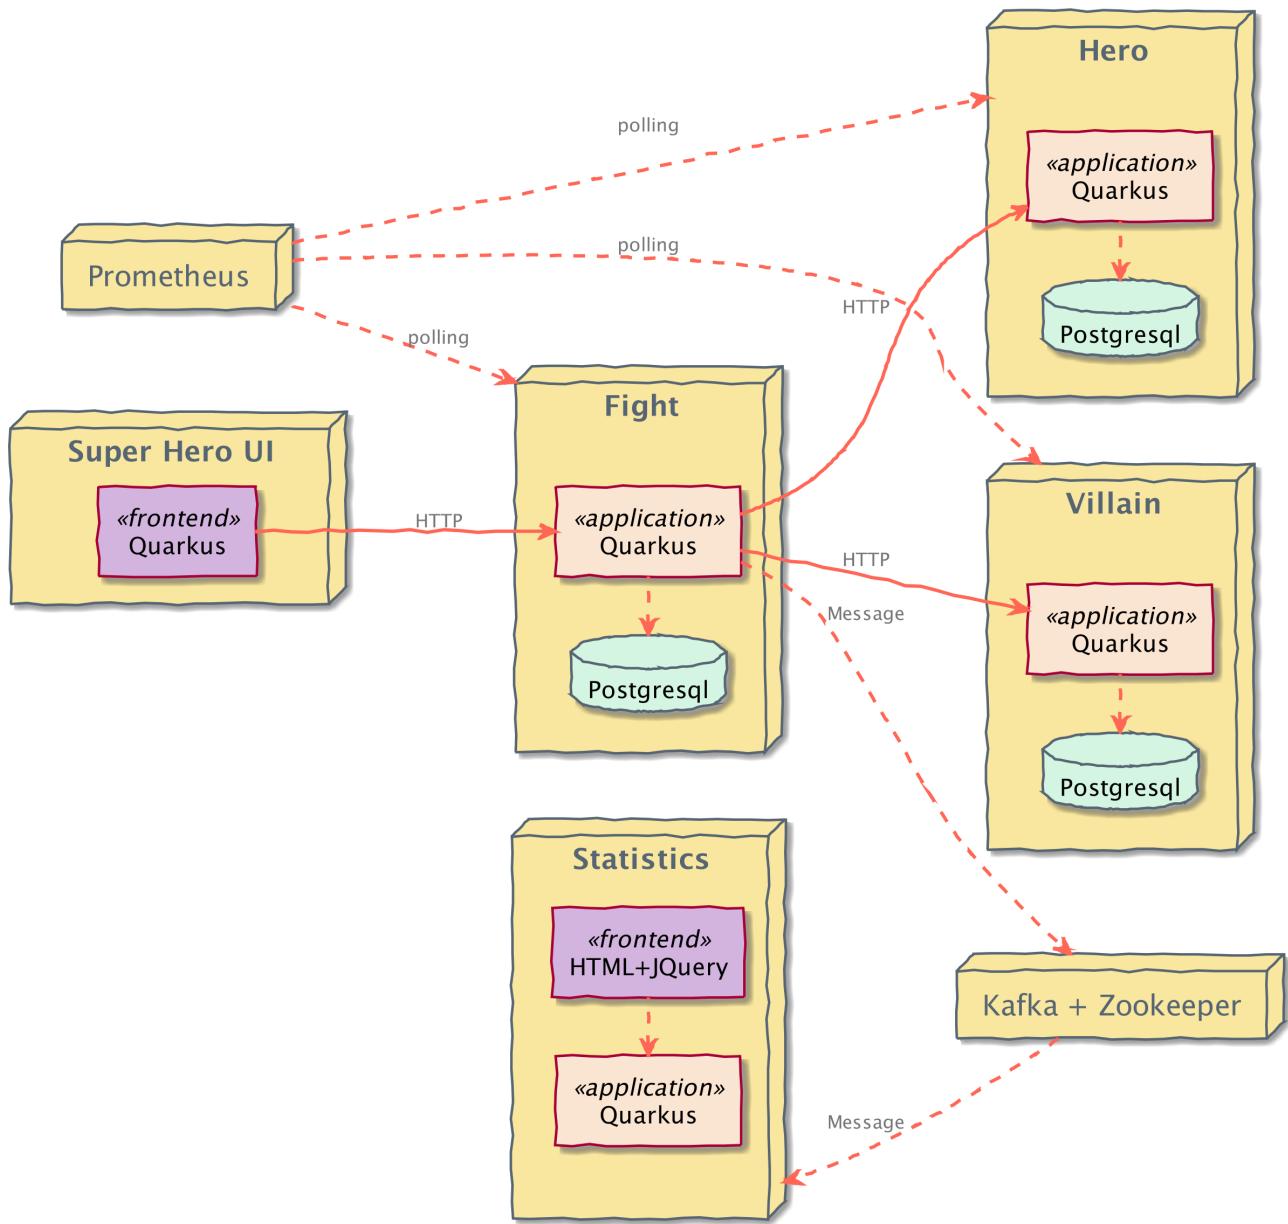

The main UI allows you to pick up one random Hero and Villain by clicking on "New Fighters". Then it's just a matter of clicking on "Fight!" to get them to fight. The table at the bottom shows the list of the previous fights.

Astérix



**⚡ 9**



Dexterity, Intelligence, Jump, Peak Human Condition, Reflexes,  
Stamina, Super Speed, Super Strength

NEW FIGHTERS

 FIGHT !

Match



**⚡ 14**



Accelerated Healing, Durability, Energy Absorption, Energy Blasts, Enhanced Hearing, Flight, Invulnerability, Jump, Super Breath, Super Speed, Super Strength, Telekinesis, Vision - Heat, Vision - Telescopic, Vision - X-Ray

Id	Fight Date	Winner	Loser
10	Oct 14, 2019, 11:04:22 AM	Black Canary	Superman
9	Oct 14, 2019, 11:04:22 AM	Tanker Bug	Shuri
8	Oct 14, 2019, 11:04:22 AM	Moondragon	Darth Plagueis
7	Oct 14, 2019, 11:04:22 AM	The Eraser	Gandalf The White
6	Oct 14, 2019, 11:04:22 AM	Anakin Skywalker	Janemba

## How Does This Workshop Work?

You have this material in your hands (either electronically or printed) and you can now follow it step by step. The structure of this workshop is as follow :

- *Installing all the needed tools*: in this section you will install all the tools and code to be able to develop, compile and execute our application
- *Developing with Quarkus*: in this section you will develop a microservice architecture by creating several Maven projects, write some Java code, add JPA entities, JAX-RS REST endpoints, write some tests, use an Angular web application, and all that on Quarkus
- *Extending Quarkus*: in this section you will create a Quarkus extension

If you already have the tools installed, skip the *Installing all the needed tools* section and jump to the sections *Developing with Quarkus* and *Extending Quarkus*, and start hacking some code and addons. This "à la carte" mode allows you to make the most of this 6 hours long hands on lab.

## What Do You Have to Do?

This workshop should be as self explanatory as possible. So your job is to follow the instructions by yourself, do what you are supposed to do, and do not hesitate to ask for any clarification or assistance, that's why the team is here. Oh, and be ready to have some fun!

## Software Requirements

First of all, make sure you have a 64bits computer with admin rights (so you can install all the needed tools) and at least 8Gb of RAM (as some tools need a few resources).

### WARNING

If you are using Mac OS X make sure the version is greater than 10.11.x (Captain).

This workshop will make use of the following software, tools, frameworks that you will need to install and now (more or less) how it works:

- Any IDE you feel comfortable with (eg. IntelliJ IDEA, Eclipse, VS Code..)
- JDK 8
- GraalVM 19.2.0.1
- Maven 3.6.x
- Docker
- cURL (or any other command line HTTP client)
- Node JS (optional, only if you are in a *frontend* mood)

The next section focuses on how to install and setup the needed software. You can skip the next section if you have already installed all the prerequisites.

### WARNING

This workshop assumes a bash shell. If you run on Windows in particular, adjust the commands accordingly.

# Installing Software

## JDK 1.8

Essential for the development and execution of this workshop is the *Java Development Kit* (JDK).<sup>[1]</sup> The JDK includes several tools such as a compiler (`javac`), a virtual machine, a documentation generator (`javadoc`), monitoring tools (Visual VM) and so on.<sup>[2]</sup> The code in this workshop uses JDK 1.8.

### Installing the JDK

To install the JDK 1.8, go to the official website, select the appropriate platform and language, and download the distribution.<sup>[3]</sup> For example, if you are running on Mac OS X, download the DMG file (you should check out the *Accept License Agreement* check box before hitting the download link to let the download start). If you are not on Mac, the download steps are still pretty similar.

Instead of the Oracle distribution, you can use AdoptOpenJDK and download the JDK from <https://adoptopenjdk.net>. Follows the instructions from <https://adoptopenjdk.net/installation.html> to download and install the JDK for your platform.

There is also an easier way to download and install Java if you are on Mac OS X. You can use Homebrew to install JDK jdk-version using the following commands.<sup>[4]</sup>

```
$ brew tap caskroom/versions  
$ brew cask install java8
```

### Checking for Java Installation

Once the installation is complete, it is necessary to set the `JAVA_HOME` variable and the `$JAVA_HOME/bin` directory to the `PATH` variable. Check that your system recognises Java by entering `java -version` as well as the Java compiler with `javac -version`.

```
$ java -version  
java version "1.8.0_201"  
Java(TM) SE Runtime Environment (build 1.8.0_201-b09)  
Java HotSpot(TM) 64-Bit Server VM (build 25.201-b09, mixed mode)  
$ javac -version  
javac 1.8.0_201
```

## GraalVM

GraalVM is an extension of the *Java Virtual Machine* (JVM) to support more languages and several execution modes.<sup>[5]</sup> It supports a large set of languages: Java of course, other JVM-based languages (such as Groovy, Kotlin etc.) but also JavaScript, Ruby, Python, R and C/C++. It includes a new high performance Java compiler, itself called *Graal*, which can be used in a *Just-In-Time* (JIT) configuration on the HotSpot VM, or in an *Ahead-Of-Time* (AOT) configuration on the Substrate VM.<sup>[6]</sup> One objective of Graal is to improve the performance of Java virtual machine-based languages to

match the performance of native languages.

## Installing GraalVM

GraalVM installed from the GraalVM web site.<sup>[7]</sup> Using the community edition is enough. Version 19.2.0.1 is required.

Once installed, make sure the `GRAALVM_HOME` environment variable configured appropriately and points to the directory where GraalVM is installed (eg. on Mac OS X it will be `/Library/Java/JavaVirtualMachines/graalvm-ce-19.2.0.1/Contents/Home`) The `native-image` tool must be installed; this can be done by running `gu install native-image` from your GraalVM directory.

### *Mac OS X - Catalina*

#### NOTE

On Mac OS X catalina, the installation of the `native-image` executable may fail. GraalVM binaries are not (yet) notarized for Catalina. To bypass the issue, it is recommended to run the following command instead of disabling macOS Gatekeeper entirely:

```
xattr -r -d com.apple.quarantine ${GRAAL_VM}
```

## Checking for GraalVM Installation

Once installed and setup, you should be able to run the following command and get the following output.

```
$ $GRAALVM_HOME/bin/native-image --version
GraalVM Version 19.2.0.1 CE
```

## Maven 3.6.x

All the examples of this workshop are built and tested using Maven.<sup>[8]</sup> Maven offers a building solution, shared libraries, and a plugin platform for your projects, allowing you to do quality control, documentation, teamwork and so forth. Based on the "convention over configuration" principle, Maven brings a standard project description and a number of conventions such as a standard directory structure. With an extensible architecture based on plugins, Maven can offer many different services.

## Installing Maven

The examples of this workshop have been developed with Apache Maven 3.6.x. Once you have installed JDK 1.8, make sure the `JAVA_HOME` environment variable is set. Then, download Maven from <http://maven.apache.org/>, unzip the file on your hard drive, and add the `apache-maven/bin` directory to your `PATH` variable. More details about the installation process is available on <https://maven.apache.org/install.html>.

But of course, if you are on Mac OS X and use Homebrew, just install Maven with the following command:

```
$ brew install maven
```

## Checking for Maven Installation

Once you've got Maven installed, open a command line and enter `mvn -version` to validate your installation. Maven should print its version and the JDK version it uses (which is handy as you might have different JDK versions installed on the same machine).

```
$ mvn -version
Apache Maven 3.6.2
Maven home: /usr/local/Cellar/maven/3.6.2/libexec
Java version: 1.8.0_201, vendor: Oracle Corporation
OS name: "mac os x", version: "10.14.2", arch: "x86_64", family: "mac"
```

Be aware that Maven needs Internet access so it can download plugins and project dependencies from the Maven Central and/or other remote repositories.<sup>[9]</sup>

## Some Maven Commands

Maven is a command line utility where you can use several parameters and options to build, test or package your code. To get some help on the commands you can type, use the following command:

```
$ mvn --help
usage: mvn [options] [<goal(s)>] [<phase(s)>]
```

Here are some commands that you will be using to run the examples in the workshop. Each invoke a different phase of the project life cycle (clean, compile, install etc.) and use the `pom.xml` to download libraries, customise the compilation, or extend some behaviours with plugins:

- `mvn clean`: Deletes all generated files (compiled classes, generated code, artifacts etc.).
- `mvn compile`: Compiles the main Java classes.
- `mvn test-compile`: Compiles the test classes.
- `mvn test`: Compiles the main Java classes as well as the test classes and executes the tests.
- `mvn package`: Compiles, executes the tests and packages the code into an archive.
- `mvn install`: Builds and installs the artifacts in your local repository.
- `mvn clean install`: Cleans and installs (note that you can add several commands separated by a space, like `mvn clean compile test`).

## cUrl

To invoke the REST Web Services described in this workshop, we often use cURL.<sup>[10]</sup> cURL is a command line tool and library to do reliable data transfers with various protocols, including HTTP. It is free, open source (available under the MIT Licence) and has been ported to several operating

systems.

## Installing cURL

If you are on Mac OS X and if you have installed Homebrew, then installing cURL is just a matter of a single command.<sup>[11]</sup> Open your terminal and install cURL with the following command:

```
$ brew install curl
```

## Checking for cURL Installation

Once installed, check for cURL by running `curl --version` in the terminal. It should display cURL version:

```
$ curl --version
curl 7.54.0 (x86_64-apple-darwin17.0) libcurl/7.54.0 LibreSSL/2.0.20 zlib/1.2.11
nghttp2/1.24.0
Protocols: dict file ftp ftps gopher http https imap imaps ldap ldaps pop3 pop3s rtsp
smb smbs smtp smtps telnet tftp
Features: AsynchDNS IPv6 Largefile GSS-API Kerberos SPNEGO NTLM NTLM_WB SSL libz HTTP2
UnixSockets HTTPS-proxy
```

## Some cURL Commands

cURL is a command line utility where you can use several parameters and options to invoke URLs. You invoke `curl` with zero, one or several command-line options to accompany the URL (or set of URLs) you want the transfer to be about. cURL supports over two hundred different options and I would recommend reading the documentation for more help.<sup>[12]</sup> To get some help on the commands and options you can type, use the following command:

```
$ curl --help
```

```
Usage: curl [options...] <url>
```

You can also opt to use `curl --manual` which will output the entire man page for cURL plus an appended tutorial for the most common use cases.

Here are some commands that you will be using to invoke the RESTful web service examples in this workshop.

- `curl http://localhost:8083/api/heroes/hello`: HTTP GET on a given URL.
- `curl -X GET http://localhost:8083/api/heroes/hello`: Same effect as the previous command, an HTTP GET on a given URL.
- `curl -v http://localhost:8083/api/heroes/hello`: HTTP GET on a given URL with verbose mode on.

- `curl -H 'Content-Type: application/json' http://localhost:8083/api/heroes/hello`: HTTP GET on a given URL passing the JSON Content Type in the HTTP Header.
- `curl -X DELETE http://localhost:8083/api/heroes/1`: HTTP DELETE on a given URL.

## Formatting the cURL JSON Output

Very often when using cURL to invoke a RESTful web service, we get some JSON payload. cURL does not format this JSON, so you will get a flat String such as:

```
$ curl http://localhost:8083/api/heroes
[{"id": "1", "name": "Chewbacca", "level": "14"}, {"id": "2", "name": "Wonder Woman", "level": "15"}, {"id": "3", "name": "Anakin Skywalker", "level": "8"}]
```

But what we really want is to format the JSON payload so it is easier to read. For that, there is a neat utility tool called jq that we could use. jq is a tool for processing JSON inputs, applying the given filter to its JSON text inputs and producing the filter's results as JSON on standard output.<sup>[13]</sup> You can install it on Mac OSX with a simple `brew install jq`. Once installed, it's just a matter of piping the cURL output to jq like this:

```
$ curl http://localhost:8083/api/heroes | jq
[
  {
    "id": "1",
    "name": "Chewbacca",
    "lastName": "14"
  },
  {
    "id": "2",
    "name": "Wonder Woman",
    "lastName": "15"
  },
  {
    "id": "3",
    "name": "Anakin Skywalker",
    "lastName": "8"
  }
]
```

## Docker

Docker is a set of platform-as-a-service (PaaS) products that use OS-level virtualization to deliver software in packages called containers. Containers are isolated from one another and bundle their own software, libraries and configuration files; they can communicate with each other through well-defined channels.

## Installing Docker

Our infrastructure is going to use Docker to ease the installation of the different technical services (database, monitoring...). So for this, we need to install `docker` and `docker-compose`. Installation instructions are available on the following page:

- Mac OS X - <https://docs.docker.com/docker-for-mac/install/>
- Windows - <https://docs.docker.com/docker-for-windows/install/>
- CentOS - <https://docs.docker.com/install/linux/docker-ce/centos/>
- Debian - <https://docs.docker.com/install/linux/docker-ce/debian/>
- Fedora - <https://docs.docker.com/install/linux/docker-ce/fedora/>
- Ubuntu - <https://docs.docker.com/install/linux/docker-ce/ubuntu/>

On Linux, don't forget the post-execution steps described on <https://docs.docker.com/install/linux/linux-postinstall/>.

## Checking for Docker Installation

Once installed, check that both `docker` and `docker-compose` are available in your `PATH`:

```
$ docker version
Client: Docker Engine - Community
Version:           19.03.2
API version:      1.40
Go version:       go1.12.8
Git commit:       6a30dfc
Built:            Thu Aug 29 05:26:49 2019
OS/Arch:          darwin/amd64
Experimental:     false

Server: Docker Engine - Community
Engine:
Version:           19.03.2
API version:      1.40 (minimum version 1.12)
Go version:       go1.12.8
Git commit:       6a30dfc
Built:            Thu Aug 29 05:32:21 2019
OS/Arch:          linux/amd64
Experimental:     false
containerd:
Version:           v1.2.6
GitCommit:         894b81a4b802e4eb2a91d1ce216b8817763c29fb
runc:
Version:           1.0.0-rc8
GitCommit:         425e105d5a03fabd737a126ad93d62a9eeede87f
docker-init:
Version:           0.18.0
GitCommit:         fec3683

$ docker-compose version
docker-compose version 1.24.1, build 4667896b
docker-py version: 3.7.3
CPython version: 3.6.8
OpenSSL version: OpenSSL 1.1.0j  20 Nov 2018
```

Finally, run your first container as follows:

```
$ docker run hello-world
```

Hello from Docker!

This message shows that your installation appears to be working correctly.

To generate this message, Docker took the following steps:

1. The Docker client contacted the Docker daemon.
2. The Docker daemon pulled the "hello-world" image from the Docker Hub.  
(amd64)
3. The Docker daemon created a new container from that image which runs the executable that produces the output you are currently reading.
4. The Docker daemon streamed that output to the Docker client, which sent it to your terminal.

To try something more ambitious, you can run an Ubuntu container with:

```
$ docker run -it ubuntu bash
```

Share images, automate workflows, and more with a free Docker ID:

<https://hub.docker.com/>

For more examples and ideas, visit:

<https://docs.docker.com/get-started/>

## Some Docker Commands

Docker is a command line utility where you can use several parameters and options to start/stop a container. You invoke `docker` with zero, one or several command-line options with the container or image ID you want to work with. Docker comes with several options that are described in the documentation if you need more help.<sup>[14]</sup> To get some help on the commands and options you can type, use the following command:

```
$ docker help
```

Usage: `docker [OPTIONS] COMMAND`

```
$ docker help attach
```

Usage: `docker attach [OPTIONS] CONTAINER`

Attach local standard input, output, and error streams to a running container

Here are some commands that you will be using to start/stop containers in this workshop.

- `docker container ls`: Lists containers.
- `docker container start CONTAINER`: Starts one or more stopped containers.
- `docker-compose -f docker-compose.yaml up -d`: Starts all containers defined in a Docker Compose file.

- `docker-compose -f docker-compose.yaml down`: Stops all containers defined in a Docker Compose file.

## Recap

Just make sure the following commands work on your machine

```
$ java -version  
$ $GRAALVM_HOME/bin/native-image --version  
$ mvn -version  
$ curl --version  
$ docker version  
$ docker-compose version
```

# Preparing for the Workshop

This workshop needs internet access to download all sorts of Maven artifacts, Docker images and even pictures. Some of these artifacts are large, and because we have to share internet connexions at the workshop, it is better to download them prior to the workshop. Here are a few commands that you can execute before the workshop.

## Creating the Directories Structure

In this workshop you will be developing an application dealing with Super Heroes (and Super Villains) as well as Quarkus extensions. The code will be separated into two different directories:

└ quarkus-workshop-super-heroes	
└ extensions	The Quarkus extensions
└ super-heroes	The entire Super Hero application

### Super Heroes Application

Under the `super-heroes` directory you will find the entire Super Hero application spread throughout a set of subdirectories, each one containing a microservice or some tooling.

└ quarkus-workshop-super-heroes	
└ super-heroes	
└ infrastructure	All the needed infrastructure (Postgres, Kafka...)
└ event-statistics	UI and application dealing with fight statistics
└ load-super-heroes	Stress tool loading heroes, villains and fights
└ rest-fight	REST API allowing super heroes to fight
└ rest-hero	REST API for CRUD operations on Heroes
└ rest-villain	REST API for CRUD operations on Villains
└ ui-super-heroes	Angular application so we can fight visually

Most of these subdirectories are Maven projects and follow the Maven directory structure:

└ quarkus-workshop-super-heroes	
└ super-heroes	
└ rest-hero	
└ src	
└ main	
└ docker	
└ java	
└ resources	
└ test	
└ java	

### Quarkus Extensions

Under the `extensions` directory you will find quarkus extensions.

└ quarkus-workshop-super-heroes	
└ extensions	
└ extension-banner	Extension displaying a startup banner
└ extension-fault-injector	Injects network latency and HTTP faults

## Script Creating the Directory Structure

So, before starting to code, make sure you create the right directory structure.

```
mkdir -p quarkus-workshop-super-heroes/extensions/extension-banner  
mkdir -p quarkus-workshop-super-heroes/extensions/extension-fault-injector  
mkdir -p quarkus-workshop-super-heroes/super-heroes/infrastructure  
mkdir -p quarkus-workshop-super-heroes/super-heroes/event-statistics  
mkdir -p quarkus-workshop-super-heroes/super-heroes/load-super-heroes  
mkdir -p quarkus-workshop-super-heroes/super-heroes/rest-fight  
mkdir -p quarkus-workshop-super-heroes/super-heroes/rest-hero  
mkdir -p quarkus-workshop-super-heroes/super-heroes/rest-villain  
mkdir -p quarkus-workshop-super-heroes/super-heroes/ui-super-heroes
```

## Warming up Maven

To warm up your Maven repository, first bootstrap a Quarkus project using the following command:

```
# If not already created, create the structure:  
mkdir -p quarkus-workshop-super-heroes/super-heroes/rest-hero  
  
cd quarkus-workshop-super-heroes/super-heroes/rest-hero  
mvn io.quarkus:quarkus-maven-plugin:0.25.0:create \  
  -DprojectGroupId=io.quarkus.workshop.super-heroes \  
  -DprojectArtifactId=rest-hero \  
  -DclassName="io.quarkus.workshop.superheroes.hero.HeroResource" \  
  -Dpath="api/heroes"
```

Then, make sure to run a `mvn install` in the directory where the `pom.xml` file is located.

## Warming up Docker

To warm up your Docker repository, download the zip file <https://raw.githubusercontent.com/quarkusio/quarkus-workshops/master/quarkus-workshop-super-heroes/super-heroes/infrastructure/infrastructure.zip> and unzip the entire code into the `quarkus-workshop-super-heroes/super-heroes/infrastructure` directory. Here, you will find a `docker-compose.yaml` file which defines all the needed Docker images. Notice that there is a `db-init` directory with a `initialize-databases.sql` script which sets up our databases and a `monitoring` directory (all that will be explained later).

Then execute `docker-compose -f docker-compose.yaml up -d`. This will download all the Docker images and start the containers.

If you have an issue creating the roles for the database with the `initialize-databases.sql` file, you have to execute the following commands:

**WARNING**

```
docker exec -it --user postgres super-database psql -c "CREATE ROLE superman LOGIN PASSWORD 'superman' NOSUPERUSER INHERIT NOCREATEDB NOCREATEROLE NOREPLICATION"
docker exec -it --user postgres super-database psql -c "CREATE ROLE superbad LOGIN PASSWORD 'superbad' NOSUPERUSER INHERIT NOCREATEDB NOCREATEROLE NOREPLICATION"
docker exec -it --user postgres super-database psql -c "CREATE ROLE superfight LOGIN PASSWORD 'superfight' NOSUPERUSER INHERIT NOCREATEDB NOCREATEROLE NOREPLICATION"
```

Once all the containers are up and running, you can shut them down with the command `docker-compose -f docker-compose.yaml down`.

*What's this infra?*

**NOTE**

Any microservice system is going to rely on a set of technical services. In our context, we are going to use PostgreSQL as the database, Prometheus as the monitoring tool, and Kafka as the event/message bus. This infrastructure starts all these services, so you don't have to worry about them.

## Checking Ports

During this workshop we will use several ports. Just make sure the following ports are free so you don't run into any conflicts

```
$ lsof -i tcp:8080    // UI
$ lsof -i tcp:8082    // Fight REST API
$ lsof -i tcp:8083    // Hero REST API
$ lsof -i tcp:8084    // Villain REST API
$ lsof -i tcp:5432    // Postgres
$ lsof -i tcp:9090    // Prometheus
$ lsof -i tcp:2181    // Zookeeper
$ lsof -i tcp:9092    // Kafka
```

## Ready?

Prerequisites has been installed, the different components have been warmed up, it's now time to write some code!

[1] Java <http://www.oracle.com/technetwork/java/javase>

[2] Visual VM <https://visualvm.github.io>

[3] Java Website <http://www.oracle.com/technetwork/java/javase/downloads/index.html>

[4] Homebrew <https://brew.sh>


[5] GraalVM <https://www.graalvm.org>

[6] SubstrateVM <https://github.com/oracle/graal/tree/master/substratevm>

- [7] GraalVM Download <https://www.graalvm.org/downloads>
- [8] Maven <https://maven.apache.org>
- [9] Maven Central <https://search.maven.org>
- [10] cURL <https://curl.haxx.se>
- [11] Homebrew <https://brew.sh>
- [12] cURL commands <https://ec.haxx.se/cmdline.html>
- [13] jq <https://stedolan.github.io/jq>
- [14] Docker commands <https://docs.docker.com/engine/reference/commandline/cli>

# Creating a REST/HTTP Microservice

At the heart of the Super Hero application comes Heroes. We need to expose a REST API allowing CRUD operations on Super Heroes. This microservice is, let's say, a *classical* microservice. It uses HTTP to expose a REST API and internally store data into a database. This service will be used by the *fight* microservice.

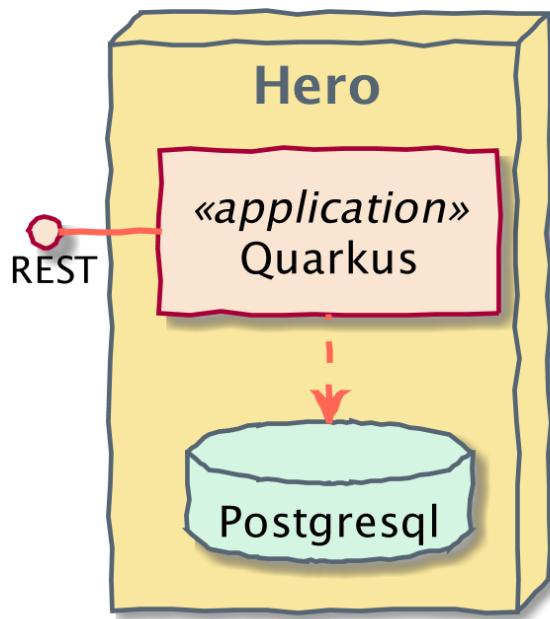

In the following sections, you learn:

- how to create a new Quarkus application
- how to implement REST API using JAX-RS
- how to compose your application using CDI beans
- how to access your database using Hibernate with Panache
- how to use transactions
- how to enable OpenAPI and Swagger-UI

But first, let's describe our service. The Super Heroes microservice stores super-heroes, with their names, powers, and so on. The REST API allows adding, removing, listing, and picking a random hero from the stored set. Nothing outstanding but a good first step to discover Quarkus.

# Hero Microservice

First thing first, we need a project. That's what you are going to see in this section.

## Bootstrapping the Hero REST Endpoint

The easiest way to create a new Quarkus project is to use the Quarkus Maven plugin. We have created the project structure earlier, so we will move to the `rest-hero` directory and run the project creation command. Open a terminal and run the following command:

```
# If not already created, create the structure:  
mkdir -p quarkus-workshop-super-heroes/super-heroes/rest-hero  
  
cd quarkus-workshop-super-heroes/super-heroes/rest-hero  
mvn io.quarkus:quarkus-maven-plugin:0.25.0:create \  
  -DprojectGroupId=io.quarkus.workshop.super-heroes \  
  -DprojectArtifactId=rest-hero \  
  -DclassName="io.quarkus.workshop.superheroes.hero.HeroResource" \  
  -Dpath="api/heroes"
```


**TIP**

*Preferring Web UI*

Instead of the Maven command, you can use <https://code.quarkus.io>.

## Directory Structure

Once you bootstrap the project, you get the following directory structure with a few Java classes and other artifacts :

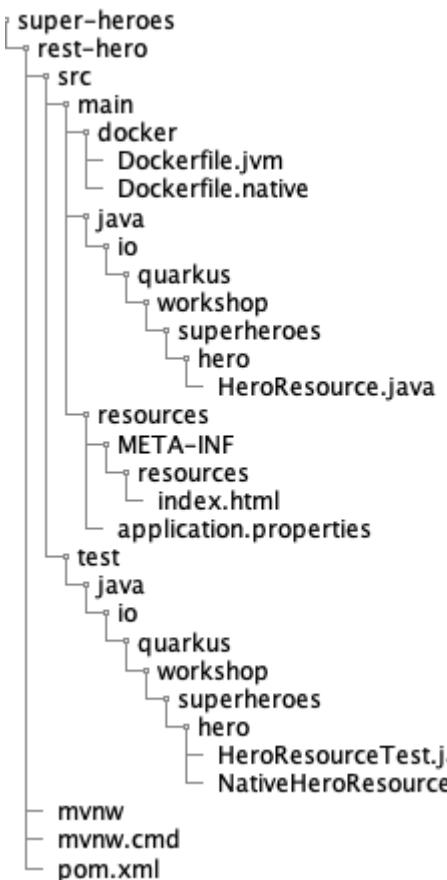

The Maven archetype generates the following `rest-hero` sub-directory:

- the Maven structure with a `pom.xml`
- an `io.quarkus.workshop.superheroes.hero.HeroResource` resource exposed on `/api/heroes`
- an associated unit test `HeroResourceTest`
- the landing page `index.html` that is accessible on `http://localhost:8080` after starting the application
- example `Dockerfile` files for both native and jvm modes in `src/main/docker`
- the `application.properties` configuration file

Once generated, look at the `pom.xml`. You will find the import of the Quarkus BOM, allowing you to omit the version on the different Quarkus dependencies. In addition, you can see the `quarkus-maven-plugin` responsible of the packaging of the application and also providing the development mode.

```

<properties>
    <quarkus.version>0.25.0</quarkus.version>
    <surefire-plugin.version>2.22.0</surefire-plugin.version>
    <maven.compiler.source>1.8</maven.compiler.source>
    <maven.compiler.target>1.8</maven.compiler.target>
    <maven.build.timestamp.format>yyyy-MM-dd</maven.build.timestamp.format>
    <project.reporting.outputEncoding>UTF-8</project.reporting.outputEncoding>
    <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
</properties>
<dependencyManagement>
    <dependencies>
        <dependency>
            <groupId>io.quarkus</groupId>
            <artifactId>quarkus-bom</artifactId>
            <version>${quarkus.version}</version>
            <type>pom</type>
            <scope>import</scope>
        </dependency>
    </dependencies>
</dependencyManagement>
<build>
    <plugins>
        <plugin>
            <groupId>io.quarkus</groupId>
            <artifactId>quarkus-maven-plugin</artifactId>
            <version>${quarkus.version}</version>
            <executions>
                <execution>
                    <goals>
                        <goal>build</goal>
                    </goals>
                </execution>
            </executions>
        </plugin>
        <plugin>
            <artifactId>maven-surefire-plugin</artifactId>
            <version>${surefire-plugin.version}</version>
            <configuration>
                <systemProperties>
                    <java.util.logging.manager>
org.jboss.logmanager.LogManager</java.util.logging.manager>
                    </systemProperties>
                </configuration>
            </plugin>
        </plugins>
    </build>

```

If we focus on the dependencies section, you can see the extension allowing the development of REST applications:

```
<dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-resteasy</artifactId>
</dependency>
```

*RESTEasy*

**TIP** You may not be familiar with RESTEasy.<sup>[15]</sup> It's an implementation of JAX-RS and it uses to implement RestFul services in Quarkus.

## The JAX-RS Resource

During the project creation, the `HeroResource.java` file has been created with the following content:

```
package io.quarkus.workshop.superheroes.hero;

@Path("/api/heroes")
public class HeroResource {

    @GET
    @Produces(MediaType.TEXT_PLAIN)
    public String hello() {
        return "hello";
    }
}
```

It's a very simple REST endpoint, returning "hello" to requests on `/api/heroes`.

## Running the Application

Now we are ready to run our application. Use: `./mvnw compile quarkus:dev`:

```
$ ./mvnw compile quarkus:dev
[INFO] -----< io.quarkus.workshop.super-heroes:rest-hero >-----
[INFO] Building rest-hero 1.0-SNAPSHOT
[INFO] -----[ jar ]-----
[INFO]
[INFO] --- maven-resources-plugin:2.6:resources (default-resources) @ rest-hero ---
[INFO] Using 'UTF-8' encoding to copy filtered resources.
[INFO] Copying 2 resources
[INFO]
[INFO] --- maven-compiler-plugin:3.1:compile (default-compile) @ rest-hero ---
[INFO] Changes detected - recompiling the module!
[INFO] Compiling 1 source file to /Users/agoncal/Code/Quarkus/rest-hero/target/classes
[INFO]
[INFO] --- quarkus-maven-plugin:0.25.0:dev (default-cli) @ rest-hero ---
[ERROR] Port 5005 in use, not starting in debug mode
2019-10-04 10:08:11,536 INFO [io.qua.dep.QuarkusAugmentor] (main) Beginning quarkus augmentation
2019-10-04 10:08:11,989 INFO [io.qua.dep.QuarkusAugmentor] (main) Quarkus augmentation completed in 453ms
2019-10-04 10:08:12,294 INFO [io.quarkus] (main) Quarkus 0.25.0 started in 0.891s.
Listening on: http://0.0.0.0:8080
2019-10-04 10:08:12,295 INFO [io.quarkus] (main) Profile dev activated. Live Coding activated.
2019-10-04 10:08:12,295 INFO [io.quarkus] (main) Installed features: [cdi, resteasy]
```

Then check that the endpoint returns `hello` as expected:

```
$ curl http://localhost:8080/api/heroes
hello
```

Alternatively, you can open <http://localhost:8080/api/heroes> in your browser.

## Development Mode

`quarkus:dev` runs Quarkus in development mode. This enables hot deployment with background compilation, which means that when you modify your Java files and/or your resource files and invoke a REST endpoint (i.e. cUrl command or refresh your browser), these changes will automatically take effect. This works too for resource files like the configuration property and HTML files. Refreshing the browser triggers a scan of the workspace, and if any changes are detected, the Java files are recompiled and the application is redeployed; your request is then serviced by the redeployed application. If there are any issues with compilation or deployment an error page will let you know.

The development mode also allows debugging and listens for a debugger on port 5005. If you want to wait for the debugger to attach before running you can pass `-Dsuspend=true` on the command line. If you don't want the debugger at all you can use `-Ddebug=false`.

Alright, time to change some code. Open your favorite IDE and import the project. To check that the

hot reload is working, update the method `HeroResource.hello()` by returning the String "hello hero". Now, execute the cUrl command again, the output has changed without you to having to stop and restart Quarkus:

```
$ curl http://localhost:8080/api/heroes
hello hero
```

## Testing the Application

All right, so far so good, but wouldn't it be better with a few tests, just in case.

In the generated `pom.xml` file, you can see 2 test dependencies:

```
<dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-junit5</artifactId>
    <scope>test</scope>
</dependency>
<dependency>
    <groupId>io.rest-assured</groupId>
    <artifactId>rest-assured</artifactId>
    <scope>test</scope>
</dependency>
```

Quarkus supports Junit 4 and Junit 5 tests. In the generated project, we use Junit 5. Because of this, the version of the Surefire Maven Plugin must be set, as the default version does not support Junit 5:

```

<properties>
    <quarkus.version>0.25.0</quarkus.version>
    <surefire-plugin.version>2.22.0</surefire-plugin.version>
    <maven.compiler.source>1.8</maven.compiler.source>
    <maven.compiler.target>1.8</maven.compiler.target>
    <maven.build.timestamp.format>yyyy-MM-dd</maven.build.timestamp.format>
    <project.reporting.outputEncoding>UTF-8</project.reporting.outputEncoding>
    <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
</properties>
<!-- ----- -->
<plugin>
    <artifactId>maven-surefire-plugin</artifactId>
    <version>${surefire-plugin.version}</version>
    <configuration>
        <systemProperties>
            <java.util.logging.manager>
org.jboss.logmanager.LogManager</java.util.logging.manager>
        </systemProperties>
    </configuration>
</plugin>

```

We also set the `java.util.logging` system property to make sure tests will use the correct log manager.

The generated project contains a simple test in `HeroResourceTest.java`.

```

package io.quarkus.workshop.superheroes.hero;

@QuarkusTest
public class HeroResourceTest {

    @Test
    public void testHelloEndpoint() {
        given()
            .when().get("/api/heroes")
            .then()
                .statusCode(200)
                .body(is("hello"));
    }
}

```

By using the `QuarkusTest` runner, the `HeroResourceTest` class instructs JUnit to start the application before the tests. Then, the `testHelloEndpoint` method checks the HTTP response status code and content. Notice that these tests use RestAssured, but feel free to use your favorite library.<sup>[16]</sup>

Execute it with `./mvnw test` or from your IDE. It fails! It's expected, you changed the output of `HeroResource.hello()` earlier. Adjust the test body condition accordingly.

## Packaging and Running the Application

The application is packaged using `./mvnw package`. It produces 2 jar files in `/target`:

- `rest-hero-1.0-SNAPSHOT.jar` : containing just the classes and resources of the projects, it's the regular artifact produced by the Maven build;
- `rest-hero-1.0-SNAPSHOT-runner.jar` : being an executable jar. Be aware that it's not an über-jar as the dependencies are copied into the `target/lib` directory.

You can run the application using: `java -jar target/rest-hero-1.0-SNAPSHOT-runner.jar`.

**NOTE**

Before running the application, don't forget to stop the hot reload mode (hit `CTRL+C`), or you will have a port conflict.

## Troubleshooting

You might come across the following error while developing:

```
WARN [io.qu.ne.ru.NettyRecorder] (Thread-48) Localhost lookup took more than one second, you need to add a /etc/hosts entry to improve Quarkus startup time. See https://thoeni.io/post/macos-sierra-java/ for details.
```

If this is the case, it's just a matter to add the node name of your machine to the `/etc/hosts`. For that, first get the name of your node with the following command:

```
$ uname -n  
my-node.local
```

Then `sudo vi /etc/hosts` so you have the rights to edit the file and add the following entry


```
127.0.0.1 localhost my-node.local
```

# Transactions and ORM

The Hero API's role is to allow CRUD operations on Super Heroes. In this module we will create a Hero entity and persist/update/delete/retrieve it from a Postgres database in a transactional way.

## Directory Structure

In this module we will add extra classes to the Hero API project. You will end-up with the following directory structure:

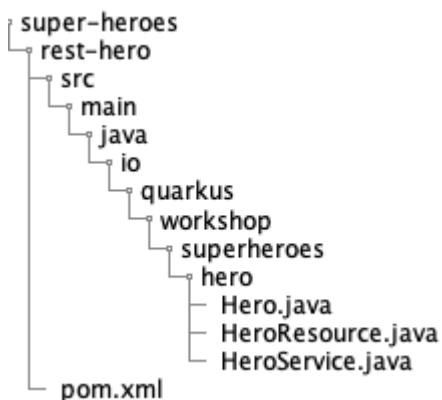

## Installing the PostgreSQL Dependency

To install the PostgreSQL driver dependency, just run the following command:

```
$ ./mvnw quarkus:add-extension -Dextensions="jdbc-postgresql"
```

This will add the following dependency in the `pom.xml` file:

```
<dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-jdbc-postgresql</artifactId>
</dependency>
```

From now on, you can choose to either edit your pom directly or use the `quarkus:add-extension` command. The command does accept partial extension names: in this case we used `jdbc-postgresql` instead of the complete `io.quarkus:quarkus-jdbc-postgresql`.

## Hero Entity

Hibernate ORM is the de-facto JPA implementation and offers you the full breadth of an Object Relational Mapper. It makes complex mappings possible, but it does not make simple and common mappings trivial. Hibernate ORM with Panache focuses on making your entities trivial and fun to write in Quarkus.<sup>[17]</sup>

Because JPA and Bean Validation work well together, we will use Bean Validation to constrain our business model. So first, make sure to add the Panache JPA and Bean Validation extensions to your

pom.xml:

```
<dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-hibernate-orm-panache</artifactId>
</dependency>
<dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-hibernate-validator</artifactId>
</dependency>
```

**TIP** When you change your POM, don't forget to restart the `quarkus:dev` mode.

To define a Panache entity, simply extend `PanacheEntity`, annotate it with `@Entity` and add your columns as public fields (no need to have getters and setters). The `Hero` entity should look like this:

```

package io.quarkus.workshop.superheroes.hero;

import io.quarkus.hibernate.orm.panache.PanacheEntity;

import javax.persistence.Column;
import javax.persistence.Entity;
import javax.validation.constraints.Min;
import javax.validation.constraints.NotNull;
import javax.validation.constraints.Size;

import java.util.Random;
@Entity
public class Hero extends PanacheEntity {

    @NotNull
    @Size(min = 3, max = 50)
    public String name;
    public String otherName;
    @NotNull
    @Min(1)
    public int level;
    public String picture;

    @Column(columnDefinition = "TEXT")
    public String powers;

    @Override
    public String toString() {
        return "Hero{" +
            "id=" + id +
            ", name='" + name + '\'' +
            ", otherName='" + otherName + '\'' +
            ", level=" + level +
            ", picture='" + picture + '\'' +
            ", powers='" + powers + '\'' +
            '}';
    }
}

```

Notice that you can put all your JPA column annotations and Bean Validation constraint annotations on the public fields.

## Adding Operations

Thanks to Panache, once you have written the `Hero` entity, here are the most common operations you will be able to do:

```

// creating a hero
Hero hero = new Hero();
hero.name = "Superman";
hero.level = 9;

// persist it
hero.persist();

// getting a list of all Hero entities
List<Hero> heroes = Hero.listAll();

// finding a specific hero by ID
hero = Hero.findById(id);

// counting all heroes
long countAll = Hero.count();

```

But we are missing a business method: we need to return a random hero. For that it's just a matter to add the following method to our `Hero.java` entity:

```

public static Hero findRandom() {
    long countHeroes = Hero.count();
    Random random = new Random();
    int randomHero = random.nextInt((int) countHeroes);
    return Hero.findAll().page(randomHero, 1).firstResult();
}

```

**NOTE**

You would need to add the following import statement if not done automatically by your IDE `import java.util.Random;`

## Configuring Hibernate

Quarkus development mode is really useful for applications that mix front end or services and database access. We use `quarkus.hibernate-orm.database.generation=drop-and-create` in conjunction with `import.sql` so every change to your app and in particular to your entities, the database schema will be properly recreated and your data (stored in `import.sql`) will be used to repopulate it from scratch. This is best to perfectly control your environment and works magic with Quarkus live reload mode: your entity changes or any change to your `import.sql` is immediately picked up and the schema updated without restarting the application!

For that, make sure to have the following configuration in your `application.properties` (located in `src/main/resources`):

```

quarkus.hibernate-orm.database.generation=drop-and-create
quarkus.hibernate-orm.log.sql=true

```

## HeroService Transactional Service

To manipulate the `Hero` entity we will develop a transactional `HeroService` class. The idea is to wrap methods modifying the database (e.g. `entity.persist()`) within a transaction. Marking a CDI bean method `@Transactional` will do that for you and make that method a transaction boundary.

`@Transactional` can be used to control transaction boundaries on any CDI bean at the method level or at the class level to ensure every method is transactional. You can control whether and how the transaction is started with parameters on `@Transactional`:

- `@Transactional(REQUIRED)` (default): starts a transaction if none was started, stays with the existing one otherwise.
- `@Transactional(REQUIRES_NEW)`: starts a transaction if none was started ; if an existing one was started, suspends it and starts a new one for the boundary of that method.
- `@Transactional(MANDATORY)`: fails if no transaction was started ; works within the existing transaction otherwise.
- `@Transactional(SUPPORTS)`: if a transaction was started, joins it ; otherwise works with no transaction.
- `@Transactional(NOT_SUPPORTED)`: if a transaction was started, suspends it and works with no transaction for the boundary of the method ; otherwise works with no transaction.
- `@Transactional(NEVER)`: if a transaction was started, raises an exception ; otherwise works with no transaction.

```
package io.quarkus.workshop.superheroes.hero;

import javax.enterprise.context.ApplicationScoped;
import javax.transaction.Transactional;
import javax.validation.Valid;
import java.util.List;

import static javax.transaction.Transactional.TxType.REQUIRED;
import static javax.transaction.Transactional.TxType.SUPPORTS;

@ApplicationScoped
@Transactional(REQUIRED)
public class HeroService {

    @Transactional(SUPPORTS)
    public List<Hero> findAllHeroes() {
        return Hero.listAll();
    }

    @Transactional(SUPPORTS)
    public Hero findHeroById(Long id) {
        return Hero.findById(id);
    }
}
```

```

@Transactional(SUPPORTS)
public Hero findRandomHero() {
    Hero randomHero = null;
    while (randomHero == null) {
        randomHero = Hero.findRandom();
    }
    return randomHero;
}

public Hero persistHero(@Valid Hero hero) {
    Hero.persist(hero);
    return hero;
}

public Hero updateHero(@Valid Hero hero) {
    Hero entity = Hero.findById(hero.id);
    entity.name = hero.name;
    entity.otherName = hero.otherName;
    entity.level = hero.level;
    entity.picture = hero.picture;
    entity.powers = hero.powers;
    return entity;
}

public void deleteHero(Long id) {
    Hero hero = Hero.findById(id);
    hero.delete();
}
}

```

Notice that both methods that persist and update a hero, pass a `Hero` object as a parameter. Thanks to the Bean Validation's `@Valid` annotation, the `Hero` object will be checked to see if it's valid or not. If it's not, the transaction will be rollbacked.

## Configuring the Datasource

Our project now requires a connection to a PostgreSQL database. The main way of obtaining connections to a database is to use a datasource. In Quarkus, the out of the box datasource and connection pooling implementation is Agroal.<sup>[18]</sup>

This is done in the `src/main/resources/application.properties` file. Just add the following datasource configuration:

```

quarkus.datasource.url=jdbc:postgresql://localhost:5432/heroes_database
quarkus.datasource.driver=org.postgresql.Driver
quarkus.datasource.username=superman
quarkus.datasource.password=superman
quarkus.datasource.max-size=8
quarkus.datasource.min-size=2

```

## HeroResource Endpoint

The `HeroResource` Endpoint was bootstrapped with only one method `hello()`. We need to add extra methods that will allow CRUD operations on heroes.

But first, our application will use JSON as payload, so let's add the RESTEasy JSON-B extension.

```
<dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-resteasy-jsonb</artifactId>
</dependency>
```

Here are the new methods to add to the `HeroResource` class:

```
package io.quarkus.workshop.superheroes.hero;

import org.jboss.logging.Logger;

import javax.inject.Inject;
import javax.validation.Valid;
import javax.ws.rs.*;
import javax.ws.rs.core.*;
import java.net.URI;
import java.util.List;

import static javax.ws.rs.core.MediaType.APPLICATION_JSON;
import static javax.ws.rs.core.MediaType.TEXT_PLAIN;

@Path("/api/heroes")
@Produces(APPLICATION_JSON)
public class HeroResource {

    private static final Logger LOGGER = Logger.getLogger(HeroResource.class);

    @Inject
    HeroService service;

    @GET
    @Path("/random")
    public Response getRandomHero() {
        Hero hero = service.findRandomHero();
        LOGGER.debug("Found random hero " + hero);
        return Response.ok(hero).build();
    }

    @GET
    public Response getAllHeroes() {
        List<Hero> heroes = service.findAllHeroes();
        LOGGER.debug("Total number of heroes " + heroes);
```

```

        return Response.ok(heroes).build();
    }

    @GET
    @Path("/{id}")
    public Response getHero(
        @PathParam("id") Long id) {
        Hero hero = service.findHeroById(id);
        if (hero != null) {
            LOGGER.debug("Found hero " + hero);
            return Response.ok(hero).build();
        } else {
            LOGGER.debug("No hero found with id " + id);
            return Response.noContent().build();
        }
    }

    @POST
    public Response createHero(
        @Valid Hero hero, @Context UriInfo uriInfo) {
        hero = service.persistHero(hero);
        UriBuilder builder = uriInfo.getAbsolutePathBuilder().path(Long.toString(hero.id));
        LOGGER.debug("New hero created with URI " + builder.build().toString());
        return Response.created(builder.build()).build();
    }

    @PUT
    public Response updateHero(
        @Valid Hero hero) {
        hero = service.updateHero(hero);
        LOGGER.debug("Hero updated with new valued " + hero);
        return Response.ok(hero).build();
    }

    @DELETE
    @Path("/{id}")
    public Response deleteHero(
        @PathParam("id") Long id) {
        service.deleteHero(id);
        LOGGER.debug("Hero deleted with " + id);
        return Response.noContent().build();
    }

    @GET
    @Produces(TEXT_PLAIN)
    @Path("/hello")
    public String hello() {
        return "hello";
    }
}

```

## Dependency Injection

Dependency injection in Quarkus is based on ArC which is a CDI-based dependency injection solution tailored for Quarkus' architecture.<sup>[19]</sup> You can learn more about it in the Contexts and Dependency Injection guide.<sup>[20]</sup>

ArC comes as a dependency of `quarkus-resteasy` so you already have it handy. That's why you were able to use `@Inject` in the `HeroResource` to inject a reference to `HeroService`.

## Adding Data

To load some SQL statements when Hibernate ORM starts, add the following `import.sql` in the root of the `resources` directory. It contains SQL statements terminated by a semicolon. This is useful to have a data set ready for the tests or demos.

```
INSERT INTO hero(id, name, otherName, picture, powers, level)
VALUES (nextval('hibernate_sequence'), 'Chewbacca', '',
'https://www.superherodb.com/pictures2/portraits/10/050/10466.jpg', 'Agility,
Longevity, Marksmanship, Natural Weapons, Stealth, Super Strength, Weapons Master', 5
);
INSERT INTO hero(id, name, otherName, picture, powers, level)
VALUES (nextval('hibernate_sequence'), 'Angel Salvadore', 'Angel Salvadore Bohusk',
'https://www.superherodb.com/pictures2/portraits/10/050/1406.jpg', 'Animal Attributes,
Animal Oriented Powers, Flight, Regeneration, Toxin and Disease Control', 4);
INSERT INTO hero(id, name, otherName, picture, powers, level)
VALUES (nextval('hibernate_sequence'), 'Bill Harken', '',
'https://www.superherodb.com/pictures2/portraits/10/050/1527.jpg', 'Super Speed, Super
Strength, Toxin and Disease Resistance', 6);
```

Ok, but that's just a few entries. Download the SQL file `import.sql` and copy it under `src/main/resources`. Now, you have around 500 heroes that will be loaded in the database.

## CRUD Tests in HeroResourceTest

To test the `HeroResource` endpoint, we will be using TestContainers to fire a Postgres database and then test CRUD operations.<sup>[21]</sup> As you will see, these tests are more complex as they start a Postgres database to allow CRUD operations to be tested against a real database. For that we will install the TestContainers dependency in our `pom.xml` as well as some extra test dependencies:

```

<dependency>
    <groupId>org.testcontainers</groupId>
    <artifactId>junit-jupiter</artifactId>
    <version>1.12.2</version>
</dependency>
<dependency>
    <groupId>org.testcontainers</groupId>
    <artifactId>postgresql</artifactId>
    <version>1.12.2</version>
</dependency>
<dependency>
    <groupId>com.fasterxml.jackson.core</groupId>
    <artifactId>jackson-databind</artifactId>
    <scope>test</scope>
</dependency>

```

You will add the following test methods to the `HeroResourceTest` class:

- `shouldNotGetUnknownHero`: giving a random Hero identifier, the `HeroResource` endpoint should return a 204 (No content)
- `shouldGetRandomHero`: checks that the `HeroResource` endpoint returns a random hero
- `shouldNotAddInvalidItem`: passing an invalid `Hero` should fail when creating it (thanks to the `@Valid` annotation)
- `shouldGetInitialItems`: checks that the `HeroResource` endpoint returns the list of heroes
- `shouldAddAnItem`: checks that the `HeroResource` endpoint creates a valid `Hero`
- `shouldUpdateAnItem`: checks that the `HeroResource` endpoint updates a newly created `Hero`
- `shouldRemoveAnItem`: checks that the `HeroResource` endpoint deletes a hero from the database

The code is as follow:

```

package io.quarkus.workshop.superheroes.hero;

import io.quarkus.test.junit.QuarkusTest;
import io.restassured.common.mapper.TypeRef;
import org.hamcrest.core.Is;
import org.junit.jupiter.api.*;
import org.testcontainers.containers.PostgreSQLContainer;
import org.testcontainers.junit.jupiter.Container;
import org.testcontainers.junit.jupiter.Testcontainers;

import javax.ws.rs.core.HttpHeaders;
import javax.ws.rs.core.MediaType;
import java.util.List;
import java.util.Random;

import static io.restassured.RestAssured.get;

```

```

import static io.restassured.RestAssured.given;
import static javax.ws.rs.core.HttpHeaders.ACCEPT;
import static javax.ws.rs.core.HttpHeaders.CONTENT_TYPE;
import static javax.ws.rs.core.MediaType.APPLICATION_JSON;
import static javax.ws.rs.core.Response.Status.*;
import static org.hamcrest.CoreMatchers.is;
import static org.junit.jupiter.api.Assertions.assertNotNull;
import static org.junit.jupiter.api.Assertions.assertTrue;
import static org.junit.jupiter.api.Assertions.assertEquals;

@QuarkusTest
@Testcontainers
@TestMethodOrder(MethodOrderer.OrderAnnotation.class)
public class HeroResourceTest {

    private static final String DEFAULT_NAME = "Super Baguette";
    private static final String UPDATED_NAME = "Super Baguette (updated)";
    private static final String DEFAULT_OTHER_NAME = "Super Baguette Tradition";
    private static final String UPDATED_OTHER_NAME = "Super Baguette Tradition
(updated)";
    private static final String DEFAULT_PICTURE = "super_baguette.png";
    private static final String UPDATED_PICTURE = "super_baguette_updated.png";
    private static final String DEFAULT POWERS = "eats baguette really quickly";
    private static final String UPDATED_POWERS = "eats baguette really quickly
(updated)";
    private static final int DEFAULT_LEVEL = 42;
    private static final int UPDATED_LEVEL = 43;

    private static final int NB_HEROES = 951;
    private static String heroId;

    @Container
    private static final PostgreSQLContainer DATABASE = new PostgreSQLContainer<>(
"postgres:10.5")
        .withDatabaseName("heroes_database")
        .withUsername("superman")
        .withPassword("superman")
        .withExposedPorts(5432);

    @BeforeAll
    private static void configure() {
        System.setProperty("quarkus.datasource.url", DATABASE.getJdbcUrl());
    }

    @AfterAll
    private static void cleanup() {
        System.clearProperty("quarkus.datasource.url");
    }
}

```

```

    @Test
    public void testHelloEndpoint() {
        given()
            .when().get("/api/heroes/hello")
            .then()
                .statusCode(200)
                .body(is("hello"));
    }

    @Test
    void shouldNotGetUnknownHero() {
        Long randomId = new Random().nextLong();
        given()
            .pathParam("id", randomId)
            .when().get("/api/heroes/{id}")
            .then()
                .statusCode(NO_CONTENT.getStatusCode());
    }

    @Test
    void shouldGetRandomHero() {
        given()
            .when().get("/api/heroes/random")
            .then()
                .statusCode(OK.getStatusCode())
                .header(CONTENT_TYPE, APPLICATION_JSON);
    }

    @Test
    void shouldNotAddInvalidItem() {
        Hero hero = new Hero();
        hero.name = null;
        hero.otherName = DEFAULT_OTHER_NAME;
        hero.picture = DEFAULT_PICTURE;
        hero.powers = DEFAULT POWERS;
        hero.level = 0;

        given()
            .body(hero)
            .header(CONTENT_TYPE, APPLICATION_JSON)
            .header(ACCEPT, APPLICATION_JSON)
            .when()
            .post("/api/heroes")
            .then()
                .statusCode(BAD_REQUEST.getStatusCode());
    }

    @Test
    @Order(1)
    void shouldGetInitialItems() {

```

```

List<Hero> heroes = get("/api/heroes").then()
    .statusCode(OK.getStatusCode())
    .header(HttpHeaders.CONTENT_TYPE, MediaType.APPLICATION_JSON)
    .extract().body().as(getHeroTypeRef());
assertEquals(NB_HEROES, heroes.size());
}

@Test
@Order(2)
void shouldAddAnItem() {
    Hero hero = new Hero();
    hero.name = DEFAULT_NAME;
    hero.otherName = DEFAULT_OTHER_NAME;
    hero.picture = DEFAULT_PICTURE;
    hero.powers = DEFAULT POWERS;
    hero.level = DEFAULT_LEVEL;

    String location = given()
        .body(hero)
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .header(ACCEPT, APPLICATION_JSON)
        .when()
        .post("/api/heroes")
        .then()
        .statusCode(CREATED.getStatusCode())
        .extract().header("Location");
    assertTrue(location.contains("/api/heroes"));

    // Stores the id
    String[] segments = location.split("/");
    heroId = segments[segments.length - 1];
    assertNotNull(heroId);

    given()
        .pathParam("id", heroId)
        .when().get("/api/heroes/{id}")
        .then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .body("name", Is.is(DEFAULT_NAME))
        .body("otherName", Is.is(DEFAULT_OTHER_NAME))
        .body("level", Is.is(DEFAULT_LEVEL))
        .body("picture", Is.is(DEFAULT_PICTURE))
        .body("powers", Is.is(DEFAULT POWERS));

    List<Hero> heroes = get("/api/heroes").then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .extract().body().as(getHeroTypeRef());
    assertEquals(NB_HEROES + 1, heroes.size());
}

```

```

@Test
@Order(3)
void shouldUpdateAnItem() {
    Hero hero = new Hero();
    hero.id = Long.valueOf(heroId);
    hero.name = UPDATED_NAME;
    hero.otherName = UPDATED_OTHER_NAME;
    hero.picture = UPDATED_PICTURE;
    hero.powers = UPDATED POWERS;
    hero.level = UPDATED_LEVEL;

    given()
        .body(hero)
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .header(ACCEPT, APPLICATION_JSON)
        .when()
        .put("/api/heroes")
        .then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .body("name", Is.is(UPDATED_NAME))
        .body("otherName", Is.is(UPDATED_OTHER_NAME))
        .body("level", Is.is(UPDATED_LEVEL))
        .body("picture", Is.is(UPDATED_PICTURE))
        .body("powers", Is.is(UPDATED_POWERS));

    List<Hero> heroes = get("/api/heroes").then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .extract().body().as(getHeroTypeRef());
    assertEquals(NB_HEROES + 1, heroes.size());
}

@Test
@Order(4)
void shouldRemoveAnItem() {
    given()
        .pathParam("id", heroId)
        .when().delete("/api/heroes/{id}")
        .then()
        .statusCode(NO_CONTENT.getStatusCode());

    List<Hero> heroes = get("/api/heroes").then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .extract().body().as(getHeroTypeRef());
    assertEquals(NB_HEROES, heroes.size());
}

private TypeRef<List<Hero>> getHeroTypeRef() {

```

```
    return new TypeRef<List<Hero>>() {
        // Kept empty on purpose
    };
}
```

Execute the test using `./mvnw test`. The test should pass.

## Running the Infrastructure

To execute the application we now need a database (and later one we will need Prometheus and Kafka). Let's use Docker and docker compose to ease the installation of such infrastructure.

You should already have installed the infrastructure into the `infrastructure` directory. Now, just execute `docker-compose -f docker-compose.yaml up -d`. You should see a few logs going on and then all the containers get started.

**NOTE**

During the workshop, just leave all the containers up and running. Then, after the workshop, remember to shut them down using: `docker-compose -f docker-compose.yaml down`

## Running the Application

Now that the tests pass and that our infrastructure is up and running, we are ready to run our application. Use `./mvnw compile quarkus:dev` to start it. Once started, check that there are heroes in the database with the following cUrl command:

```
$ curl http://localhost:8080/api/heroes
```

# Configuring the Hero Microservice

Hardcoded values in our code are a no go (even if we all did it at some point ;-)). In this guide, we learn how to configure our Hero API as well as some parts of Quarkus.

## Configuring Logging

Run time configuration of logging is done through the normal `application.properties` file.

```
quarkus.log.console.enable=true  
quarkus.log.console.format=%d{HH:mm:ss} %-5p [%c{2.}] (%t) %s%e%n  
quarkus.log.console.level=DEBUG  
quarkus.log.console.color=true
```

## Configuring Quarkus Listening Port

Because we will end-up running several microservices, let's configure Quarkus so it listens to a different port than 8080: This is quite easy as we just need to add one property in the `application.properties` file:

```
quarkus.http.port=8083
```

You would need to restart the application to change the port.

## Injecting Configuration Value

When we persist a new hero we want to multiply its level by a value that can be configured. For this, Quarkus uses MicroProfile Config to inject the configuration in the application.<sup>[22]</sup> The injection uses the `@ConfigProperty` annotation.

**NOTE** When injecting a configured value, you can use `@Inject @ConfigProperty` or just `@ConfigProperty`. The `@Inject` annotation is not necessary for members annotated with `@ConfigProperty`, a behavior which differs from [MicroProfile Config](#).

Edit the `HeroService`, and introduce the following configuration properties:

```
@ConfigProperty(name = "level.multiplier", defaultValue="1")  
int levelMultiplier;
```

**NOTE** You may need to add the following import statement if your IDE does not do it automatically: `import org.eclipse.microprofile.config.inject.ConfigProperty;`

- If you do not provide a value for this property, the application startup fails with `javax.enterprise.inject.spi.DeploymentException: No config value of type [int] exists for: level.multiplier`

- A default value (property `defaultValue`) is injected if the configuration does not provide a value for `level.multiplier`

Now, modify the `HeroService.persistHero()` method to use the injected properties:

```
public Hero persistHero(@Valid Hero hero) {  
    hero.level = hero.level * levelMultiplier;  
    Hero.persist(hero);  
    return hero;  
}
```

## Create the Configuration

By default, Quarkus reads `application.properties`. Edit the `src/main/resources/application.properties` with the following content:

```
# Business configuration  
level.multiplier = 3
```

## Running and Testing the Application

Now we are ready to run our application. Use `./mvnw compile quarkus:dev` to start it. Once started, create a new hero with the following cUrl command:

```
$ curl -X POST -d '{"level":5, "name":"Chewbacca", "powers":"Agility, Longevity"}'  
-H "Content-Type: application/json" http://localhost:8083/api/heroes -v  
  
< HTTP/1.1 201 Created  
< Location: http://localhost:8083/api/heroes/952
```

As you can see, we've passed a level of 5 to create this new hero. The cUrl command returns the location of the newly created hero. Take this URL and do an HTTP GET on it. You will see that the level has been increased.

```
$ curl http://localhost:8083/api/heroes/952 | jq  
  
{  
  "id": 957,  
  "level": 15,  
  "name": "Chewbacca",  
  "powers": "Agility, Longevity"  
}
```

### NOTE


You may not know `jq`. It's an amazing tool to manipulate JSON in the shell. More info on: <https://stedolan.github.io/jq/>

# Open API

By default, a Quarkus application exposes its API description through an OpenAPI specification. Quarkus also lets you test it via a user-friendly UI named Swagger UI.

## Directory Structure

In this module we will add extra class ([HeroApplication](#)) to the Hero API project. You will end-up with the following directory structure:

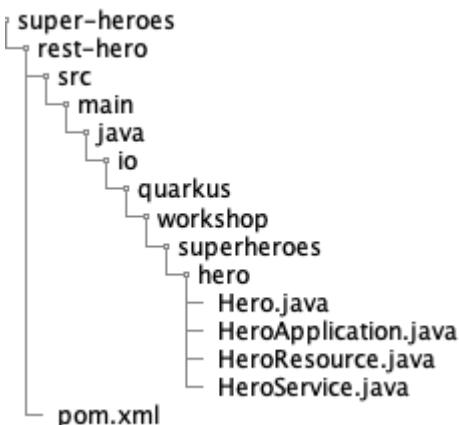

## Installing the OpenAPI Dependency

Quarkus proposes a [smallrye-openapi](#) extension compliant with the Eclipse MicroProfile OpenAPI specification in order to generate your API OpenAPI v3 specification.<sup>[23]</sup> To install the OpenAPI dependency, just run the following command:

```
$ ./mvnw quarkus:add-extension -Dextensions="openapi"
```

This will add the following dependency in the [pom.xml](#) file:

```
<dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-smallrye-openapi</artifactId>
</dependency>
```

## Open API

Now, we are ready to restart our application (stop it first if you didn't):

```
$ ./mvnw compile quarkus:dev
```

Once your application is started, you can make a request to the default <http://localhost:8083/openapi> endpoint:

```
---  
openapi: 3.0.1  
info:  
  title: Generated API  
  version: "1.0"  
paths:  
  /api/heroes:  
    get:  
      responses:  
        200:  
          description: OK  
    put:  
      responses:  
        200:  
          description: OK  
    post:  
      responses:  
        200:  
          description: OK  
  /api/heroes/hello:  
    get:  
      responses:  
        200:  
          description: OK  
          content:  
            text/plain:  
              schema:  
                $ref: '#/components/schemas/String'  
  /api/heroes/random:  
    get:  
      responses:  
        200:  
          description: OK  
  /api/heroes/{id}:  
    get:  
      parameters:  
        - name: id  
          in: path  
          required: true  
          schema:  
            $ref: '#/components/schemas/Long'  
      responses:  
        200:  
          description: OK  
    delete:  
      parameters:  
        - name: id  
          in: path  
          required: true  
          schema:  
            $ref: '#/components/schemas/Long'
```

```

responses:
  200:
    description: OK
components:
  schemas:
    Long:
      format: int64
      type: integer
    String:
      type: string

```

**NOTE** Use cURL to retrieve the document: `curl http://localhost:8083/openapi`

This contract lacks of documentation. The Eclipse Microprofile OpenAPI allows you to customize the methods of your REST endpoint as well as the application.

## Customizing Methods

The Microprofile OpenAPI has a set of annotations to customize each REST endpoint method so the OpenAPI contract is richer and clearer for consumers:

- `@Operation`: Describes a single API operation on a path.
- `@APIResponse`: Corresponds to the OpenAPI Response model object which describes a single response from an API Operation
- `@Parameter`: The name of the parameter.
- `@RequestBody`: A brief description of the request body.

This is what the `HeroResource` endpoint looks like once annotated

```

package io.quarkus.workshop.superheroes.hero;

import org.eclipse.microprofile.openapi.annotations.Operation;
import org.eclipse.microprofile.openapi.annotations.enums.SchemaType;
import org.eclipse.microprofile.openapi.annotations.media.Content;
import org.eclipse.microprofile.openapi.annotations.media.Schema;
import org.eclipse.microprofile.openapi.annotations.parameters.Parameter;
import org.eclipse.microprofile.openapi.annotations.parameters.RequestBody;
import org.eclipse.microprofile.openapi.annotations.responses.APIResponse;
import org.jboss.logging.Logger;

import javax.inject.Inject;
import javax.validation.Valid;
import javax.ws.rs.*;
import javax.ws.rs.core.*;
import java.net.URI;
import java.util.List;

import static javax.ws.rs.core.MediaType.APPLICATION_JSON;

```

```

import static javax.ws.rs.core.MediaType.TEXT_PLAIN;

@Path("/api/heroes")
@Produces(APPLICATION_JSON)
public class HeroResource {

    private static final Logger LOGGER = Logger.getLogger(HeroResource.class);

    @Inject
    HeroService service;

    @Operation(summary = "Returns a random hero")
    @APIResponse(responseCode = "200", content = @Content(mediaType =
    APPLICATION_JSON, schema = @Schema(implementation = Hero.class, required = true)))
    @GET
    @Path("/random")
    public Response getRandomHero() {
        Hero hero = service.findRandomHero();
        LOGGER.debug("Found random hero " + hero);
        return Response.ok(hero).build();
    }

    @Operation(summary = "Returns all the heroes from the database")
    @APIResponse(responseCode = "200", content = @Content(mediaType =
    APPLICATION_JSON, schema = @Schema(implementation = Hero.class, type = SchemaType
    .ARRAY)))
    @APIResponse(responseCode = "204", description = "No heroes")
    @GET
    public Response getAllHeroes() {
        List<Hero> heroes = service.findAllHeroes();
        LOGGER.debug("Total number of heroes " + heroes);
        return Response.ok(heroes).build();
    }

    @Operation(summary = "Returns a hero for a given identifier")
    @APIResponse(responseCode = "200", content = @Content(mediaType =
    APPLICATION_JSON, schema = @Schema(implementation = Hero.class)))
    @APIResponse(responseCode = "204", description = "The hero is not found for a
    given identifier")
    @GET
    @Path("/{id}")
    public Response getHero(
        @Parameter(description = "Hero identifier", required = true)
        @PathParam("id") Long id) {
        Hero hero = service.findHeroById(id);
        if (hero != null) {
            LOGGER.debug("Found hero " + hero);
            return Response.ok(hero).build();
        } else {
            LOGGER.debug("No hero found with id " + id);
            return Response.noContent().build();
        }
    }
}

```

```

    }

}

@Operation(summary = "Creates a valid hero")
@APIResponse(responseCode = "201", description = "The URI of the created hero",
content = @Content(mediaType = APPLICATION_JSON, schema = @Schema(implementation =
URI.class)))
@POST
public Response createHero(
    @RequestBody(required = true, content = @Content(mediaType = APPLICATION_JSON,
schema = @Schema(implementation = Hero.class)))
    @Valid Hero hero, @Context UriInfo uriInfo) {
    hero = service.persistHero(hero);
    UriBuilder builder = uriInfo.getAbsolutePathBuilder().path(Long.toString(hero
.id));
    LOGGER.debug("New hero created with URI " + builder.build().toString());
    return Response.created(builder.build());
}

@Operation(summary = "Updates an exiting hero")
@APIResponse(responseCode = "200", description = "The updated hero", content =
@Content(mediaType = APPLICATION_JSON, schema = @Schema(implementation = Hero.class)))
@PUT
public Response updateHero(
    @RequestBody(required = true, content = @Content(mediaType = APPLICATION_JSON,
schema = @Schema(implementation = Hero.class)))
    @Valid Hero hero) {
    hero = service.updateHero(hero);
    LOGGER.debug("Hero updated with new valued " + hero);
    return Response.ok(hero).build();
}

@Operation(summary = "Deletes an exiting hero")
@APIResponse(responseCode = "204", content = @Content(mediaType =
APPLICATION_JSON, schema = @Schema(implementation = Hero.class)))
@DELETE
@Path("/{id}")
public Response deleteHero(
    @Parameter(description = "Hero identifier", required = true)
    @PathParam("id") Long id) {
    service.deleteHero(id);
    LOGGER.debug("Hero deleted with " + id);
    return Response.noContent().build();
}

@GET
@Produces(TEXT_PLAIN)
@Path("/hello")
public String hello() {
    return "hello";
}

```

```
}
```

## Customizing the Application

The previous annotations allow you to customize the contract for a given REST Endpoint. But it's also important to customize the entire application. The Microprofile OpenAPI also has a set of annotation to do so. The difference is that these annotations cannot be used on the Endpoint itself, but instead on another Java class configuring the entire application. For this, you need to create the `src/main/java/io/quarkus/workshop/superheroes/hero/HeroApplication` class with the following content:

```
package io.quarkus.workshop.superheroes.hero;

import org.eclipse.microprofile.openapi.annotations.ExternalDocumentation;
import org.eclipse.microprofile.openapi.annotations.OpenAPIDefinition;
import org.eclipse.microprofile.openapi.annotations.info.Contact;
import org.eclipse.microprofile.openapi.annotations.info.Info;
import org.eclipse.microprofile.openapi.annotations.servers.Server;
import org.eclipse.microprofile.openapi.annotations.tags.Tag;

import javax.ws.rs.ApplicationPath;
import javax.ws.rs.core.Application;

@ApplicationPath("/")
@OpenAPIDefinition(
    info = @Info(title = "Hero API",
        description = "This API allows CRUD operations on a hero",
        version = "1.0",
        contact = @Contact(name = "Quarkus", url = "https://github.com/quarkusio")),
    servers = {
        @Server(url = "http://localhost:8083")
    },
    externalDocs = @ExternalDocumentation(url = "https://github.com/quarkusio/quarkus-workshops", description = "All the Quarkus workshops"),
    tags = {
        @Tag(name = "api", description = "Public that can be used by anybody"),
        @Tag(name = "heroes", description = "Anybody interested in heroes")
    }
)
public class HeroApplication extends Application {
```

## Customized Contract

If you go back to the `http://localhost:8083/openapi` endpoint you will see the following OpenAPI contract:

```
---
```

```

openapi: 3.0.1
info:
  title: Hero API
  description: This API allows CRUD operations on a hero
  contact:
    name: Quarkus
    url: https://github.com/quarkusio
  version: "1.0"
externalDocs:
  description: All the Quarkus workshops
  url: https://github.com/quarkusio/quarkus-workshops
servers:
- url: http://localhost:8083
tags:
- name: api
  description: Public that can be used by anybody
- name: heroes
  description: Anybody interested in heroes
paths:
  /api/heroes:
    get:
      summary: Returns all the heroes from the database
      responses:
        204:
          description: No heroes
        200:
          description: OK
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/Hero'
    put:
      summary: Updates an exiting hero
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Hero'
            required: true
      responses:
        200:
          description: The updated hero
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/Hero'
    post:
      summary: Creates a valid hero
      requestBody:

```

```

content:
  application/json:
    schema:
      $ref: '#/components/schemas/Hero'
  required: true
responses:
  201:
    description: The URI of the created hero
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/URI'
/api/heroes/hello:
get:
  responses:
    200:
      description: OK
      content:
        text/plain:
          schema:
            $ref: '#/components/schemas/String'
/api/heroes/random:
get:
  summary: Returns a random hero
  responses:
    200:
      description: OK
      content:
        application/json:
          schema:
            description: The hero fighting against the villain
            required:
              - level
              - name
            type: object
            properties:
              id:
                format: int64
                type: integer
              level:
                format: int32
                minimum: 1
                type: integer
                nullable: false
              name:
                maxLength: 50
                minLength: 3
                type: string
                nullable: false
              otherName:
                type: string

```

```

        picture:
          type: string
        powers:
          type: string
/api/heroes/{id}:
  get:
    summary: Returns a hero for a given identifier
    parameters:
      - name: id
        in: path
        description: Hero identifier
        required: true
        schema:
          $ref: '#/components/schemas/Long'
    responses:
      204:
        description: The hero is not found for a given identifier
      200:
        description: OK
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Hero'
  delete:
    summary: Deletes an exiting hero
    parameters:
      - name: id
        in: path
        description: Hero identifier
        required: true
        schema:
          $ref: '#/components/schemas/Long'
    responses:
      204:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Hero'
components:
  schemas:
    Hero:
      description: The hero fighting against the villain
      required:
        - level
        - name
      type: object
      properties:
        id:
          format: int64
          type: integer
        level:

```

```

format: int32
minimum: 1
type: integer
nullable: false
name:
  maxLength: 50
  minLength: 3
  type: string
  nullable: false
otherName:
  type: string
picture:
  type: string
powers:
  type: string
URI:
  type: object
properties:
  string:
    type: string
rawAuthority:
  type: string
rawFragment:
  type: string
rawPath:
  type: string
rawQuery:
  type: string
rawSchemeSpecificPart:
  type: string
rawUserInfo:
  type: string
absolute:
  type: boolean
opaque:
  type: boolean
Long:
  format: int64
  type: integer
String:
  type: string

```

## Swagger UI

When building APIs, developers want to test them quickly. Swagger UI is a great tool permitting to visualize and interact with your APIs.<sup>[24]</sup> The UI is automatically generated from your OpenAPI specification. The Quarkus `smallrye-openapi` extension comes with a `swagger-ui` extension embedding a properly configured Swagger UI page. By default, Swagger UI is accessible at `/swagger-ui`. So, once your application is started, you can go to `http://localhost:8083/swagger-ui` and play with your API.

You can visualize your API's operations and schemas.

The screenshot shows the Swagger UI interface for a 'Hero API'. At the top, there's a navigation bar with the 'Swagger' logo, a 'Supported by SMARTBEAR' link, a search bar containing '/openapi', and a 'Explore' button. Below the header, the title 'Hero API' is displayed with a '1.0' version and an 'OAS3' badge. A note says 'This API allows CRUD operations on a hero'. There are links to 'Quarkus - Website' and 'All the Quarkus workshops'. A 'Servers' dropdown is set to 'http://localhost:8083'. The main content area shows the API structure under sections like 'api', 'heroes', and 'default'. Each section contains various HTTP method entries with their descriptions. For example, under 'default', there are entries for GET /api/heroes, PUT /api/heroes, POST /api/heroes, GET /api/heroes/hello, GET /api/heroes/random, GET /api/heroes/{id}, and DELETE /api/heroes/{id}.

Servers

`http://localhost:8083`

**api** Public that can be used by anybody

**heroes** Anybody interested in heroes

**default**

**GET** `/api/heroes` Returns all the heroes from the database

**PUT** `/api/heroes` Updates an exiting hero

**POST** `/api/heroes` Creates a valid hero

**GET** `/api/heroes/hello`

**GET** `/api/heroes/random` Returns a random hero

**GET** `/api/heroes/{id}` Returns a hero for a given identifier

**DELETE** `/api/heroes/{id}` Deletes an exiting hero

## OpenAPI Tests in HeroResourceTest

Let's add a few extra test methods that would make sure OpenAPI and Swagger UI are packaged in the application:

```

@Test
void shouldPingOpenAPI() {
    given()
        .header(ACCEPT, APPLICATION_JSON)
        .when().get("/openapi")
        .then()
        .statusCode(OK.getStatusCode());
}

@Test
void shouldPingSwaggerUI() {
    given()
        .when().get("/swagger-ui")
        .then()
        .statusCode(OK.getStatusCode());
}

```

Execute the test using `./mvnw test`.

**NOTE**

The tests may fail because of the *multiplier*. In the `application.properties` file, add: `%test.level.multiplier=1` We will cover this syntax later.

**WARNING**

If you have any problem with the code, don't understand or feel you are running, remember to ask for some help. Also, you can get the code of this entire workshop from <https://github.com/quarkusio/quarkus-workshops/tree/master/quarkus-workshop-super-heroes>.

[15] RESTEasy <https://resteasy.github.io>

[16] RestAssured <http://rest-assured.io>

[17] Panache <https://github.com/quarkusio/quarkus/tree/master/extensions/panache>

[18] Agroal <https://agroal.github.io>

[19] ArC <https://github.com/quarkusio/quarkus/tree/master/independent-projects/arc>

[20] Quarkus - Contexts and Dependency Injection <https://quarkus.io/guides/cdi-reference.html>

[21] TestContainers <https://www.testcontainers.org>

[22] Microprofile Config <https://microprofile.io/project/eclipse/microprofile-config>

[23] MicroProfile OpenAPI <https://github.com/eclipse/microprofile-open-api>

[24] Swagger UI <https://swagger.io/tools/swagger-ui>

# Quarkus

---

In the previous chapter, you had a quick peek to Quarkus and how you can build HTTP / REST-based applications with it. But that was just the beginning, Quarkus can do a lot more, and this is the purpose of this chapter. In this chapter, you are going to see:

- What's Quarkus? and how does it change the Java landscape
- What are the main Quarkus idea and how it helps in the *cloud native world*
- The Quarkus build process, in other words, the *secret sauce*
- Some Quarkus features such as the application lifecycle support
- How you can use Quarkus to generate native executable

## What's Quarkus?

Java was born more than 20 years ago. The world 20 years ago was quite different. The software industry has gone through several revolutions over these two decades. Java has always been able to reinvent itself to stay relevant.

But a new revolution is happening right now. While for years, most applications were running on huge machines, with lots of CPU and memory, they are now running on the Cloud, in constrained environments, in containers, where the resources are shared. Density is the new optimization: crank as many mini-apps (or microservices) as possible per node. And scale by adding more instances of an app instead of a more powerful single instance.

The Java ergonomics, designed 20 years ago, do not fit well in this new environment. Java applications were designed to run 24/7 for months, even years. The JIT is optimizing the execution over time; the GC manages the memory efficiently... But all these features have a cost, and the memory required to run Java applications and startup times are showstoppers when instead of one application, you deploy 20 or 50 microservices. The issue is not the JVM itself; it's also the Java ecosystem that needs to be reinvented.

That's where Quarkus, and other projects, enter the game. Quarkus proposes to generalize "Ahead of Time" techniques.<sup>[25]</sup> When a Quarkus application is built, some work that usually happens at runtime is moved to the build time. Thus, when the application runs, everything has been pre-computed, and all the annotation scanning, XML parsing, and so on won't be executed anymore. It has two direct benefits: on the startup time (a lot faster) and on memory consumption (a lot lower).



So, as depicted on the figure above, Quarkus does bring an infrastructure for frameworks to embrace build time metadata discovery (like annotations), declare which classes need reflection at runtime, boot at build time, and generally offer a lot GraalVM optimization for free (or cheap at least). Indeed, thanks to all these metadata, Quarkus can configure native compilers such as the SubstrateVM compiler to generate a native executable for your Java application. Thanks to an aggressive dead-code elimination, the final executable is smaller, faster to start and use a ridiculously small amount of memory.



Quarkus does not stop there. As you have seen in the previous chapter, it proposes a stellar developer experience. It also unifies reactive and imperative so that you can mix regular JAX-RS and event-oriented code in the same application. Finally, Quarkus is based on many popular framework out there such as Eclipse Vert.x, Apache Camel, Undertow... You can already state that you have 5 years of experience with Quarkus.

Ok, but enough talking, time to see this in action.

## Quarkus Augmentation

Let's demystify all this.

So far, you have developed the superheroes microservice. This microservice is relatively simple, but it still has database access, ORM support, transaction, JSON serialization, and deserialization.

Let's now package this application using:

```
$ mvn package
```

In the log, you can see actions happening at build time during what Quarkus call the *augmentation* phase.

```
[INFO] --- quarkus-maven-plugin:0.25.0:build (default) @ rest-hero ---
[INFO] [io.quarkus.deployment.QuarkusAugmentor] Beginning quarkus augmentation
[INFO] [org.jboss.threads] JBoss Threads version 3.0.0.Final
[INFO] [org.hibernate.jpa.boot.internal.PersistenceXmlParser] HHH000318: Could not
find any META-INF/persistence.xml file in the classpath
[INFO] [org.hibernate.Version] HHH000412: Hibernate Core {5.4.5.Final}
[INFO] [io.quarkus.deployment.QuarkusAugmentor] Quarkus augmentation completed in
2653ms
```

In this log, you can see that the Hibernate XML parser has been executed at build time. This saves from having to:

1. embed an XML parser at runtime,
2. Do the actual parsing,
3. Configure Hibernate based on the content of the file.

With Quarkus, at runtime, almost everything is already configured. Only runtime configuration properties are applied at startup (such as database URLs).

Also, during this augmentation, Java classes are generated or extended. Remember the `Hero` Panache entity. The class is extended during the *augmentation*. If you run `javap target/transformed-classes/io/quarkus/workshop/superheroes/hero/Hero.class`, you can see methods prefixed with `$$`, which have been added to the class.

If now you look at the `target/wiring-classes/io/quarkus/workshop/superheroes/hero`, you can see many generated classes.

All these metadata are computed and managed by *extensions*. The next figure present some of the extension you already used, but there are a lot more. We are going to learn more about extensions later in this workshop, and even build one. What's important to understand for now is that the magic is packaged into extension and every time you add a `quarkus-` dependency to your `pom.xml` file, you enable an extension.




# Application Lifecycle

Now that you know how is structured Quarkus, let's continue using various extensions. You often need to execute custom actions when the application starts and clean up everything when the application stops. In this module we will display a banner in the logs once the Hero API has started.

## Directory Structure

In this module we will add an extra class ([HeroApplicationLifecycle](#)) to handle the Hero API lifecycle. You will end-up with the following directory structure:

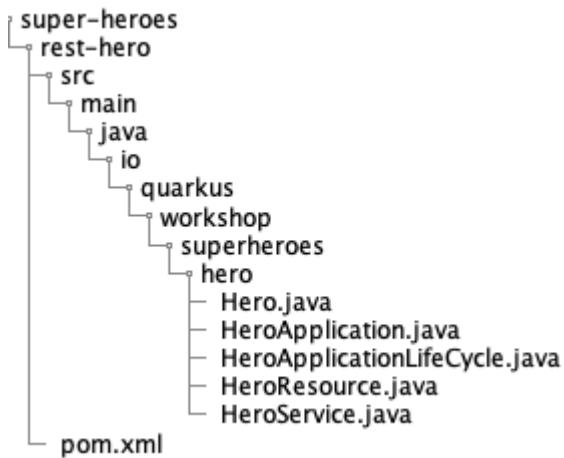

## Displaying a Banner

When our application starts, the logs are pretty boring... and lack of a banner (any decent application **must** have a banner nowadays). So the first thing that you need to do is to go to the [following website](#) and pick up your favourite "Hero API" text banner. Create a new class named [HeroApplicationLifecycle](#) (or pick another name, the name does not matter) in the `io.quarkus.workshop.superheroes.hero` package, and copy your banner so you end up with a similar content:

```

package io.quarkus.workshop.superheroes.hero;

import io.quarkus.runtime.ShutdownEvent;
import io.quarkus.runtime.StartupEvent;
import io.quarkus.runtime.configuration.ProfileManager;
import org.jboss.logging.Logger;

import javax.enterprise.context.ApplicationScoped;
import javax.enterprise.event.Observes;

@ApplicationScoped
class HeroApplicationLifeCycle {

    private static final Logger LOGGER = Logger.getLogger(HeroApplicationLifeCycle
.class);

    void onStart(@Observes StartupEvent ev) {
        LOGGER.info(" _ _ _ _ _ / \\ _ _ _ _ ");
        LOGGER.info(" | | | | --- - -- --- / \\ | _ \\_ _ |");
        LOGGER.info(" | | | | / _ \\ ' _ / _ \\ / _ \\ | | |");
        LOGGER.info(" | _ | _ | _ / | | ( ) | / _ _ \\ | _ / |");
        LOGGER.info(" | _ | _ | _ \\ _ | _ \\ _ / / _ _ \\_ | _ _ |");
        LOGGER.info("                                     Powered by Quarkus");
    }

    void onStop(@Observes ShutdownEvent ev) {
        LOGGER.info("The application HERO is stopping...");
    }
}

```

Thanks to the CDI `@Observes`, the `HeroApplicationLifeCycle` is invoked:

- on startup with the `StartupEvent` so it can execute code (here, displaying the banner) when the application is starting
- on shutdown with the `ShutdownEvent` when the application is terminating

Run the application with: `./mvnw compile quarkus:dev`, the banner is printed to the console. When the application is stopped, the second log message is printed.

**NOTE**

If your application was still running, just send an HTTP request, like go to <http://localhost:8083>. As the application code changed, the application is restarted.

# Configuration Profiles

Quarkus supports the notion of configuration profiles. These allow you to have multiple configuration in the same file and select between them via a profile name.

By default Quarkus has three profiles, although it is possible to use as many as you like. The default profiles are:

- **dev** - Activated when in development mode (i.e. `quarkus:dev`)
- **test** - Activated when running tests
- **prod** - The default profile when not running in development or test mode

Let's change the `HeroApplicationLifecycle` so it displays the current profile. For that, just add a log invoking the `ProfileManager.getActiveProfile()` method:

```
void onStart(@Observes StartupEvent ev) {  
    LOGGER.info(" _ _ _ _ / \ \ _ \ _ |");  
    LOGGER.info(" | | | | / _ \ \ / _ \ |");  
    LOGGER.info(" | | | | / \ \ | | | ");  
    LOGGER.info(" | | | | / \ \ | | | ");  
    LOGGER.info(" | | | | / \ \ | | | ");  
    LOGGER.info(" | | | | / \ \ | | | ");  
    LOGGER.info(" Powered by Quarkus");  
    LOGGER.info("The application HERO is starting with profile " + ProfileManager  
    .getActiveProfile());  
}
```

**NOTE**

If not already done, you need to add the following import statement: `import io.quarkus.runtime.configuration.ProfileManager;`

In the `application.properties` file, you can prefix a property to be defined in the running profile. For example, we did add the `%test.level.multiplier=1` property in the previous chapter. This indicates that the property `level.multiplier` is set to 1 in the `test` profile.

Now, if you start your application in dev mode with `mvn compile quarkus:dev`, you will get the `dev` profile enabled. If you start the tests, the `test` profile is enabled (and so the `multiplier` is set to 1).

Package your application with `mvn package`, and start it with `java -Dquarkus.profile=foo -jar target/rest-hero-1.0-SNAPSHOT-runner.jar`. You will see that the `foo` profile is enabled. As not overridden, the `level.multiplier` property has the value 3.

Profiles are very useful to customize the configuration per environment. We are going to see an example of such customization in the next section.

# Building Native Images

## Building a Native Executable

Let's now produce a native executable for our application. As explained in the introduction of this chapter, Quarkus is able to generate native executables. Just like Go, native executable don't need a VM to run, they contain the whole application, like an `.exe` file on Windows.

It improves the startup time of the application, and produces a minimal disk footprint. The executable would have everything to run the application including the "JVM" (shrunk to be just enough to run the application), and the application.

**NOTE** Choosing JVM execution vs native executable execution depends on your application needs and environment. Discuss with the lab organizers for some insights

To do so, you will find in the `pom.xml` the following profile:

```

<profile>
  <id>native</id>
  <activation>
    <property>
      <name>native</name>
    </property>
  </activation>
  <build>
    <plugins>
      <plugin>
        <groupId>io.quarkus</groupId>
        <artifactId>quarkus-maven-plugin</artifactId>
        <version>${quarkus.version}</version>
        <executions>
          <execution>
            <goals>
              <goal>native-image</goal>
            </goals>
            <configuration>
              <enableHttpUrlHandler>true</enableHttpUrlHandler>
            </configuration>
          </execution>
        </executions>
      </plugin>
      <plugin>
        <artifactId>maven-failsafe-plugin</artifactId>
        <version>${surefire-plugin.version}</version>
        <executions>
          <execution>
            <goals>
              <goal>integration-test</goal>
              <goal>verify</goal>
            </goals>
            <configuration>
              <systemProperties>
                <native.image.path>${project.build.directory}/${project.build.finalName}-runner</native.image.path>
              </systemProperties>
            </configuration>
          </execution>
        </executions>
      </plugin>
    </plugins>
  </build>
</profile>

```

Create a native executable using: `./mvnw package -Pnative`. In addition to the regular files (`rest-hero-1.0-SNAPSHOT.jar` and `rest-hero-1.0-SNAPSHOT-runner.jar`), the build also produces

`target/rest-hero-1.0-SNAPSHOT-runner` (notice that there is no `.jar` file extension). You can run it using: `./target/rest-hero-1.0-SNAPSHOT-runner`.

**WARNING**

Creating a native executable requires a lot of memory and CPU. It also takes a few minutes, even for simple application like the Hero microservice. Most of the time is spent during the dead code elimination, as it traverse the whole (closed) world.

## Testing the Native Executable

Producing a native executable can lead to a few issues, and so it's also a good idea to run some tests against the application running in the native file. In the `pom.xml` file, the native profile contains:

```
<plugin>
  <artifactId>maven-failsafe-plugin</artifactId>
  <version>${surefire-plugin.version}</version>
  <executions>
    <execution>
      <goals>
        <goal>integration-test</goal>
        <goal>verify</goal>
      </goals>
      <configuration>
        <systemProperties>
          <native.image.path>${project.build.directory}/${project.build.finalName}-
runner</native.image.path>
        </systemProperties>
      </configuration>
    </execution>
  </executions>
</plugin>
```

This instructs the failsafe-maven-plugin to run integration-test and indicates the location of the produced native executable.

Then, open the `src/test/java/io/quarkus/workshop/superheroes/hero/NativeHeroResourceIT.java` and update it with the following:

```
package io.quarkus.workshop.superheroes.hero;

import com.github.dockerjava.api.model.ExposedPort;
import com.github.dockerjava.api.model.PortBinding;
import com.github.dockerjava.api.model.Ports;
import io.quarkus.test.junit.SubstrateTest;
import io.restassured.common.mapper.TypeRef;
import io.vertx.core.json.JsonObject;
import org.hamcrest.core.Is;
import org.junit.jupiter.api.MethodOrderer;
```

```

import org.junit.jupiter.api.Order;
import org.junit.jupiter.api.Test;
import org.junit.jupiter.api.TestMethodOrder;
import org.testcontainers.containers.PostgreSQLContainer;
import org.testcontainers.junit.jupiter.Container;
import org.testcontainers.junit.jupiter.Testcontainers;

import javax.ws.rs.core.HttpHeaders;
import javax.ws.rs.core.MediaType;
import java.util.List;
import java.util.Random;

import static io.restassured.RestAssured.get;
import static io.restassured.RestAssured.given;
import static javax.ws.rs.core.HttpHeaders.ACCEPT;
import static javax.ws.rs.core.HttpHeaders.CONTENT_TYPE;
import static javax.ws.rs.core.MediaType.APPLICATION_JSON;
import static javax.ws.rs.core.Response.Status.*;
import static org.hamcrest.CoreMatchers.is;
import static org.junit.jupiter.api.Assertions.*;

{@SubstrateTest
@Testcontainers
@TestMethodOrder(MethodOrderer.OrderAnnotation.class)
public class NativeHeroResourceIT {

    private static final String DEFAULT_NAME = "Super Baguette";
    private static final String UPDATED_NAME = "Super Baguette (updated)";
    private static final String DEFAULT_OTHER_NAME = "Super Baguette Tradition";
    private static final String UPDATED_OTHER_NAME = "Super Baguette Tradition
(updated)";

    private static final String DEFAULT_PICTURE = "super_baguette.png";
    private static final String UPDATED_PICTURE = "super_baguette_updated.png";
    private static final String DEFAULT POWERS = "eats baguette really quickly";
    private static final String UPDATED_POWERS = "eats baguette really quickly
(updated)";

    private static String heroId;

    @Container
    private static final PostgreSQLContainer DATABASE = new PostgreSQLContainer<>(
"postgres:10.5")
        .withDatabaseName("heroes_database")
        .withUsername("superman")
        .withPassword("superman")
        .withExposedPorts(5432)
        .withCreateContainerCmdModifier(cmd ->
            cmd
                .withHostName("localhost")
                .withPortBindings(new PortBinding(Ports.Binding.bindPort(5499), new
ExposedPort(5432)))
}

```

```

);

@Test
void shouldPingOpenAPI() {
    given()
        .header(ACCEPT, APPLICATION_JSON)
        .when().get("/openapi")
        .then()
        .statusCode(OK.getStatusCode());
}

@Test
public void testHelloEndpoint() {
    given()
        .when().get("/api/heroes/hello")
        .then()
        .statusCode(200)
        .body(is("hello"));
}

@Test
void shouldNotGetUnknownHero() {
    Long randomId = new Random().nextLong();
    given()
        .pathParam("id", randomId)
        .when().get("/api/heroes/{id}")
        .then()
        .statusCode(NO_CONTENT.getStatusCode());
}

@Test
void shouldNotAddInvalidItem() {
    JSONObject hero = new JSONObject();
    hero.put("otherName", DEFAULT_OTHER_NAME);
    hero.put("picture", DEFAULT_PICTURE);
    hero.put("powers", DEFAULT POWERS);
    hero.put("level", 0);

    given()
        .body(hero.encode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .header(ACCEPT, APPLICATION_JSON)
        .when()
        .post("/api/heroes")
        .then()
        .statusCode(BAD_REQUEST.getStatusCode());
}

```

```

    @Test
    @Order(1)
    void shouldGetInitialItems() {
        List<Hero> heroes = get("/api/heroes").then()
            .statusCode(OK.getStatusCode())
            .header(HttpHeaders.CONTENT_TYPE, MediaType.APPLICATION_JSON)
            .extract().body().as(getHeroTypeRef());
        assertEquals(0, heroes.size());
    }

    @Test
    @Order(2)
    void shouldAddAnItem() {
        JSONObject hero = new JSONObject();
        hero.put("name", DEFAULT_NAME);
        hero.put("otherName", DEFAULT_OTHER_NAME);
        hero.put("picture", DEFAULT_PICTURE);
        hero.put("powers", DEFAULT POWERS);
        hero.put("level", 20);

        String location = given()
            .body(hero.encode())
            .header(CONTENT_TYPE, APPLICATION_JSON)
            .header(ACCEPT, APPLICATION_JSON)
            .when()
            .post("/api/heroes")
            .then()
            .statusCode(CREATED.getStatusCode())
            .extract().header("Location");
        assertTrue(location.contains("/api/heroes"));

        // Stores the id
        String[] segments = location.split("/");
        heroId = segments[segments.length - 1];
        assertNotNull(heroId);

        given()
            .pathParam("id", heroId)
            .when().get("/api/heroes/{id}")
            .then()
            .statusCode(OK.getStatusCode())
            .header(CONTENT_TYPE, APPLICATION_JSON)
            .body("name", Is.is(DEFAULT_NAME))
            .body("otherName", Is.is(DEFAULT_OTHER_NAME))
            .body("level", Is.is(60))
            .body("picture", Is.is(DEFAULT_PICTURE))
            .body("powers", Is.is(DEFAULT POWERS));

        List<Hero> heroes = get("/api/heroes").then()
            .statusCode(OK.getStatusCode())
            .header(CONTENT_TYPE, APPLICATION_JSON)

```

```

.extract().body().as(getHeroTypeRef());
assertEquals(1, heroes.size());
}

@Test
@Order(3)
void shouldUpdateAnItem() {
    JSONObject hero = new JSONObject();
    hero.put("id", Long.valueOf(heroId));
    hero.put("name", UPDATED_NAME);
    hero.put("otherName", UPDATED_OTHER_NAME);
    hero.put("picture", UPDATED_PICTURE);
    hero.put("powers", UPDATED_POWERS);
    hero.put("level", 21);

    given()
        .body(hero.encode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .header(ACCEPT, APPLICATION_JSON)
        .when()
        .put("/api/heroes")
        .then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .body("name", Is.is(UPDATED_NAME))
        .body("otherName", Is.is(UPDATED_OTHER_NAME))
        .body("level", Is.is(21))
        .body("picture", Is.is(UPDATED_PICTURE))
        .body("powers", Is.is(UPDATED_POWERS));

    List<Hero> heroes = get("/api/heroes").then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .extract().body().as(getHeroTypeRef());
    assertEquals(1, heroes.size());
}

@Test
@Order(4)
void shouldRemoveAnItem() {
    given()
        .pathParam("id", heroId)
        .when().delete("/api/heroes/{id}")
        .then()
        .statusCode(NO_CONTENT.getStatusCode());

    List<Hero> heroes = get("/api/heroes").then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .extract().body().as(getHeroTypeRef());
    assertEquals(0, heroes.size());
}

```

```

    }

    private TypeRef<List<Hero>> getHeroTypeRef() {
        return new TypeRef<List<Hero>>() {
            // Kept empty on purpose
        };
    }

}

```

Instead of using `@QuarkusTest`, it uses the `@SubstrateTest` test runner that starts the application from the native file before the tests. The executable is retrieved using the `native.image.path` system property configured in the Failsafe Maven Plugin. We extend our previous tests, but you can also implement your own tests.

**NOTE**

Notice that `NativeHeroResourceIT` does not extend `HeroResourceTest`. It is a good practice to share the same tests for native and JVM mode that way but in our case the behavior is a bit different. For example, we do not want Swagger UI exposed in our native image.

Before running the test, we need to configure in which *profile* they run. If you look at the test class, it starts a database on a specific port (5499). We need to configure the application to connect on this port. For this edit the `application.properties` and add:

```

quarkus.test.native-image-profile=it
%it.quarkus.datasource.url=jdbc:postgresql://localhost:5499/heroes_database

```

The first line configure the profile to use in the native integration tests. Here we use a custom profile named `it`. Note that by default `prod` is used. The second line overrides the JDBC url to use the right port. Now we can run the tests.


To see the `NativeHeroResourceIT` run against the native executable, use `./mvnw verify -Pnative`:

```
[INFO] --- maven-failsafe-plugin:2.22.0:integration-test (default) @ rest-hero ---
[INFO]
[INFO] -----
[INFO] T E S T S
[INFO] -----
[INFO] Running io.quarkus.workshop.superheroes.hero.NativeHeroResourceIT
...
20:42:59 INFO [io.quarkus.workshop.superheroes.hero.NativeHeroResourceIT] (main) - - -
20:42:59 INFO [io.quarkus.workshop.superheroes.hero.NativeHeroResourceIT] (main) | | | | - - - -
/ \ | _ \_ | |
20:42:59 INFO [io.quarkus.workshop.superheroes.hero.NativeHeroResourceIT] (main) | | | | / _ \ ' __/ _ \
/ _ \ | |_) | |
20:42:59 INFO [io.quarkus.workshop.superheroes.hero.NativeHeroResourceIT] (main) | _ | | _/ | | ( )
| / ___ \| _/| |
20:42:59 INFO [io.quarkus.workshop.superheroes.hero.NativeHeroResourceIT] (main) |_| |_| \___|_| \___/
/_/ \_\_| |__|
20:42:59 INFO [io.quarkus.workshop.superheroes.hero.NativeHeroResourceIT] (main)
Powered by Quarkus
...
[INFO] Tests run: 8, Failures: 0, Errors: 0, Skipped: 0, Time elapsed: 9.068 s - in
io.quarkus.workshop.superheroes.hero.NativeHeroResourceIT
[INFO]
[INFO] Results:
[INFO]
[INFO] Tests run: 8, Failures: 0, Errors: 0, Skipped: 0
[INFO]
[INFO]
[INFO] --- maven-failsafe-plugin:2.22.0:verify (default) @ rest-hero ---
[INFO] -----
[INFO] BUILD SUCCESS
[INFO] -----
[INFO] Total time: 05:29 min
[INFO] Finished at: 2019-10-18T20:43:03+02:00
[INFO] -----
```

[25] Ahead-of-Time Compilation <https://www.graalvm.org/docs/reference-manual/native-image>

# One Microservice is no Microservices

So far we've built one microservice. In the following sections you will develop two extra microservices: a *villain* microservice, a mad copycat of the *hero* microservice, and a *fight* microservice where heroes and villains fight. We will also add an Angular front-end so we can fight graphically.

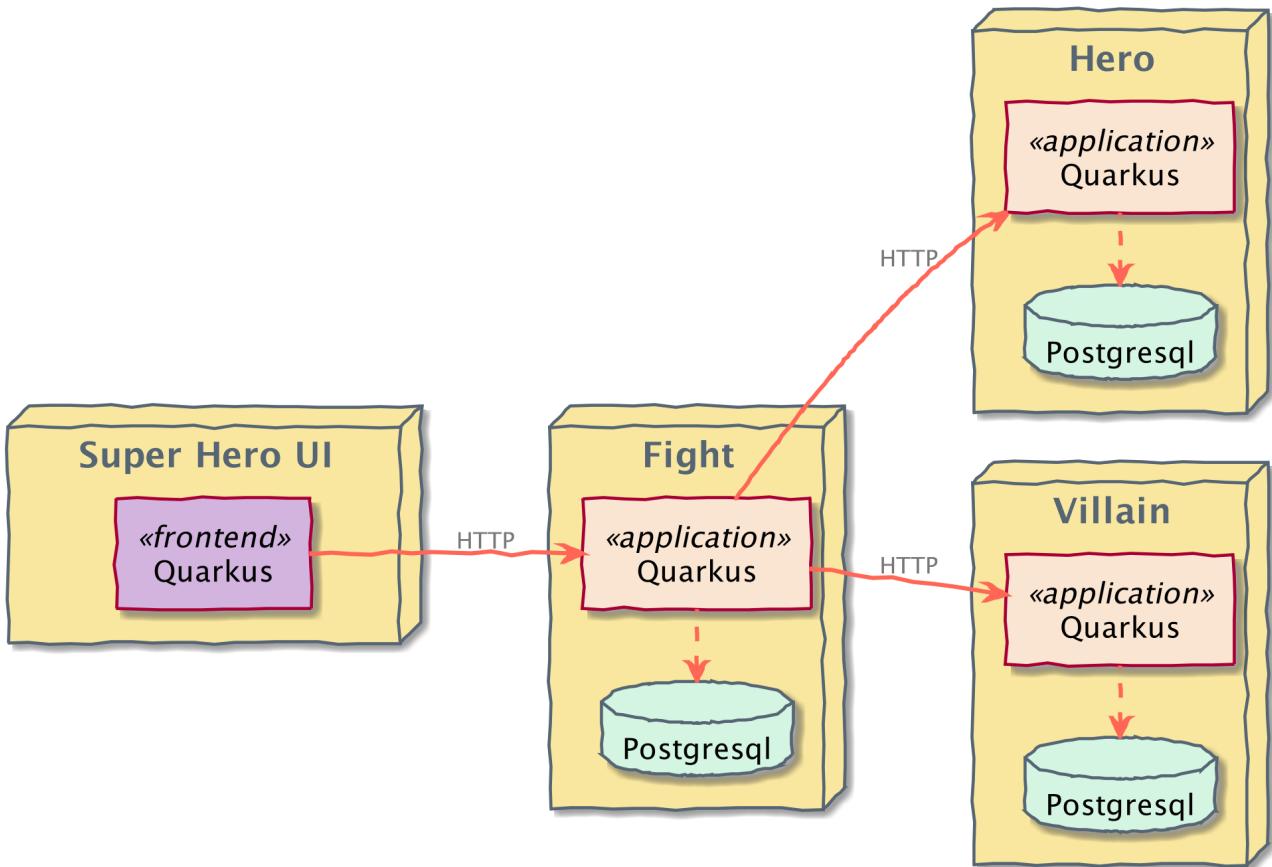

Each microservice is developed in its own directory.

```
super-heroes
├── infrastructure
│   └── rest-fight
│       └── src
│           ├── main
│           └── test
└── rest-hero
    └── src
        ├── main
        └── test
└── rest-villain
    └── src
        ├── main
        └── test
└── ui-super-heroes
    └── src
        ├── app
        └── main
```

# Villain Microservice

New microservice, new project! In this section we will develop a Villain REST Endpoint which is **really** similar to the Hero Endpoint (and remember, copy/paste is your best friend).

TIP

If you are running out of time, or if you can't be bothered in typing all the code of the Villain REST Endpoint, you can also download the code. Download the zip file <https://raw.githubusercontent.com/quarkusio/quarkus-workshops/master/quarkus-workshop-super-heroes/super-heroes/rest-villain/rest-villain.zip> and unzip the entire code into your `rest-villain` directory. If you do that, you can skip entirely this chapter and go straight to [Fight Microservice](#).

## Bootstrapping the Villain REST Endpoint

Like for the Hero API, the easiest way to create this new Quarkus project is to use a Maven archetype. Under the `quarkus-workshop-super-heroes/super-heroes` root directory where you have all your code, create a `rest-villain` sub-directory, open a terminal and run the following command:

```
mvn io.quarkus:quarkus-maven-plugin:0.25.0:create \
-DprojectGroupId=io.quarkus.workshop.super-heroes \
-DprojectArtifactId=rest-villain \
-DclassName="io.quarkus.workshop.superheroes.villain.VillainResource" \
-Dpath="api/villains" \
-Dextensions="jdbc-postgresql,hibernate-orm-panache,hibernate-validator,quarkus \
-resteasy-jsonb,openapi"
```

Also add the following dependencies:

```
<dependency>
  <groupId>com.fasterxml.jackson.core</groupId>
  <artifactId>jackson-databind</artifactId>
  <scope>test</scope>
</dependency>
<dependency>
  <groupId>org.testcontainers</groupId>
  <artifactId>junit-jupiter</artifactId>
  <version>1.12.2</version>
  <scope>test</scope>
</dependency>
<dependency>
  <groupId>org.testcontainers</groupId>
  <artifactId>postgresql</artifactId>
  <version>1.12.2</version>
  <scope>test</scope>
</dependency>
```


TIP

*Prefering Web UI*

Instead of the Maven command, you can use <https://code.quarkus.io>.

## Directory Structure

At the end you should have the following directory structure:

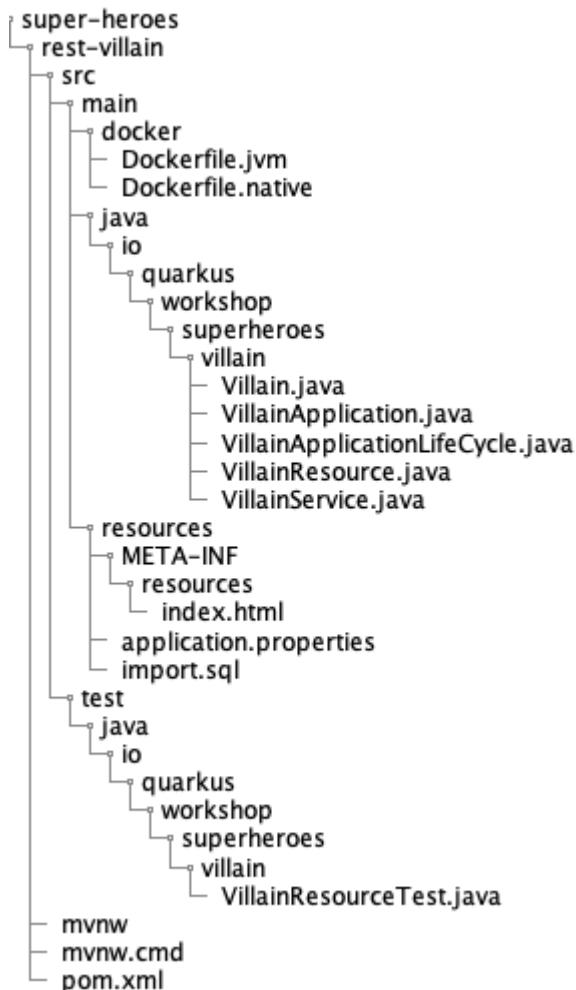

## Villain Entity

Villains need to be stored, updated and retrieved from a database. As you know now, Hibernate with Panache makes the ORM job really easy. So this is what the `Villain` looks like (notice the `findRandom()` method):

```

package io.quarkus.workshop.superheroes.villain;

import io.quarkus.hibernate.orm.panache.PanacheEntity;
import org.eclipse.microprofile.openapi.annotations.media.Schema;

import javax.persistence.Column;
import javax.persistence.Entity;
import javax.validation.constraints.Min;
import javax.validation.constraints.NotNull;
import javax.validation.constraints.Size;
import java.util.Random;

@Entity
@Schema(description = "The villain fighting against the hero")
public class Villain extends PanacheEntity {

    @NotNull
    @Size(min = 3, max = 50)
    public String name;
    public String otherName;
    @NotNull
    @Min(1)
    public int level;
    public String picture;

    @Column(columnDefinition = "TEXT")
    public String powers;

    public static Villain findRandom() {
        long countVillains = count();
        Random random = new Random();
        int randomVillain = random.nextInt((int) countVillains);
        return findAll().page(randomVillain, 1).firstResult();
    }
}

```

## VillainService Transactional Service

To transactionnally manipulate a `Villain` entity we need a `VillainService`.

```

package io.quarkus.workshop.superheroes.villain;

import org.eclipse.microprofile.config.inject.ConfigProperty;

import javax.enterprise.context.ApplicationScoped;
import javax.transaction.Transactional;
import javax.validation.Valid;
import java.util.List;

```

```
import static javax.transaction.Transactional.TxType.REQUIRED;
import static javax.transaction.Transactional.TxType.SUPPORTS;

@ApplicationScoped
@Transactional(REQUIRED)
public class VillainService {

    @ConfigProperty(name = "level.multiplier", defaultValue="1")
    int levelMultiplier;

    @Transactional(SUPPORTS)
    public List<Villain> findAllVillains() {
        return Villain.listAll();
    }

    @Transactional(SUPPORTS)
    public Villain findVillainById(Long id) {
        return Villain.findById(id);
    }

    @Transactional(SUPPORTS)
    public Villain findRandomVillain() {
        Villain randomVillain = null;
        while (randomVillain == null) {
            randomVillain = Villain.findRandom();
        }
        return randomVillain;
    }

    public Villain persistVillain(@Valid Villain villain) {
        villain.level = villain.level * levelMultiplier;
        villain.persist();
        return villain;
    }

    public Villain updateVillain(@Valid Villain villain) {
        Villain entity = Villain.findById(villain.id);
        entity.name = villain.name;
        entity.otherName = villain.otherName;
        entity.level = villain.level;
        entity.picture = villain.picture;
        entity.powers = villain.powers;
        return entity;
    }

    public void deleteVillain(Long id) {
        Villain villain = Villain.findById(id);
        villain.delete();
    }
}
```

## VillainResource Endpoint

To expose a REST API we also need a `VillainResource`. Notice the OpenAPI annotations.

```
package io.quarkus.workshop.superheroes.villain;

import org.eclipse.microprofile.openapi.annotations.Operation;
import org.eclipse.microprofile.openapi.annotations.enums.SchemaType;
import org.eclipse.microprofile.openapi.annotations.media.Content;
import org.eclipse.microprofile.openapi.annotations.media.Schema;
import org.eclipse.microprofile.openapi.annotations.parameters.Parameter;
import org.eclipse.microprofile.openapi.annotations.parameters.RequestBody;
import org.eclipse.microprofile.openapi.annotations.responses.APIResponse;
import org.jboss.logging.Logger;

import javax.inject.Inject;
import javax.validation.Valid;
import javax.ws.rs.DELETE;
import javax.ws.rs.GET;
import javax.ws.rs.POST;
import javax.ws.rs.PUT;
import javax.ws.rs.Path;
import javax.ws.rs.PathParam;
import javax.ws.rs.Produces;
import javax.ws.rs.core.Context;
import javax.ws.rs.core.Response;
import javax.ws.rs.core.UriBuilder;
import javax.ws.rs.core.UriInfo;
import java.net.URI;
import java.util.List;

import static javax.ws.rs.core.MediaType.APPLICATION_JSON;
import static javax.ws.rs.core.MediaType.TEXT_PLAIN;

@Path("/api/villains")
@Produces(APPLICATION_JSON)
public class VillainResource {

    private static final Logger LOGGER = Logger.getLogger(VillainResource.class);

    @Inject
    VillainService service;

    @Operation(summary = "Returns a random villain")
    @APIResponse(responseCode = "200", content = @Content(mediaType =
    APPLICATION_JSON, schema = @Schema(implementation = Villain.class, required = true)))
    @GET
    @Path("/random")
    public Response getRandomVillain() {
```

```

        Villain villain = service.findRandomVillain();
        LOGGER.debug("Found random villain " + villain);
        return Response.ok(villain).build();
    }

    @Operation(summary = "Returns all the villains from the database")
    @APIResponse(responseCode = "200", content = @Content(mediaType =
APPLICATION_JSON, schema = @Schema(implementation = Villain.class, type = SchemaType
.ARRAY)))
    @APIResponse(responseCode = "204", description = "No villains")
    @GET
    public Response getAllVillains() {
        List<Villain> villains = service.findAllVillains();
        LOGGER.debug("Total number of villains " + villains);
        return Response.ok(villains).build();
    }

    @Operation(summary = "Returns a villain for a given identifier")
    @APIResponse(responseCode = "200", content = @Content(mediaType =
APPLICATION_JSON, schema = @Schema(implementation = Villain.class)))
    @APIResponse(responseCode = "204", description = "The villain is not found for a
given identifier")
    @GET
    @Path("/{id}")
    public Response getVillain(@Parameter(description = "Villain identifier", required
= true) @PathParam("id") Long id) {
        Villain villain = service.findVillainById(id);
        if (villain != null) {
            LOGGER.debug("Found villain " + villain);
            return Response.ok(villain).build();
        } else {
            LOGGER.debug("No villain found with id " + id);
            return Response.noContent().build();
        }
    }

    @Operation(summary = "Creates a valid villain")
    @APIResponse(responseCode = "201", description = "The URI of the created villain",
content = @Content(mediaType = APPLICATION_JSON, schema = @Schema(implementation =
URI.class)))
    @POST
    public Response createVillain(@RequestBody(required = true, content = @Content
(mediaType = APPLICATION_JSON, schema = @Schema(implementation = Villain.class)))
@Valid Villain villain, @Context UriInfo uriInfo) {
        villain = service.persistVillain(villain);
        UriBuilder builder = uriInfo.getAbsolutePathBuilder().path(Long.toString
(villain.id));
        LOGGER.debug("New villain created with URI " + builder.build().toString());
        return Response.created(builder.build()).build();
    }
}

```

```

    @Operation(summary = "Updates an exiting villain")
    @APIResponse(responseCode = "200", description = "The updated villain", content =
    @Content(mediaType = APPLICATION_JSON, schema = @Schema(implementation = Villain.
    class)))
    @PUT
    public Response updateVillain(@RequestBody(required = true, content = @Content
    (mediaType = APPLICATION_JSON, schema = @Schema(implementation = Villain.class)))
    @Valid Villain villain) {
        villain = service.updateVillain(villain);
        LOGGER.debug("Villain updated with new valued " + villain);
        return Response.ok(villain).build();
    }

    @Operation(summary = "Deletes an exiting villain")
    @APIResponse(responseCode = "204", content = @Content(mediaType =
    APPLICATION_JSON, schema = @Schema(implementation = Villain.class)))
    @DELETE
    @Path("/{id}")
    public Response deleteVillain(@Parameter(description = "Villain identifier",
    required = true) @PathParam("id") Long id) {
        service.deleteVillain(id);
        LOGGER.debug("Villain deleted with " + id);
        return Response.noContent().build();
    }

    @GET
    @Produces(TEXT_PLAIN)
    @Path("/hello")
    public String hello() {
        return "hello";
    }
}

```

## VillainApplication for OpenAPI

The `VillainApplication` class is just there to customize the OpenAPI contract.

```

package io.quarkus.workshop.superheroes.villain;

import org.eclipse.microprofile.openapi.annotations.ExternalDocumentation;
import org.eclipse.microprofile.openapi.annotations.OpenAPIDefinition;
import org.eclipse.microprofile.openapi.annotations.info.Contact;
import org.eclipse.microprofile.openapi.annotations.info.Info;
import org.eclipse.microprofile.openapi.annotations.servers.Server;
import org.eclipse.microprofile.openapi.annotations.tags.Tag;

import javax.ws.rs.ApplicationPath;
import javax.ws.rs.core.Application;

@ApplicationPath("/")
@OpenAPIDefinition(
    info = @Info(title = "Villain API",
        description = "This API allows CRUD operations on a villain",
        version = "1.0",
        contact = @Contact(name = "Quarkus", url = "https://github.com/quarkusio")),
    servers = {
        @Server(url = "http://localhost:8084")
    },
    externalDocs = @ExternalDocumentation(url = "https://github.com/quarkusio/quarkus-
workshops", description = "All the Quarkus workshops"),
    tags = {
        @Tag(name = "api", description = "Public that can be used by anybody"),
        @Tag(name = "villains", description = "Anybody interested in villains")
    }
)
public class VillainApplication extends Application {
}

```

## VillainApplicationLifeCycle for Startup Banner

The villain API also needs a nice banner. Go back to <http://patorjk.com/software/taag> and pick up your favourite "Villain API" text banner and paste it into the `VillainApplicationLifeCycle` class.

```
package io.quarkus.workshop.superheroes.villain;

import io.quarkus.runtime.ShutdownEvent;
import io.quarkus.runtime.StartupEvent;
import io.quarkus.runtime.configuration.ProfileManager;
import org.jboss.logging.Logger;

import javax.enterprise.context.ApplicationScoped;
import javax.enterprise.event.Observes;

@ApplicationScoped
public class VillainApplicationLifeCycle {

    private static final Logger LOGGER = Logger.getLogger(VillainApplicationLifeCycle
.class);

    void onStart(@Observes StartupEvent ev) {
        LOGGER.info(" _ _ _ _ - _ _ _ _ " );
        LOGGER.info(" \\ \\ / ( ) | | _ _ ( ) _ _ _ / \\ | _ \\ _ | " );
        LOGGER.info(" \\ \\ / | | | | / _ ' | | ' \\ / _ \\ | | | " );
        LOGGER.info(" \\ V / | | | | ( | | | | | | / _ \\ | _ / | " );
        LOGGER.info(" \\ / | | | | \\ _ , _ | | | | | / _ \\ | | | " );
        LOGGER.info("                                     Powered by Quarkus");
        LOGGER.info("The application VILLAIN is starting with profile " +
ProfileManager.getActiveProfile());
    }

    void onStop(@Observes ShutdownEvent ev) {
        LOGGER.info("The application VILLAIN is stopping...");
    }
}
```

## Adding Data

To load some SQL statements when Hibernate ORM starts, download the SQL file `import.sql` and copy it under `src/main/resources`.

```

INSERT INTO villain(id, name, otherName, picture, powers, level)
VALUES (nextval('hibernate_sequence'), 'Buuccolo', 'Majin Buu',
'https://www.superherodb.com/pictures2/portraits/11/050/15355.jpg', 'Accelerated
Healing, Adaptation, Agility, Flight, Immortality, Intelligence, Invulnerability,
Reflexes, Self-Sustenance, Size Changing, Spatial Awareness, Stamina, Stealth, Super
Breath, Super Speed, Super Strength, Teleportation', 22);
INSERT INTO villain(id, name, otherName, picture, powers, level)
VALUES (nextval('hibernate_sequence'), 'Darth Vader', 'Anakin Skywalker',
'https://www.superherodb.com/pictures2/portraits/10/050/10444.jpg', 'Accelerated
Healing, Agility, Astral Projection, Cloaking, Danger Sense, Durability,
Electrokinesis, Energy Blasts, Enhanced Hearing, Enhanced Senses, Force Fields,
Hypnokinesis, Illusions, Intelligence, Jump, Light Control, Marksmanship,
Precognition, Psionic Powers, Reflexes, Stealth, Super Speed, Telekinesis, Telepathy,
The Force, Weapons Master', 13);
INSERT INTO villain(id, name, otherName, picture, powers, level)
VALUES (nextval('hibernate_sequence'), 'The Rival (CW)', 'Edward Clariss',
'https://www.superherodb.com/pictures2/portraits/11/050/13846.jpg', 'Accelerated
Healing, Agility, Bullet Time, Durability, Electrokinesis, Endurance, Enhanced Senses,
Intangibility, Marksmanship, Phasing, Reflexes, Speed Force, Stamina, Super Speed,
Super Strength', 10);
...

```

## VillainResourceTest Test Class

We need to test our REST API. For that, copy the following `VillainResourceTest` class under the `src/test/java/io/quarkus/workshop/superheroes/villain` directory.

```

package io.quarkus.workshop.superheroes.villain;

import io.quarkus.test.junit.QuarkusTest;
import io.restassured.common.mapper.TypeRef;
import org.hamcrest.core.Is;
import org.junit.jupiter.api.*;
import org.testcontainers.containers.PostgreSQLContainer;
import org.testcontainers.junit.jupiter.Container;
import org.testcontainers.junit.jupiter.Testcontainers;

import java.util.List;
import java.util.Random;

import static io.restassured.RestAssured.get;
import static io.restassured.RestAssured.given;
import static javax.ws.rs.core.HttpHeaders.ACCEPT;
import static javax.ws.rs.core.HttpHeaders.CONTENT_TYPE;
import static javax.ws.rs.core.MediaType.APPLICATION_JSON;
import static javax.ws.rs.core.Response.Status.*;
import static org.hamcrest.CoreMatchers.is;
import static org.junit.jupiter.api.Assertions.*;

```

```

@QuarkusTest
@Testcontainers
@TestMethodOrder(MethodOrderer.OrderAnnotation.class)
public class VillainResourceTest {

    private static final String DEFAULT_NAME = "Super Chocolatine";
    private static final String UPDATED_NAME = "Super Chocolatine (updated)";
    private static final String DEFAULT_OTHER_NAME = "Super Chocolatine chocolate in";
    private static final String UPDATED_OTHER_NAME = "Super Chocolatine chocolate in
(updated)";
    private static final String DEFAULT_PICTURE = "super_chocolatine.png";
    private static final String UPDATED_PICTURE = "super_chocolatine_updated.png";
    private static final String DEFAULT POWERS = "does not eat pain au chocolat";
    private static final String UPDATED_POWERS = "does not eat pain au chocolat
(updated)";
    private static final int DEFAULT_LEVEL = 42;
    private static final int UPDATED_LEVEL = 43;

    private static final int NB_VILLAINS = 581;
    private static String villainId;

    @Container
    public static final PostgreSQLContainer DATABASE = new PostgreSQLContainer<>(
"postgres:10.5")
        .withDatabaseName("villains_database")
        .withUsername("superbad")
        .withPassword("superbad")
        .withExposedPorts(5432);

    @BeforeAll
    private static void configure() {
        System.setProperty("quarkus.datasource.url", DATABASE.getJdbcUrl());
    }

    @AfterAll
    private static void cleanup() {
        System.clearProperty("quarkus.datasource.url");
    }

    @Test
    void shouldPingOpenAPI() {
        given()
            .header(ACCEPT, APPLICATION_JSON)
            .when().get("/openapi")
            .then()
            .statusCode(OK.getStatusCode());
    }

    @Test
    void shouldPingSwaggerUI() {
        given()

```

```

        .when().get("/swagger-ui")
        .then()
        .statusCode(OK.getStatusCode());
    }

    @Test
    public void testHelloEndpoint() {
        given()
            .when().get("/api/villains/hello")
            .then()
            .statusCode(200)
            .body(is("hello"));
    }

    @Test
    void shouldNotGetUnknownVillain() {
        Long randomId = new Random().nextLong();
        given()
            .pathParam("id", randomId)
            .when().get("/api/villains/{id}")
            .then()
            .statusCode(NO_CONTENT.getStatusCode());
    }

    @Test
    void shouldGetRandomVillain() {
        given()
            .when().get("/api/villains/random")
            .then()
            .statusCode(OK.getStatusCode())
            .header(CONTENT_TYPE, APPLICATION_JSON);
    }

    @Test
    void shouldNotAddInvalidItem() {
        Villain villain = new Villain();
        villain.name = null;
        villain.otherName = DEFAULT_OTHER_NAME;
        villain.picture = DEFAULT_PICTURE;
        villain.powers = DEFAULT POWERS;
        villain.level = 0;

        given()
            .body(villain)
            .header(CONTENT_TYPE, APPLICATION_JSON)
            .header(ACCEPT, APPLICATION_JSON)
            .when()
            .post("/api/villains")
            .then()
    }
}

```

```

        .statusCode(BAD_REQUEST.getStatusCode());
    }

    @Test
    @Order(1)
    void shouldGetInitialItems() {
        List<Villain> villains = get("/api/villains").then()
            .statusCode(OK.getStatusCode())
            .header(CONTENT_TYPE, APPLICATION_JSON)
            .extract().body().as(getVillainTypeRef());
        assertEquals(NB_VILLAINS, villains.size());
    }

    @Test
    @Order(2)
    void shouldAddAnItem() {
        Villain villain = new Villain();
        villain.name = DEFAULT_NAME;
        villain.otherName = DEFAULT_OTHER_NAME;
        villain.picture = DEFAULT_PICTURE;
        villain.powers = DEFAULT POWERS;
        villain.level = DEFAULT_LEVEL;

        String location = given()
            .body(villain)
            .header(CONTENT_TYPE, APPLICATION_JSON)
            .header(ACCEPT, APPLICATION_JSON)
            .when()
            .post("/api/villains")
            .then()
            .statusCode(CREATED.getStatusCode())
            .extract().header("Location");
        assertTrue(location.contains("/api/villains"));

        // Stores the id
        String[] segments = location.split("/");
        villainId = segments[segments.length - 1];
        assertNotNull(villainId);

        given()
            .pathParam("id", villainId)
            .when().get("/api/villains/{id}")
            .then()
            .statusCode(OK.getStatusCode())
            .header(CONTENT_TYPE, APPLICATION_JSON)
            .body("name", Is.is(DEFAULT_NAME))
            .body("otherName", Is.is(DEFAULT_OTHER_NAME))
            .body("level", Is.is(DEFAULT_LEVEL))
            .body("picture", Is.is(DEFAULT_PICTURE))
            .body("powers", Is.is(DEFAULT_POWERS));
    }
}

```

```

List<Villain> villains = get("/api/villains").then()
    .statusCode(OK.getStatusCode())
    .header(CONTENT_TYPE, APPLICATION_JSON)
    .extract().body().as(getVillainTypeRef());
assertEquals(NB_VILLAINS + 1, villains.size());
}

@Test
@Order(3)
void testUpdatingAnItem() {
    Villain villain = new Villain();
    villain.id = Long.valueOf(villainId);
    villain.name = UPDATED_NAME;
    villain.otherName = UPDATED_OTHER_NAME;
    villain.picture = UPDATED_PICTURE;
    villain.powers = UPDATED_POWERS;
    villain.level = UPDATED_LEVEL;

    given()
        .body(villain)
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .header(ACCEPT, APPLICATION_JSON)
        .when()
        .put("/api/villains")
        .then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .body("name", Is.is(UPDATED_NAME))
        .body("otherName", Is.is(UPDATED_OTHER_NAME))
        .body("level", Is.is(UPDATED_LEVEL))
        .body("picture", Is.is(UPDATED_PICTURE))
        .body("powers", Is.is(UPDATED_POWERS));

    List<Villain> villains = get("/api/villains").then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .extract().body().as(getVillainTypeRef());
    assertEquals(NB_VILLAINS + 1, villains.size());
}

@Test
@Order(4)
void shouldRemoveAnItem() {
    given()
        .pathParam("id", villainId)
        .when().delete("/api/villains/{id}")
        .then()
        .statusCode(NO_CONTENT.getStatusCode());

    List<Villain> villains = get("/api/villains").then()
        .statusCode(OK.getStatusCode())

```

```
.header(CONTENT_TYPE, APPLICATION_JSON)
.extract().body().as(getVillainTypeRef());
assertEquals(NB_VILLAINS, villains.size());
}

private TypeRef<List<Villain>> getVillainTypeRef() {
    return new TypeRef<List<Villain>>() {
        // Kept empty on purpose
    };
}
}
```

**NOTE**

For the villain microservices, we won't cover the native test, as it will be the same as for the hero microservice. So delete the `NativeVillainResourceIT` class.

## Configuration

Notice that this instance of Quarkus listens on port 8084

```

## HTTP configuration
quarkus.http.port=8084

## Database configuration
quarkus.datasource.url=jdbc:postgresql://localhost:5432/villains_database
quarkus.datasource.driver=org.postgresql.Driver
quarkus.datasource.username=superbad
quarkus.datasource.password=superbad
quarkus.datasource.max-size=8
quarkus.datasource.min-size=2
# drop and create the database at startup (use `update` to only update the schema)
quarkus.hibernate-orm.database.generation=drop-and-create
quarkus.hibernate-orm.log.sql=true

## Logging configuration
quarkus.log.console.enable=true
quarkus.log.console.format=%d{HH:mm:ss} %-5p [%c{2.}] (%t) %s%n
quarkus.log.console.level=DEBUG
quarkus.log.console.color=true

## Test configuration
%test.level.multiplier = 1

## Production configuration
%prod.quarkus.hibernate-orm.log.sql=false
%prod.quarkus.log.console.level=INFO
%prod.quarkus.hibernate-orm.database.generation=update

# Business configuration
level.multiplier = 2

```

## Running, Testing and Packaging the Application

First, make sure the tests pass by executing the command `./mvnw test` (or from your IDE).

Now that the tests are green, we are ready to run our application. Use `./mvnw compile quarkus:dev` to start it (notice the nice banner). Once the application is started, create a new villain with the following cUrl command:

```

$ curl -X POST -d '{"level":2, "name":"Darth Vader", "powers":"Darkness, Longevity"}'
-H "Content-Type: application/json" http://localhost:8084/api/villains -v

< HTTP/1.1 201 Created
< Location: http://localhost:8084/api/villains/582

```

The cUrl command returns the location of the newly created villain. Take this URL and do an HTTP GET on it.

```
$ curl http://localhost:8084/api/villains/582 | jq
```

```
{  
  "id": 582,  
  "level": 4,  
  "name": "Darth Vader",  
  "powers": "Darkness, Longevity"  
}
```

Remember that you can also check Swagger UI by going to <http://localhost:8084/swagger-ui>.

# Fight Microservice

Ok, let's develop another microservice. We have a REST API that returns a random Hero. Another REST API that returns a random Villain... we need a new REST API that invokes those two, gets one random hero and one random villain and makes them fight. Let's call it the Fight API.

## Bootstrapping the Fight REST Endpoint

Like for the Hero and Villain API, the easiest way to create this new Quarkus project is to use a Maven archetype. Under the `quarkus-workshop-super-heroes/super-heroes` root directory where you have all your code, create a `rest-fight` sub-directory, open a terminal and run the following command:

```
mvn io.quarkus:quarkus-maven-plugin:0.25.0:create \
-DprojectGroupId=io.quarkus.workshop.super-heroes \
-DprojectArtifactId=rest-fight \
-DclassName="io.quarkus.workshop.superheroes.fight.FightResource" \
-Dpath="api/fights"
./mvnw quarkus:add-extension -Dextensions="jdbc-postgresql,hibernate-orm
-panache,hibernate-validator,quarkus-resteasy-jsonb,openapi,kafka"
```

Also add Testcontainers to your `pom.xml`.

```
<dependency>
    <groupId>org.testcontainers</groupId>
    <artifactId>junit-jupiter</artifactId>
    <version>1.12.2</version>
</dependency>
<dependency>
    <groupId>org.testcontainers</groupId>
    <artifactId>postgresql</artifactId>
    <version>1.12.2</version>
</dependency>
<dependency>
    <groupId>com.fasterxml.jackson.core</groupId>
    <artifactId>jackson-databind</artifactId>
    <scope>test</scope>
</dependency>
<dependency>
    <groupId>com.fasterxml.jackson.datatype</groupId>
    <artifactId>jackson-datatype-jsr310</artifactId>
    <scope>test</scope>
</dependency>
<dependency>
    <groupId>org.testcontainers</groupId>
    <artifactId>kafka</artifactId>
    <version>1.12.2</version>
    <scope>test</scope>
</dependency>
```

**TIP**

*Prefering Web UI*

Instead of the Maven command, you can use <https://code.quarkus.io>.

You can see that beyond the extensions we have used so far, we added the Kafka support which uses Eclipse MicroProfile Reactive Messaging. Stay tuned.

## Directory Structure

At the end you should have the following directory structure:

```
super-heroes
└── rest-fight
    ├── src
    │   ├── main
    │   │   └── docker
    │   │       ├── Dockerfile.jvm
    │   │       └── Dockerfile.native
    │   ├── java
    │   │   └── io
    │   │       └── quarkus
    │   │           └── workshop
    │   │               └── superheroes
    │   │                   └── fight
    │   │                       ├── Fight.java
    │   │                       ├── FightApplication.java
    │   │                       ├── FightResource.java
    │   │                       ├── FightService.java
    │   │                       ├── Fighters.java
    │   │                       └── KafkaWriter.java
    │   └── resources
    │       ├── META-INF
    │       │   └── resources
    │       │       └── index.html
    │       └── application.properties
    │           └── import.sql
    └── test
        ├── java
        │   └── io
        │       └── quarkus
        │           └── workshop
        │               └── superheroes
        │                   └── fight
        │                       └── FightResourceTest.java
    └── mvnw
    └── mvnw.cmd
    └── pom.xml
```

## Fight Entity

A fight is between a hero and a villain. Each time there is a fight, there is a winner and a loser. So the **Fight** entity is there to store all these fights.

```

package io.quarkus.workshop.superheroes.fight;

import io.quarkus.hibernate.orm.panache.PanacheEntity;
import org.eclipse.microprofile.openapi.annotations.media.Schema;

import javax.persistence.Entity;
import javax.validation.constraints.NotNull;
import java.time.Instant;

@Entity
@Schema(description="Each fight has a winner and a loser")
public class Fight extends PanacheEntity {

    @NotNull
    public Instant fightDate;
    @NotNull
    public String winnerName;
    @NotNull
    public int winnerLevel;
    @NotNull
    public String winnerPicture;
    @NotNull
    public String loserName;
    @NotNull
    public int loserLevel;
    @NotNull
    public String loserPicture;
    @NotNull
    public String winnerTeam;
    @NotNull
    public String loserTeam;

    // toString method
}

```

## Fighters Bean

Now comes a trick. The Fight REST API will ultimately invoke the Hero and Villain APIs (next sections) to get two random fighters. The `Fighters` class has one `Hero` and one `Villain`. Notice that `Fighters` is not an entity, it is not persisted in the database, just marshalled and unmarshalled to JSON.

```

package io.quarkus.workshop.superheroes.fight;

import io.quarkus.workshop.superheroes.fight.client.Hero;
import io.quarkus.workshop.superheroes.fight.client.Villain;
import org.eclipse.microprofile.openapi.annotations.media.Schema;

import javax.validation.constraints.NotNull;

@Schema(description="A fight between one hero and one villain")
public class Fighters {

    @NotNull
    public Hero hero;
    @NotNull
    public Villain villain;

}

```

The Fight REST API is just interested in the hero's name, level, picture and powers (not the other name as described in the Hero API). So the `Hero` bean looks like this (notice the `client` subpackage):

```

package io.quarkus.workshop.superheroes.fight.client;

import org.eclipse.microprofile.openapi.annotations.media.Schema;

import javax.validation.constraints.NotNull;

@Schema(description="The hero fighting against the villain")
public class Hero {

    @NotNull
    public String name;
    @NotNull
    public int level;
    @NotNull
    public String picture;
    public String powers;

}

```

`Villain` is pretty similar (also in the `client` subpackage):

```

package io.quarkus.workshop.superheroes.fight.client;

import org.eclipse.microprofile.openapi.annotations.media.Schema;

import javax.validation.constraints.NotNull;

@Schema(description="The villain fighting against the hero")
public class Villain {

    @NotNull
    public String name;
    @NotNull
    public int level;
    @NotNull
    public String picture;
    public String powers;

}

```

So, these classes are just used to map the results from the Hero and Villain microservices.

## FightService Transactional Service

To *transactionnally* manipulate the `Fight` entity we need a `FightService`. Notice the `persistFight` method. This method is the one creating a fight between a hero and a villain. As you can see the algorithm to determine the winner is a bit random (even though it uses the levels). If you are not happy about the way the fight operates, choose your own winning algorithm ;o)

```

package io.quarkus.workshop.superheroes.fight;

import io.quarkus.workshop.superheroes.fight.client.Hero;
import io.quarkus.workshop.superheroes.fight.client.Villain;
import org.jboss.logging.Logger;

import javax.enterprise.context.ApplicationScoped;
import javax.inject.Inject;
import javax.transaction.Transactional;
import java.time.Instant;
import java.util.List;
import java.util.Random;

import static javax.transaction.Transactional.TxType.REQUIRED;
import static javax.transaction.Transactional.TxType.SUPPORTS;

@ApplicationScoped
@Transactional(SUPPORTS)
public class FightService {

    private static final Logger LOGGER = Logger.getLogger(FightService.class);

```

```

private final Random random = new Random();

public List<Fight> findAllFights() {
    return Fight.listAll();
}

public Fight findFightById(Long id) {
    return Fight.findById(id);
}

@Transactional(REQUIRED)
public Fight persistFight(Fighters fighters) {
    // Amazingly fancy logic to determine the winner...
    Fight fight;

    int heroAdjust = random.nextInt(20);
    int villainAdjust = random.nextInt(20);

    if ((fighters.hero.level + heroAdjust)
        > (fighters.villain.level + villainAdjust)) {
        fight = heroWon(fighters);
    } else if (fighters.hero.level < fighters.villain.level) {
        fight = villainWon(fighters);
    } else {
        fight = random.nextBoolean() ? heroWon(fighters) : villainWon(fighters);
    }

    fight.fightDate = Instant.now();
    fight.persist(fight);
    return fight;
}

private Fight heroWon(Fighters fighters) {
    LOGGER.info("Yes, Hero won :o)");
    Fight fight = new Fight();
    fight.winnerName = fighters.hero.name;
    fight.winnerPicture = fighters.hero.picture;
    fight.winnerLevel = fighters.hero.level;
    fight.loserName = fighters.villain.name;
    fight.loserPicture = fighters.villain.picture;
    fight.loserLevel = fighters.villain.level;
    fight.winnerTeam = "heroes";
    fight.loserTeam = "villains";
    return fight;
}

private Fight villainWon(Fighters fighters) {
    LOGGER.info("Gee, Villain won :o(");
    Fight fight = new Fight();
    fight.winnerName = fighters.villain.name;
}

```

```

        fight.winnerPicture = fighters.villain.picture;
        fight.winnerLevel = fighters.villain.level;
        fight.loserName = fighters.hero.name;
        fight.loserPicture = fighters.hero.picture;
        fight.loserLevel = fighters.hero.level;
        fight.winnerTeam = "villains";
        fight.loserTeam = "heroes";
        return fight;
    }

}

```

For now, just implement an empty `Fighters findRandomFighters()` method which returns null. Later, this method will invoke the Hello and Villain API to get a random Hello and random Villain. So for now something like the following is enough:

#### NOTE

```

public Fighters findRandomFighters() {
    // Will be implemented later
    return null;
}

```

## FightResource Endpoint

To expose a REST API we also need a `FightResource` (with OpenAPI annotations of course).

```

package io.quarkus.workshop.superheroes.fight;

import org.eclipse.microprofile.openapi.annotations.Operation;
import org.eclipse.microprofile.openapi.annotations.enums.SchemaType;
import org.eclipse.microprofile.openapi.annotations.media.Content;
import org.eclipse.microprofile.openapi.annotations.media.Schema;
import org.eclipse.microprofile.openapi.annotations.parameters.Parameter;
import org.eclipse.microprofile.openapi.annotations.parameters.RequestBody;
import org.eclipse.microprofile.openapi.annotations.responses.APIResponse;
import org.jboss.logging.Logger;

import javax.inject.Inject;
import javax.validation.Valid;
import javax.ws.rs.GET;
import javax.ws.rs.POST;
import javax.ws.rs.Path;
import javax.ws.rs.PathParam;
import javax.ws.rs.Produces;
import javax.ws.rs.core.Context;
import javax.ws.rs.core.Response;
import javax.ws.rs.core.UriInfo;

```

```

import java.util.List;

import static javax.ws.rs.core.MediaType.APPLICATION_JSON;
import static javax.ws.rs.core.MediaType.TEXT_PLAIN;

@Path("/api/fights")
@Produces(APPLICATION_JSON)
public class FightResource {

    private static final Logger LOGGER = Logger.getLogger(FightResource.class);

    @Inject
    FightService service;

    @Operation(summary = "Returns two random fighters")
    @APIResponse(responseCode = "200", content = @Content(mediaType =
    APPLICATION_JSON, schema = @Schema(implementation = Fighters.class, required = true)))
    @GET
    @Path("/randomfighters")
    public Response getRandomFighters() throws InterruptedException {
        Fighters fighters = service.findRandomFighters();
        LOGGER.debug("Get random fighters " + fighters);
        return Response.ok(fighters).build();
    }

    @Operation(summary = "Returns all the fights from the database")
    @APIResponse(responseCode = "200", content = @Content(mediaType =
    APPLICATION_JSON, schema = @Schema(implementation = Fight.class, type = SchemaType
    .ARRAY)))
    @APIResponse(responseCode = "204", description = "No fights")
    @GET
    public Response getAllFights() {
        List<Fight> fights = service.findAllFights();
        LOGGER.debug("Total number of fights " + fights);
        return Response.ok(fights).build();
    }

    @Operation(summary = "Returns a fight for a given identifier")
    @APIResponse(responseCode = "200", content = @Content(mediaType =
    APPLICATION_JSON, schema = @Schema(implementation = Fight.class)))
    @APIResponse(responseCode = "204", description = "The fight is not found for a
    given identifier")
    @GET
    @Path("/{id}")
    public Response getFight(@Parameter(description = "Fight identifier", required =
    true) @PathParam("id") Long id) {
        Fight fight = service.findFightById(id);
        if (fight != null) {
            LOGGER.debug("Found fight " + fight);
            return Response.ok(fight).build();
        } else {
    }
}

```

```

        LOGGER.debug("No fight found with id " + id);
        return Response.noContent().build();
    }

}

@Operation(summary = "Trigger a fight between two fighters")
@ApiResponse(responseCode = "200", description = "The result of the fight",
content = @Content(mediaType = APPLICATION_JSON, schema = @Schema(implementation =
Fight.class)))
@POST
public Fight fight(@RequestBody(description = "The two fighters fighting",
required = true, content = @Content(mediaType = APPLICATION_JSON, schema = @Schema
(implementation = Fighters.class))) @Valid Fighters fighters, @Context UriInfo
uriInfo) {
    return service.persistFight(fighters);
}

@GET
@Produces(TEXT_PLAIN)
@Path("/hello")
public String hello() {
    return "hello";
}
}

```

## FightApplication for OpenAPI

The `FightApplication` class is just there to customize the OpenAPI contract.

```

package io.quarkus.workshop.superheroes.fight;

import org.eclipse.microprofile.openapi.annotations.ExternalDocumentation;
import org.eclipse.microprofile.openapi.annotations.OpenAPIDefinition;
import org.eclipse.microprofile.openapi.annotations.info.Contact;
import org.eclipse.microprofile.openapi.annotations.info.Info;
import org.eclipse.microprofile.openapi.annotations.servers.Server;
import org.eclipse.microprofile.openapi.annotations.tags.Tag;

import javax.ws.rs.ApplicationPath;
import javax.ws.rs.core.Application;

@ApplicationPath("/")
@OpenAPIDefinition(
    info = @Info(title = "Fight API",
        description = "This API allows a hero and a villain to fight",
        version = "1.0",
        contact = @Contact(name = "Quarkus", url = "https://github.com/quarkusio")),
    servers = {
        @Server(url = "http://localhost:8082")
    },
    externalDocs = @ExternalDocumentation(url = "https://github.com/quarkusio/quarkus-
workshops", description = "All the Quarkus workshops"),
    tags = {
        @Tag(name = "api", description = "Public that can be used by anybody"),
        @Tag(name = "fight", description = "Anybody interested in fights"),
        @Tag(name = "superheroes", description = "Well, superhero fights")
    }
)
public class FightApplication extends Application {
}

```

**NOTE**

Notice that there is no `FightApplicationLifecycle` class. We will use a Quarkus extension later on to display a banner for Fight.

## Adding Data

To load some SQL statements when Hibernate ORM starts, download the SQL file `import.sql` and copy it under `src/main/resources`.

```

INSERT INTO fight(id, fightDate, winnerName, winnerLevel, winnerPicture, loserName,
loserLevel, loserPicture, winnerTeam, loserTeam)
VALUES (nextval('hibernate_sequence'), current_timestamp, 'Chewbacca', 5,
'https://www.superherodb.com/pictures2/portraits/10/050/10466.jpg', 'Buuccolo', 3,
'https://www.superherodb.com/pictures2/portraits/11/050/15355.jpg', 'heroes',
'vellains');
INSERT INTO fight(id, fightDate, winnerName, winnerLevel, winnerPicture, loserName,
loserLevel, loserPicture, winnerTeam ,loserTeam)
VALUES (nextval('hibernate_sequence'), current_timestamp, 'Galadriel', 10,
'https://www.superherodb.com/pictures2/portraits/11/050/11796.jpg', 'Darth Vader', 8,
'https://www.superherodb.com/pictures2/portraits/10/050/10444.jpg', 'heroes',
'vellains');
INSERT INTO fight(id, fightDate, winnerName, winnerLevel, winnerPicture, loserName,
loserLevel, loserPicture, winnerTeam ,loserTeam)
VALUES (nextval('hibernate_sequence'), current_timestamp, 'Annihilus', 23,
'https://www.superherodb.com/pictures2/portraits/10/050/1307.jpg', 'Shikamaru', 1,
'https://www.superherodb.com/pictures2/portraits/10/050/11742.jpg', 'villains',
'heroes');
...

```

## Configuration

As usual, we need to configure the application. In the `application.properties` file add:

```

quarkus.http.port=8082

## Database configuration
quarkus.datasource.url=jdbc:postgresql://localhost:5432/fights_database
quarkus.datasource.driver=org.postgresql.Driver
quarkus.datasource.username=superfight
quarkus.datasource.password=superfight
quarkus.datasource.max-size=8
quarkus.datasource.min-size=2
quarkus.hibernate-orm.database.generation=drop-and-create
quarkus.hibernate-orm.log.sql=true

## Logging configuration
quarkus.log.console.enable=true
quarkus.log.console.format=%d{HH:mm:ss} %-5p [%c{2.}] (%t) %s%n
quarkus.log.console.level=DEBUG
quarkus.log.console.color=true

## Production configuration
%prod.quarkus.hibernate-orm.log.sql=false
%prod.quarkus.log.console.level=INFO
%prod.quarkus.hibernate-orm.database.generation=update

processmilliseconds=0

```

Note that the fight service uses the port 8082.

## FightResourceTest Test Class

We need to test our REST API. For that, copy the following `FightResourceTest` class under the `src/test/java/io/quarkus/workshop/superheroes/fight` directory.

```
package io.quarkus.workshop.superheroes.fight;

import io.quarkus.test.junit.QuarkusTest;
import io.quarkus.workshop.superheroes.fight.client.Hero;
import io.quarkus.workshop.superheroes.fight.client.Villain;

import io.restassured.common.mapper.TypeRef;
import org.hamcrest.core.Is;
import org.junit.jupiter.api.*;
import org.testcontainers.containers.KafkaContainer;
import org.testcontainers.containers.PostgreSQLContainer;
import org.testcontainers.junit.jupiter.Container;
import org.testcontainers.junit.jupiter.Testcontainers;

import java.util.List;
import java.util.Random;

import static io.restassured.RestAssured.get;
import static io.restassured.RestAssured.given;
import static javax.ws.rs.core.HttpHeaders.ACCEPT;
import static javax.ws.rs.core.HttpHeaders.CONTENT_TYPE;
import static javax.ws.rs.core.MediaType.APPLICATION_JSON;
import static javax.ws.rs.core.Response.Status.*;
import static org.hamcrest.CoreMatchers.*;
import static org.junit.jupiter.api.Assertions.*;

@QuarkusTest
@Testcontainers
@TestMethodOrder(MethodOrderer.OrderAnnotation.class)
public class FightResourceTest {

    private static final String DEFAULT_WINNER_NAME = "Super Baguette";
    private static final String DEFAULT_WINNER_PICTURE = "super_baguette.png";
    private static final int DEFAULT_WINNER_LEVEL = 42;
    private static final String DEFAULT_LOSER_NAME = "Super Chocolatine";
    private static final String DEFAULT_LOSER_PICTURE = "super_chocolatine.png";
    private static final int DEFAULT_LOSER_LEVEL = 6;

    private static final int NB_FIGHTS = 10;
    private static String fightId;

    @Container
    public static final PostgreSQLContainer DATABASE = new PostgreSQLContainer<>(
```

```

"postgres:10.5")
    .withDatabaseName("fights_database")
    .withUsername("superfight")
    .withPassword("superfight")
    .withExposedPorts(5432);

@Container
public static final KafkaContainer KAFKA = new KafkaContainer();

@BeforeAll
public static void configureKafkaLocation() {
    System.setProperty("quarkus.datasource.url", DATABASE.getJdbcUrl());
    System.setProperty("kafka.bootstrap.servers", KAFKA.getBootstrapServers());
}

@AfterAll
public static void clearKafkaLocation() {
    System.clearProperty("kafka.bootstrap.servers");
    System.clearProperty("quarkus.datasource.url");
}

@Test
void shouldPingOpenAPI() {
    given()
        .header(ACCEPT, APPLICATION_JSON)
        .when().get("/openapi")
        .then()
        .statusCode(OK.getStatusCode());
}

@Test
void shouldPingSwaggerUI() {
    given()
        .when().get("/swagger-ui")
        .then()
        .statusCode(OK.getStatusCode());
}

@Test
public void testHelloEndpoint() {
    given()
        .when().get("/api/fights/hello")
        .then()
        .statusCode(200)
        .body(is("hello"));
}

@Test
void shouldNotGetUnknownFight() {
}

```

```

Long randomId = new Random().nextLong();
given()
    .pathParam("id", randomId)
    .when().get("/api/fights/{id}")
    .then()
        .statusCode(NO_CONTENT.getStatusCode());
}

@Test
void shouldNotAddInvalidItem() {
    Fighters fighters = new Fighters();
    fighters.hero = null;
    fighters.villain = null;

    given()
        .body(fighters)
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .header(ACCEPT, APPLICATION_JSON)
        .when()
        .post("/api/fights")
        .then()
            .statusCode(BAD_REQUEST.getStatusCode());
}

@Test
@Order(1)
void shouldGetInitialItems() {
    List<Fight> fights = get("/api/fights").then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .extract().body().as(getFightTypeRef());
    assertEquals(NB_FIGHTS, fights.size());
}

@Test
@Order(2)
void shouldAddAnItem() {
    Hero hero = new Hero();
    hero.name = DEFAULT_WINNER_NAME;
    hero.picture = DEFAULT_WINNER_PICTURE;
    hero.level = DEFAULT_WINNER_LEVEL;
    Villain villain = new Villain();
    villain.name = DEFAULT_LOSER_NAME;
    villain.picture = DEFAULT_LOSER_PICTURE;
    villain.level = DEFAULT_LOSER_LEVEL;
    Fighters fighters = new Fighters();
    fighters.hero = hero;
    fighters.villain = villain;

    fightId = given()

```

```

    .body(fighters)
    .header(CONTENT_TYPE, APPLICATION_JSON)
    .header(ACCEPT, APPLICATION_JSON)
    .when()
    .post("/api/fights")
    .then()
    .statusCode(OK.getStatusCode())
    .body(containsString("winner"), containsString("loser"))
    .extract().body().jsonPath().getString("id");

    assertNotNull(fightId);

    given()
        .pathParam("id", fightId)
        .when().get("/api/fights/{id}")
        .then()
        .statusCode(OK.getStatusCode())
        .header(CONTENT_TYPE, APPLICATION_JSON)
        .body("winnerName", Is.is(DEFAULT_WINNER_NAME))
        .body("winnerPicture", Is.is(DEFAULT_WINNER_PICTURE))
        .body("winnerLevel", Is.is(DEFAULT_WINNER_LEVEL))
        .body("loserName", Is.is(DEFAULT_LOSER_NAME))
        .body("loserPicture", Is.is(DEFAULT_LOSER_PICTURE))
        .body("loserLevel", Is.is(DEFAULT_LOSER_LEVEL))
        .body("fightDate", Is.is(notNullValue())));
}

List<Fight> fights = get("/api/fights").then()
    .statusCode(OK.getStatusCode())
    .header(CONTENT_TYPE, APPLICATION_JSON)
    .extract().body().as(getFightTypeRef());
assertEquals(NB_FIGHTS + 1, fights.size());
}

private TypeRef<List<Fight>> getFightTypeRef() {
    return new TypeRef<List<Fight>>() {
        // Kept empty on purpose
    };
}
}

```

Also, delete the generated `NativeFightResourceIT` class, as we won't run native test for this microservice.

## Running, Testing and Packaging the Application

First, make sure the tests pass by executing the command `./mvnw test` (or from your IDE).

Now that the tests are green, we are ready to run our application. Use `./mvnw compile quarkus:dev` to start it (notice that there is no banner yet, it will come later). Once the application is started, just check that it returns the fights from the database with the following cUrl command:

```
$ curl http://localhost:8082/api/fights
```

Remember that you can also check Swagger UI by going to <http://localhost:8082/swagger-ui>.

# User Interface

Now that we have the three main microservices, time to have a decent user interface to start fighting. The purpose of this workshop is not to develop a web interface and learn *yet another web framework*. This time you will just download an Angular application, install it, and run it on another Quarkus instance.

## Downloading the Web Application

Download the zip file <https://raw.githubusercontent.com/quarkusio/quarkus-workshops/master/quarkus-workshop-super-heroes/super-heroes/ui-super-heroes/ui-super-heroes.zip> and unzip the entire code into your `ui-super-heroes` directory. Being an Angular application, you will find a `package.json` file which defines all the needed dependencies. Notice that there is a `pom.xml` file. This is just a convenient way to install NodeJS and NPM so we can build the Angular application with Maven. The `pom.xml` also allows us to package the Angular application into Quarkus.

## Looking at Some Code

You don't need to be an Angular expert, but there are some pieces of code that are worth looking at. If you look under the `src/app/shared` directory, you will find an `api` and a `model` sub-directory. Let's look at `fight.ts`.

```
export interface Fight {
    id?: number;
    fightDate: FightFightDate;
    winnerName: string;
    winnerLevel: number;
    winnerPicture: string;
    loserName: string;
    loserLevel: number;
    loserPicture: string;
}
```

As you can see, it matches our `Fight` Java class. Same for `fighters.ts`, `hero.ts` or `villain.ts`. Under `api` there is the `fight.service.ts` that defines all the methods to access to our Fight REST API through HTTP.

```
public apiFightsGet(observe?: 'body', reportProgress?: boolean): Observable<Array<Fight>>;
public apiFightsGet(observe?: 'response', reportProgress?: boolean): Observable<HttpResponse<Array<Fight>>>;
public apiFightsGet(observe?: 'events', reportProgress?: boolean): Observable<HttpEvent<Array<Fight>>>;
public apiFightsRandomfightersGet(observe?: 'body', reportProgress?: boolean): Observable<Fighters>;
public apiFightsRandomfightersGet(observe?: 'response', reportProgress?: boolean): Observable<HttpResponse<Fighters>>;
public apiFightsRandomfightersGet(observe?: 'events', reportProgress?: boolean): Observable<HttpEvent<Fighters>>;
```

Well, guess what? We didn't have to type this code either. It was generated thanks to a tool called [swagger-codegen](#).<sup>[26]</sup> Because our Fight REST API exposes an OpenAPI contract, [swagger-codegen](#) just swallows it, and generates the TypeScript code to access it. It's just a matter of running:

```
$ swagger-codegen generate -i http://localhost:8082/openapi -l typescript-angular -o src/app/shared
```

Here, you see another advantage of exposing an OpenAPI contract: it documents the API which can be read by a human, or processed by tools.

## Installing the Web Application on Quarkus

Thanks to the [frontend-maven-plugin](#) plugin declared on the [pom.xml](#), we can use a good old Maven command to install and build this Angular application. Execute `mvn install` and Maven will download and install Node JS and NPM and build the application. You should now have a `node_modules` directory with all the Angular dependencies. At this stage, make sure the following commands work:

```
ng version (or ./node_modules/.bin/ng version)
node -v    (or ./node/node -v)
```

To install the Angular application into a Quarkus instance, we just build the app and copy the bundles under the `resources/META-INF/resources` directory. Look at the `package.sh`, that's exactly what it does.

```
export DEST=src/main/resources/META-INF/resources
./node_modules/.bin/ng build --prod --base-href "."
rm -Rf ${DEST}
cp -R dist/* ${DEST}
```

Execute the `package.sh` script. You will see all the Javascript files under `resources/META-`

INF/resources directory. We are now ready to go.

### WARNING

If the `ng` command does not work because it can't find `node`, there is a little hack to solve it. Open the file `ui-super-heroes/node_modules/.bin/ng` and change the shebang line from `#!/usr/bin/env node` to `#!/usr/bin/env ./node/node`. This way `ng` knows it has to use NodeJS installed under the `ui-super-heroes/node` directory

## Running the Web Application

As usual, use `mvn compile quarkus:dev` to start the web application.

Be sure you have the hero and villain microservices running (dev mode is enough).

Once the application is started, go to <http://localhost:8080> (8080 is the default Quarkus port as we didn't change it in the `application.properties` this time). It should display the main web page.



The screenshot shows the main interface of the "Super Heroes Fight!" application. At the top, a header reads "Welcome to Super Heroes Fight!". Below the header, there are three main sections: "Astérix" on the left, "Match" on the right, and a central "Fighter Selection" area. The "Astérix" section features a cartoon illustration of Asterix the Gaul, a character from the Asterix comic strip. Below the illustration are two icons: a lightning bolt and a blue hexagon. The "Match" section features a circular illustration of Superman. Below the illustration are two icons: a lightning bolt and a red hexagon. In the center, there is a button labeled "NEW FIGHTERS" and a large red button labeled "FIGHT!". At the bottom of the screen, there is a table showing a list of previous fights.

ID	Fight Date	Winner	Loser
10	Oct 14, 2019, 11:04:22 AM	Black Canary	Superman
9	Oct 14, 2019, 11:04:22 AM	Tanker Bug	Shuri
8	Oct 14, 2019, 11:04:22 AM	Moondragon	Darth Plagueis
7	Oct 14, 2019, 11:04:22 AM	The Eraser	Gandalf The White
6	Oct 14, 2019, 11:04:22 AM	Anakin Skywalker	Janemba

Oups, not working yet! Not even the pictures, we must have been forgotten something! Let's move on to the next section then and make the application work.

# CORS

Cross-origin resource sharing (CORS) is a mechanism that allows restricted resources on a web page to be requested from another domain outside the domain from which the first resource was served.  
<sup>[27]</sup> So when we want our heros and villains to fight, we actually cross several origins: we go from localhost:8080 (the UI) to localhost:8082 (Fight API) which invokes localhost:8083 (Hero) and localhost:8084 (Villain). If you look at the console of your Browser you should see something similar to this:

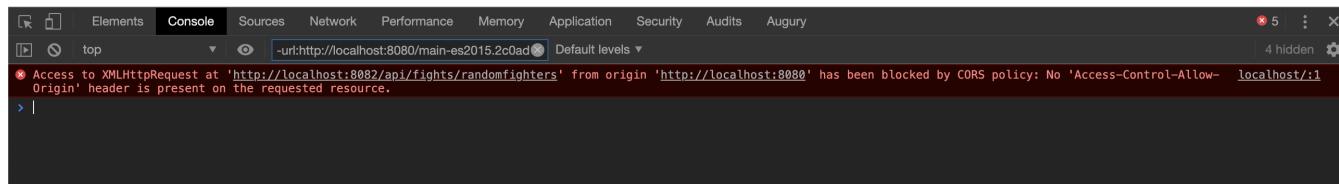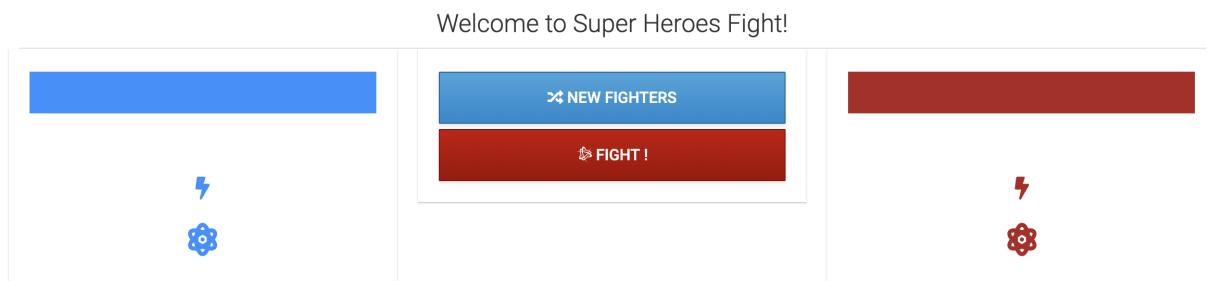

Quarkus comes with a CORS filter which intercepts all incoming HTTP requests. It can be enabled in the Quarkus configuration file, `src/main/resources/application.properties`:

```
quarkus.http.cors=true
```


If the filter is enabled and an HTTP request is identified as cross-origin, the CORS policy and headers defined using the following properties will be applied before passing the request on to its actual target (servlet, JAX-RS resource, etc.):

Property	Description
<code>quarkus.http.cors.origins</code>	The comma-separated list of origins allowed for CORS. The filter allows any origin if this is not set.
<code>quarkus.http.cors.methods</code>	The comma-separated list of HTTP methods allowed for CORS. The filter allows any method if this is not set.
<code>quarkus.http.cors.headers</code>	The comma-separated list of HTTP headers allowed for CORS. The filter allows any header if this is not set.
<code>quarkus.http.cors.exposed-headers</code>	The comma-separated list of HTTP headers exposed in CORS.
<code>quarkus.http.cors.access-control-max-age</code>	The duration indicating how long the results of a pre-flight request can be cached. This value will be returned in a Access-Control-Max-Age response header.

So make sure you set the `quarkus.http.cors` property to `true` on the:

1. Fight microservice,
2. Hero microservice,
3. Villain microservice

But, even with this, the UI is still not working. The explanation is simple, we forgot another thing:

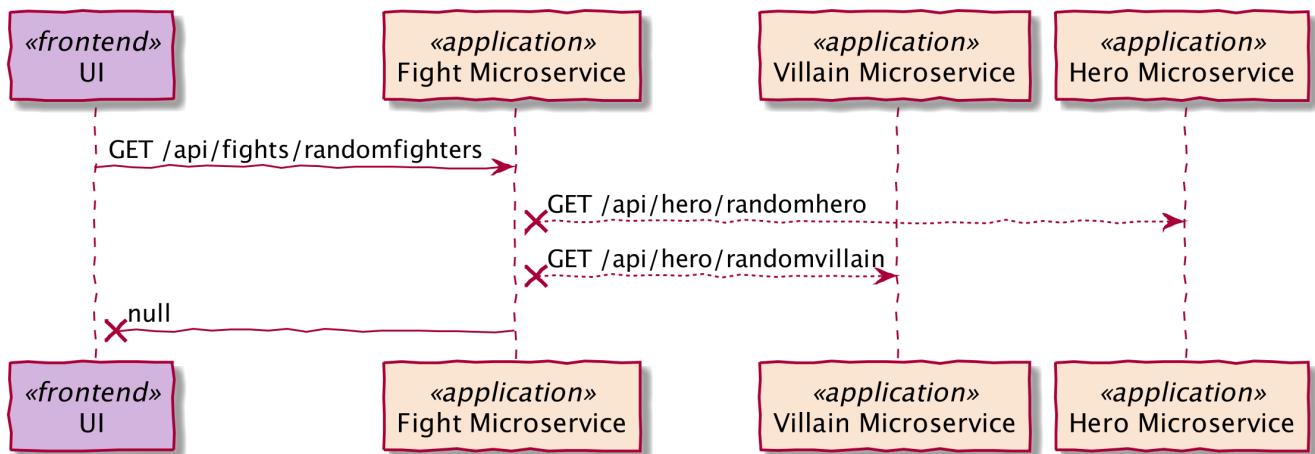


Remember the function to retrieve random fighters. We are currently returning `null`. Let's move to the next session to see how we can implement this method.

[26] Swagger Codegen <https://github.com/swagger-api/swagger-codegen>

[27] CORS [https://en.wikipedia.org/wiki/Cross-origin\\_resource\\_sharing](https://en.wikipedia.org/wiki/Cross-origin_resource_sharing)

# HTTP communication & Fault Tolerance

So far we've built one Fight microservice which need to invoke the Hero and Villain microservices. In the following sections you will develop this invocation thanks to the MicroProfile REST Client. We will also deal with fault tolerance thanks to timeouts and circuit breaker.

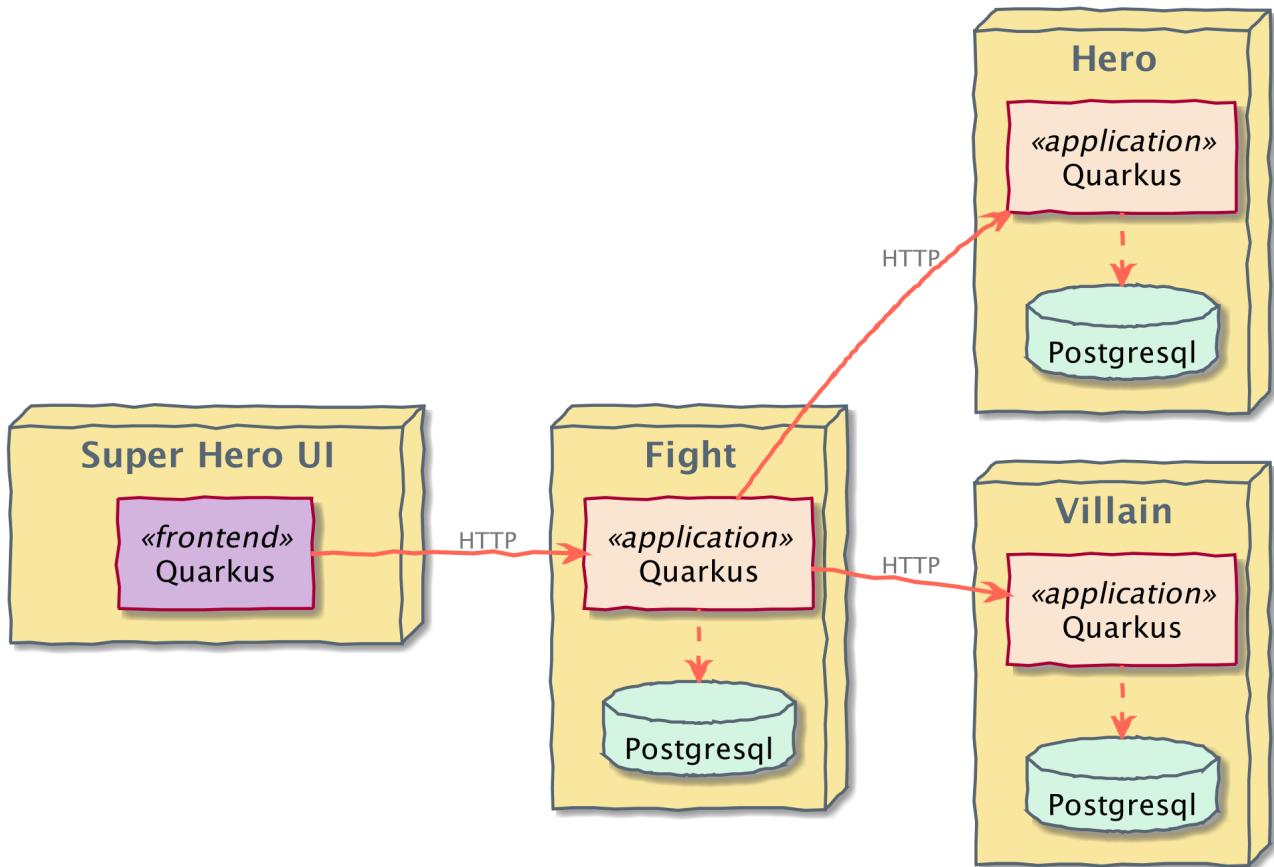


# REST Client

This chapter explains how to use the MicroProfile REST Client in order to interact with REST APIs with very little effort.<sup>[28]</sup>

## Directory Structure

Remember the structure of the Fight microservice:

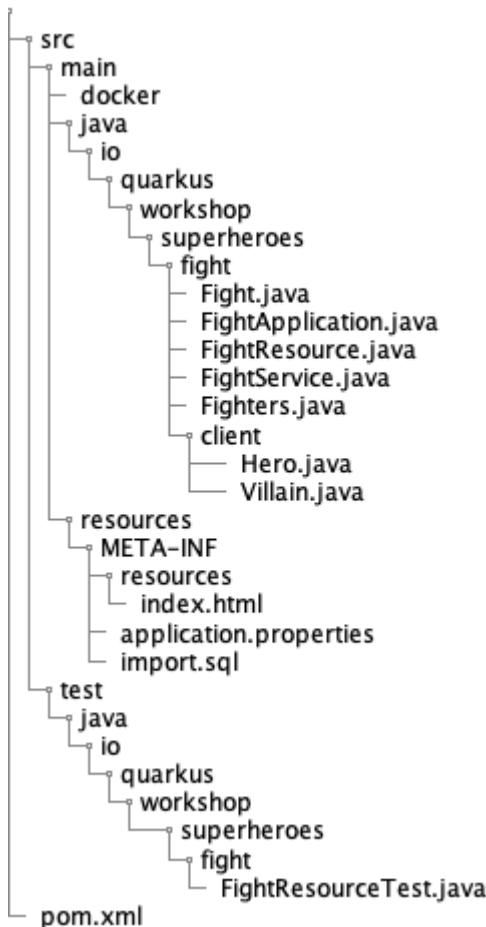

We are going to rework the:

- `FightService` class
- `FightResourceTest` class
- `application.properties`

## Installing the REST Client Dependency

To install the MicroProfile REST Client dependency, just run the following command:

```
$ ./mvnw quarkus:add-extension -Dextensions="rest-client"
```

This will add the following dependency in the `pom.xml` file:

```
<dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-rest-client</artifactId>
</dependency>
```

## FightService Invoking External Microservices

Remember that in the previous sections we left the `FightService.findRandomFighters()` method returns `null`. We have to fix this. What we actually want is to invoke both the Hero and Villain APIs, asking for a random hero and a random villain. For that, replace the `findRandomFighters` method with the following code to the `FightService` class:

```
@Inject
@RestClient
HeroService heroService;

@Inject
@RestClient
VillainService villainService;

Fighters findRandomFighters() {
    Hero hero = findRandomHero();
    Villain villain = findRandomVillain();
    Fighters fighters = new Fighters();
    fighters.hero = hero;
    fighters.villain = villain;
    return fighters;
}

Hero findRandomHero() {
    return heroService.findRandomHero();
}

Villain findRandomVillain() {
    return villainService.findRandomVillain();
}
```

Note that in addition to the standard CDI `@Inject` annotation, we also need to use the MicroProfile `@RestClient` annotation to inject `HeroService` and `VillainService`.

**NOTE** If not done automatically by your IDE, add the following import statement: `import org.eclipse.microprofile.rest.client.inject.RestClient;`

## Creating the Interfaces

Using the MicroProfile REST Client is as simple as creating an interface using the proper JAX-RS and MicroProfile annotations. In our case both interfaces should be created under the `client`

subpackage and have the following content:

```
package io.quarkus.workshop.superheroes.fight.client;

import org.eclipse.microprofile.rest.client.inject.RegisterRestClient;

import javax.ws.rs.GET;
import javax.ws.rs.Path;
import javax.ws.rs.Produces;
import javax.ws.rs.core.MediaType;

@Path("/api/heroes")
@Produces(MediaType.APPLICATION_JSON)
@RegisterRestClient
public interface HeroService {

    @GET
    @Path("/random")
    Hero findRandomHero();
}
```

The `findRandomHero` method gives our code the ability to query a random hero from the Hero REST API. The client will handle all the networking and marshalling leaving our code clean of such technical details.

The purpose of the annotations in the code above is the following:

- `@RegisterRestClient` allows Quarkus to know that this interface is meant to be available for CDI injection as a REST Client
- `@Path` and `@GET` are the standard JAX-RS annotations used to define how to access the service
- `@Produces` defines the expected content-type

The `VillainService` is very similar and looks like this:

```

package io.quarkus.workshop.superheroes.fight.client;

import org.eclipse.microprofile.rest.client.inject.RegisterRestClient;

import javax.ws.rs.GET;
import javax.ws.rs.Path;
import javax.ws.rs.Produces;
import javax.ws.rs.core.MediaType;

@Path("/api/villains")
@Produces(MediaType.APPLICATION_JSON)
@RegisterRestClient
public interface VillainService {

    @GET
    @Path("/random")
    Villain findRandomVillain();
}

```

Once created, go back to the `FightService` class and add the following import statements:

```

import io.quarkus.workshop.superheroes.fight.client.HeroService;
import io.quarkus.workshop.superheroes.fight.client.VillainService;

```

## Configuring REST Client Invocation

In order to determine the base URL to which REST calls will be made, the REST Client uses configuration from `application.properties`. The name of the property needs to follow a certain convention which is best displayed in the following code:

```

io.quarkus.workshop.superheroes.fight.client.HeroService/mp-
rest/url=http://localhost:8083
io.quarkus.workshop.superheroes.fight.client.HeroService/mp-
rest/scope=javax.inject.Singleton
io.quarkus.workshop.superheroes.fight.client.VillainService/mp-
rest/url=http://localhost:8084
io.quarkus.workshop.superheroes.fight.client.VillainService/mp-
rest/scope=javax.inject.Singleton

```

Having this configuration means that all requests performed using `HeroService` will use `http://localhost:8083` as the base URL. Using this configuration, calling the `findRandomHero` method of `HeroService` would result in an HTTP GET request being made to `http://localhost:8083/api/heroes/random`.

Having this configuration means that the default scope of `HeroService` will be `@Singleton`. Supported scope values are `@Singleton`, `@Dependent`, `@ApplicationScoped` and `@RequestScoped`. The default scope is `@Dependent`. The default scope can also be defined on the interface.

## Updating the Test with Mock Support

So now we have our problem: to run the tests of the Fight API we need the Hero and Villain REST APIs to be up and running. To avoid this, we need to Mock the `HeroService` and `VillainService` interfaces.

Quarkus supports the use of mock objects using the CDI `@Alternative` mechanism.<sup>[29]</sup> To use this simply override the bean you wish to mock with a class in the `src/test/java` directory, and put the `@Alternative` and `@Priority(1)` annotations on the bean. Alternatively, a convenient `io.quarkus.test.Mock` stereotype annotation could be used. This built-in stereotype declares `@Alternative`, `@Priority(1)` and `@Dependent`. So, to mock the `HeroService` interface we just need to implement the following `MockHeroService` class:

```
package io.quarkus.workshop.superheroes.fight.client;

import io.quarkus.test.Mock;
import org.eclipse.microprofile.rest.client.inject.RestClient;

import javax.enterprise.context.ApplicationScoped;

@Mock
@ApplicationScoped
@RestClient
public class MockHeroService implements HeroService {

    public static final String DEFAULT_HERO_NAME = "Super Baguette";
    public static final String DEFAULT_HERO_PICTURE = "super_baguette.png";
    public static final String DEFAULT_HERO POWERS = "eats baguette really quickly";
    public static final int DEFAULT_HERO_LEVEL = 42;

    @Override
    public Hero findRandomHero() {
        Hero hero = new Hero();
        hero.name = DEFAULT_HERO_NAME;
        hero.picture = DEFAULT_HERO_PICTURE;
        hero.powers = DEFAULT_HERO POWERS;
        hero.level = DEFAULT_HERO_LEVEL;
        return hero;
    }
}
```

Do the same for the `MockVillainService`:

```
package io.quarkus.workshop.superheroes.fight.client;

import io.quarkus.test.Mock;
import org.eclipse.microprofile.rest.client.inject.RestClient;

import javax.enterprise.context.ApplicationScoped;

@Mock
@ApplicationScoped
@RestClient
public class MockVillainService implements VillainService {

    public static final String DEFAULT_VILLAIN_NAME = "Super Chocolatine";
    public static final String DEFAULT_VILLAIN_PICTURE = "super_chocolatine.png";
    public static final String DEFAULT_VILLAIN POWERS = "does not eat pain au
chocolat";
    public static final int DEFAULT_VILLAIN_LEVEL = 42;

    @Override
    public Villain findRandomVillain() {
        Villain villain = new Villain();
        villain.name = DEFAULT_VILLAIN_NAME;
        villain.picture = DEFAULT_VILLAIN_PICTURE;
        villain.powers = DEFAULT_VILLAIN POWERS;
        villain.level = DEFAULT_VILLAIN_LEVEL;
        return villain;
    }
}
```

Finally, edit the `FightResourceTest` and add the following method:

```
import static io.quarkus.workshop.superheroes.fight.client.MockHeroService.*;
import static io.quarkus.workshop.superheroes.fight.client.MockVillainService.*;

//...
@Test
void shouldGetRandomFighters() {
    given()
        .when().get("/api/fights/randomfighters")
        .then()
            .statusCode(OK.getStatusCode())
            .header(CONTENT_TYPE, APPLICATION_JSON)
            .body("hero.name", Is.is(DEFAULT_HERO_NAME))
            .body("hero.picture", Is.is(DEFAULT_HERO_PICTURE))
            .body("hero.level", Is.is(DEFAULT_HERO_LEVEL))
            .body("villain.name", Is.is(DEFAULT_VILLAIN_NAME))
            .body("villain.picture", Is.is(DEFAULT_VILLAIN_PICTURE))
            .body("villain.level", Is.is(DEFAULT_VILLAIN_LEVEL));
}
```

## Running and Testing the Application

First, make sure the tests pass by executing the command `./mvnw test` (or from your IDE).

Now that the tests are green, we are ready to run our application. Use `./mvnw compile quarkus:dev` to start it. Once the application is started, go to <http://localhost:8080> and start fighting (finally!).

# Fallbacks

So now you've been playing this great Super Heroes Fight for a few hours... and you kill the Hero REST API. What happens? Well, the Fight REST API cannot invoke the Hero API anymore and breaks with the following exception:

```
ERROR [io.qu.ve.ht.ru.QuarkusErrorHandler] HTTP Request to /api/fights/randomfighters failed:  
org.jboss.resteasy.spi.UnhandledException: javax.ws.rs.ProcessingException:  
RESTEASY004655: Unable to invoke request: java.net.ConnectException: Connection refused (Connection refused)  
at  
org.jboss.resteasy.core.ExceptionHandler.handleApplicationException(ExceptionHandler.java:106)  
at org.jboss.resteasy.core.ExceptionHandler.handleException(ExceptionHandler.java:372)  
at  
org.jboss.resteasy.core.SynchronousDispatcher.writeException(SynchronousDispatcher.java:209)  
at  
org.jboss.resteasy.core.SynchronousDispatcher.invoke(SynchronousDispatcher.java:496)
```

One of the challenges brought by the distributed nature of microservices is that communication with external systems is inherently unreliable. This increases demand on resiliency of applications. To simplify making more resilient applications, Quarkus contains an implementation of the MicroProfile Fault Tolerance specification.<sup>[30]</sup>

## Installing the Fault Tolerance Dependency

To install the MicroProfile Fault Tolerance dependency, just run the following command:

```
$ ./mvnw quarkus:add-extension -Dextensions="smallrye-fault-tolerance"
```

This will add the following dependency in the `pom.xml` file:

```
<dependency>  
  <groupId>io.quarkus</groupId>  
  <artifactId>quarkus-smallrye-fault-tolerance</artifactId>  
</dependency>
```

## Adding Fallbacks

Let's make our find random fighters feature better by providing a fallback way of getting a dummy hero or villain in case of failure. For that, add two fallback methods to the `FightService` and a `@Fallback` annotation to both `findRandomHero` and `findRandomVillain` methods as follows:

```

@Inject
@RestClient
HeroService heroService;

@Inject
@RestClient
VillainService villainService;

Fighters findRandomFighters() {
    Hero hero = findRandomHero();
    Villain villain = findRandomVillain();
    Fighters fighters = new Fighters();
    fighters.hero = hero;
    fighters.villain = villain;
    return fighters;
}

@Fallback(fallbackMethod = "fallbackRandomHero")
Hero findRandomHero() {
    return heroService.findRandomHero();
}

@Fallback(fallbackMethod = "fallbackRandomVillain")
Villain findRandomVillain() {
    return villainService.findRandomVillain();
}

Hero fallbackRandomHero() {
    LOGGER.warn("Falling back on Hero");
    Hero hero = new Hero();
    hero.name = "Fallback hero";
    hero.picture = "https://dummyimage.com/280x380/1e8fff/ffffff&text=Fallback+Hero";
    hero.powers = "Fallback hero powers";
    hero.level = 1;
    return hero;
}

Villain fallbackRandomVillain() {
    LOGGER.warn("Falling back on Villain");
    Villain villain = new Villain();
    villain.name = "Fallback villain";
    villain.picture =
"https://dummyimage.com/280x380/b22222/ffffff&text=Fallback+Villain";
    villain.powers = "Fallback villain powers";
    villain.level = 42;
    return villain;
}

```

**NOTE** Also add the `import org.eclipse.microprofile.faulttolerance.Fallback;` statement.

## Running the Application

Now we are ready to run our application and test the fallbacks. For that, kill the Hero (and/or the Villain API) and start playing again. You should see the following:

Welcome to Super Heroes Fight!


The screenshot shows the application's main interface. At the top center is a blue header bar with the text "Welcome to Super Heroes Fight!". Below it is a white card-like area containing two buttons: "NEW FIGHTERS" (blue) and "FIGHT!" (red). To the left is a large blue circle labeled "Fallback Hero". To the right is a red circle labeled "Onyxia" which contains a detailed illustration of a dark, scaly, horned creature. Below each fighter are their stats: Fallback Hero has a lightning bolt icon and the number 42, while Onyxia has a lightning bolt icon and the number 25. Below the stats are small icons representing their powers. At the bottom, there is a table showing past fight results.

ID	Fight Date	Winner	Loser
10	Oct 14, 2019, 4:39:13 PM	Black Canary	Superman
9	Oct 14, 2019, 4:39:13 PM	Tanker Bug	Shuri

Restart the Hero REST API... and keep on playing. Super heroes are back to the fight!

# Timeout

Sometimes invoking a REST API can take long. In fact, the more microservices invoke other microservices, the more network latency you can have. And what happens when a HTTP request takes long? Well, it hangs. On your browser you can see the request pending if you turn on the dev tools and look at what's the network is doing.

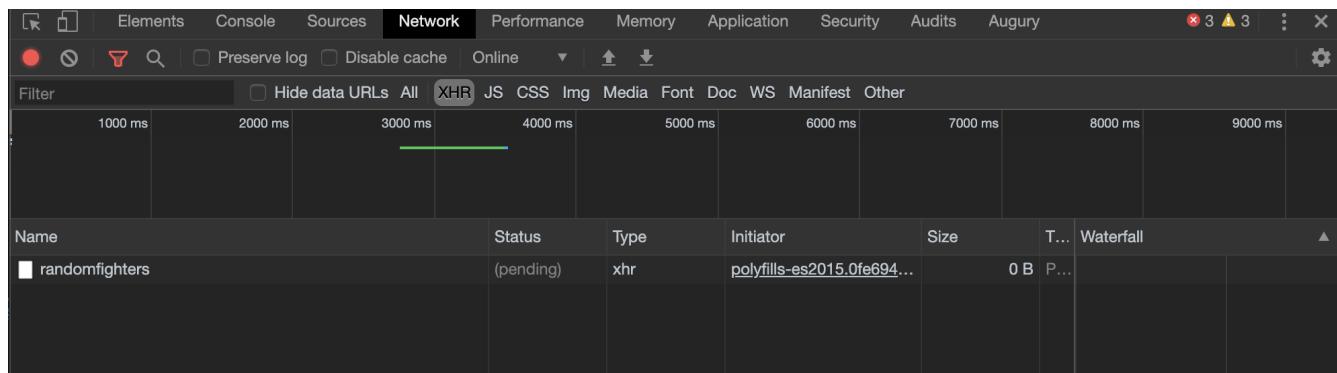

## Adding Timeouts

Getting random fighters can take longer than expected. To simulate a long running process, update the `FightResource` with the following code:

```
@ConfigProperty(name = "process.currentTimeMillis", defaultValue="0")
long tooManyMilliseconds;

private void veryLongProcess() throws InterruptedException {
    Thread.sleep(tooManyMilliseconds);
}

@Operation(summary = "Returns two random fighters")
@APIResponse(responseCode = "200", content = @Content(mediaType = APPLICATION_JSON,
schema = @Schema(implementation = Fighters.class, required = true)))
@Timeout(250)
@GET
@Path("/randomfighters")
public Response getRandomFighters() throws InterruptedException {
    veryLongProcess();
    Fighters fighters = service.findRandomFighters();
    LOGGER.debug("Get random fighters " + fighters);
    return Response.ok(fighters).build();
}
```

**NOTE**

Don't forget to add the following import: `import org.eclipse.microprofile.config.inject.ConfigProperty;`

Let's say we've added some new functionality in the `veryLongProcess` method. When the process is really too long and the system is overloaded, we would rather time out.

**NOTE**

Here we throw the `InterruptedException` in the method signature. But what you would have to do in real life is to catch it, and propose a fallback algorithm when the process times out.

Note that the timeout was configured to 250 ms, and a `Thread.sleep` was introduced and can be configured in the `application.properties`. If we set the property to a higher value than the timeout, let's say 10.000, then the request should be interrupted.

```
process.milliseconds=10000
```

## Running the Application

Now that you have set the number of waiting milliseconds to 10.000, run the application and start fighting again. You should see the following:

```
ERROR [io.qu.ve.ht.ru.QuarkusErrorHandler] HTTP Request to /api/fights/randomfighters failed:  
org.jboss.resteasy.spi.UnhandledException:  
org.eclipse.microprofile.faulttolerance.exceptions.TimeoutException:  
com.netflix.hystrix.exception.HystrixRuntimeException:  
io_quarkus_workshop_superheroes_fight_FightResource#getRandomFighters() timed-out and  
no fallback available.  
at  
org.jboss.resteasy.core.ExceptionHandler.handleApplicationException(ExceptionHandler.j  
ava:106)
```

Before going further, set the `process.milliseconds` to 0.

**WARNING**

If you have any problem with the code, don't understand or feel you are running, remember to ask for some help. Also, you can get the code of this entire workshop from <https://github.com/quarkusio/quarkus-workshops/tree/master/quarkus-workshop-super-heroes>.


[28] MicroProfile REST Client <https://github.com/eclipse/microprofile-rest-client>

[29] Alternatives [https://docs.jboss.org/weld/reference/latest/en-US/html/beanscdi.html#\\_alternatives](https://docs.jboss.org/weld/reference/latest/en-US/html/beanscdi.html#_alternatives)

[30] MicroProfile Fault Tolerance <https://github.com/eclipse/microprofile-fault-tolerance>

# Observability

Now that we have several microservices, observing them starts to be a bit tricky: we can't just look at the logs of all the microservices to see if they are up and running or behaving correctly. In the following sections you will add health checks and several metrics to the Fight, Hero and Villain APIs and gather them within Prometheus

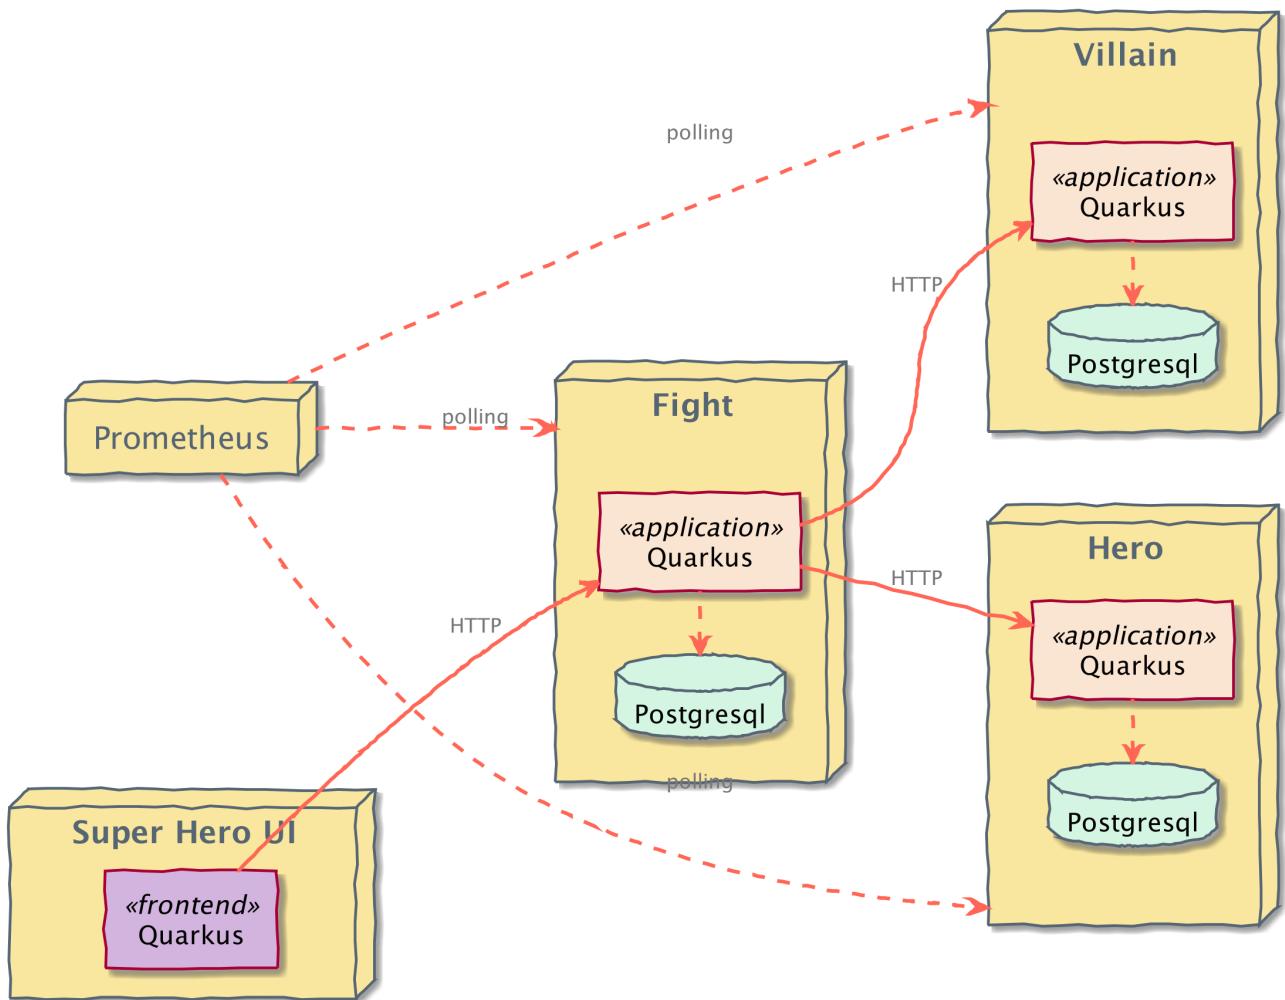


# Health Check

Quarkus applications can utilize the MicroProfile Health specification through the SmallRye Health extension. The MicroProfile Health allows applications to provide information about their state to external viewers which is typically useful in cloud environments where automated processes must be able to determine whether the application should be discarded or restarted.<sup>[31]</sup>

## Directory Structure

In this module we will add an extra subdirectory with two classes to handle the Health Check. You will end-up with the following directory structure:

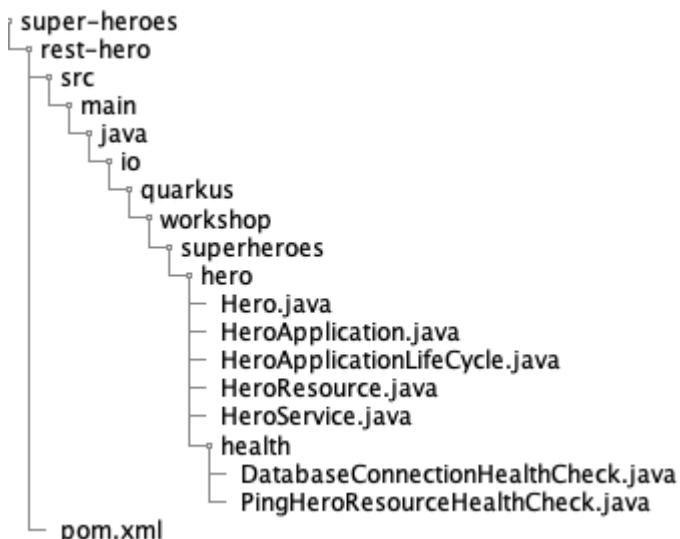

While you could add add health checks to all our microservices, we are focusing on the Hero microservice. You can apply the same to the other microservices.

## Installing the Health Dependency

To install the MicroProfile Health dependency, just run the following command:

```
$ ./mvnw quarkus:add-extension -Dextensions="health"
```

This will add the following dependency in the `pom.xml` file:

```
<dependency>
  <groupId>io.quarkus</groupId>
  <artifactId>quarkus-smallrye-health</artifactId>
</dependency>
```

**IMPORTANT** Don't forget to restart the dev mode after having added the extension.

## Running the Default Health Check

Importing the `smallrye-health` extension directly exposes three REST endpoints:

- `/health/live` - The application is up and running.
- `/health/ready` - The application is ready to serve requests.
- `/health` - Accumulating all health check procedures in the application.

To check that the `smallrye-health` extension is working as expected, access using your browser or CURL:

- <http://localhost:8083/health/live>
- <http://localhost:8083/health/ready>
- <http://localhost:8083/health>

All of the health REST endpoints return a simple JSON object with two fields:

- `status` — the overall result of all the health check procedures
- `checks` — an array of individual checks

The general `status` of the health check is computed as a logical AND of all the declared health check procedures. The checks array is empty as we have not specified any health check procedure yet so let's define some.

## Adding Liveness

To check that our Hero API application is live, we can check that the `HeroResource.hello()` method works. For that, this is the `PingHeroResourceHealthCheck` class that we can write under the `io.quarkus.workshop.superheroes.hero.health` sub-package:

```

package io.quarkus.workshop.superheroes.hero.health;

import io.quarkus.workshop.superheroes.hero.HeroResource;
import org.eclipse.microprofile.health.HealthCheck;
import org.eclipse.microprofile.health.HealthCheckResponse;
import org.eclipse.microprofile.health.Liveness;

import javax.enterprise.context.ApplicationScoped;
import javax.inject.Inject;

@Liveness
@ApplicationScoped
public class PingHeroResourceHealthCheck implements HealthCheck {

    @Inject
    HeroResource heroResource;

    @Override
    public HealthCheckResponse call() {
        heroResource.hello();
        return HealthCheckResponse.named("Ping Hero REST Endpoint").up().build();
    }
}

```

As you can see health check procedures are defined as implementations of the `HealthCheck` interface which are defined as CDI beans with the CDI qualifier `@Liveness`. The liveness check accessible at `/health/live`. `HealthCheck` is a functional interface whose single method `call` returns a `HealthCheckResponse` object which can be easily constructed by the fluent builder API shown in the example.

As we have started our Quarkus application in dev mode simply repeat the request to `http://localhost:8083/health/live` by refreshing your browser window or by using curl `http://localhost:8083/health/live`. Because we defined our health check to be a liveness procedure (with `@Liveness` qualifier) the new health check procedure is now present in the checks array.

```
{
  "status": "UP",
  "checks": [
    {
      "name": "Ping Hero REST Endpoint",
      "status": "UP"
    }
  ]
}
```

## Adding Readiness

We've just created a simple liveness health check procedure which states whether our application

is running or not. Here, we will create a readiness health check which will be able to state whether our application is able to process requests.

We will create another health check procedure that accesses our database. If the database can be accessed, then we will always return the response indicating the application is ready. Create the `io.quarkus.workshop.superheroes.hero.health.DatabaseConnectionHealthCheck` class as follow:

```
package io.quarkus.workshop.superheroes.hero.health;

import io.quarkus.workshop.superheroes.hero.Hero;
import io.quarkus.workshop.superheroes.hero.HeroService;
import org.eclipse.microprofile.health.HealthCheck;
import org.eclipse.microprofile.health.HealthCheckResponse;
import org.eclipse.microprofile.health.HealthCheckResponseBuilder;
import org.eclipse.microprofile.health.Readiness;

import javax.enterprise.context.ApplicationScoped;
import javax.inject.Inject;
import java.util.List;

@Readiness
@ApplicationScoped
public class DatabaseConnectionHealthCheck implements HealthCheck {

    @Inject
    HeroService heroService;

    @Override
    public HealthCheckResponse call() {
        HealthCheckResponseBuilder responseBuilder = HealthCheckResponse
            .named("Hero Datasource connection health check");

        try {
            List<Hero> heroes = heroService.findAllHeroes();
            responseBuilder.withData("Number of heroes in the database", heroes.size()
                ).up();
        } catch (IllegalStateException e) {
            responseBuilder.down();
        }

        return responseBuilder.build();
    }
}
```

If you now rerun the health check at <http://localhost:8083/health/live> the checks array will contain only the previously defined `PingHeroResourceHealthCheck` as it is the only check defined with the `@Liveness` qualifier. However, if you access <http://localhost:8083/health/ready> (in the browser or with curl <http://localhost:8083/health/ready>) you will see only the Database connection health check as it is the only health check defined with the `@Readiness` qualifier as the readiness health check

procedure. If you access <http://localhost:8083/health> you will get back both checks.

```
{  
  "status": "UP",  
  "checks": [  
    {  
      "name": "Hero health check",  
      "status": "UP",  
      "data": {  
        "rows": 951  
      }  
    },  
    {  
      "name": "Database connection(s) health check",  
      "status": "UP"  
    }  
  ]  
}
```

## Health Check Tests in HeroResourceTest

Let's add a few extra test methods that would make sure Health Check are available in the application:

```
@Test  
void shouldPingLiveness() {  
  given()  
    .when().get("/health/live")  
    .then()  
    .statusCode(OK.getStatusCode());  
}  
  
@Test  
void shouldPingReadiness() {  
  given()  
    .when().get("/health/ready")  
    .then()  
    .statusCode(OK.getStatusCode());  
}
```

### NOTE

Here we've just shown you the health check for the Hero API, but you should do the same for Fight and Villain.

# Metrics

MicroProfile Metrics allows applications to gather various metrics and statistics that provide insights into what is happening inside the application.<sup>[32]</sup> The metrics can be read remotely using JSON format or the OpenMetrics format, so that they can be processed by additional tools such as Prometheus, and stored for analysis and visualisation.<sup>[33]</sup>

While you could add metrics to all our microservices, we are focusing on the Hero microservice. You can apply the same to the other microservices.

## Installing the Metrics Dependency

To install the MicroProfile Metrics dependency, just run the following command:

```
$ ./mvnw quarkus:add-extension -Dextensions="metrics"
```

This will add the following dependency in the `pom.xml` file:

```
<dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-smallrye-metrics</artifactId>
</dependency>
```

**IMPORTANT** Don't forget to restart the dev mode after having added the extension.

## Adding Metrics to HeroResource

We want now to measure all methods of all our REST resources. For that, we need a few annotations to make sure that our desired metrics are calculated over time and can be exported for manual analysis or processing by additional tooling. The metrics that we will gather are these:

- `countGetRandomHero`: A counter which is increased by one each time the user gets a random hero.
- `timeGetRandomHero`: This is a timer, therefore a compound metric that benchmarks how much time the request take.

Below the source code of the `getRandomHero()` method, but make sure to add metrics on all methods:

```

@Operation(summary = "Returns a random hero")
@APIResponse(responseCode = "200", content = @Content(mediaType = APPLICATION_JSON,
schema = @Schema(implementation = Hero.class, required = true)))
@Counted(name = "countGetRandomHero", description = "Counts how many times the
getRandomHero method has been invoked")
@Timed(name = "timeGetRandomHero", description = "Times how long it takes to invoke
the getRandomHero method", unit = MetricUnits.MILLISECONDS)
@GET
@Path("/random")
public Response getRandomHero() {
    Hero hero = service.findRandomHero();
    LOGGER.debug("Found random hero " + hero);
    return Response.ok(hero).build();
}

```

You will need to add the following import statements:

**NOTE**

```

import org.eclipse.microprofile.metrics.MetricUnits;
import org.eclipse.microprofile.metrics.annotation.Counted;
import org.eclipse.microprofile.metrics.annotation.Timed;

```

## Metrics Tests in HeroResourceTest

Let's add an extra test method that would make sure Metrics are available in the application:

```

@Test
void shouldPingMetrics() {
    given()
        .header(ACCEPT, APPLICATION_JSON)
        .when().get("/metrics/application")
        .then()
        .statusCode(OK.getStatusCode());
}

```

## Reviewing the Generated Metrics

To view the metrics, execute `curl -H "Accept: application/json" http://localhost:8083/metrics/application`. You will receive a response such as:

```
{
  "io.quarkus.workshop.superheroes.hero.HeroResource.countGetRandomHero": 44,
  "io.quarkus.workshop.superheroes.hero.HeroResource.timeGetRandomHero": {
    "p99": 16.227182,
    "min": 2.525987,
    "max": 16.227182,
    "mean": 3.202769680486923,
    "p50": 2.967352,
    "p999": 16.227182,
    "stddev": 1.55809730109504,
    "p95": 3.565725,
    "p98": 4.157616,
    "p75": 3.104259,
    "fiveMinRate": 0.12382047800943181,
    "fifteenMinRate": 0.04406239601227314,
    "meanRate": 0.08741866976313094,
    "count": 44,
    "oneMinRate": 0.4332024919472982
  }
}
```

Let's explain the meaning of each metric:

- **countGetRandomHero**: A counter which is increased by one each time the user asks for a random hero.
- **timeGetRandomHero**: This is a timer, therefore a compound metric that benchmarks how much time the request takes. All durations are measured in milliseconds. It consists of these values:
  - **min**: The shortest duration it took to perform a request.
  - **max**: The longest duration.
  - **mean**: The mean value of the measured durations.
  - **stddev**: The standard deviation.
  - **count**: The number of observations (so it will be the same value as **countGetRandomHero**).
  - **p50, p75, p95, p99, p999**: Percentiles of the durations. For example the value in p95 means that 95 % of the measurements were faster than this duration.
  - **meanRate, oneMinRate, fiveMinRate, fifteenMinRate**: Mean throughput and one-, five-, and fifteen-minute exponentially-weighted moving average throughput.

If you prefer an OpenMetrics export rather than the JSON format, remove the `-H "Accept: application/json"` argument from your command line.

**NOTE**

Again, in this chapter, we've just shown you how to add metrics for the Hero API, but you should do the same for Fight and Villain.

# Loading the Microservices

Now that we have the three main microservices exposing health checks and metrics, time to have a decent user interface to monitor how the system behaves. The purpose of this workshop is to add some load to our application. You will download the load application, install it and run it.

## Downloading the Load Application

Download the zip file <https://raw.githubusercontent.com/quarkusio/quarkus-workshops/master/quarkus-workshop-super-heroes/super-heroes/load-super-heroes/load-super-heroes.zip> and unzip the entire code into your `load-super-heroes` directory. It is a Maven application, so you will find a `pom.xml` file with all the dependencies. This application is not a Quarkus application, just a Java app that simulates users interacting with the system so it generates some load.

## Looking at Some Code

The `SuperHeroesLoad` class is just a `main` that executes the `FightScenario`, `HeroScenario` and `VillainScenario` in different threads. For example, if you look at the `HeroScenario`, you will see that it's just a suit of HTTP calls on the Hero API:

```
private static final String targetUrl = "http://localhost:8083";

private static final String contextRoot = "/api/heroes";

@Override
protected List<Endpoint> getEndpoints() {
    return Stream.of(
        endpoint(contextRoot, "GET"),
        endpoint(contextRoot + "/hello", "GET"),
        endpoint(contextRoot + "/random", "GET"),
        endpointWithTemplates(contextRoot + "/{id}", "GET", this::idParam),
        endpointWithTemplates(contextRoot + "/{id}", "DELETE", this::idParam),
        endpointWithEntity(contextRoot, "POST", this::createHero)
    ).collect(Collectors.unmodifiableList());
}
```

## Running the Load Application

You are all set! Time to compile and start the load application using:

```
$ mvn compile
$ mvn exec:java
```

You will see the following logs:

```
INFO: GET - http://localhost:8082/api/fights/1 - 200
INFO: DELETE - http://localhost:8084/api/villains/440 - 204
INFO: GET - http://localhost:8083/api/heroes - 200
INFO: GET - http://localhost:8084/api/villains/hello - 200
INFO: GET - http://localhost:8082/api/fights - 200
INFO: GET - http://localhost:8083/api/heroes/581 - 200
INFO: GET - http://localhost:8084/api/villains/126 - 200
INFO: GET - http://localhost:8082/api/fights/hello - 200
INFO: DELETE - http://localhost:8083/api/heroes/491 - 204
```

# Displaying Metrics on Prometheus

Now that we've added some load to our application, let's measure it with Prometheus.<sup>[34]</sup> Prometheus is an open-source systems monitoring and alerting toolkit that integrates well with Quarkus.

## Configuring Prometheus

Prometheus needs to be configured to poll data from our microservices. This is made under our `infrastructure` directory, in the `prometheus.yml` file:

```
scrape_configs:
  - job_name: 'prometheus'
    static_configs:
      - targets: ['localhost:9090']
  - job_name: 'fights'
    static_configs:
      - targets: ['host.docker.internal:8082']
  - job_name: 'heroes'
    static_configs:
      - targets: ['host.docker.internal:8083']
  - job_name: 'villains'
    static_configs:
      - targets: ['host.docker.internal:8084']
```

This file contains basic Prometheus configuration, plus a specific `scrape_config` which instructs Prometheus to look for application metrics from both Prometheus itself, and our Quarkus microservices at the `/metrics` endpoint.

**NOTE** To execute the application we now need Prometheus. Make sure the infrastructure is up and running. This means that you've executed `docker-compose -f docker-compose.yaml up -d`.

## Adding Graphs to Prometheus

The Prometheus console is accessible at <http://localhost:9090>.

Enable query history

Expression (press Shift+Enter for newlines)

Execute

- insert metric at cursor · ↴

Graph

Console



Moment



Element

Value

no data

Remove Graph

Add Graph

Out of the box, you get a lot of basic JVM metrics or even metrics of Prometheus itself, which are useful. But let's create new graphs with the metrics of our microservices. Type `timeGetRandomHero` in the query, and select `application_io_quarkus_workshop_superheroes_hero_HeroResource_timeGetRandomHero_fifteen_min_rate_per_second` in the box, and click *Execute*.

Enable query history

timeGetRandomHero

Load time: 9ms  
Resolution: 14s  
Total time series: 0

application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_fifteen\_min\_rate\_per\_second  
application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_five\_min\_rate\_per\_second  
application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_max\_seconds  
application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_mean\_seconds  
application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_min\_seconds  
application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_one\_min\_rate\_per\_second  
application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_rate\_per\_second  
application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_seconds  
application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_seconds\_count  
application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_stddev\_seconds

Remove Graph

This will fetch the values from our metric showing the number of checks performed:

Enable query history

application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_five\_min\_rate\_per\_second

Load time: 8ms  
Resolution: 7s  
Total time series: 1

Execute

application\_ft\_io\_quarkus

Graph

Console

- 30m + ⏪ Until ⏩ Res. (s)  stacked

✓ application\_io\_quarkus\_workshop\_superheroes\_hero\_HeroResource\_timeGetRandomHero\_five\_min\_rate\_per\_second{instance="host.docker.internal:8083",job="heroes"}

Remove Graph

Add Graph

**WARNING**

If you have any problem with the code, don't understand or feel you are running, remember to ask for some help. Also, you can get the code of this entire workshop from <https://github.com/quarkusio/quarkus-workshops/tree/master/quarkus-workshop-super-heroes>.

**NOTE**

Stop the load application before going further.

[31] MicroProfile Health <https://microprofile.io/project/eclipse/microprofile-health>

[32] MicroProfile Metrics <https://microprofile.io/project/eclipse/microprofile-metrics>

[33] OpenMetrics <https://openmetrics.io>

[34] Prometheus <https://prometheus.io>

# Event-driven and Reactive microservices

---

So far, we have build 3 microservices, all using HTTP to interact. However, HTTP has significant flaws, such as temporal coupling between the actors. If the service is not there or is slow, the caller is directly impacted. Also, it's hard to guess the capacity of the service you call; maybe you should not call it right now because this service is under heavy load.


Fortunately, event-driven microservices are rising and avoid most of these issues. By using events (wrapped in messages), the different microservices enforce a looser coupling. Depending on the messaging protocol you use, it may handle durability (avoiding the temporal coupling) and back-pressure (avoiding the overload).

In this section, we are going to see how Quarkus let you build event-driven microservices. More specially, you are going to see how to:

- send messages and process them
- connect a Quarkus application to Apache Kafka
- write Kafka records and read them
- use reactive programming to compute statistics on the fly
- how to send messages to the browser using web sockets

Quarkus uses MicroProfile Reactive Messaging to interact with Kafka, and other messaging middleware (such as AMQP).<sup>[35]</sup>

In this chapter, we are going to use events as a way for microservices to interact. You are going to extend the current system with the **stats** group depicted on the next figure:

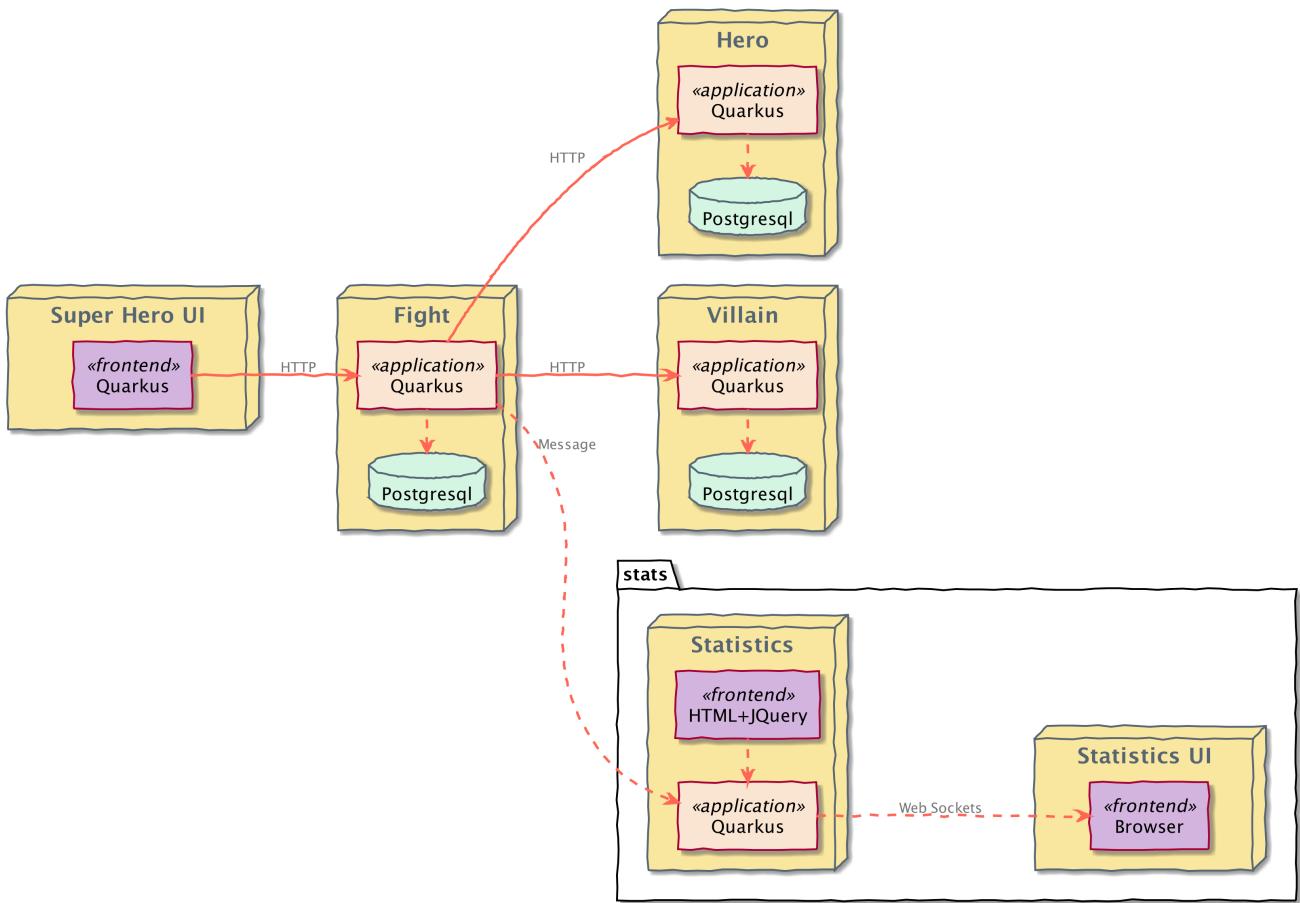


When the application persists a new fight, in the *fight* microservice, you are going to send it to a Kafka topic. These messages are read in the *statistics* microservice, processed, and the result is sent to a UI using web sockets.

# Sending Messages to Kafka

In this section, you are going to see how you can send messages to a Kafka topic.<sup>[36]</sup>

## Directory Structure

In this section we are going to extend the Fight microservice. In the following tree, we are going to edit the marked classes

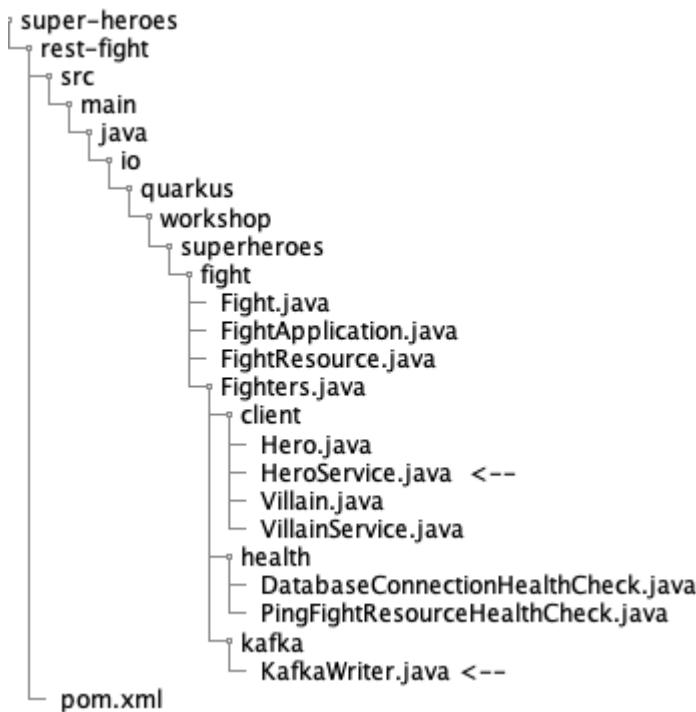

## Adding the Reactive Messaging Dependency

First, stop the *fight* microservice. To install the Kafka support, just run the following command:

```
$ ./mvnw quarkus:add-extension -Dextensions="kafka"
```

The previous command adds the following dependency:

```
<dependency>
  <groupId>io.quarkus</groupId>
  <artifactId>quarkus-smallrye-reactive-messaging-kafka</artifactId>
</dependency>
```

**NOTE**

The extension may already have been added when the *fight* microservice has been created.

Then, you can restart the microservice, using `mvn compile quarkus:dev`.

**NOTE** To execute the application we now need Kafka. Make sure the infrastructure is up and running. This means that you've executed `docker-compose -f docker-compose.yaml up -d`.

## Connecting Imperative and Reactive Using an Emitter

Now edit the `FightService` class. First, add the following field:

```
@Inject  
@Channel("fights-channel") Emitter<Fight> emitter;
```

You will also need to add the following imports:

**NOTE**

```
import io.smallrye.reactive.messaging.annotations.Channel;  
import io.smallrye.reactive.messaging.annotationsEmitter;
```

This field is an *emitter*, and lets you send events or messages (here fights) to the *channel* specified with the `@Channel` annotation. A *channel* is a *virtual destination*.

In the `persistFight` method, add the following line just before the `return` statement:

```
emitter.send(fight);
```

With this in place, every time the application persists a `fight`, it also sends the `fight` to the `fights-channel` channel.

## Transforming Messages Transiting on a Channel

Now, in the `Fight` microservice, create the `io.quarkus.workshop.superheroes.fight.kafka.KafkaWriter` class with the following content:

```

package io.quarkus.workshop.superheroes.fight.kafka;

import io.quarkus.workshop.superheroes.fight.Fight;
import org.eclipse.microprofile.reactive.messaging.Incoming;
import org.eclipse.microprofile.reactive.messaging.Outgoing;
import org.jboss.logging.Logger;

import javax.annotation.PostConstruct;
import javax.annotation.PreDestroy;
import javax.enterprise.context.ApplicationScoped;
import javax.json.bind.Jsonb;
import javax.json.bind.JsonbBuilder;

@ApplicationScoped
public class KafkaWriter {

    private static final Logger LOGGER = Logger.getLogger(KafkaWriter.class);
    private Jsonb jsonb;

    @PostConstruct
    public void init() {
        jsonb = JsonbBuilder.create();
    }

    @PreDestroy
    public void cleanup() {
        try {
            jsonb.close();
        } catch (Exception e) {
            LOGGER.warn("Unable to close JSON-B: ", e);
        }
    }

    @Incoming("fights-channel")
    @Outgoing("fights")
    public String toJson(Fight fight) {
        return jsonb.toJson(fight);
    }

}

```

This bean receives the fights sent by the `FightService` and serializes them as JSON. This eases sending the message to Kafka as it avoids writing a specific serializer or a schema.

Note the `@Incoming` and `@Outgoing` annotation. Both take a channel name as a parameter. When used together, it indicates that the method receives *things* (`fights`) from the channel indicated in the `@Incoming` annotation, and produces *things* (strings) sent to the channel indicated in the `@Outgoing` annotation. It's only one of the possible signature, reactive messaging proposed more than 30 variants, and you are going to see more possibilities soon.

## Connecting to Kafka

At this point, the serialized fights are sent to the `fights` channel. You need to connect this `channel` to a Kafka topic. For this, edit the `application.properties` file and add the following properties:

```
## Kafka configuration
mp.messaging.outgoing.fights.connector=smallrye-kafka
mp.messaging.outgoing.fights.value.serializer=org.apache.kafka.common.serialization.StringSerializer
```

These properties are structured as follows:

```
mp.messaging.[incoming|outgoing].channel.attribute=value
```

For example, `mp.messaging.outgoing.fights.connector` configures configure the connector used for the `outgoing` channel `fights`.

The `mp.messaging.outgoing.fights.value.serializer` configures the serializer used to write the message in Kafka. When omitted, the Kafka topic reuses the channel name (`fights`). Also, it connects by default to `localhost:9092`. You can override this using the `kafka.bootstrap.servers` property.


Now, you have connected the fight microservice to Kafka, and you are sending new fights to the Kafka topic. Let's see how you can read these messages in the `stats` microservice.

# Receiving Messages from Kafka

In this section, you are going to see how you can receive messages from a Kafka topic. For this, you are going to create a new microservice, named `stats`. This microservice computes statistics based on the results of the fights. For example, it determines if villains win more battles than heroes, and who is the superhero or supervillain having won the most fights.

## Directory Structure

In this section, we are going to develop the following structure:

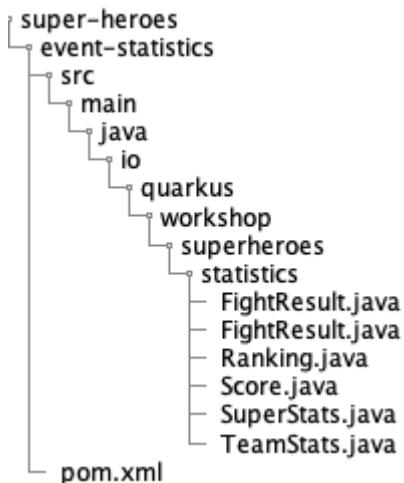

## Bootstrapping the Statistics REST Endpoint

Like for the other microservice, the easiest way to create this new Quarkus project is to use a Maven command. Under the `quarkus-workshop-super-heroes/super-heroes` root directory where you have all your code, create a `event-statistics` sub-directory, open a terminal and run the following command:

```
mvn io.quarkus:quarkus-maven-plugin:0.25.0:create \
-DprojectGroupId=io.quarkus.workshop.super-heroes \
-DprojectArtifactId=event-statistics \
-DclassName="io.quarkus.workshop.superheroes.statistics.StatisticResource" \
-Dpath="api/stats" \
-Dextensions="kafka, vertx, resteasy-jsonb, undertow-websockets"
```

### NOTE

As you can see in the command, you can configure the extensions you want using the `-Dextensions` parameter. Open the `pom.xml` file to see the result.

## Computing Statistics

Now, create the `io.quarkus.workshop.superheroes.statistics.SuperStats` class with the following content. This class contains 3 methods annotated with `@Incoming` and `@Outgoing`.

The first one (`toFightResults`) is responsible for deserializing the JSON content received from Kafka.

It gets items from the `fights` channel and produces items sent to the `results` channel. It takes a `Flowable` parameter and returns another `Flowable`. `Flowable` is a class provided by RX Java 2 and represents a stream of data. So, this method is called only once with a `Flowable` representing the incoming channel, and the returned `Flowable` is the outgoing channel. In the body of the method, each item from the incoming channel are *mapped* to `FightResults`.

The `@Broadcast` annotation indicates that several consumers (methods) consume the items produced by the method.

The `computeTeamStats` method follows the same pattern. It computes the ratio of victories for heroes and villains.

The `computeTopWinners` method uses more advanced reactive programming constructs such as `groupBy`, `flatMap` and `scan`:

```

package io.quarkus.workshop.superheroes.statistics;

import io.reactivex.Flowable;
import io.smallrye.reactive.messaging.annotations.Broadcast;
import io.vertx.core.json.JsonObject;
import org.eclipse.microprofile.reactive.messaging.Incoming;
import org.eclipse.microprofile.reactive.messaging.Outgoing;

import javax.enterprise.context.ApplicationScoped;

@ApplicationScoped
public class SuperStats {

    private Ranking topWinners = new Ranking(10);
    private TeamStats stats = new TeamStats();

    @Incoming("fights")
    @Outgoing("results")
    @Broadcast
    public Flowable<FightResult> toFightResults(Flowable<JsonObject> stream) {
        return stream.map(json -> json.mapTo(FightResult.class));
    }

    @Incoming("results")
    @Outgoing("team-stats")
    public Flowable<Double> computeTeamStats(Flowable<FightResult> results) {
        return results.map(fr -> stats.add(fr));
    }

    @Incoming("results")
    @Outgoing("winner-stats")
    public Flowable<Iterable<Score>> computeTopWinners(Flowable<FightResult> results)
    {
        return results
            // Create a sub-stream per hero and villain - for each winner, we get a
            // new sub-stream
            .groupBy(FightResult::getWinnerName)
            // For each of these sub-stream
            .flatMap(group ->
                // Compute the new score (increment the score by one)
                group.scan(0, (i, s) -> i + 1)
                    // Skip the initial 0, oddity of the scan operator
                    .skip(1)
                    // Creates the Score object
                    .map(i -> new Score(group.getKey(), i)))
            // For every Score emitted by the sub-streams, add it to the
            // ranking object and check if it changes the top 10.
            .flatMapMaybe(score -> topWinners.onNewScore(score));
    }
}

```

In addition, create the `io.quarkus.workshop.superheroes.statistics.FightResult`, `io.quarkus.workshop.superheroes.statistics.Ranking`, `io.quarkus.workshop.superheroes.statistics.Score` and `io.quarkus.workshop.superheroes.statistics.TeamStats` classes with the following contents:

The `FightResult` class is used to deserialize the JSON object from the Kafka topic. Note the `@RegisterForReflection` annotation indicating to Quarkus that this class is accessed using reflection.  
[37] This information is required when running the application as a native executable.

```
package io.quarkus.workshop.superheroes.statistics;

import io.quarkus.runtime.annotations.RegisterForReflection;

import java.time.Instant;

@registerforreflection
public class FightResult {

    private long id;
    private Instant fightDate;
    private String winnerName;
    private int winnerLevel;
    private String winnerPicture;
    private String loserName;
    private int loserLevel;
    private String loserPicture;
    private String winnerTeam;
    private String loserTeam;

    // Getters and Setters
}
```

In `FightResult`, add or generate the getter and setter methods for the `private` fields.

Then, create the `Ranking` class, used to compute a floating top 10, with the following content:

```

package io.quarkus.workshop.superheroes.statistics;

import io.reactivex.Maybe;

import java.util.Collections;
import java.util.Comparator;
import java.util.LinkedList;

public class Ranking {

    private final int max;

    private final Comparator<Score> comparator = (s1, s2) -> {
        if (s2.score > s1.score) {
            return 1;
        } else if (s2.score < s1.score) {
            return -1;
        }
        return 0;
    };

    private LinkedList<Score> top = new LinkedList<>();

    public Ranking(int size) {
        max = size;
    }

    public synchronized Maybe<Iterable<Score>> onNewScore(Score score) {
        // synchronized should not be required if used in a flatMap, as the call needs
        // to be serialized.

        // Remove score if already present,
        // Add the score
        // Sort
        top.removeIf(s -> s.name.equalsIgnoreCase(score.name));
        top.add(score);
        top.sort(comparator);

        // Drop on overflow
        if (top.size() > max) {
            top.remove(top.getLast());
        }

        if (top.contains(score)) {
            return Maybe.just(Collections.unmodifiableList(top));
        } else {
            return Maybe.empty();
        }
    }
}

```

The `Score` class is a simple structure storing the name of a hero or villain and its actual score, *i.e.* the number of won battles. Don't forget to generate the getter and setter methods.

```
package io.quarkus.workshop.superheroes.statistics;

import io.quarkus.runtime.annotations.RegisterForReflection;

@registerforreflection
public class Score {
    protected String name;
    protected int score;

    public Score(String name, int score) {
        this.name = name;
        this.score = score;
    }

    public Score() {
    }

    // Getters, Setters and toString
}
```

The `TeamStats` class is an object keeping track of the number of battles won by heroes and villains.

```
package io.quarkus.workshop.superheroes.statistics;

class TeamStats {

    private int villains = 0;
    private int heroes = 0;

    double add(FightResult result) {
        if (result.getWinnerTeam().equalsIgnoreCase("heroes")) {
            heroes = heroes + 1;
        } else {
            villains = villains + 1;
        }
        return ((double) heroes / (heroes + villains));
    }

}
```

**TIP** The `@RegisterForReflection` annotation instruct the native compilation to allow reflection access to the class. Without, the serialization/deserialization would not work when running the native executable.

## Reading Messages from Kafka

It's now time to connect the `fights` channel with the Kafka topic. Edit the `application.properties` file and add the following content:

```
quarkus.http.port=8085

## Kafka configuration
mp.messaging.incoming.fights.connector=smallrye-kafka
mp.messaging.incoming.fights.value.deserializer=io.vertx.kafka.client.serialization.Js
onObjectDeserializer
mp.messaging.incoming.fights.auto.offset.reset=earliest
```

As for the writing side, it configures the Kafka connector. The `mp.messaging.incoming.fights.auto.offset.reset=earliest` property indicates that the topic is read from the earliest available record. Check the Kafka configuration to see all the available settings.

# Sending Events on WebSockets

At this point, you read the *fights* from Kafka and computes statistics. Actually, even if you start the application, nothing will happen as nobody consumes these statistics.

In this section, we are going to consume these statistics and send them to two WebSockets. For this, we are going to add two classes and a simple presentation page:

- `TeamStatsWebSocket`
- `TopWinnerWebSocket`
- `index.html`

Quarkus uses the [JSR 356](#) providing an annotation-driven approach to implement WebSockets.

## The TeamStats WebSocket

Create the `io.quarkus.workshop.superheroes.statistics.TeamStatsWebSocket` class with the following content:

```
package io.quarkus.workshop.superheroes.statistics;

import io.reactivex.Flowable;
import io.reactivex.disposables.Disposable;
import io.smallrye.reactive.messaging.annotations.Channel;
import org.jboss.logging.Logger;

import javax.annotation.PostConstruct;
import javax.annotation.PreDestroy;
import javax.enterprise.context.ApplicationScoped;
import javax.inject.Inject;
import javax.websocket.OnClose;
import javax.websocket.OnOpen;
import javax.websocket.Session;
import javax.websocket.server.ServerEndpoint;
import java.util.List;
import java.util.concurrent.CopyOnWriteArrayList;

@ServerEndpoint("/stats/team")
@ApplicationScoped
public class TeamStatsWebSocket {

    @Inject @Channel("team-stats") Flowable<Double> stream;

    private static final Logger LOGGER = Logger.getLogger(TeamStatsWebSocket.class);

    private List<Session> sessions = new CopyOnWriteArrayList<>();
    private Disposable subscription;

    @OnOpen
    public void onOpen(Session session) {
```

```

        sessions.add(session);
    }

    @OnClose
    public void onClose(Session session) {
        sessions.remove(session);
    }

    @PostConstruct
    public void subscribe() {
        subscription = stream.subscribe(ratio -> sessions.forEach(session -> write
(session, ratio)));
    }

    @PreDestroy
    public void cleanup() {
        subscription.dispose();
    }

    private void write(Session session, double ratio) {
        session.getAsyncRemote().sendText(Double.toString(ratio), result -> {
            if (result.getException() != null) {
                LOGGER.error("Unable to write message to web socket", result
.getException());
            }
        });
    }
}

```

This component is a WebSocket as specified by the `@ServerEndpoint("/stats/team")` annotation. It handles the `/stats/team` WebSocket.

When a client (like a browser) connects to the WebSocket, it keeps track of the session. This session is released when the client disconnects.

The `TeamStatsWebSocket` also injects a `Flowable` attached to the `team-stats` channel. After creation, the component subscribes to this stream and broadcasts the fights to the different clients connected to the web socket.

The `subscription` is an essential part of the stream lifecycle. It indicates that someone is interested in the items transiting on the stream, and it triggers the emission. In this case, it triggers the connection to Kafka and starts receiving the messages from Kafka. Without it, items would not be emitted.

## The TopWinner WebSocket

The `io.quarkus.workshop.superheroes.statistics.TopWinnerWebSocket` follows the same pattern but subscribes to the `winner-stats` channel. Creates the `io.quarkus.workshop.superheroes.statistics.TopWinnerWebSocket` with the following content:

```
package io.quarkus.workshop.superheroes.statistics;

import io.reactivex.Flowable;
import io.reactivex.disposables.Disposable;
import io.smallrye.reactive.messaging.annotations.Channel;
import org.jboss.logging.Logger;

import javax.annotation.PostConstruct;
import javax.annotation.PreDestroy;
import javax.enterprise.context.ApplicationScoped;
import javax.inject.Inject;
import javax.json.bind.Jsonb;
import javax.json.bind.JsonbBuilder;
import javax.websocket.OnClose;
import javax.websocket.OnOpen;
import javax.websocket.Session;
import javax.websocket.server.ServerEndpoint;
import java.util.List;
import java.util.concurrent.CopyOnWriteArrayList;

@ServerEndpoint("/stats/winners")
@ApplicationScoped
public class TopWinnerWebSocket {

    private static final Logger LOGGER = Logger.getLogger(TopWinnerWebSocket.class);
    private Jsonb jsonb;

    @Inject @Channel("winner-stats") Flowable<Iterable<Score>> winners;

    private List<Session> sessions = new CopyOnWriteArrayList<>();
    private Disposable subscription;

    @OnOpen
    public void onOpen(Session session) {
        sessions.add(session);
    }

    @OnClose
    public void onClose(Session session) {
        sessions.remove(session);
    }

    @PostConstruct
    public void subscribe() {
        jsonb = JsonbBuilder.create();
        subscription = winners
            .map(scores -> jsonb.toJson(scores))
            .subscribe(serialized -> sessions.forEach(session -> write(session,
serialized)));
    }
}
```

```

@PreDestroy
public void cleanup() throws Exception {
    subscription.dispose();
    jsonb.close();
}

private void write(Session session, String serialized) {
    session.getAsyncRemote().sendText(serialized, result -> {
        if (result.getException() != null) {
            LOGGER.error("Unable to write message to web socket", result
.getException());
        }
    });
}

```

Because the items (top 10) need to be serialized, the `TopWinnerWebSocket` also use JSONB to transform the object into a serialized form.

## The UI

Finally, you need a UI to watch these live statistics. Replace the `META-INF/resources/index.html` file with the following content:

```

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <title>Super Battle Stats</title>

    <link rel="stylesheet" type="text/css" href=
"https://cdnjs.cloudflare.com/ajax/libs/patternfly/3.24.0/css/patternfly.min.css">
    <link rel="stylesheet" type="text/css" href=
"https://cdnjs.cloudflare.com/ajax/libs/patternfly/3.24.0/css/patternfly-
additions.min.css">

    <style>
        .page-title {
            font-size: xx-large;
        }

        .progress {
            background-color: firebrick;
        }

        .progress-bar {
            background: dodgerblue;
        }

    </style>

```

```

</head>
<body>
<div class="container">
<div class="row">
    <div class="col"><h1 class="page-title">Super Stats</h1></div>
</div>
</div>
<div class="container container-cards-pf">
    <div class="row row-cards-pf">
        <div class="col-xs-12 col-sm-6 col-md-4 col-lg-3">
            <!-- Top winners -->
            <div class="card-pf card-pf-view card-pf-view-select">
                <h2 class="card-pf-title">
                    <i class="fa fa-trophy"></i> Top Winner
                </h2>
                <div class="card-pf-body">
                    <div id="top-winner">

                        </div>
                    </div>
                </div>
            </div>
        <div class="col-xs-12 col-sm-8 col-md-6 col-lg-6">
            <!-- Top losers -->
            <div class="card-pf card-pf-view card-pf-view-select">
                <h2 class="card-pf-title">
                    <i class="fa pficon-rebalance"></i> Heroes vs. Villains
                </h2>
                <div class="card-pf-body">
                    <div class="progress-container progress-description-left progress-label-right">
                        <div class="progress-description">
                            Heroes
                        </div>
                        <div class="progress">
                            <div id="balance" class="progress-bar" role="progressbar"
aria-valuenow="50" aria-valuemin="0" aria-valuemax="100" style="width: 50%;">
                                <span>Villains</span>
                            </div>
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>

<script src="https://cdnjs.cloudflare.com/ajax/libs/jquery/3.2.1/jquery.min.js">
</script>
<script src="https://cdnjs.cloudflare.com/ajax/libs/twitter-

```

```

bootstrap/3.3.7/js/bootstrap.min.js"></script>
<script src=
"https://cdnjs.cloudflare.com/ajax/libs/patternfly/3.24.0/js/patternfly.min.js"></script>
<script src="https://cdnjs.cloudflare.com/ajax/libs/c3/0.7.11/c3.js"></script>
<script src="https://cdnjs.cloudflare.com/ajax/libs/d3/5.12.0/d3.min.js"></script>

<script>
$(document).ready(function() {
    var host = window.location.host;

    var top = new WebSocket("ws://" + host + "/stats/winners");
    top.onmessage = function (event) {
        updateTop(event.data);
    };
    var team = new WebSocket("ws://" + host + "/stats/team");
    team.onmessage = function(event) {
        console.log(event.data);
        updateRatio(event.data);
    };
});
});

function updateTop(scores) {
    $("#top-winner").children("p").remove();
    JSON.parse(scores).forEach(function(score) {
        $("#top-winner").append($(".<p>" + score.name + " [" + score.score + "
]</p>"))
    });
}

function updateRatio(ratio) {
    var percent = ratio * 100;
    $("#balance").attr("aria-valuenow", ratio * 100).attr("style", "width: " +
percent + "%;");
}
</script>
</body>
</html>

```

## Running the Application

You are all set! Time to start the application using:

```
$ mvn compile quarkus:dev
```


Then, open <http://localhost:8085> in a new browser window. Trigger some fights, and you should see the live statistics moving.

**WARNING**

If you have any problem with the code, don't understand or feel you are running, remember to ask for some help. Also, you can get the code of this entire workshop from <https://github.com/quarkusio/quarkus-workshops/tree/master/quarkus-workshop-super-heroes>.

# Unifying Imperative and Reactive Programming

So, as seen in this chapter, Quarkus is not limited to HTTP microservices, but fits perfectly in an event-driven architecture. The secret behind this is to use a single reactive engine for both imperative and reactive code:

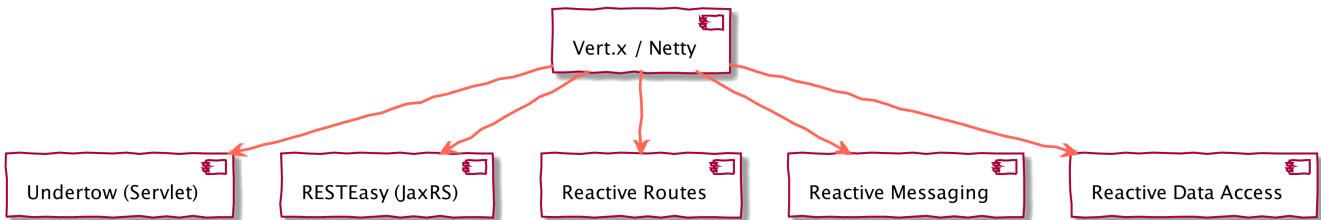

This unique architecture allows to mix imperative and reactive, but also use the right *model* for the job. To go further on this, we recommend:

- <https://quarkus.io/guides/reactive-routes-guide> to use reactive routes
- <https://quarkus.io/guides/reactive-sql-clients> to access SQL database in a non-blocking fashion
- <https://quarkus.io/guides/kafka-guide> to integrate with Kafka
- <https://quarkus.io/guides/amqp-guide> to integrate with AMQP 1.0
- <https://quarkus.io/guides/using-vertx> to understand how you can use Vert.x directly

[35] MicroProfile Reactive Messaging <https://github.com/eclipse/microprofile-reactive-messaging>

[36] Kafka Topic [https://kafka.apache.org/intro#intro\\_topics](https://kafka.apache.org/intro#intro_topics)

[37] RegisterForReflection <https://quarkus.io/guides/writing-native-applications-tips#alternative-with-registerforreflection>

# Writing a Quarkus Extension

---

Most of the Quarkus magic happens inside extensions. The goal of an extension is to compute *just enough bytecode* to start the services that the application requires, and drop everything else.

So, when writing an extension, you need to distinguish the action that:

- Can be done at build time
- Must be done at runtime

Because of this distinction, extensions are divided into 2 parts: a build time augmentation and a runtime. The augmentation part is responsible for all the metadata processing, annotation scanning, XML parsing... The output of this augmentation is **recorded bytecode**, which, then, is executed at runtime to instantiate the relevant services.

In this chapter, you are going to implement a *banner* extension. Instead of having to include the bean invoked during the application startup in the application code, you are going to write an extension that does this.

## The extension framework


Quarkus's mission is to transform your entire application, including the libraries it uses, into an artifact that uses significantly fewer resources than traditional approaches. These can then be used to build native executables using GraalVM. To do this, you need to analyze and understand the full "closed world" of the application. Without the full context, the best that can be achieved is partial and limited generic support.

To build an extension, Quarkus provides a framework to:

- read configuration from the `application.properties` file and map it to objects,
- read metadata from classes without having to load them, this includes classpath and annotation scanning,
- generate bytecode if needed (for proxies for instance),
- pass sensible defaults to the application,
- make the application compatible with GraalVM (resources, reflection, substitutions),
- implement hot-reload

## Structure of an extension

As stated above, an extension is divided into 2 parts, called **deployment** (augmentation) and **runtime**.

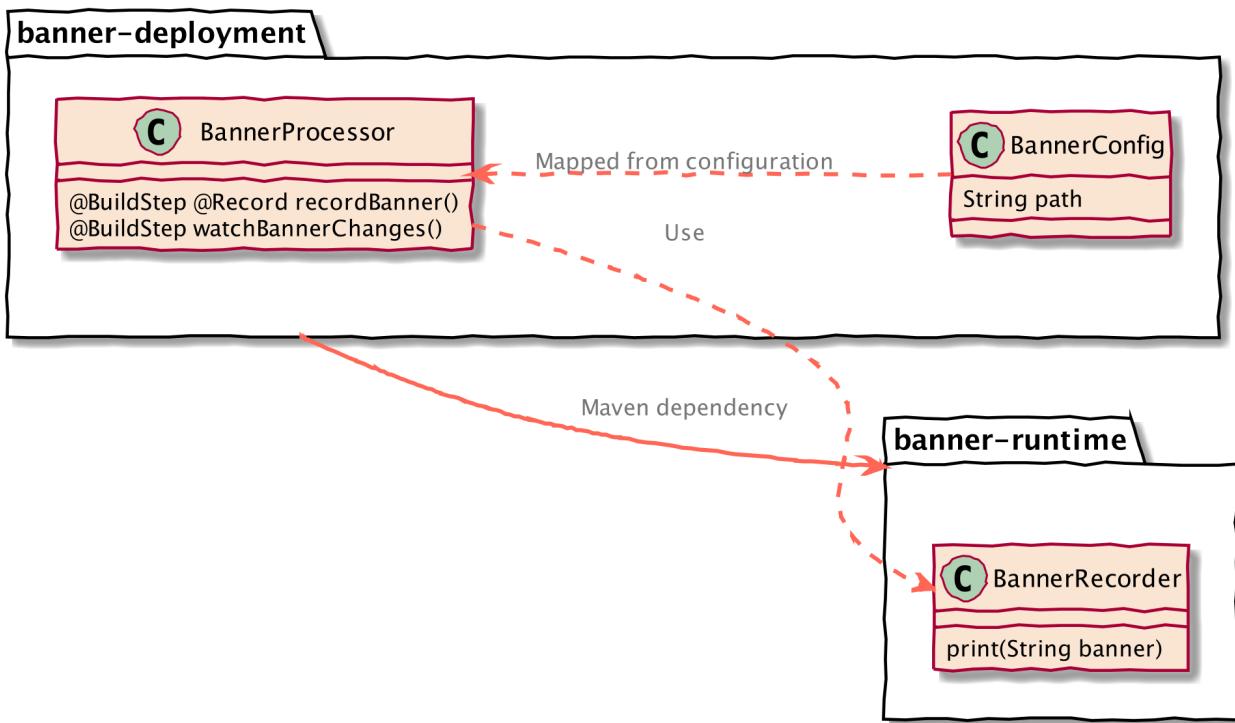

Create a new directory, named `banner-extension`, and execute, from this directory the following commands:

```

mkdir -p deployment/src/main/java
mkdir -p deployment/src/main/resources
mkdir -p runtime/src/main/java
mkdir -p runtime/src/main/resources

echo "<project xmlns='http://maven.apache.org/POM/4.0.0'
  xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance'
    xsi:schemaLocation='http://maven.apache.org/POM/4.0.0
      http://maven.apache.org/maven-v4_0_0.xsd'>
  <modelVersion>4.0.0</modelVersion>

  <groupId>io.quarkus.workshop.super-heroes</groupId>
  <artifactId>extension-banner-parent</artifactId>
  <version>1.0</version>
  <packaging>pom</packaging>
  <name>Quarkus Workshop :: Extensions :: Banner Extension</name>

  <modules>
    <module>runtime</module>
    <module>deployment</module>
  </modules>

  <dependencyManagement>
    <dependencies>
      <dependency>
        <groupId>io.quarkus</groupId>

```

```

        <artifactId>quarkus-bom</artifactId>
        <version>\${quarkus.version}</version>
        <type>pom</type>
        <scope>import</scope>
    </dependency>
    <dependency>
        <groupId>io.quarkus</groupId>
        <artifactId>quarkus-bom-deployment</artifactId>
        <version>\${quarkus.version}</version>
        <type>pom</type>
        <scope>import</scope>
    </dependency>
</dependencies>
</dependencyManagement>

<properties>
    <quarkus.version>0.25.0</quarkus.version>
    <surefire-plugin.version>2.22.0</surefire-plugin.version>
    <maven.compiler.source>1.8</maven.compiler.source>
    <maven.compiler.target>1.8</maven.compiler.target>
    <maven.build.timestamp.format>yyyy-MM-dd</maven.build.timestamp.format>
    <project.reporting.outputEncoding>UTF-8</project.reporting.outputEncoding>
    <project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
</properties>
</project>
" > pom.xml

echo "<project xmlns='http://maven.apache.org/POM/4.0.0'
xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance'
xsi:schemaLocation='http://maven.apache.org/POM/4.0.0
http://maven.apache.org/maven-v4_0_0.xsd'>
<modelVersion>4.0.0</modelVersion>

<parent>
    <groupId>io.quarkus.workshop.super-heroes</groupId>
    <artifactId>extension-banner-parent</artifactId>
    <version>1.0</version>
</parent>

<artifactId>extension-banner-deployment</artifactId>
<name>Quarkus Workshop :: Extensions :: Banner Extension :: Deployment</name>

<dependencies>
    <dependency>
        <groupId>io.quarkus</groupId>
        <artifactId>quarkus-core-deployment</artifactId>
        <version>\${quarkus.version}</version>
    </dependency>
    <dependency>
        <groupId>io.quarkus</groupId>
        <artifactId>quarkus-arc-deployment</artifactId>

```

```

<version>\${quarkus.version}</version>
</dependency>
<dependency>
    <groupId>io.quarkus.workshop.super-heroes</groupId>
    <artifactId>extension-banner</artifactId>
    <version>\${project.version}</version>
</dependency>

<dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-junit5-internal</artifactId>
    <version>\${quarkus.version}</version>
    <scope>test</scope>
</dependency>
</dependencies>

<build>
    <plugins>
        <plugin>
            <artifactId>maven-compiler-plugin</artifactId>
            <version>3.8.1</version>
            <configuration>
                <annotationProcessorPaths>
                    <path>
                        <groupId>io.quarkus</groupId>
                        <artifactId>quarkus-extension-processor</artifactId>
                        <version>\${quarkus.version}</version>
                    </path>
                </annotationProcessorPaths>
            </configuration>
        </plugin>
        <plugin>
            <artifactId>maven-surefire-plugin</artifactId>
            <version>3.0.0-M3</version>
            <configuration>
                <systemProperties>
<java.util.logging.manager>org.jboss.logmanager.LogManager</java.util.logging.manager>
                </systemProperties>
            </configuration>
        </plugin>
    </plugins>
</build>

</project>" > deployment/pom.xml

echo "<project xmlns='http://maven.apache.org/POM/4.0.0'
    xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance'
        xsi:schemaLocation='http://maven.apache.org/POM/4.0.0
http://maven.apache.org/maven-v4_0_0.xsd'>
    <modelVersion>4.0.0</modelVersion>

```

```

<parent>
  <groupId>io.quarkus.workshop.super-heroes</groupId>
  <artifactId>extension-banner-parent</artifactId>
  <version>1.0</version>
</parent>

<artifactId>extension-banner</artifactId>
<name>Quarkus Workshop :: Extensions :: Banner Extension :: Runtime</name>

<dependencies>
  <dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-core</artifactId>
  </dependency>
  <dependency>
    <groupId>io.quarkus</groupId>
    <artifactId>quarkus-arc</artifactId>
  </dependency>
</dependencies>

<build>
  <plugins>
    <plugin>
      <groupId>io.quarkus</groupId>
      <artifactId>quarkus-bootstrap-maven-plugin</artifactId>
      <version>\${quarkus.version}</version>
      <executions>
        <execution>
          <goals>
            <goal>extension-descriptor</goal>
          </goals>
          <phase>compile</phase>
          <configuration>
            <deployment>\${project.groupId}:\${project.artifactId}-deployment:\${project.version}</deployment>
          </configuration>
        </execution>
      </executions>
    </plugin>
    <plugin>
      <artifactId>maven-compiler-plugin</artifactId>
      <version>3.8.1</version>
      <configuration>
        <annotationProcessorPaths>
          <path>
            <groupId>io.quarkus</groupId>
            <artifactId>quarkus-extension-processor</artifactId>
            <version>\${quarkus.version}</version>
          </path>
        </annotationProcessorPaths>
      </configuration>
    </plugin>
  </plugins>
</build>

```

```


        </configuration>
    </plugin>
</plugins>
</build>
</project>" > runtime/pom.xml

```

This script creates the structure for the banner extension:

- one parent `pom.xml` importing the `quarkus-bom` and the `quarkus-bom-deployment`
- a module for the runtime
- a module for the deployment, with a dependency on the runtime artifact

The final structure of the extension developed in this section is the following:

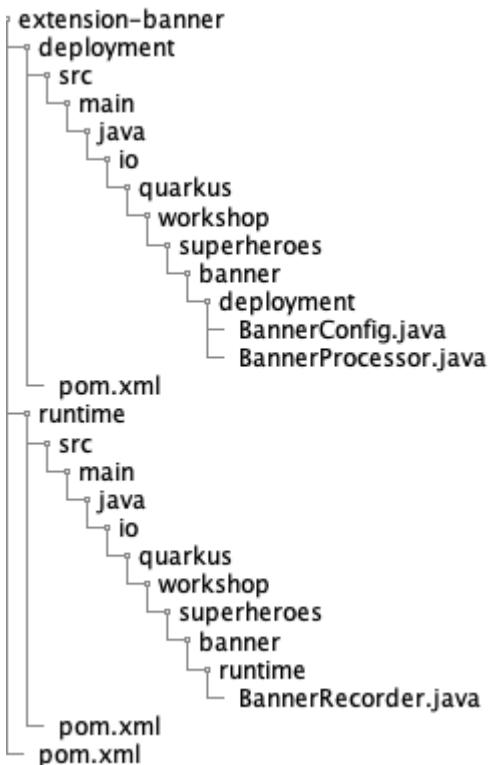

## The banner extension

The goal of this chapter is to implement an extension that displays a textual *banner* when the application starts. For this, what do we need:

1. The banner itself, in a file - so some configuration,
2. Some code that would print the banner when the application starts; so some runtime code,
3. Some augmentation code (build steps) that receives the configuration reads; the content of the banner file and record the runtime invocations,
4. A way to monitor the content of the file and trigger a hot-reload in dev mode

# The Runtime module

The *runtime* part of an extension contains only the classes and resources required at runtime. For the banner extension, it would be a single class that prints the banner.

In the runtime module, creates the `io.quarkus.workshop.superheroes.banner.runtime.BannerRecorder` class with the following content:

```
package io.quarkus.workshop.superheroes.banner.runtime;

import io.quarkus.runtime.annotations.Recorder;

@Recorder
public class BannerRecorder {

    public void print(String banner) {
        System.err.println(banner);
    }
}
```

Simple right? But how does it work? Look at the `@Recorder` annotation. It indicates that this class is a *recorder* that is used to record actions executed, later, at runtime. Indeed, these actions are replayed at runtime. We will see how this recorder is used from the *deployment* module.

# The deployment module

This module contains *build steps*, i.e., methods called during the augmentation phase and computing just enough bytecode to serve the services the application requires. For the banner extension, it consists of two build steps:

1. The first build step is going to read the banner file and use the `BannerRecorder`
2. The second build step is related to the dev mode and triggers a hot-reload when the content of the banner file changes.

In the deployment module, create the `io.quarkus.workshop.superheroes.banner.deployment.BannerConfig` with the following content:

```
package io.quarkus.workshop.superheroes.banner.deployment;

import io.quarkus.runtime.annotations.ConfigItem;
import io.quarkus.runtime.annotations.ConfigPhase;
import io.quarkus.runtime.annotations.ConfigRoot;

@ConfigRoot(name = "banner", phase = ConfigPhase.BUILD_TIME)
public class BannerConfig {

    /**
     * The path of the banner.
     */
    @ConfigItem public String path;
}
```

This class maps entries from the `application.properties` file to an object. It's a convenient mechanism to avoid having to use the low-level configuration API directly. The `ConfigRoot` annotation indicates that this class maps properties prefixed with `quarkus.banner`. The class declares a single property, `path`, which is the `quarkus.banner.path` user property. Instances of this class are created by Quarkus and are used in the second part of the deployment module: the processor.

Create the `io.quarkus.workshop.superheroes.banner.deployment.BannerProcessor` class with the following content:

```

package io.quarkus.workshop.superheroes.banner.deployment;

import io.quarkus.deployment.annotations.BuildStep;
import io.quarkus.deployment.annotations.ExecutionTime;
import io.quarkus.deployment.annotations.Record;
import io.quarkus.deployment.builditem.HotDeploymentWatchedFileBuildItem;
import io.quarkus.deployment.util.FileUtil;
import io.quarkus.workshop.superheroes.banner.runtime.BannerRecorder;

import java.io.IOException;
import java.io.InputStream;
import java.io.UncheckedIOException;
import java.net.URL;
import java.nio.charset.StandardCharsets;
import java.util.ArrayList;
import java.util.List;

public class BannerProcessor {

    @BuildStep
    @Record(ExecutionTime.RUNTIME_INIT)
    public void recordBanner(BannerRecorder recorder, BannerConfig config) {
        String content = readBannerFile(config.path);
        recorder.print(content);
    }

    @BuildStep
    List<HotDeploymentWatchedFileBuildItem> watchBannerChanges(BannerConfig config) {
        List<HotDeploymentWatchedFileBuildItem> watchedFiles = new ArrayList<>();
        watchedFiles.add(new HotDeploymentWatchedFileBuildItem((config.path)));
        return watchedFiles;
    }

    private String readBannerFile(String path) {
        URL resource = Thread.currentThread().getContextClassLoader().getResource(path);
        if (resource != null) {
            try (InputStream is = resource.openStream()) {
                byte[] content = FileUtil.readFileContents(is);
                return new String(content, StandardCharsets.UTF_8);
            } catch (IOException e) {
                throw new UncheckedIOException(e);
            }
        } else {
            throw new IllegalArgumentException("Cannot find the banner file: " + path);
        }
    }
}

```

This class is the core of the extension. It contains a set of methods annotated with `@BuildStep`.

The `recordBanner` method is responsible for recording the actions that happen at runtime. In addition to the `@BuildStep` annotation, it also has the `@Record` annotation allowing to receive a *recorder* object (`BannerRecorder`) and indicating when the recorded bytecode is replayed. Here we are replaying during the runtime initialization, *i.e.* equivalent to the `public static void main(String... args)` method.

The method reads the content of the banner file. This file is located using the `path` property from the `BannerConfig` object. Once the content is retrieved, it calls the recorder with the content. This invocation is going to be replayed at runtime.

#### *Recorder at deployment time*

**NOTE**

At deployment time, proxies of recorders are injected into `@BuildStep` methods that have been annotated with `@Record`. Any invocations made on these proxies will be recorded, and bytecode will be written out to be executed at runtime to make the same sequence of invocations with the same parameters on the actual recorder objects.

At this point, the extension is functional, but don't forget one of the pillars of Quarkus: the developer joy. The extension is also responsible for implementing hot reload logic. It is the role of the `watchBannerChanges` method, which indicates that the banner file must be watched, and the application restarted when this file changes.

## Packaging the extension

From the root directory of the extension, run:


```
mvn clean install
```

## Using the extension

Go back to the *fight* microservice, and add the following dependency to the `pom.xml` file:

```
<dependency>
    <groupId>io.quarkus.workshop.super-heroes</groupId>
    <artifactId>extension-banner</artifactId>
    <version>1.0</version>
</dependency>
```

Go to <http://patorjk.com/software/taag/> to generate a banner for the *fight* microservice. Once you have the content, write it into `src/main/resources/banner.txt`. For instance:

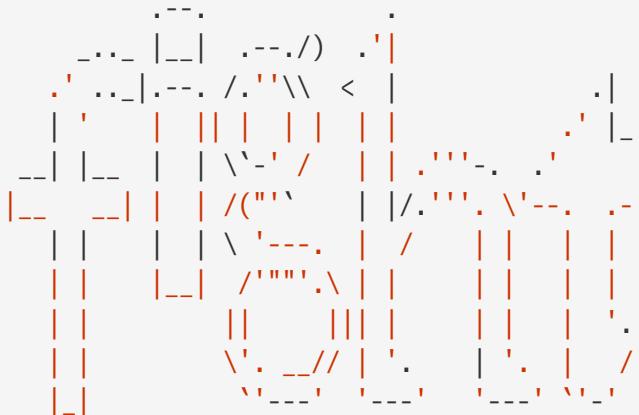

Then, edit the `src/main/resources/application.properties` and add:

```
quarkus.banner.path=banner.txt
```

Now, restart the microservice with:

```
mvn compile quarkus:dev
```

And the banner will be displayed. While keeping the dev mode running, edit the file, save and wait a few seconds. Once the change is detected, the application is restarted, and the banner updated.

Let's now check the behavior in native mode. Compile the microservice with:

```
mvn package -Pnative
```

And then start the service with:

```
./target/rest-fight-01-runner
```

## Conclusion

In this section you have seen how to develop a simple extension for Quarkus. Quarkus offers a complete toolbox to implement extensions, from configuration support, tests, bytecode generation... The mindset to implement an extension is crucial. The distinction between build time and runtime is what makes Quarkus so efficient. To go further, check <https://quarkus.io/guides/extension-authors-guide>.

# Containers & Cloud

This chapter explores how you can deploy Quarkus applications in containers and Cloud platforms. There are many different approaches to achieve these deployments. In this chapter, we are focusing on the creation of containers using Quarkus native executables and the deployment of our system in Kubernetes/OpenShift.

## From bare metal to containers

In this section, we are going to package our microservices into containers. In particular, we are going to produce Linux 64 bits native executables and runs them in a container. The native compilation uses the OS and architecture of the host system.

And... Linux Containers are ... *Linux*. So before being able to build a container with our native executable, we need to produce compatible native executables. If you are using a Linux 64 bits machine, you are good to go. If not, Quarkus comes with a trick to produce these executable:

```
$ mvn clean package -Pnative -Dnative-image.docker-build=true -DskipTests
```

The `-Dnative-image.docker-build=true` allows running the native compilation inside a container (provided by Quarkus). The result is a Linux 64 bits executable.

**TIP** Building a native executable takes time, CPU, and memory. It's even more accurate in the container. So, first, be sure that your container system has enough memory to build the executable. It requires at least 6Gb of memory, 8Gb is recommended.

Execute the above command for all our microservices. We also copy the UI into the fight service, to simplify the process:

```
cd rest-hero
mvn clean package -Pnative -Dnative-image.docker-build=true -DskipTests
cd ..
cd rest-villain
mvn clean package -Pnative -Dnative-image.docker-build=true -DskipTests
cd ..
cd rest-fight
cp -R ../*ui-super-heroes/dist/* src/main/resources/META-INF/resources
mvn clean package -Pnative -Dnative-image.docker-build=true -DskipTests
cd ..
cd event-statistics
mvn clean package -Pnative -Dnative-image.docker-build=true -DskipTests
cd ..
```

# Building containers

Now that we have the native executables, we can build containers. When you create projects, Quarkus generates two **Dockerfiles**:

1. **Dockerfile.jvm** - A **Dockerfile** for running the application in JVM mode
2. **Dockerfile.native** - A **Dockerfile** for running the application in native mode

We are interested in this second file. Open one of these **Dockerfile.native** files:

```
FROM registry.access.redhat.com/ubi8/ubi-minimal
WORKDIR /work/
COPY target/*-runner /work/application
RUN chmod 775 /work
EXPOSE 8080
CMD ["./application", "-Dquarkus.http.host=0.0.0.0"]
```

It's a pretty straightforward **Dockerfile** taking a minimal base image and copying the generated native executable. It also exposes the port 8080. Wait, our microservices are not configured to run on the port 8080. We need to override this property as well as a few other such as the HTTP client endpoints, and database locations.

To build the containers, use the following scripts:

```
export ORG=xxxx
cd rest-hero
docker build -f src/main/docker/Dockerfile.native -t $ORG/quarkus-workshop-hero .
cd ..
cd rest-villain
docker build -f src/main/docker/Dockerfile.native -t $ORG/quarkus-workshop-villain .
cd ..
cd rest-fight
docker build -f src/main/docker/Dockerfile.native -t $ORG/quarkus-workshop-fight .
cd ..
cd event-statistics
docker build -f src/main/docker/Dockerfile.native -t $ORG/quarkus-workshop-stats .
cd ..
```

**NOTE** Replace **ORG** with your DockerHub / Quay.io username.

# Deploying on Kubernetes

This section is going to deploy our microservices on Kubernetes. It is required to have access to a Kubernetes or OpenShift cluster.

**IMPORTANT**

To deploy your microservices, push the built container images to an image registry accessible by your cluster, such as Quay.io or DockerHub.

We recommend using a specific namespace to deploy your system. In the following sections, we use the `quarkus-workshop` namespace.

## Deploying the infrastructure

The first thing to deploy is the required infrastructure:

- 3 PostgreSQL instances
- Kafka brokers (3 brokers with 3 Zookeeper to follow the recommended approach)

There are many ways to deploy this infrastructure. Here, we are going to use two operators:

- PostgreSQL Operator by Dev4Ddevs.com
- Strimzi Apache Kafka Operator by Red Hat

With these operators installed, you can create the required infrastructure with the following custom resource definition (CRD):

```
apiVersion: postgresql.dev4devs.com/v1alpha1
kind: Database
metadata:
  name: heroes-database
  namespace: quarkus-workshop
spec:
  databaseCpu: 30m
  databaseCpuLimit: 60m
  databaseMemoryLimit: 512Mi
  databaseMemoryRequest: 128Mi
  databaseName: heroes-database
  databaseNameKeyEnvVar: POSTGRESQL_DATABASE
  databasePassword: superman
  databasePasswordKeyEnvVar: POSTGRESQL_PASSWORD
  databaseStorageRequest: 1Gi
  databaseUser: superman
  databaseUserKeyEnvVar: POSTGRESQL_USER
  image: centos/postgresql-96-centos7
  size: 1
```

This CRD creates the database for the Hero microservice. Duplicate this CRD for the fight and villain databases.

For the Kafka broker, create the following CRD:

```

apiVersion: kafka.strimzi.io/v1beta1
kind: Kafka
metadata:
  name: my-kafka
  namespace: quarkus-workshop
spec:
  kafka:
    version: 2.3.0
    replicas: 3
    listeners:
      plain: {}
      tls: {}
    config:
      offsets.topic.replication.factor: 3
      transaction.state.log.replication.factor: 3
      transaction.state.log.min_isr: 2
      log.message.format.version: '2.3'
    storage:
      type: ephemeral
  zookeeper:
    replicas: 3
    storage:
      type: ephemeral
  entityOperator:
    topicOperator: {}
    userOperator: {}

```

This CRD creates the brokers and the Zookeeper instances.

It's also recommended to create the topic. For this, create the following CRD:

```

apiVersion: kafka.strimzi.io/v1beta1
kind: KafkaTopic
metadata:
  name: fights
  labels:
    strimzi.io/cluster: my-kafka
  namespace: quarkus-workshop
spec:
  partitions: 1
  replicas: 3
  config:
    retention.ms: 604800000
    segment.bytes: 1073741824

```

Once everything is created, you should have the following resources:

```
$ kubectl get database
NAME          AGE
fights-database 16h
heroes-database 16h
villains-database 16h

$ kubectl get kafka
NAME      DESIRED KAFKA REPLICAS  DESIRED ZK REPLICAS
my-kafka   3
```

## Deploying the Hero & Villain microservices

Now that the infrastructure is in place, we can deploy our microservices. Let's start with the hero and villain microservices.

For each, we need to override the port and data source URL. Create a config map with the following content:

*Listing 1. config-hero.yaml*

```
apiVersion: v1
data:
  port: "8080"
  database: "jdbc:postgresql://heroes-database:5432/heroes-database"
kind: ConfigMap
metadata:
  name: hero-config
```

Do the same for the villain microservice. Then, apply these resources:

```
$ kubectl -f config-hero.yaml
$ kubectl -f config-villain.yaml
```

Once the config maps are created, we can deploy the microservices.

Create a `deployment-hero.yaml` file with the following content:

```
---
apiVersion: "v1"
kind: "List"
items:
  - apiVersion: "v1"
    kind: "Service"
    metadata:
      labels:
        app: "quarkus-workshop-hero"
        version: "01"
```

```

group: "$ORG"
name: "quarkus-workshop-hero"
spec:
  ports:
    - name: "http"
      port: 8080
      targetPort: 8080
  selector:
    app: "quarkus-workshop-hero"
    version: "01"
    group: "$ORG"
    type: "ClusterIP"
  - apiVersion: "apps/v1"
    kind: "Deployment"
  metadata:
    labels:
      app: "quarkus-workshop-hero"
      version: "01"
      group: "$ORG"
      name: "quarkus-workshop-hero"
  spec:
    replicas: 1
    selector:
      matchLabels:
        app: "quarkus-workshop-hero"
        version: "01"
        group: "$ORG"
    template:
      metadata:
        labels:
          app: "quarkus-workshop-hero"
          version: "01"
          group: "$ORG"
    spec:
      containers:
        - image: "$ORG/quarkus-workshop-hero:latest"
          imagePullPolicy: "IfNotPresent"
          name: "quarkus-workshop-hero"
          ports:
            - containerPort: 8080
              name: "http"
              protocol: "TCP"
        env:
          - name: "KUBERNETES_NAMESPACE"
            valueFrom:
              fieldRef:
                fieldPath: "metadata.namespace"
          - name: QUARKUS_DATASOURCE_URL
            valueFrom:
              configMapKeyRef:

```

```
    name: hero-config
    key: database

    - name: QUARKUS_HTTP_PORT
      valueFrom:
        configMapKeyRef:
          name: hero-config
          key: port
```

This descriptor declares:

1. A service to expose the HTTP endpoint
2. A deployment that instantiates the application

The deployment declares one container using the container image we built earlier. It also overrides the configuration for the HTTP port and database URL.

Don't forget to create the equivalent files for the villain microservice.

Then, deploy the microservice with:

```
$ kubectl apply -f deployment-hero.yaml
$ kubectl apply -f deployment-villain.yaml
```

## Deploying the Fight microservice

Follow the same approach for the fight microservice. Note that there are more properties to configure from the config map:

- the location of the hero and villain microservice
- the location of the Kafka broker.

Once everything is configured and deployed, your system is now running on Kubernetes.

# Conclusion

---

# References

- <https://github.com/cescoffier/quarkus-todo-app>
- <https://github.com/agoncal/baking-microservice-pie>
- <https://forge.jboss.org/document/hands-on-lab>
- <https://bit.ly/forge-hol>
- <https://code.quarkus.io>
- <https://quarkus.io/guides/all-config>