

# ACTIVITY 6 - WS

JOAQUIM PICÓ MORA, IAN  
PALACÍN ALIANA, SERGI SIMÓN  
BALCELLS

Created: 2021-01-11 Mon 01:09


# 1 INTRODUCTION

In this document is it specified all the endpoints and which responses do they return, as well as a defense of which technologies we have used.

Additionally, it can be found a table containing the REST API developed, as well as a class diagram of the database model used by the API.

The integration can be found at [RMI Project](#), at the branch `integration`. On the other hand, the Web Service can be found at [WS Project](#).

# 2 UML

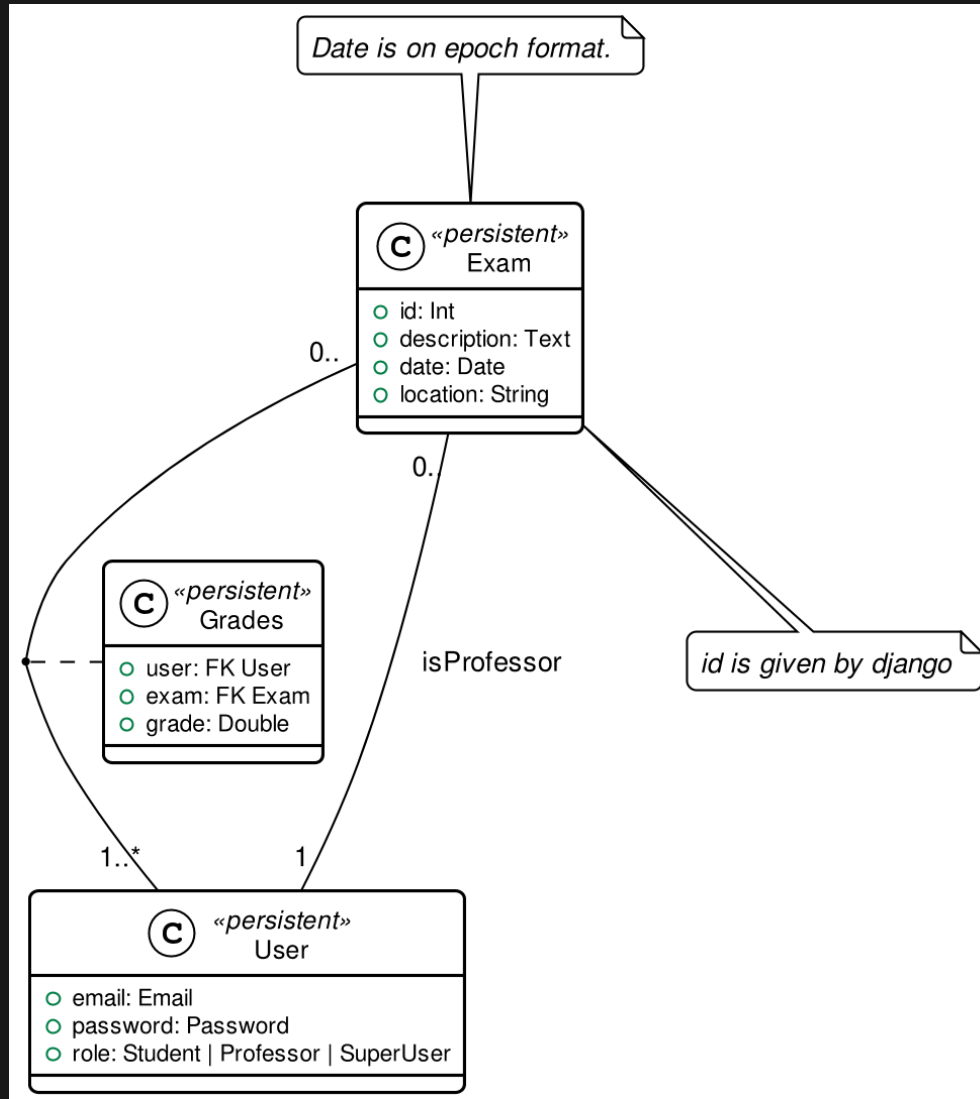

## 2.1 EXAM

Exam is the class that holds all the Exam information. It stores the a description, a date and a location of an exam.

## 2.2 USER

User is the class that stores the information of a user that is making use of our system. It's the default implementation of the Django User class.

## 2.3 GRADES

This class it's the one that stores grades of exams made by users. It holds two foreign keys to the exam that belongs the grade, as well as the student.

# 3 ENDPOINT TABLE

Method	URL	What	Status code
get	exam/	List d'exams	200
get	exam/{exam}/	Detall de Exam (tot)	200, 404
get	exam/search?description = {text}/	Buscar descripció parcial.	200

---

post	exam/	Crea exam. pk no s'ha de donar.	201, 403, 401
put	exam/{exam}/	Modificar camps d'Exam (tots)	200, 403, 401
patch	exam/{exam}/	Partial update.	200, 403, 401

---



---

delete	exam/{exam}/	Deletes if professor and no grades	204, 403, 401
post	grades/	Penjar nota d'un examen.	201, 403, 401
get	grades/{user}/user/	List totes les notes d'un estudiant.	200

---

---

get	grades/	List all grades.	200
get	grades/{grade-id}	Detail a grade.	200, 404
put	grades/{grade-id}	Updates a grade.	200, 403, 401

---

---

patch	grades/{grade-id}	Partially updates a grade.	200, 403, 401
-------	-------------------	----------------------------	---------------------

---

delete	grades/{grade-id}	Deletes a grade.	204, 403, 401
--------	-------------------	------------------	---------------------

---

post	auth/login/	Logins	201, 403, 401
get	auth/logout/	Logouts	200
post	auth/logout/	Logout	201, 403, 401

post	auth/password/change/	Password change.	201, 403, 401
post	auth/password/reset/	Password reset by email confirmation. Needs Email configuration	201, 403, 401
post	auth/password/reset <i>confirm</i>	Password Confirmation	201, 403,

post	auth/registration/	Register a new user.	201, 403, 401
post	auth/registration/verify-email	Verifies email. Needs Email configuration	201, 403, 401
get	auth/user/	Reads User. Needs authentication	200

---

put	auth/user/	Updates User	200, 403, 401
patch	auth/user/	Partial update.	200, 403, 401
get	user/{user}/	Gets user with pk.	200, 404

---

# 4 SCREENSHOTS

The screenshots are for the most important cases, there are endpoints that has been omitted, like user password change.

Note that due to a bug in the docs viewer, as deleting an object only returns a status code without any data, it does not correctly show that the status code is 204. Instead, only shows “undefined”, even though it is properly deleted from the database.



# 4.1 AUTHENTICATION

⇒ registration > create

Data Raw

**Username \***

**Email**

**Password1 \***

**Password2 \***

POST /auth/registration/ 201

```
{
  "key": "5ee5be2307cdf6fe5cec97920a930ba5cb421292"
}
```

Close Send Request

Figure 2: Register

login > create

DataRaw

Username

user4

Email

Password \*

user4567

POST /auth/login/ 200

```
{
  "key": "5ee5be2307cdf6fe5cec97920a930ba5cb421292"
}
```

Close

Send Request

Figure 3: Login

# 4.2 EXAM

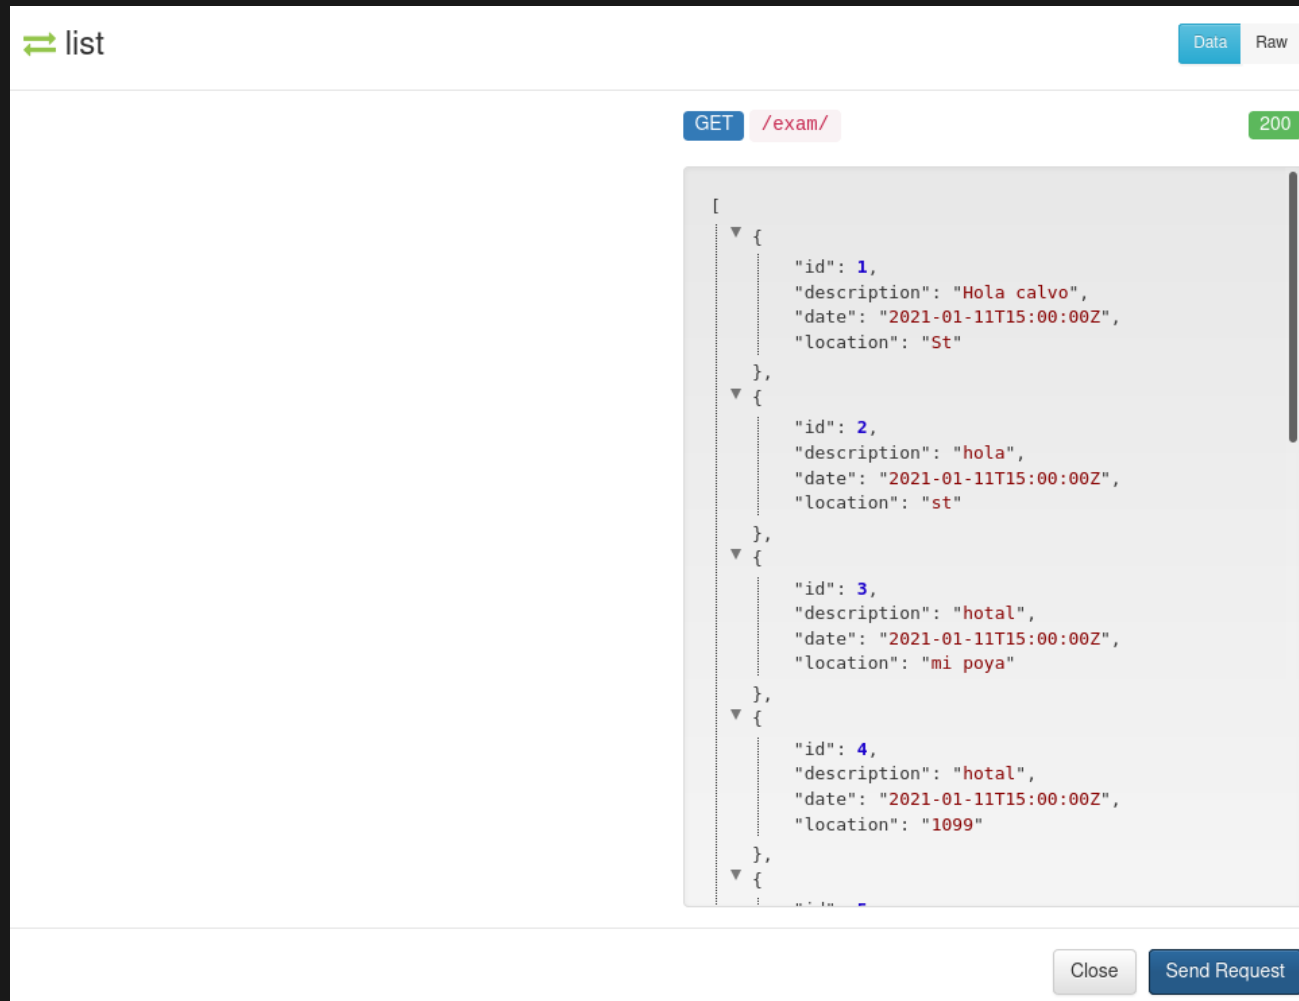


Figure 4: List exams



 create

Description \*

Exàmen Computació Distribuida

Date \*

2021-01-11T15:00:00Z

Location \*

ExamenDistComp

POST

/exam/

201

{

"id": 12,

"description": "Exàmen Computació Distribuida",

"date": "2021-01-11T15:00:00Z",


"location": "ExamenDistComp"

}

Close

Send Request

Figure 5: Create exam

 read

ID \*

12

⬆ ⬇ ⬆

A unique integer value identifying this exam.

GET

/exam/12/

200

```
{
  "id": 12,
  "description": "Exàmen Computació Distribuida",
  "date": "2021-01-11T15:00:00Z",
  "location": "ExamenDistComp"
}
```

Close

Send Request

Figure 6: Read exam

↔ update

Data

Raw

ID \*

12

A unique integer value identifying this exam.

Description \*

Exàmen Èines Computacionals

Date \*

2021-01-14T15:00:00Z

Location \*

ExamEinesComp

PUT

/exam/12/

200

```
{
  "id": 12,
  "description": "Exàmen Èines Computacionals",
  "date": "2021-01-14T15:00:00Z",
  "location": "ExamEinesComp"
}
```

Close

Send Request

Figure 7: Update exam

⇌ partial\_update

Data Raw

ID \*

12

A unique integer value identifying this exam.

Description

Al final no hi ha examen tothom aprovat

Date

Location

PATCH /exam/12/

200


```
{
  "id": 12,
  "description": "Al final no hi ha examen tothom apro
  "date": "2021-01-14T15:00:00Z",
  "location": "ExamEinesComp"
}
```

Close

Send Request

Figure 8: Patch exam



 delete

**ID \***

^

v

undefined

A unique integer value identifying this exam.

Close

Send Request

Figure 9: Delete exam

127.0.0.1:8000/exam/search?description=hotal

Django REST framework user4

Exam List / Exam Search List

## Exam Search List

OPTIONS GET

GET /exam/search?description=hotal

HTTP 200 OK  
Allow: GET, HEAD, OPTIONS  
Content-Type: application/json  
Vary: Accept

```
[
  {
    "id": 3,
    "description": "hotal",
    "date": "2021-01-11T15:00:00Z",
    "location": "mi poya"
  },
  {
    "id": 4,
    "description": "hotal",
    "date": "2021-01-11T15:00:00Z",
    "location": "1099"
  },
  {
    "id": 5,
    "description": "hotal",
    "date": "2021-01-11T15:00:00Z",
    "location": "1099"
  },
  {
    "id": 6,
    "description": "hotalhotalhotal",
    "date": "2021-01-11T15:00:00Z",
    "location": "1099"
  },
  {
    "id": 7,
    "description": "hotal",
    "date": "2021-01-11T15:00:00Z",
    "location": "1099"
  }
]
```

Figure 10: Search exam


# 4.3 GRADES

The screenshot shows a REST client interface. At the top left, there is a green double-headed arrow icon followed by the text "list". At the top right, there are two tabs: "Data" (active) and "Raw". Below the tabs, the HTTP method "GET" is shown in a blue button, followed by the endpoint "/grades/" in a pink button. To the right of the endpoint, the status code "200" is displayed in a green box. The main area shows the JSON response, which is a list of two objects. Each object has the following fields: "id", "grade", "exam", and "user". The first object has values: "id": 1, "grade": 3.3333335, "exam": 6, "user": 4. The second object has values: "id": 2, "grade": 0, "exam": 7, "user": 4. At the bottom right, there are two buttons: "Close" and "Send Request".

```
[
  {
    "id": 1,
    "grade": 3.3333335,
    "exam": 6,
    "user": 4
  },
  {
    "id": 2,
    "grade": 0,
    "exam": 7,
    "user": 4
  }
]
```

Figure 11: List grades



 create

Grade \*

9.2

Exam \*

2

User \*

1

POST

/grades/

201

```
{  
  "id": 4,  
  "grade": 9.2,  
  "exam": 2,  
  "user": 1  
}
```

Close

Send Request

Figure 12: Create grade

 read

ID \*

A unique integer value identifying this grade.

GET

/grades/1/


200

```
{
  "id": 1,
  "grade": 3.3333335,
  "exam": 6,
  "user": 4
}
```

Close

Send Request

Figure 13: Read grade

 update

ID \*

A unique integer value identifying this grade.

Grade \*

Exam \*

User \*

PUT

/grades/6/


200

```
{
  "id": 6,
  "grade": 7.8,
  "exam": 8,
  "user": 1
}
```

Close

Send Request

Figure 14: Update grade

 partial\_update

ID \*

A unique integer value identifying this grade.

Grade

Exam

User

PATCH

/grades/7/

200


```
{
  "id": 7,
  "grade": 9.9,
  "exam": 10,
  "user": 1
}
```

Close

Send Request

Figure 15: Patch grade



 delete

**ID \***

undefined

A unique integer value identifying this grade.

Close

Send Request

Figure 16: Delete grade

**user**

**ID \***

1


A unique integer value identifying this grade.

**GET** **/grades/1/user/** **200**

```
[
  {
    "id": 3,
    "grade": 9.2,
    "exam": 1,
    "user": 1
  },
  {
    "id": 4,
    "grade": 9.2,
    "exam": 2,
    "user": 1
  },
  {
    "id": 5,
    "grade": 9.2,
    "exam": 2,
    "user": 1
  }
]
```

Close Send Request

Figure 17: Search user grades



Data

Raw

GET

/grades/2/exam/

200

ID \*

A unique integer value identifying this grade.

```
[
  {
    "id": 4,
    "grade": 9.2,
    "exam": 2,
    "user": 1
  },
  {
    "id": 5,
    "grade": 9.2,
    "exam": 2,
    "user": 1
  }
]
```

Close

Send Request

Figure 18: Search exam grades

# 5 SOLUTION JUSTIFICATION

# 5.1 WEB SERVICE

## **5.1.1 TECHNOLOGIES**

## 5.1.2 VIEWSETS AND GENERICS

## **5.1.3 DECISIONS: AUTHENTICATION**



## 5.2 RMI MODIFICATIONS

## 5.2.1 HTTP

## 5.2.2 CLIENT FLOW CHANGES

1. Search
2. List
3. Choose

## 5.2.3 SERVER FLOW CHANGES

1. Description
2. Date
3. Location

## 5.3 TIME DEDICATED

It is difficult to say, but we estimate an approximation of 90 hours. We are a group of three students, and we worked in this project for 6 days, 5 hours each day.