Metadata side

arXiv Corpus

(title, abstract, categories, link, date, ..)

↓

embed papers

- based on title + abstract concatenation
- use sentence-transformers (SPECTER2) $d = 768$
- normalized

↓

embedded papers clustering

- K-means ($K \approx 500$)

User data side

1. Initialization

Topic selection when sign-up

- category tag

↓

User embedding initialization

- the normalized avg of category centroids

Computed & saved in a look-up table

- saved in user profile (data structure)

2. Update by feedback event

User embedding update

- exponential moving average

latent space of embedded + clustered papers (right)

PCA

(visualization in 2D, for the sake of evaluation)

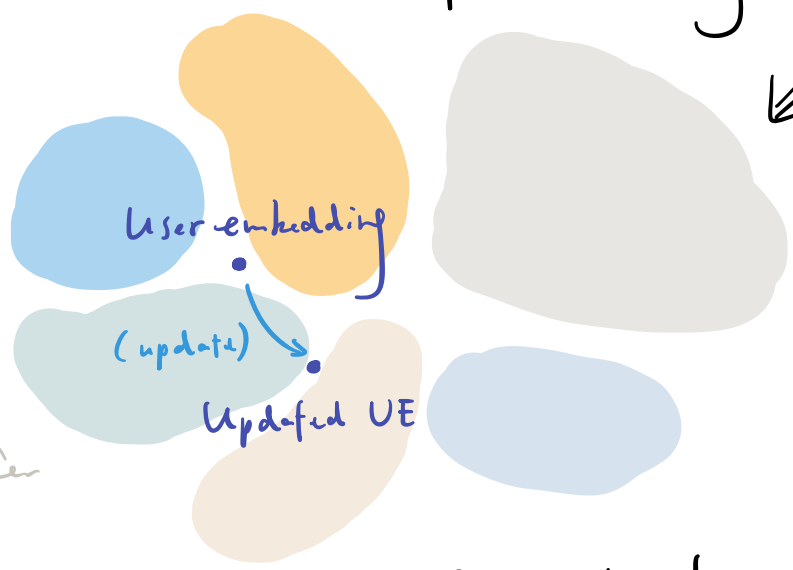

Query time!

i.e. recommendation time

↓

Retrieval

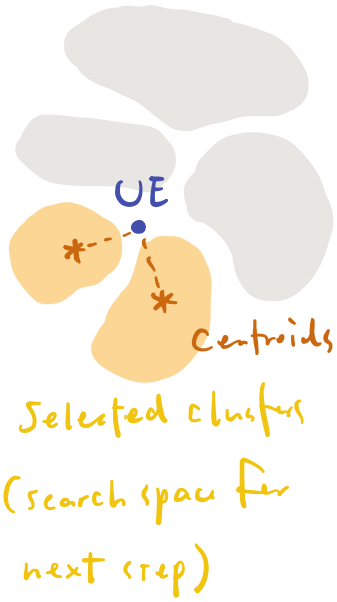

Clusters selection (this is limiting the search space)

- the 2 clusters w/ centroids closest to the UE
- searched by dot products

↓

KNN search w/in selected clusters

- Search is based on a similarity score (dot product)
- top-M papers are retrieved

(naive case: M = 3, next step is optional)

↓

Filter

For the M candidates,

- rerank by its recency (the more up-to-date, the better)
- make sure the 3 final chosen papers do not come from the same K-Means cluster (for diversity)
- exclude the papers user has already seen

↓

Serve 3 papers

- title, abstract, pdf link, ...