

ABC	DEF	GHI	JKL	AAA	BBB	CCC	DDD
a	b	c	d				
ì ót			x	đì đót			
	f			d			
a							
b							
c				oof			
d							

EEE

FFF

GGG

HHH

ZZZ

YYY

ZKKK

ASW

main.go




Package main

api.go



service.go



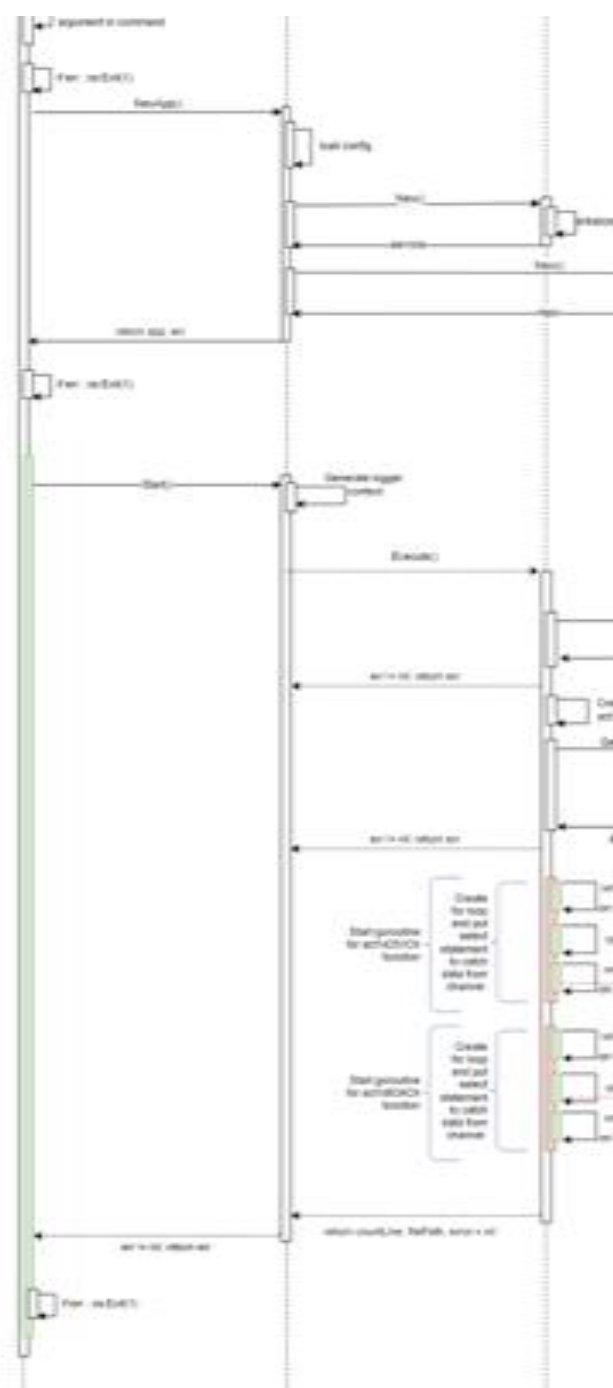


]

for event, msg in

...

endless



PrepareTimeDate()

Return time, dt

with attr(0)=02

attr(1)=02 channel

attr(2)=log(log(channel), order=0)

Return countDate, countAmount, dt

do header

do footer

order body

order footer

order header

do header

do footer

order body

order footer

order header

Prepare content
with orderString

```
select * from log_order, log_order_header, log_order_header_header  
join log_order_header on log_order_header_id = log_order_header_id  
where log_order_header_id = 0000  
and timestamp >= to_timestamp('2011-01-01 00:00:00', 'YYYY-MM-DD HH24:00:00') and timestamp  
<= to_timestamp('2011-01-01 00:00:00', 'YYYY-MM-DD HH24:00:00')
```

On open
v1 = orderDate in format (YYYY-MM-DD HH24:00:00-07:00)
v2 = orderOrder in format (YYYY-MM-DD HH24:00:00-07:00)

Scan each row
countDate++ countAmount++
write to attr(0)=02
attr(1)=02

