


On-demand model synthesis for ARC-AGI-3: the MSA Bayesian loop inside an OpenWorld solver

synthesize a goal-program on demand · keep a posterior over programs · abstain under uncertainty · let the replay-only env be ground truth

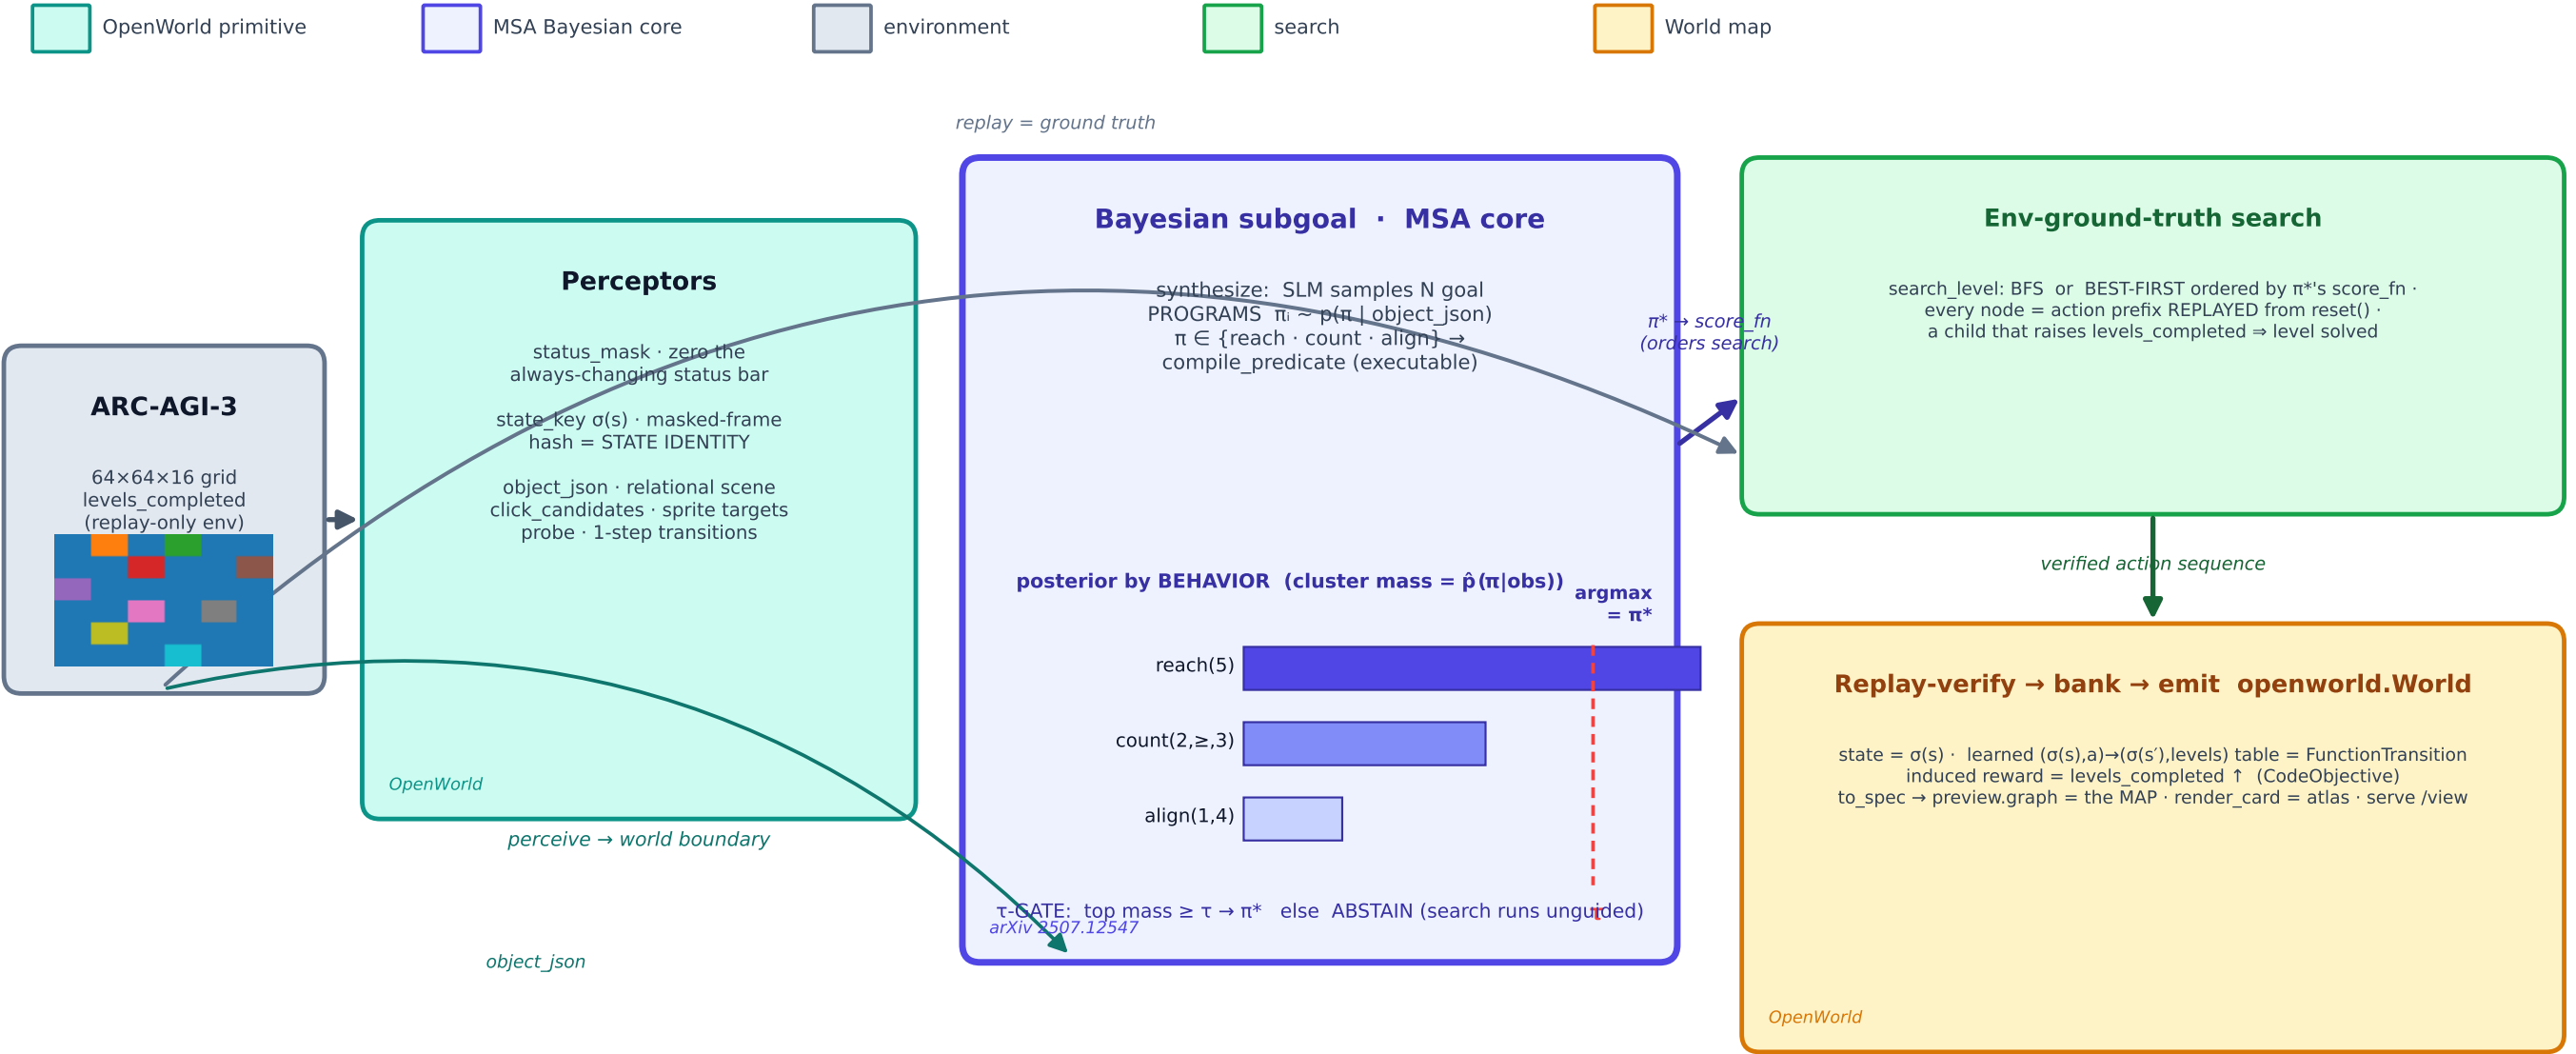

INVARIANT: the synthesized model only **ORDERS** search — the replay-only env decides correctness. A wrong or abstained subgoal costs **SPEED**, never a false solve (so `slm-rung` $\sqsubseteq$ `search-rung` control).