



FAKULTÄT FÜR INFORMATIK
DER TECHNISCHEN UNIVERSITÄT MÜNCHEN

Master Thesis in Informatics

Adding C++ Support to MBEDDR

Zaur Molotnikov





FAKULTÄT FÜR INFORMATIK


DER TECHNISCHEN UNIVERSITÄT MÜNCHEN

Master Thesis in Informatics

Adding C++ Support to MBEDDR

C++ Unterstützung für MBEDDR

Author: Zaur Molotnikov
Supervisor: Dr. Bernhard Schätz
Advisor: Dr. Daniel Ratiu
Date: September 16, 2013



Ich versichere, dass ich diese Masterarbeit selbständig verfasst und nur die angegebenen Quellen und Hilfsmittel verwendet habe.

München, den 16. September 2013

Zaur Molotnikov

Acknowledgments

This is going to be written, after the final review and corrections.

Abstract

In this work we describe the process of adding the C++ programming language support to *mbeddr project*, an implementation of the C programming language with extensions in a projectional language engineering environment, *JetBrains MPS*. While implementing the C++ programming language several well-known pitfalls of the language are taken into account in an attempt to build a better C++ language flavor. Various analyses are implemented to improve the programming experience of the end user. Lessons learned from this experience are described finally. They include generalized principles which could be used to improve a language while recreating it in a projectional language engineering environment, language modularity and extensibility support by *JetBrains MPS*, problems of analyses complexity, and potential ways to resolve them in the future.

Contents

Acknowledgements	vii
Abstract	ix
1 Introduction	1
1.1 Context	1
1.1.1 <i>mbeddr</i> : a Language Engineering Project with <i>JetBrains MPS</i>	2
1.2 Problem	3
1.3 Approach	4
1.4 Contribution	5
1.5 Structure of the Master Thesis	6
2 Foundations	9
2.1 Building DSLs and IDEs	9
2.1.1 Traditional Approach	9
2.1.2 Projectional Approach	11
2.2 Modular Language Engineering	13
2.2.1 Describing a Language in Projection	13
2.2.2 Language Modularity	14
2.2.3 Text Language Importers	15
3 Technologies in Use	17
3.1 JetBrains MPS	17
3.1.1 Concept Declaration	19
3.1.2 Editor View	20
3.1.3 Behavior View	21
3.1.4 Constraints View	22
3.1.5 Type System View	23
3.1.6 Non-Type-System Checks	24
3.1.7 TextGen View	25
3.1.8 Generator View	25
3.1.9 Intentions	26
3.1.10 Other MPS Instruments	27
3.2 <i>mbeddr</i> Project	27
3.2.1 <i>mbeddr</i> Expressions Language	28
3.2.2 <i>mbeddr</i> Statements Language	29

3.2.3	Modules in mbeddr	30
3.2.4	Pointers and Arrays in mbeddr	30
3.3	The C++ Language	30
4	Projectional C++ Implementation	33
4.1	C and C++	33
4.1.1	Reference Type and Boolean Type	33
4.1.2	Modules and C++	34
4.1.3	Memory Allocation	36
4.2	C++ Object-Oriented Programming	36
4.2.1	Class Declaration and Copying	36
4.2.2	Encapsulation and Inheritance	42
4.2.3	Polymorphism	45
4.2.4	Safer Casting for a Pointer to Class	48
4.3	Operator Overloading	53
4.4	Templates	57
4.5	Other C++ Language Features	60
4.5.1	Exceptions	60
4.5.2	Standard Output Stub	60
4.6	Advanced IDE Functionality	60
4.6.1	Primitive Renaming Refactoring	61
4.6.2	Getter and Setter Generation	61
4.6.3	Naming Conventions	63
4.6.4	Method Implemented Check	64
4.6.5	Abstract Class Construction Check	65
4.6.6	Array Deallocation Check	66
4.6.7	Suggestions for the Future Work	66
5	Lessons Learned	67
5.1	Comparison with Textual Approach	67
5.1.1	Some Additional Remarks on Naming Conventions	70
5.2	Generalized Principles of the Projectional Approach	70
5.2.1	Targeting Semantics	70
5.2.2	Store More Information	71
5.2.3	Configuration as a Part of Source Code	71
5.2.4	Hide Redundant Syntax	71
5.2.5	Make Old Syntax Readable	72
5.2.6	Show the Core, Hint on Details	72
5.2.7	Perform Analyses and Inform the User	72
5.3	Projectional Language Extensibility	72
5.3.1	Structure Extensibility	73
5.3.2	Editor Extensibility	73
5.3.3	Constraints Extensibility	73
5.3.4	Behavior Extensibility	74

5.3.5	TextGen Extensibility	74
5.3.6	Generators Extensibility	74
5.3.7	Intentions Extensibility	74
5.3.8	Type System Extensibility	75
5.3.9	Analyses Extensibility	75
5.3.10	Extensibility Overview	76
5.4	Analyses and Complexity	76
5.4.1	Analysis Initiation	76
5.4.2	Analysis Running	77
5.4.3	Reporting the Results of an Analysis	78
5.5	Templates	79
6	Conclusion	81
6.1	Accomplished Contributions	81
6.2	Future Work	82
6.2.1	Full Language Support	82
6.2.2	Investigating the Language Use	83
6.2.3	Extending the Projectional C++	83
6.2.4	Projectional C++ Importer and Other Tools	83
6.2.5	JetBrains MPS Evolution	83
	Appendix	87
	Glossary	87
	Bibliography	91

1 Introduction

1.1 Context

In embedded programming the C++ programming language is widely spread, [1]. Being a general purpose programming language, C++ does not provide, however, any special support for embedded systems programmers.

By changing the language itself, together with a tool set for it, it is possible to get a better environment for a dedicated domain, for example, specifically for embedded programming. There are two known approaches to change the language itself.

Taking a Subset of a Language The first possible approach is dropping some language features, to get the language, which is simpler. As an example, a subset of C++, called *Embedded C++* can be brought, [2]. The approach taken in *Embedded C++* is omitting very many core features of C++ like virtual base classes, exceptions, namespaces and templates. It allows for a higher degree of optimizations by compiler possible.

Embedded C++ was intended to ensure higher software quality through better understanding of the limited C++ by programmers, higher quality of compilers, through simplicity, better suitability for the embedded domain, through memory consumption considerations [3].

The C++ community has criticized the approach taken in *Embedded C++*, specifically for the inability of the limited language to take advantage of the C++ *Standard Template Library (STL)*, which requires the C++ language features, absent in *Embedded C++*, [4]. As a response for it IAR System have developed *Extended Embedded C++*, which includes many of the language features, omitted by *Embedded C++*, and a memory-aware version of *STL*, [5].

Extending a Language The second approach to modify a language in order to get it more suitable for embedded development consists of extending the language with constructions, specific to the domain. The authors of the *mbeddr project* has taken such approach, to improve on the C programming language, [6].

Specific extensions may represent some often met idioms in the domain, for example, a state table or a state machine diagram in a specification may describe behavior of a device under the programmer control. A language developer can incorporate such notions as a state machine into a language, Figure 1.1¹, providing

¹Illustration is taken from [7]

a higher abstraction level, when compared to the existing language constructs.

```
enum mode { MANUAL; AUTO; FAIL; }

mode nextMode(mode mode, int8_t speed) {
    return mode, FAIL
    

|            |                |              |
|------------|----------------|--------------|
|            | mode == MANUAL | mode == AUTO |
| speed < 30 | MANUAL         | AUTO         |
| speed > 30 | MANUAL         | MANUAL       |


} nextMode (function)
```

[Taken from [7], Ratiu 2012]

Figure 1.1: Example of a Decision Table, Added to C Language

Moreover, higher level extensions induce some higher level semantics. An *Integrated Development Environment (IDE)* under construction could check this higher level semantics for correctness on the programming stage. For example, an *IDE* can check a given decision table for completeness of choices and their consistency, [7]. Such checks can improve quality of the software under development.

Extensions to C language developed in *mbeddr* include state machines and decision tables, together with analyses for them.

For example, the Figure 1.1 demonstrates a decision table. The decision table takes `mode` and `speed` as input parameters and returns a new `mode` value as determined by the input parameters. A careful reader can see, that the exact value 30 of `speed` is not taken into account, and the default value `FAIL` is going to be returned. A programmer could invoke analysis², to find out that the table is not covering itself the whole choice space.

1.1.1 *mbeddr*: a Language Engineering Project with *JetBrains MPS*

The *mbeddr* development team have used a special language engineering environment, *JetBrains MPS*, to support modular and incremental language development. A programmer using *JetBrains MPS* splits a language under development into special class-like items, called *concepts*. Concepts represent the *Abstract Syntax Tree (AST)* node types.

As an example of a *concept* an expression can be taken. It is possible to describe in *JetBrains MPS* different expression kinds, similar to object oriented class hierarchy, allowing the objects to reference each other, and enabling polymorphism, in a way when any descendant can be used instead of its ancestor, e.g. binary minus expression can be used wherever an expression (any expression) is required. After various expression types were described to the language engineering environment as *concepts*, the environment provides a chance to instantiate concrete expressions and edit them, acting as an editor for the language created.

²Described in detail in [7]

Over the inheritance mechanisms, it is possible to extend languages, providing new concepts as descendants of the existing ones. For example, expression concept can be extended to support new sort of expressions, like decision tables. Thus language modularity is achieved and incremental development is made to be possible.

Modularity is achieved as well, when one language is enabled to interact with another one. For example, expressions, described independently as a language, can be reused in any language, which has a need in expressions, like language with statements of a programming language, because statements include expressions naturally.

Having in mind the opportunities, the language modularity in *JetBrains MPS* brings, it makes sense to recreate a general purpose programming language in *JetBrains MPS*. Building the general purpose programming language brings a basis to develop domain specific extensions to the well-known general purpose language. The editor for the general purpose language comes almost “for free”, as a side product.

Later, from the code in the implemented general purpose language a text code can be generated for further processing, compiling, deployment. The language extensions, of-course, are not known to the existing tools which process the language. But they usually can be reduced to the base general purpose programming language statements, presenting a regular syntax to the further tool chains as an outcome. Thus the general purpose programming language is getting enhanced, remaining compatible with all the existing tools to process it further.

Additionally to the language modification itself, an *IDE* can be improved to support the domain specific development. Various analyses³ can be built in into the code editor in order to detect inconsistencies, or, simply, “dangerous” constructs, and inform the programmer. Certain code formatting, or standard requirements could be enforced as well. The *IDE* can be enhanced with various automations, like support for code generation and refactorings.

As the new *IDE* works internally with *AST* described through the node types, or *concepts*, in order to perform code analysis, generation, or transformation, there is no need to invoke parsers for the code, which is advantageous.

1.2 Problem

Being a powerful tool for an embedded systems developer, *mbeddr* does not support the C++ programming language. Supporting C++ would be an advantageous argument for *mbeddr*, as C++ empowers the developer with additional paradigms⁴

³analyses not only for extensions, but for the base language itself

⁴C++ represents a multi-paradigm programming language, as functional programming or programming with templates can be seen as distinct paradigms. C is a single-paradigm language, with the only one procedure-oriented paradigm supported.

of programming, including object-oriented programming. Thus a problem appears, to support C++ within *mbeddr*. As *mbeddr* is itself built upon *JetBrains MPS* and language modularity principles, these principles have to be taken into account while extending *mbeddr*. This means, the C++ programming language has to be developed as a modular extension for the C language provided by *mbeddr*.

1.3 Approach

Above we describe the two approaches to making a language more suitable for a particular domain. In this work we use a mixture of the two approaches in an attempt to achieve a modular C++ language. On the one hand, we limit C++, trying to hide its “dangerous” sides from the developer. On the other hand, we built C++ itself as an extension to C and as a modular base for further extending. While limiting C++ we try to keep all the necessary features in it, to not to face the same problems as *Embedded C++* had.

We built C++ as a suitable base for the further language engineering, including the specialization of C++ for embedded development, and even more general, for later extension, to specialize the common base C++ language to any domain of choice. A special *IDE* is created together with a new C++ language flavor, which supports the C++ programmer.

During the creation of the C++ programming language in the way described, the language modularity in general is analyzed, and caveats of it are described together with the ways to avoid them. The newly created *IDE* features analyses. The question of their computational complexity for such analyses is raised in general, together with the practical outcomes of it. The new language together with the new *IDE* can later serve as a basis for extending the C++ programming language with domain specific constructs for embedded programming. Creation of these extensions lies out of scope for this Master Thesis, and is left for further research.

The approach taken in this work goes further into exploring the language modularity on the basis of *JetBrains MPS*. While building the C++ programming language itself with the goal of embedded domain specific extensions in mind, the C++ itself is being built itself as an extension to the C programming language, provided by the *mbeddr*. The C++ implemented in *JetBrains MPS* and discussed in this work we call the *Projectional C++*. Although C++ is a separate from C language, the high degree of similarity allows to make use of the C programming language, implemented by the *mbeddr* as a foundation. Not only reuse of the basic C is achieved, but also the embedded extensions from the *mbeddr* are immediately supported by the newly built C++.

The ultimate goal during the reuse of *mbeddr* as a base for C++ is keeping *mbeddr* not modified towards the C++ programming language only, but instead, making, when needed, *mbeddr* more extensible in general, so that both resulting C++ and the base for it, *mbeddr*, can develop further being disjoint to a high degree. This independence of *mbeddr* on C++ extension ensures, that the *mbeddr project* can de-

velop further without looking back on C++, making the C++ support an independent task.

1.4 Contribution

In this work we describe a C++ programming language implementation⁵ on top of *mbeddr* project. Our contributions towards it are listed below.

Pure modular extension for *mbeddr*. The task of a one-side-aware only extension is a challenge for the whole language modularity concept, provided by *JetBrains MPS*. This work explores further the support, provided by *JetBrains MPS* for the modular language construction, c.f. [7], and reviews it from the architectural point of view, summarizing in the end the support for it, provided by *JetBrains MPS*.

Improved C++ programmer support. This work contributes the C++ programming language with a number of automations. The automations include code generation and structuring. They are designed to compensate on some caveats of C++, or lack of support for several aspects in the language itself, like coding style.

Improving on C++ language itself. C++ is known for a number of pitfalls a programmer can be caught by. This work tries to improve on this situation by introducing analyses. The analyses are intended to increase understanding of a constructed code by a novice to C++ programmer, or to provide information to an experienced C++ professional. Both analyses and automations are provided to achieve an improvement in quality, security and understanding of the pure C++ code. The automations and analyses are mostly implemented as a programming on the *AST* in a Java-like programming language.

Analyses run-time and complexity problem researched. As analyses and automations grow in complexity and quantity, the question of their computational complexity arises. In the *JetBrains MPS Application Programming Interface (API)* it is not explicitly defined, when the analyses provided for the language take place, how much of the computational resource they can take advantage of, and how the end user should be informed on the results and progress. These aspects may affect the overall *IDE* behavior, including performance, as the analyses complexity may be high and the results of them could be of a high value. The question of analyses run-time, complexity and results presentation is raised and discussed in this work in general and in particular, suggesting improvements to *JetBrains MPS API*.

⁵This implementation does not represent complete C++, and limitations are discussed along this work

General language recreation principles. Generalized principles useful when recreating an existing language in a projectional environment were formulated, and supported by practical examples in this work.

Language extensibility in *JetBrains MPS* researched Being one of the largest extensions to a language ever constructed in *JetBrains MPS*, *Projectional C++* represents a good basis to discover general language extensibility support limitation of *JetBrains MPS*. The support for extensibility in *JetBrains MPS* is reviewed considering each view on the language, workarounds for current *JetBrains MPS* version are offered, and improvements for future *JetBrains MPS* development are suggested.

Finally, it is fair to say, that the *mbeddr* team⁶ have already grounded some practical foundations for the *Projectional C++*, before the start of this work. Some of them, were kept either as suitable (reference type) or for the further improvement (templates) and just described and analyzed here, some of them were considerably reworked (classes, inheritance, encapsulation and polymorphism).

Couching from the *mbeddr* team made us changing some of the implementation aspects to be different from what we planned originally (namespaces, operator overloading partially). And, of-course, we built some parts new, from scratch, without any influence (at least at the moment of being) *mbeddr* team at all (all analyses, construction and copying, some more).

The evaluation of the experience, gained by us during the practical implementation part, results into the extensibility analysis, research on complexity of checks and the run-time for them together with suggested *JetBrains MPS* improvements, and general guidelines for building projectional language implementation represent my own theoretical focus and commitment.

1.5 Structure of the Master Thesis

In the Chapter 2 we describe in general two approaches, *IDE* developers can take when building a new *IDE* for a language, together with the language itself. we describe the traditional textual approach followed by the newer *projectional approach* used in this work. The language modularity and the way a language is described in a projectional environment are discussed. Finally, we shortly touch the problem of importing an existing code base into a projectional *IDE*.

The Chapter 3 is dedicated to the main technologies used in this Master Thesis. At first an environment, providing all the facilities for building a projectional *IDE* is described, *JetBrains MPS*. Then, we describe the *mbeddr project* which serves as a modular basis for the present work practical achievements. Last, we give a number

⁶especially Markus Voelter

of references for the reader, who wants to get a better level of familiarity with the C++ programming language.

In the Chapter 4 we discuss the practical questions of the *Projectional* C++ implementation. At first, we align, why the *mbeddr* C implementation can serve as a good basis for this work, and describe primitive extensions towards C++ for it. Next, we discuss all language features of C++ related to the object-oriented programming, and their implementation in the *Projectional* C++. After that, we describe the implementation of operator overloading and templates, as advanced C++ features. And finally advanced *IDE* functionality is described, including analyses and checks, supporting the C++ development.

In the Chapter 5 at first we compare the *projectional approach* and the textual approach.

2 Foundations

Before describing the technologies on which the current work is based, as well as the work itself, it makes sense to describe more general foundations and principles, around which the technology is built.

In the Section 2.1 we describe two approaches to create an *IDE* for a certain language, and mainly the projectional approach, which originates from the area of building new *Domain Specific Languages (DSLs)*.

In the Section 2.2 we describe the modular approach towards language engineering and extending, intensively used with the projectional approach to construct languages.

2.1 Building DSLs and IDEs

This section compares the traditional approach to build textual editors for the program code with the projectional approach, bringing up motivation for the least.

2.1.1 Traditional Approach

Traditionally programming languages are used in a textual form in text files, forming programs. However the textual nature is not typical for the structure of programs themselves, being rather a low-level code representation, especially when talking about syntax, which is only necessary for parsers to produce correct results, and not for the program intended semantics.

Parsers are used to construct so-called *ASTs* from the textual program representation. *ASTs* are structures in memory, usually graph-alike, reminding a control flow graph, where nodes are different statements and edges are the ways control passes from one statement to the next one.

For the developer, using an editor, the degree to which the editor can support the development process is important. For this, the editor has to recognize the programming language constructions and provide possible assistance. Among such assistance can be code formatting, syntax validation, source code transformations (including refactoring support), code analyses and verification, source code generation and others. Many of these operation rely indeed on the higher than text level notions related to program such as a method, a variable, a statement. A good editor has to be aware of these higher level program structures, to provide meaningful automations for the operations mentioned above.

Nowadays, most of the editors work with text, and, to provide assistance to a programmer, integrate with a parser/compiler front-end for the programming language. Such way to extract the program structure during editing is not perfect for several reasons:

- The program being edited as text is not syntactically correct at every moment, being incomplete, for example. Under such circumstances the parsing front-end can not be successfully invoked and returns error messages which are either not related to the program, when the code is completed, or false-positive warning and errors.
- After a minor editing of the code, usually the whole text file has to be processed again. Such compiler calls are usually computationally expensive, they slow down, sometimes significantly, the performance of the developer machine. Various techniques exist to speed it up, including partial and pre-compilation, but the problem is still relevant to a large extent.
- The textual nature of the code complicates certain operations additionally. As an example, we can take a refactoring to rename a method. Every usage of the method, being renamed, has to be found and changed. To implement it correctly an editor must take into account various possible name collisions, as well as presume a compilable state of the program prior to the start of the refactoring.

Not to mention the parsing problem itself. Parsing a program in a complex language like C++ is a difficult problem, it involves the need to resolve correctly scoping and typing, templates and related issues, work with pre-processor directives incorporated in the code. In this regard different compilers treat C++ in a different way, creating dialects, which may represent obstacles for the code to be purely cross-platform.

Listing 2.1: Closing several blocks

```
class MyClass {  
    void doSomething() {  
        while(true) {  
            try {  
                // ...  
            }  
            catch(Exception e) {  
            }  
        }  
    }  
};
```

The textual representation of program code, involves the need in formatting and preserving syntax. These both tasks, indeed, have nothing to do with the functionality program, and additionally load the developer, reducing productivity. As an example, here we can mention the need to close several blocks ending at the same point correctly, indenting the closing brace symmetrically to opening one. The Listing 2.1 demonstrates it in the last few lines.

2.1.2 Projectional Approach

Another approach a creator can take when building an *IDE* is called *projectional approach*. Projectional editors do not work with a low-level textual representation of a program, but rather with a higher level concept, *ASTs*. This approach is especially useful and used when constructing new *DSLs*.


Working with *ASTs* directly has several advantages over the conventional textual code editing:

- All syntax errors are no longer possible, as there is no syntax.
- There is no need to format the code on the level of indentation and look, since it is only needed for textual code.
- All features, which in textual approach require parsing, can be implemented without a parser involved, because *AST* is always known to the editor.

Additionally, as the compilers still expect a code in a textual form, code generation is used to convert the *AST* into the text code for the further use. The code generation step can be customized to provide support for a variety of compilers, when the compilers differ.

Projectional editors have to display the *AST* to the developer, in order for him/her to work with it. Such visualization of an *AST* is called “projection”, giving a name to the editor class.

The model of code is stored as an *AST* in the projectional editor. As in the Model-View-Controller pattern the view for the model can be implemented separately, [8]. Thus the code may be presented in a number of different ways to the user. For example, the *AST* can be visualized as a graph, similar to control flow graph. This visualization, however, is not always advantageous being sometimes not compact and complicated to overview.

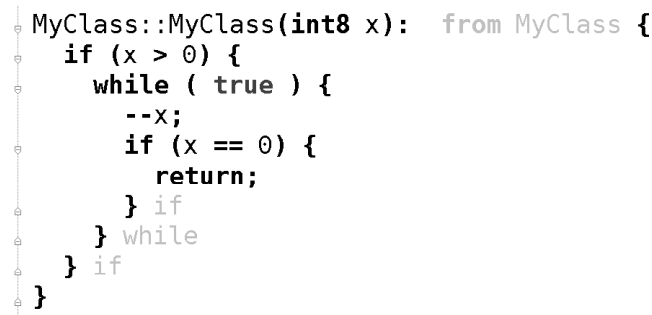

```
MyClass::MyClass(int8 x): from MyClass {
  if (x > 0) {
    while ( true ) {
      --x;
      if (x == 0) {
        return;
      } if
    } while
  } if
}
```

Figure 2.1: Example projection of an *AST*, “source code” view

One of the well-accepted way to visualize *AST* is by visualizing its textual representation, as if it would be written as a text code in the programming language, see Figure 2.1. There can be in principle many such textual visualizations, supporting different ways the code looks. Normally in the traditional approach this has to be achieved by reformatting, and thus changing, the source code. This is performed for the code to look similar across the developed software, and standards or coding guidelines are written to enforce the way to format the text code. Compare to the projectional approach, where such formatting guidelines are not needed, when arguing about the low-level code formatting, like indentation.

The textual projection of the *AST* looks similar to the text code. However the projectional nature of it has certain outcomes, which may be unusual for a programmer, who is used to editing the code as text.

The statements in the projectional editor are only selected as whole. There is now way to just select the “while” word for cut or copy, without selecting the condition and the block belonging to the statement. This behavior represents the position of the condition and *while*-body in the *AST* as children of the *while* statement. The statement can be selected all together only, including all of its children. Alternatively, one could select just an expression in the condition part.

Every block delimiters are just a part of the block visualization. They are organized in a proper way automatically, and there is no way to delete or confuse them, as well as to type them initially. Each closing brace can marked with the parent statement name (through implementing such behavior in the *AST* visualization), enhancing navigation through the displayed code.

Among the benefits of the textual projection over text code are quicker code construction after short learning, a more structured way to select code fragments, since not individual characters or lines, but rather *AST* nodes or groups of nodes are selected, plus, all the advantages, the projectional editing brings by itself, as discussed above.

we discuss additionally the projectional approach and some of its basic principles, which we consider to be of practical value in the Section 5.2.

2.2 Modular Language Engineering

2.2.1 Describing a Language in Projection

When building a projectional editor for a language, the language must be given as a certain description of a possible *AST* in the language. As an *AST* represents a graph, the nodes and edges types, as well as their possible relationships must be described¹.

The nodes of an *AST* are described through giving their types. The node type in projectional editing is called a *concept*. *Concepts* are very similar to classes in object oriented programming languages. They feature inheritance, they can implement interfaces, they can have internal data, similar to member fields, and they can feature behavior, similar to member functions. The difference with classes, however, is that the member fields are not usually encapsulated.

The edges of the *AST* are not described on their own, but instead as a properties of nodes. A node can have children, or can reference other nodes. An example of child relationship, can be a condition expression of the `if` statement. An example of reference relationship can be a local variable usage, referencing the declaration of the local variable. Child and reference relationships can have different cardinality, with minimal border from 0 or 1, to the maximal border of 1 or N, where N stands for just “many”, or several.

The cardinality itself, is not usually enough, to restrict as desirable node relationships. Special constraints can be added and checked for each relationship, which describe precisely, or provide procedure to check, the validity of a relationship being established. The projectional editor must inform the user, every time, the constraint was not satisfied, so that the user has a chance to correct the code, to match a valid *AST* description.

For the user to be able to manipulate the *AST* for each node *concept* an editor has to be created. The editor defines, how a node of a given *concept* should be represented to the user, which editing operations, and how, the user may perform on the node.

The minimal set of data was described above, which has to be defined for a language, to enable the projectional editing for it.

Additionally, constraints may be refined, involving some usual for typed languages type restrictions and checks. Generators can be added to transform *ASTs* given in a language. Text generators can be defined to generate a text code from an *AST*.

Behavior can be defined for a concept, to provide some method-like functionality to it. Additionally, some user-invokable functions can be described, to perform manipulations with the *AST*.

¹Compare this with the textual approach, where a grammar for the language must be built, which is generally speaking complex, and some times even not a possible task, which leads to the increasing parser complexity, known problem in particular in the C++ area

The process of defining a modular language in the *JetBrains MPS* environment is described additionally with practical details in the Section 3.1.

2.2.2 Language Modularity

As *concepts* feature inheritance, it is possible² to use a child concept at a place where a parent concept could be used. This creates a great opportunity for language extensibility. In order to extend a language at some point, just a passing base *concept* has to be determined and inherited from, by a new *concept* which is meant to provide the language extension. The new concept is immediately able to be used in place of the base concept. As an example, one could think of extending statements of the language. The only new statement is needed, a *concept* has to be created, which represents the new statement, and enabling the new statement consist of just inheriting it from the base statement concept, which exists in the language extended, Figure 2.2.

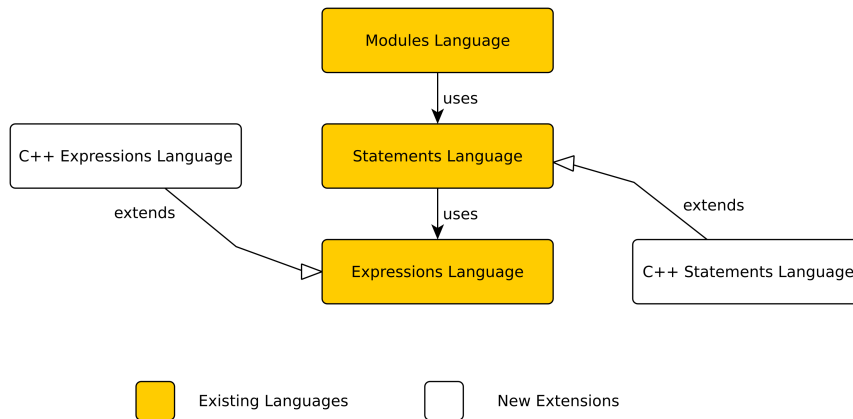


Figure 2.2: An Example of Modular Language Reuse and Extension

The inheritance works over the language borders, allowing to create the child concept in a language L2, separate from the language L1, where the original parent concept has been described. Thus the language L2 can be seen as a modular extension to the language L1.

The modular *DSL* creation is discussed in [9], [10]. The language modularity, in a context of *JetBrains MPS* is described in [7], [11].

The main focus of this work is a construction of the C++ programming language on top of the *mbeddr* C implementation. Thus the modularity in the language engineering plays a key role in the work.

While extending the C language of the *mbeddr* with C++ specific *concepts*, all the aspects of the language description (see previous subsection) have to be extended.

²to some extent, the extensibility is described separately in one of the following chapters

The newly introduced *concepts* for nodes of the *AST*, typical for C++, must inherit from some *concepts* of the original *mbeddr project C* language. Not only new nodes and edges are introduced, but also constraints and other language description aspects have to be made incorporating the newly introduced concepts. The practical side of the language modularity and extensibility is discussed throughout this work.

2.2.3 Text Language Importers

When recreating an existing text language in projection, it is natural to support some libraries with it. The libraries, or a code base in another form, is present however not in the projectional form, but in the native for the language text code. Thus, for the user of the language, to be able to use the code base, it has to be *imported* to the projectional editor.

The import process consists of parsing the text code getting an *AST* and converting the *AST* in an *AST*, as can be described by the language in projection.

The task of import contains usually several principal challenges. At first, the native text language can have more constructions, than the version described in the projection. This happens, due to the intentions to omit some of them in projection³, absence of them due to the simplicity of projectional implementation of the language, no need for them in projection, because the constructions are only specific to the textual nature of the code⁴. Second, the projectional language can contain more information about the nodes, than is present in the textual language, thus the information has to be generated or manually added later.

Additionally the technical work to create an importer can be considered significant, especially for complex languages, like the C++ programming language.

³dangerous constructions, like `reinterpret_cast`

⁴for example, preprocessor directives

3 Technologies in Use

The C++ programming language developed through out this Master Thesis is based on two technologies, which are introduced in this chapter. The first technology is the *JetBrains MPS* language engineering environment, which provides the core foundations and means for incremental language construction. The second technology is the *mbeddr project*.

3.1 Jetbains MPS

JetBrains MPS stands for JetBrains Meta Programming System. In this *IDE*-like software it is possible to develop *DSLs*. The approach taken in the *JetBrains MPS* is rather unique, and it is considered to be advantageous in many ways, [12].

In general, the way the language is describe in *JetBrains MPS* corresponds to the way, described in the Section 2.2. Here we will describe the process in practical details, as it is crucial for understanding the practical part of this Master Thesis.

In this section we will go through a definition of one *concept*, describing the facilities, *JetBrains MPS* provides to support it. Each *concept* is described by several views on it.

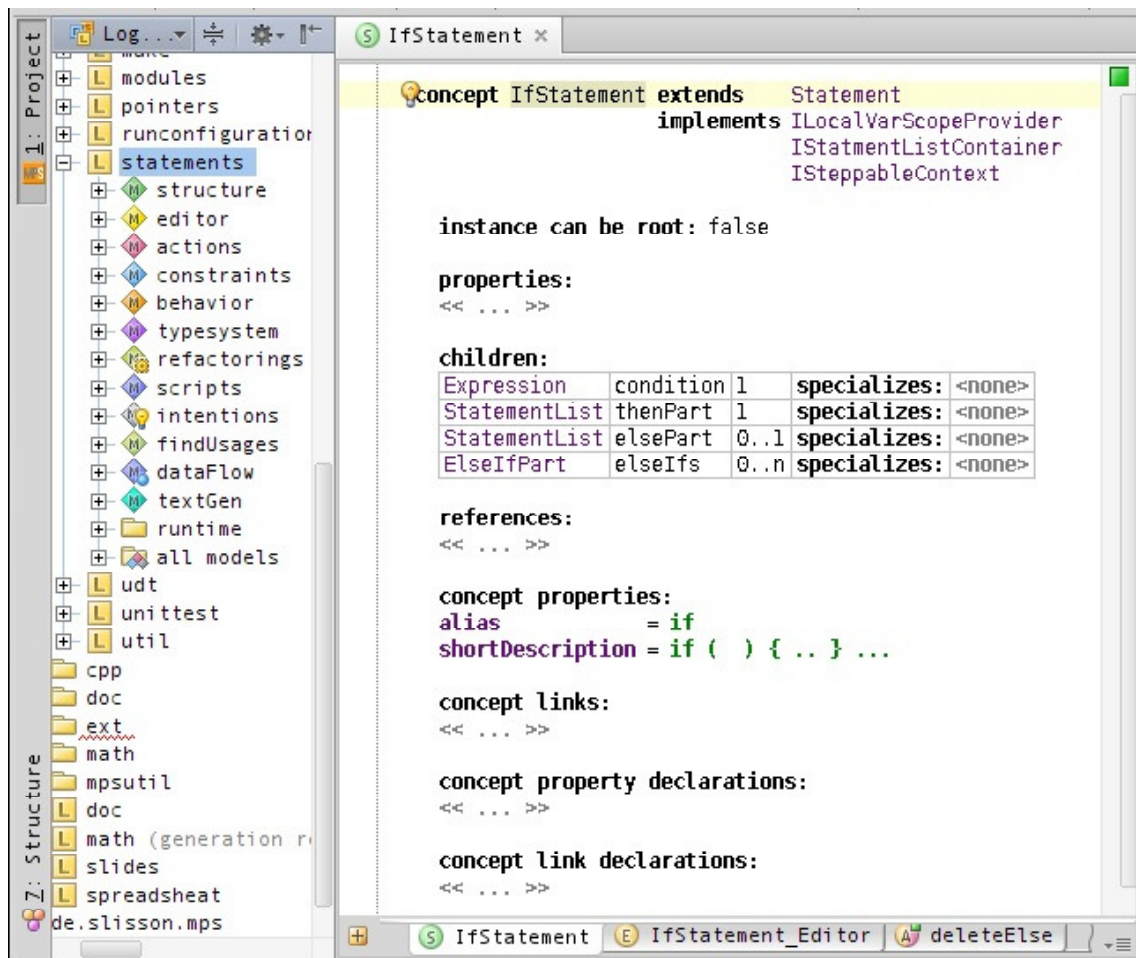


Figure 3.1: JetBrains MPS User Interface, if Statement Concept

Among such views there are *concept* declaration (or language structure) view, editor view, behavior view, constraints view, type system view, generator view and few more views. As a language consists mostly of the included in it concepts, the whole language is presented by the mentioned views as well, where each view on the language contains all views of the kind on each language *concept*. Left part of the Figure 3.1 demonstrates the views on the *statements* language.

The *mbeddr project* is a software, separate from *JetBrains MPS* but based on it, representing an extensible C language implementation with extensions. we will use *concepts* from the *mbeddr project* throughout this section as examples to demonstrate MPS. Different C language parts are going to be decomposed into *concepts* and these concepts are going to be defined using *JetBrains MPS*. The reader should not confuse though the *mbeddr project* and *JetBrains MPS* itself: the former is a software, developed in the latter and is used to demonstrate the latter.

Interestingly enough, *DSLs* are used in order to define new languages. Each view features a language used to describe a new *concept*.

3.1.1 Concept Declaration

Concepts, as it is described in the Section 2.2 represent a class-like types for nodes of an *AST*. This terminology is kept in *JetBrains MPS* and MPS concept has the same meaning as *concept* term used in the Section 2.2. we use the term “concept” both in general, to describe an *AST* node type, and in particular referring to an MPS concept.

The Figure 3.1 on the right part demonstrates a declaration of **IfStatement** concept from the *mbeddr statements* language. It corresponds to the `if` statement of the C language.

At first, the *concept* is named, and a *base concept* is defined. The **IfStatement** *concept* inherits from the **Statement** *concept*. This allows the **IfStatement** to be used at any place at which the **Statement** could be used, and inherits like in object oriented programming all data and behavior of the **Statement**.

Next, it is defined, which interfaces the *concept* is going to implement. For example, by implementing **ISteppableContext**, the **IfStatement** supports the *mbeddr* debugger when stepping in the body of the **IfStatement**.

The “instance can be root” property defines, if it is meaningful, to create a *concept* without a parent *concept* for it. In the case of the **IfStatement** it does not make sense, as the statement should belong to some block. The `true` value can be used, e.g. for modules, as they do not have any outer concepts, and can be seen as a document in *JetBrains MPS*.

The “properties” part defines if the described *concept* instances should have some primitive type data fields (string, boolean, int). An example of a property could be a **name** property of a variable declaration. The **IfStatement** *concept* does not specify any properties, neither does it inherit any from the **Statement** concept.

The “children” section describe which nodes can be children on the *AST* of the

IfStatement. Each child is assigned with a role and cardinality. For example, the **IfStatement** should have exactly one child of *concept* **Expression**, it has a role “condition”.

The “references” section describes in the similar way as in the “children” section, which nodes could be referenced by the node of a given *concept*. Referencing can be used, to bind a given node, to a node, located somewhere else on the *AST*. As an example, a variable usage in expression shall reference the variable declaration, to express precisely, which variable is used.


Finally, some attributes of a *concept* follow, which do not have a primary importance for the discussion here. The “alias” is used to name a *concept* in a short way, to allow for quick instantiation in the editor. The “short description” is shown to hint a programmer on the alias meaning. A *concept* can be made abstract in the “concept properties” section. Abstract *concepts* are purely used in inheritance to create other non-abstract concepts with a common parent.

JetBrains MPS separately allows to define so-called *interface concepts*. Interface concepts are *concepts* which can not be instantiated, but which serve as a base for inheritance and implementing and interfaces as Java classes do. A *concept* can have only one base concept, but can inherit from/implement many interface concepts.

3.1.2 Editor View

The editor view, Figure 3.2, is designed to give a look for a node of a *concept*, and a way to input it. This is where the projection of an *AST* node is defined. As editors are mostly defined to look like text, a program in the C++ programming language implemented in MPS looks almost like a regular C++ code.

In the editor view one defines an editor for a *concept*. *JetBrains MPS* introduces here a bit confusing terminology, calling one editor for a given *concept* concept an “editor concept”. Thus an error message “An editor concept not found for a concept X” would mean that no editor has been defined for the *concept* **X** in the editor view for it. In this work we call the content in the editor view for a *concept* **X** an “editor for the *concept* **X**”. The same terminology applies to all the following views related to a single *concept*.

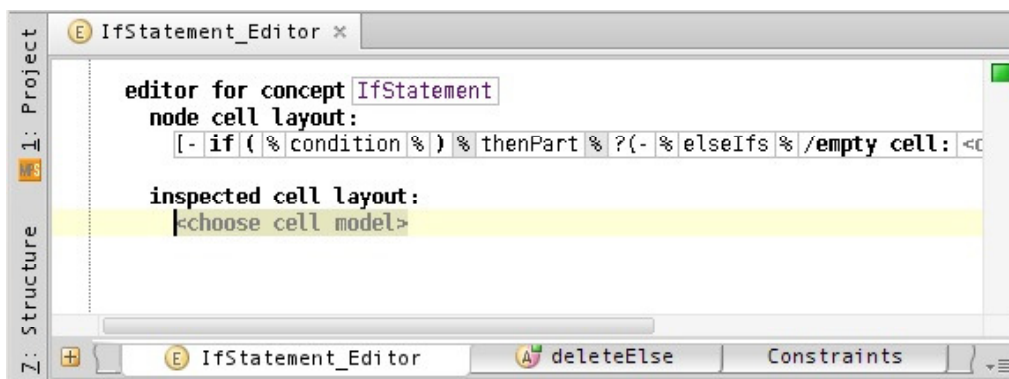Figure 3.2: Editor View for the **IfStatement** Concept

The editor for a *concept* defines the visual representation for a node of the concept, using special syntax. For example, Figure 3.2 defines an editor for the **IfStatement**. At first the “constant” non-changeable by a programmer text is given, which is “if” and “(”. Then the child **condition** is referenced, so that after the “if(” the user will be able to input an expression for the condition of the `if` statement. The editor can be configured to show or hide some parts of a node, depending on some condition, e.g. hiding `else` part of the `if` statement, if it is not defined anyhow. Editors are also responsible for all the interaction, a user experiences when editing a code in *JetBrains MPS*.

3.1.3 Behavior View

The behavior view, can be used to define certain methods for a concept. A concept is represented there similar to a Java class, and it is possible to define the methods in a Java-like language. *Concept* inheritance is taken into account like in Java.

A *concept* constructor can be defined there to initialize by default a newly created node of a *concept*.

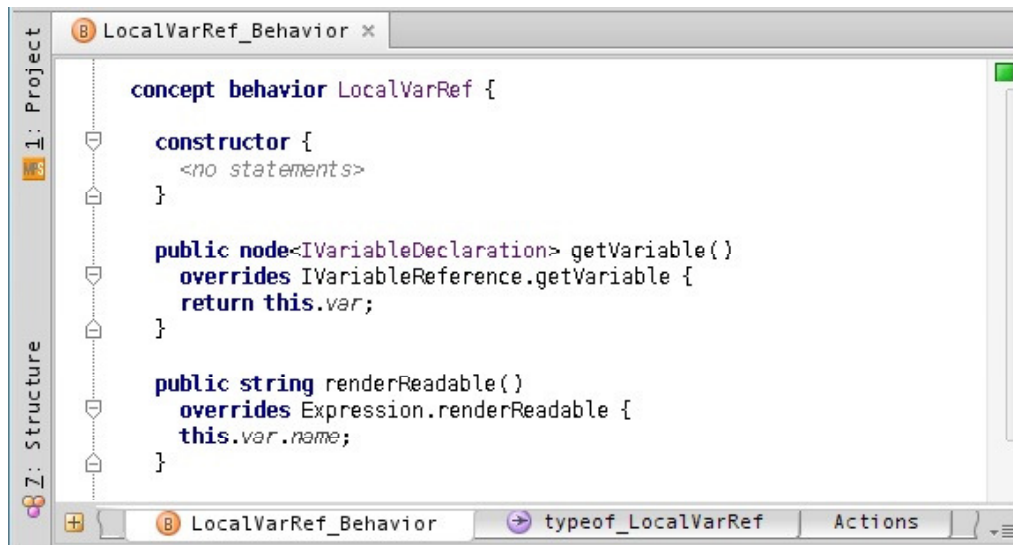



Figure 3.3: Behavior View for the **LocalVarRef** Concept

The Figure 3.3 shows the behavior of the **LocalVarRef** concept. This concept represents in the *mbeddr project C* language an expression, referencing a local variable. The local variable declaration is stored as a reference **var** in the *concept* nodes.

Two convenience methods are defined for the **LocalVarRef** concept, to get an easy access to the local variable properties.

3.1.4 Constraints View

The constraints view can be used, to limit in a desirable way *concept* property values and relationships, a node of the *concept* can have to other nodes. It is possible to take into account any sort of context, and thus create a context-aware/sensitive *concept*.

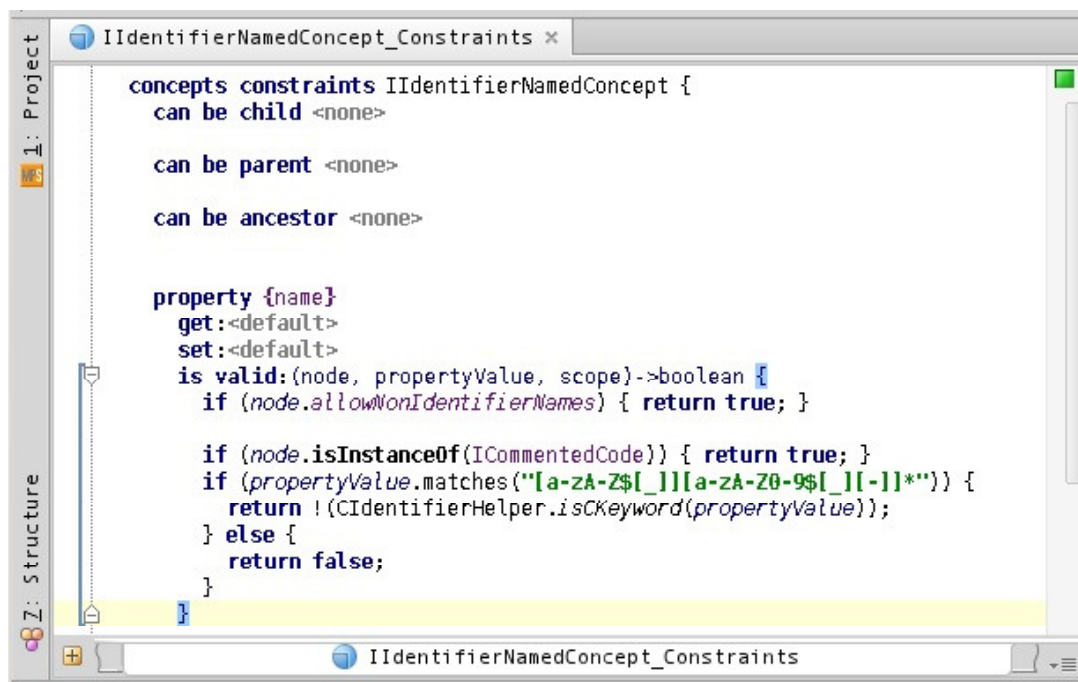Figure 3.4: Editor View for the **IfStatement** Concept

The Figure 3.4 shows constraints defined for a property **name** of the **IIdentifierNamedConcept** interface concept. All *concepts* which have a name, which must confirm to the identifier naming restrictions, can implement the **IIdentifierNamedConcept**, to immediately get the desired characteristic.


The **name** property is programmatically restricted by the use of Java-like code snippet, Figure 3.4. In a similar way relationships to children and referents can be restricted.

It is possible to create a pure Java class withing an *JetBrains MPS* language, and use it in almost any *concept* view in the *JetBrains MPS*. In the **IIdentifierNamedConcept** interface concept constraints the **CIdentifierHelper** class was used to check the name property on collision with the C language keywords.

Constraints play an important role for the editor work. A programmer is presented with a list of choices, when inputting a new node on an AST. The choice of nodes is *defined* with the constraints.

3.1.5 Type System View

JetBrains MPS has a special support for creation of typed languages. Types are mainly used in expressions. An expressions may count on a certain sub-expression to have a given type, or a type, compatible with it. Whenever the expectation does not meet the reality, a warning or error can be displayed to a programmer.

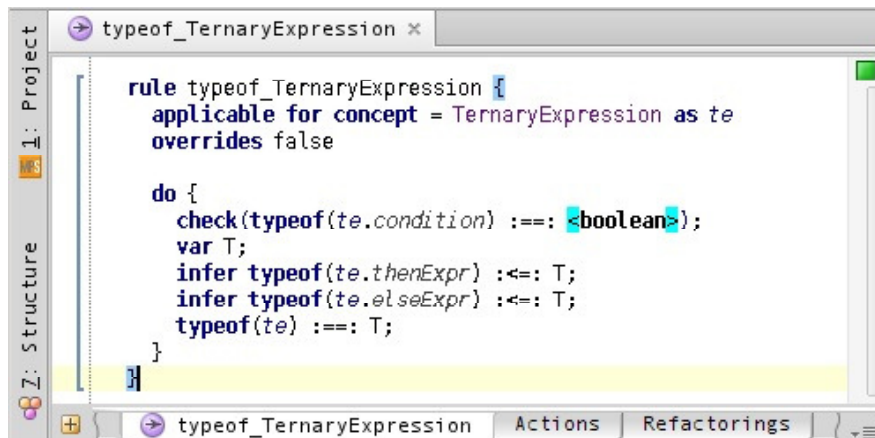Figure 3.5: Type System View for the **TernaryExpression** Concept

A *concept* representing nodes which can have type in *mbeddr* inherits from **ITyped** interface concept. In the type system view certain rules must be defined with the use of a special language, which define the type or type comparison rules for a *concept*. Moreover, the type system language can be used to infer a type for a given node, Figure 3.5.

The Figure 3.5, demonstrates the use of the *JetBrains MPS* type system language to infer a type of the **TernaryExpression** Concept node. The syntax is on the one hand self-explanatory when reading, but on the other hand could be rather confusing when crafting.

When none of the existing type system rules can resolve a given typing problem, the so-called replacement rule can be invoked in *JetBrains MPS*. Replacement rules are defined for a given *concept*. A snippet of Java-like code must be given to explicitly analyze a node and assign a type to it.

3.1.6 Non-Type-System Checks

Additional to type system and constraints limitations on an *AST* structure can be put via implementing non-type-system rules. In this work we often call them simply “checks”.

For a given *concept* a code snippet can be given, to check all nodes of the *concept*. After the check is performed, there is a chance to mark a node as an error node, or create a warning on the node. It is possible to provide some textual hint for a language user, to identify the reason of the error or warning, see the Figure 4.19 for an example.

Non-type-system rules are used in this work to create *preventive analyses*, and are discussed additionally in 5.4.3.

Extensibility for the checks is evaluated as an extensibility for analyses, 5.3.9.

3.1.7 TextGen View

To make use of the code in the projectional editor, further tools must be invoked on it, e.g. parser, compiler, etc. Normally they work with a textual representation of the same code. In order to obtain the textual code from the *AST* in the projectional editor generators are invoked.

Generators can be of two kinds. The kind of generator is dedicated to transform an *AST* in one *DSL* into another *AST* represented in a, usually, lower-level language. The second kind of generators is dedicated to transform an *AST* into text. Such generators are called “*TextGens*” in *JetBrains MPS*.

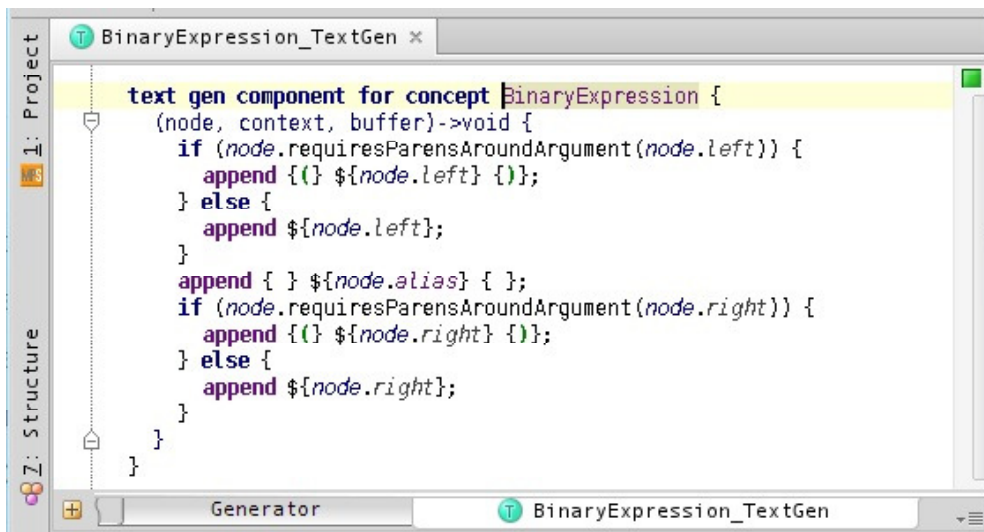


Figure 3.6: TextGen View for the **BinaryExpression** Concept

The Figure 3.6 demonstrates how a node of a **BinaryExpression** Concept is converted to text. It is noteworthy to say, that when rendering to text the **left** and **right** sub-expressions, the corresponding *TextGens* are invoked, making the text generation recursive.

3.1.8 Generator View

The generator view is one of the most complex *JetBrains MPS* views. A language engineer uses this view to define, how an *AST* composed in one language, has to be transformed into an *AST* in another language in *JetBrains MPS*.

In this work we mostly use *TextGens* to produce a textual C++ code, when the programming in the projectional editor has completed. Thus, generator view does not have a strong connection to the present work. We do not describe it in details here.

3.1.9 Intentions

JetBrains MPS intentions are special procedures which can be used for automatic manipulations on the *AST* with a node of a given *concept*.

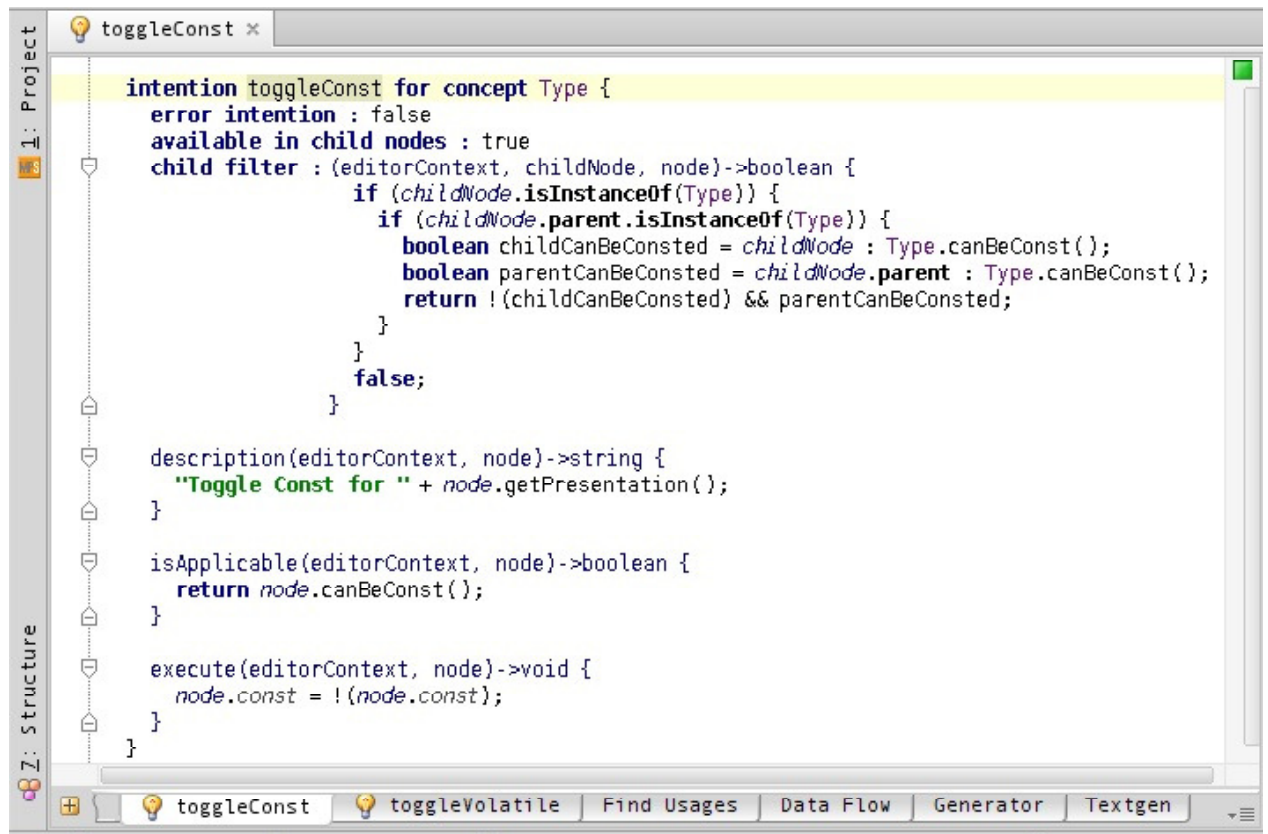


Figure 3.7: Toggle Const Property for a **Type** Intention


The Figure 3.7 demonstrates an intention, used to modify the `const` property of a given type.

For an *intention* to be defined, one has to name it, specify a *concept*, to which the *intention* is applicable, provide a textual description for it, and finally specify the desired effect.

There is also a special kind of *intentions*, called “error intentions”. They are not anyhow fundamentally different from the usual *intentions*, except their special purpose to fix an error, when one occur.

Error *intentions* are visualized using a red bulb icon in *JetBrains MPS*.

Intentions are accessible in the projectional editor from a context menu, when focused on a target node, Figure 3.8. They represent a useful mechanism to support a programmer with various automations, including automatic code generation.

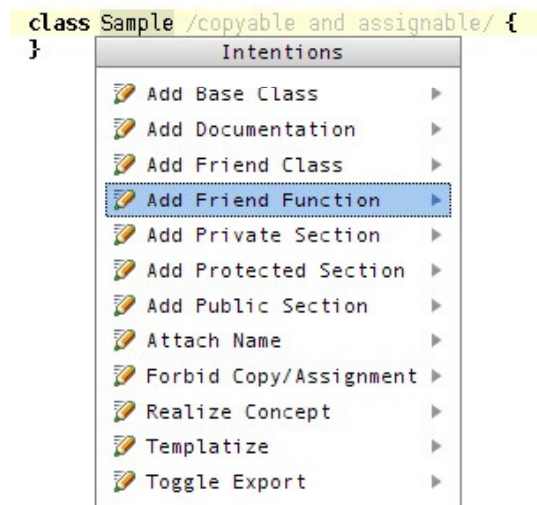Figure 3.8: Intentions Available for the **Class** Concept

3.1.10 Other MPS Instruments

JetBrains MPS provides other instruments to enhance languages.

Actions are used to automate node deletions or editing. For example, deleting an array indexing expression, could be made to provide a substitution, an array expression itself. Such behavior may seem more natural to a programmer, used to text editing.

JetBrains MPS provides a special support for refactorings. Special code snippets in the Java-like language can automate routine operations. As an example, factoring out a local variable from an expression can be taken.

Additionally, it is possible to extend the functionality of an editor under construction via creating special *JetBrains MPS* plug-ins. It can be in particular useful to implement some complex *analyses on demand*.

3.2 mbeddr Project

The *mbeddr* project is a software built with the use of *JetBrains MPS*.

The *mbeddr* project represent mainly an implementation of the C programming language in the *JetBrains MPS* environment. Having embedded systems and software for them as the main focus, *mbeddr* provides certain language extensions to empower the programmer in the mentioned domain [13], [12].

Being a different language the C++ programming language shares a lot of commonality with the C programming language. As *JetBrains MPS* allows, to some extent, see 2.2.2, incremental language construction, the *mbeddr* project represents

a suitable basis for the C++ programming language implementation in *JetBrains MPS*.

We could not extend *mbeddr* with C++ pure incrementally. We had to perform some changes to *mbeddr* itself. The changes were introduced however, in a way to make *mbeddr* more extensible in general. Compare this to creating a separate branch of *mbeddr* designed only for C++. After such forking a separate team would have to support a newly created *mbeddr* version for C++. By making *mbeddr* more extensible, and by building C++ as a pure extension we keep only one *mbeddr* version, and reduce the maintenance needed in future, to keep C++ supported by *mbeddr*.

In this section we describe the *mbeddr project*, as the current work is based on it.

No matter the *mbeddr project* has (one) C language with extensions as an outcome, internally, as a *JetBrains MPS* software it is represented as several *JetBrains MPS* languages.

All *mbeddr* languages are named starting from *com.mbeddr.* name part. In this document we usually omit it, keeping the last word of the name only. E.g. *com.mbeddr.expressions* is called simply *expressions* here.

3.2.1 mbeddr Expressions Language

The *expressions* language contains definitions for all expressions, possible in the *mbeddr* C language. As in object oriented programming languages *concepts* of the *expressions* language form inheritance hierarchies. *JetBrains MPS* is capable of showing a given *concept* in a hierarchy.

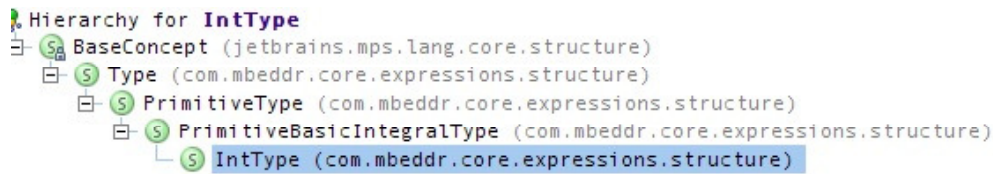


Figure 3.9: *Concept* Hierarchy Example

The Figure 3.9 shows a hierarchy for the **MinusExpression** *concept*. In a similar way all expressions of the C programming language are implemented in the *expressions* language.

Whenever there is a need in the C++ programming language to extend the C programming language with a new expression kind, like object member reference, *new* expression and so on, a point of inheritance has to be found in the *mbeddr expressions* language to base a new *concept* on it.

Additionally, the *expressions* language defines C language types.

Figure 3.10: *mbeddr* Type Hierarchy Example

All *concepts* corresponding to C types are based (directly or indirectly) on the **Type** *concept*. For example, the hierarchy of **IntType** *concept* is demonstrated in Figure 3.10.

In order to add a type to *mbeddr* C language, one should inherit from the **Type** *concept* as well. Such inheritance automatically allows the new type to appear at all places, where a type in general can be found in the C language or its extensions.

3.2.2 *mbeddr* Statements Language

mbeddr statements language contains definitions for C language statements. The **Statement** *concept* serves as the base for inheritance, and represent by itself an empty line, or no-statement.

In order to create a new statement, like `delete` statement in C++, the inheritance should start from the **Statement** *concept*.

```

int16 abs(int16 x) {
    if (x >= 0) {
        return x;
    } else {
        return -x;
    } if
} abs (function)

```

Figure 3.11: Example of Multiple Languages Used Together

The *statements* language actively uses the *expressions* language, Figure 3.11. In the *mbeddr* code snippet the nodes coming from *statements* language are marked green, and the nodes, coming from *expressions* language are marked yellow¹. As the example shows, **if** statement and **return** statement are coming from the *statements* language, but inside they contain as children expressions. This is an example of language modularity in *JetBrains MPS*, used by *mbeddr*.

¹not marked with color is an instance of the *Function* concept, which comes from the *modules* language

3.2.3 Modules in mbeddr

In C (and in C++ as well) there is no clear concept of a module. The *mbeddr project* improves on it, defining modules, [12]. A C module is a *concept*, from which the header and the .c files are generated in mbeddr. Flagging an object (function, variable, structure, etc.) in a module as `exported` causes the declaration of the object to appear in the header, and thus the object starts to be accessible by other modules.

An issue with the C programming language is that there is one and only global namespace. The *mbeddr project* improves on it by introducing so-called name mangling. All names of the module contents are prefixed with the module name, when generated to the C text code. Thus the object with the same name but from different modules do not cause a name clash.

The implementation of modules in *mbeddr* can be found in the *modules* language. Functions are described there as well, for the **Function** concept example, see the Figure 3.11, not marked with colors part.

Modules are further included into *JetBrains MPS models*, which correspond to one single *JetBrains MPS* file unit. After a programmer finishes the code in the projectional editor, *JetBrains MPS* generates textual C code, according to the rules, given by *mbeddr*. Each model is generated into a set of textual C files. After the files has been generated, *mbeddr* launches a compiler to get an object code.

For the purpose of the code generation and compilation, every model should have a node of **TypeSizeConfiguration** and **BuildConfiguration** concepts. In the former, the programmer should specify all sizes for C language types, in the latter, the programmer should specify, how the *mbeddr* has to invoke the compiler.

3.2.4 Pointers and Arrays in mbeddr

In the *pointers* language array access and pointer dereferencing expressions are defined as *concepts*. Similar syntax to them have overloaded operators with classes. Thus this language could also be extended by the *Projectional C++*, if some reuse is possible there as well. This is discussed in detail in the Section 4.3.

3.3 The C++ Language

This work is basically an implementation of the C++ programming language in *JetBrains MPS*. No matter, the whole work is about the C++ implementation, it is infeasible to describe the language in detail itself here. Thus we give a references to literature about the language in this chapter only. Certain aspects of C++ are explained in depth during the description of the C++ implementation in *JetBrains MPS* itself in the Chapter 4.

Various literature is available, to get acquainted with the language closer. The most complete guide to the language, covering *STL* as well is [14]. The more easy-to-read and more suitable for beginners book on C++ is [15]. A newer book,

oriented towards intermediate level C++ programmers and updated to the recent C++11 standard, [16], and describing *STL* as well, [17].

The collection of techniques to get more effective C++ programs is [18]. Templates are explained in detail in [19]. The book dedicated to ad hoc polymorphism and advanced template meta programming can be also of interest as an approach to language engineering in a certain sense, [20].

The C++ programming language is a mature language, with long traditions, and high flexibility, [21] can serve as an example. It will not be possible to simplify language, removing features from it, which will restrict the language use, most importantly the *STL* support. Thus in this work we try to research, how the editor can be more supportive for the user of the *existing* complex language, to eliminate usual mistakes made while programming, as well as provide help in structuring the code.

4 Projectional C++ Implementation

4.1 C and C++

Initially C++ appeared to be an extension to the C language, called “C with Classes” [22]. Till now the high degree of commonality can be found between the two languages. Mainly, the most of the C code is going to be valid C++ code.

Some differences exist however, I introduce them here, together with the way they are adopted in the *Projectional C++*.

4.1.1 Reference Type and Boolean Type

Among primitive types and operations there are two major differences relevant to practice. They are discussed in the following subsections.

Reference Type

The reference type is basically a new construction in C++ which represent the old notion of pointer in C with a different syntax. In fact behind the reference type stands a pointer to the base type, and it is dereferenced when needed.

The syntax for a variable of type *T* can be used with the variable of type reference to *T*, or *&T* as it is designated in C++. Thus the programmer benefits from the shorter syntax in comparison to the pointer dereferencing.

It comes especially handy when passing arguments to methods by reference, which avoids creating a copy of an object to pass by value, and still preserves the short syntax without pointer dereferencing, when accessing the value.

Listing 4.1: Reference Type in a Copy Constructor

```
class MyClass {  
    MyClass( const MyClass& original);  
};
```

The value of the reference type in C++ is bigger however, than just a new syntax for pointers. A constant reference to a class object has to be used in a constructor to give it a special meaning of the copy constructor for the class, as the Listing 4.1 demonstrates. This changes the whole semantics of the class, making it copyable. It is discussed in detail in 4.2.1.

The reference type itself is implemented rather straightforward and similar to the pointer type of *mbeddr*. It inherits the **Type** concept of *mbeddr* as described in the 3.2.1, and has a base type as a child.

Boolean Type

The C++ programming language has a special `bool` type to represent the two logical values. There is no such type in C.

No matter, the `bool` type is not present in C, for the convenience of the user the *mbeddr* C implementation introduced a type `bool`, which is translated to `int8_t`, together with `true` and `false` values, converting to 1 and 0 respectively. This implementation can arguably be considered better than the original C++ `bool` type present in the generated code, because the C++ programming language standard does not define explicitly the size of the `bool` type [16]. This can be suitable for the embedded domain better, conforming to the *mbeddr* spirit.

In the context of embedded systems, which *mbeddr* targets, it is often very important to know precisely, with which type the user is operating, as the limited resources are important to consider. Substituting the `bool` type with the `int8_t` type ensures that the size of the `bool` variables is known. Also, it can be changed as needed in the **TypeSizeConfiguration** in each model created with *mbeddr* separately, see 3.2.3.

The C++ standard explicitly allows the `bool` type to participate in integer promotions. This ensures further the compatibility of the custom-written text code, which may use actual `bool` type, with the code generated with substitution of `bool` to `int8_t`, as the user `bool` will be promoted.

Among limitations of the approach, when `bool` is translated to `int8_t`, one can consider `std::vector<bool>`. Since the word “bool” itself is never generated, it is not possible to use the specialization of the template, which ensures storage optimization, through higher processing load when extracting a value from such a `vector` though.

The `bool` type from *mbeddr* is kept in the *Projectional C++*. This decision is arguable, and can, of-course, be changed in the future.

4.1.2 Modules and C++

The C++ programming language is an improvement over the C language by itself. There is, however, no concept of a module, which can bring certain advantages and disadvantages. As a disadvantage can be named a potential disorder in placing implementations for classes and functions, as the language itself does not enforce a clear one place for them. Potential name clashes are also disadvantageous. As an advantage, conditional compilation can be used in C++ to include different files with different implementations, which is often used to create cross-platform code. Additionally, classes can be used analogously to modules.

The name clash problem is solved in C++ by introducing the namespaces. The programmer defines a namespace and then places there all the exported code. The nodes with equal names from different namespaces do not clash.

C++ however does not elaborate on the disadvantage of having declarations and implementation not organized in one place, and being fully disjoint. *mbeddr* compensates on it, 3.2.3.

After comparing the two approaches of *mbeddr* and of the C++ programming language to improve on C, the hybrid approach has been picked. Firstly, the C++ implementation modules have been introduced. And secondly, the namespaces can be defined and used.

In *Projectional* C++ modules are program modular elements, where a programmer declares and implements C++ classes, and the .h and .cpp files are automatically generated from them. This eliminates the need to create and control two files for each logical program element, like a class, and keep them synchronized with each other. For example, changing an interface of a class would require at first opening the header file, and introducing the changes in the declaration, and then rewriting the corresponding part of the .cpp file in strong correspondence with the header. This work decrease in order to change an interface can improve productivity.

Namespaces are introduced in the *Projectional* C++ to avoid inter-modular name clashes, they work similar to the namespaces in C++.

The need in the `using` directive does not emerge the same strong as in plain text editors, because the inputting of namespace names is made effective within the projectional editor. Long names of namespaces are appended to the end of method definitions for classes, to be exact about the namespace, but the declarations are kept looking short, with only the last namespace shown, Figure 4.1.

```
namespace MyNamespace {
    namespace MyInnerNamespace {
        class A /copyable and assignable/ {
            public:
                void DoSomething()
        }
        void A::DoSomething() from MyNamespace::MyInnerNamespace::A {
    }
}
```

Figure 4.1: Example of Nested Namespaces

In general, the generator is responsible in generating correct namespace resolution, and the projectional C++ programmer can benefit from short and clear namespace presentations, which are also quite handy to input.

4.1.3 Memory Allocation

In the C programming language memory (de-)allocation on the heap is happening via calls to the dedicated library functions. C++ instead introduces separate language construction for memory allocation and de-allocation.

The `new` and `delete` together with their array versions are simply an expression and a statement correspondingly, which perform the required operations.

Creating them is relatively easily possible by inheriting from the **Expression** and **Statement** *concepts*, and introducing the corresponding typing for the `new` expression, as described in 3.2.1.

When a segment of memory is allocated as an array, it has to be de-allocated as an array either. As it is stated in the C++ standard ([16]) the behavior of simple de-allocation of an memory segment, allocated as an array, results into undefined behavior. A simple check is introduced in order to control this, see the Section 4.6.6.

4.2 C++ Object-Oriented Programming

The C++ programming language is a multi-paradigm programming language. The ability to support the object-oriented programming, is incorporated via classes support.

A class represents a new type in the C++ programming language. Each class may have data in the form of fields, and behavior in the form of methods. Two types of methods are special for C++ - constructors and destructors, they have special meaning and syntax.

Encapsulation is enabled via governing access permissions to fields and methods of a class. The access control is governed with the creation of `public`, `protected` and `private` class sections.

Inheritance is implemented in C++ via allowing for each class to have one, or even many base classes. Inheritance from a base class is performed under a certain access control modifier. There is no pure notion of an interface, but rather abstract classes are introduced.

Polymorphism is implemented via pointer-to-class type compatibility over inheritance-connected classes.

The implementation of these C++ features in a projectional editor environment is discussed in the following sections.

4.2.1 Class Declaration and Copying

Visibility Sections

C++ Problematic Instead of declaring visibility type for individual class members (C#, Java), visibility sections are created in C++.

The sections can be opened with a string `private:`, `protected:` or `public:` within a class declaration, and closed when another section is opened or when

the class declaration ends. This allows the user to open and close the same section multiple times and declare sections without any particular order. This can be error-prone and confusing.

Various coding guidelines ([23], [24]) exist to enforce some restrictions on the visibility sections.

In particular, the sections are allowed to be opened only once. This ensures, the reader of the code will see the interface of the class (public section) in one place, “contents” of the class (private section) in one place, and opportunities to access members in an inheriting class (protected section) in one place, without the need to search through the whole class declaration.

Another typical requirement in coding standards, is the order of the sections. Usually the public section is required to be first, for the class users to see immediately the (public) interface, the class provides.

```
class WebPage {  
    public:  
        explicit WebPage() (constructor)  
        WebPage(const WebPage& original) (copy constructor)  
        boolean loadFromFile(string path)  
        string getHtml()  
    private:  
        int32 visits  
    protected:  
        string html  
}
```

Figure 4.2: Sample class type declaration

Implementation in *Projectional C++* The Figure 4.2, shows an example class declaration implemented in the *Projectional C++*. The **Class** concept has the visibility sections as children. Each section is given a separate role (see 3.1.1) and can appear 0 or 1 times. The editor for the **Class** concept orders the visibility sections so, that the public section always comes first, if present, followed by the private and protected sections.

The creation of a section is made with the use of *intentions*. The user uses *Alt+Enter* combination on the class declaration to create visibility sections. It should be more practical and fast for the user, compared to typing the keyword, colon and indenting the result.

A question arises on how to support another way to represent a class, so that it will reflect requirements from a different coding standard. And as a way to resolve it a definition of another editor for a class concept can be offered. Unfortunately, the current version of *JetBrains MPS* 2.5 does not support a definition of multiple editors for the same concepts. This limitation however is addressed in the newer

3.0 version, which was not tested completely with *mbeddr* on the time this work was made.

Constructors

C++ Problematic Constructors are special methods of a class, used to construct the class instances.

Constructors have special syntax and no return type, being similar to class methods. Additional value, however, the constructors gain, when participating in type transformations. Namely, when a constructor of a class *B* exist from a type *T*, instances of the type *T* can be used whenever the *B* class instance is required. The constructor will be *implicitly* called and a temporary object of class *B* is going to be created as a mediator.

Thus constructors extend the type system of the C++ language, adding conversion rules to it. Since this type extension can not be easily observed, it is highly possible to get various *run-time* errors or unexpected behavior.

Listing 4.2: Example of an Implicit Constructor Error

```
#include<iostream>
using namespace std;

/*
 * API definition
 */

class Circle{
private:
    int r;
public:
    Circle(int radius){
        r = radius;
    }

    float getPerimeter(){
        return 2*3.14*r;
    }
};

void print(Circle c) {
    cout << "The_perimeter_is:_ " << c.getPerimeter();
}

/*
```

```
* Use case by user of the API
*/

int main(){
    print(5); //Prints "The perimeter is: 31.4"
    return 0;
}
```

The Listing 4.2 demonstrates a simplified use case where the function `print()` is invoked on `int` without any compiler error, and the resulting behavior is unexpected.

To avoid similar situations, it is possible to deprecate participation of a constructor in type conversions, adding a word `explicit` to the constructor declaration.

Implementation in Projectional C++ The described problematic motivated the following decision. When a new constructor is created with one argument, it is by default declared to be explicit, the user must intentionally change it to get the type conversion behavior. Such behavior is safer by default. This is an example improvement to classical C++ which makes the code understood better by novices and safer for them.

Copying

C++ Problematic In the C++ programming language the programmer controls memory allocation fully on his/her own. This affects the way of copying for the class instances. In C++ a programmer should define two methods for a class: a copy constructor and an assignment operator. These two methods work when assignment like `a = b` happens, when instances of a class are passed by value to a function, when one object is initialized with a value of another object and so on.

C++ serves here sometimes dangerously generating default copy constructor and assignment operator, which by default represent a bitwise cloning of an object. This can lead to problems. For example, if a pointer value is getting copied bitwise in a second instance and is deallocated twice in destructors.

Listing 4.3: Need in a Custom Copy constructor

```
class Resource{
    int* r;
public:
    Resource(){
        r = new int(0);
    }
    ~Resource(){
```

```
        delete r;
    }
};

int main(){
    Resource a;
    Resource b = a; // b.r is the same address as a.r
    return 0;
}
```

The Listing 4.3 demonstrates a program which crashes upon execution as destructors of `a` and `b` are deallocating memory with the same address, after default copy-constructor copies the address from `a` into `b`.

To avoid the described problem, the programmer has to either define a proper copy-constructor or forbid copying of the objects for the class. The same applies to the assignment operator. Many standards require the two functions to be implemented in sync, i.e. implementing the same semantic behavior, [25]. This can be performed in an elegant way by implementing the assignment operator first and reusing it in the copy-constructor.

When not providing the copying behavior it comes logical to disable also the assignment behavior. This is done by a trick of declaring the corresponding functions in the private area, without implementing them (as they never get called). To visually explain such design and make it handier to implement, specialized known macros exist in various libraries, for example `DISALLOW_COPY_AND_ASSIGN` or `Q_DISABLE_COPY`, [24], [26]. An alternative approach is the use of `boost::noncopyable` from the boost library, [27].

The use of macros in C++ appears often in similar cases, in order to perform some language-engineering tasks to add the missing features to the language (copying or assignment deprecation in this case). Macros bear pure textual nature, and are processed by the pre-processor. Some negative effects may come out: need to preprocess reduces the speed of compilation and hides the resulting code from a programmer. Macros lead to error prone programming, as no type checks are possible. And macros make code less analyzable by automatic analyzers.

Implementation in Projectional C++

```
class A /copyable and assignable/ {  
public:  
    explicit A() (constructor)  
    A& operator = (const A& original ) (makes class assignable)  
    A(const A& original) (copy constructor)  
    int16 getX()  
private:  
    int16 x  
}
```

Figure 4.3: Hinting about Copyable and Assignable Class Properties

The projectional editor allows for another solution, different from macros, or the use of a new library. In order to provide some support for the programmer regarding the copying issue, the *Projectional C++* hints on the class declaration its assignable and copyable properties, Figure 4.3, and generates by default the declarations of copy-constructor and assignment operator declarations, when the class is created.

The copy constructor and the assignment operator are recognized by the *Projectional C++*. Two *intentions* are provided on the **Class** concept to forbid or allow copying. The forbidding *intention* imitates the macros mentioned above, but displaying and explaining the implementation to the user Figure 4.4. The implementation of the intention consists of moving the declarations of two functions to the private section of the class. The allowing *intention* moves the declaration back to the public section, or creates them. The check for implementation provided for a method flags the two declarations appropriately, 4.6.4, to finish the process.

```
class A /neither copyable nor assignable/ {  
public:  
    explicit A() (constructor)  
    int16 getX()  
private:  
    int16 x  
    A& operator = (const A& o ) (makes class not assignable)  
    A(const A& o) (makes class not copyable)  
}
```

Figure 4.4: Class Made not Copyable by the *Forbid Copying* Intention

The *JetBrains MPS* supports the *Projectional C++* implementation by providing read-only model accesses, special parts of the editor concept, 3.1.2, by which the hinting is implemented. The *intentions* allowed manipulations on the **Class** concept, which made it possible to automate the allowing or forbidding of copying/assignment, making the implementation clear to the user, without the use of macros or libraries.

The whole work the programmer needs to perform to forbid copying and assignment contains of a call to an *intention*, one key-stroke. There is no need to include a header file with macros, and look up the documentation for them, using them in a right way afterward (symmetric macro requires exactly one parameter - the class name, and it has to go in the private class section). The boost library, [27], providing functionality to disable copying is often considered to be too heavy-weight to include, when it goes about little tasks, like the one described in this section.

4.2.2 Encapsulation and Inheritance

Encapsulation and inheritance are considered here together, because from the language-engineering point of view, they just decide the access to class members. In other words, the *Projectional C++* implementation has to track encapsulation and inheritance related definitions and provide access to the class members accordingly.

Various Cases of Access Control

C++ Problematic In the C++ programming language a number of ways to govern access control to class members exists. Before discussing the implementation of them in a *projectional C++*, we briefly review them with an example.

All members, a class has, are either declared in the class, or inherited from its base classes.

The members can be accessed in a number of different locations in the code, which differ by the level of access they have to the class members. Among these locations are the class methods, friend functions of the class, and external to the class code.

Each member can be declared with a certain visibility/access type, and the inheritance of the base class can happen with one of the three inheritance modifiers.

Implementation in *Projectional C++*


```
class A /copyable and assignable/ {  
    public:  
        int8 valAPublic  
    private:  
        int8 valAPrivate  
    protected:  
        int8 valAProtected  
    friends:  
        friend compare (boolean compare(const A& a1, const A& a2))  
}  
  
class B : public A /copyable and assignable/ {  
    public:  
        B(const B& original) (copy constructor)  
}
```

Figure 4.5: Declaration of two classes with a friend function

The Figure 4.5 shows a declaration of two classes. The class A has all three public, protected and private fields. A function `compare()` is declared to be a friend function of the class A.

This example demonstrate how showing only the central information, `friend` keyword and the friend function name, and just hinting on the details (the complete friend signature), can make the syntax more appealing. This is an example of the “Hide Redundant Syntax” principle, as in the Section 5.2.

The visibility plays no role for the friend function declarations themselves. That is why a decision was made to create a special section for friend declarations, called `friends`. This section name is not generated anyhow in the resulting C++ text. This allows for all the friend functions to appear in one place, and be easily observable.

The class B in the Figure 4.5 is inheriting publicly from the class A, which means, that public members of A remain being public in B. The class B declares a copy constructor.

Such declaration can be utilized as shown in the figure Figure 4.6.

```

B::B(const B& original) from B {
    this->valAPublic = original.valAPublic;
    this->valAProtected = original.valAProtected;
    this->valAPrivate;
}

boolean compare(const A& a1, const A& a2) {
    return a1.valAPrivate >= a2.valAPrivate;
} compare (function)

void printOut(B b) {
    cout << b.valAPublic;
    cout << b.valAPrivate;
    cout << b.valAProtected;
} printOut (function)

```

Figure 4.6: Visibility resolution

In the copy-constructor the visibility resolution happens after `this` pointer and after the `original` object. Arrow expression and dot expression are used for this. The first and second lines are making use of public and protected fields of the base class A. The use of the private field is however not possible, since private fields of a class are only accessible to methods of the same class and friend functions.

It is even not possible to input the not-allowed member, as the projectional editor does not bind the text to anything, and it remains red. This means, no node in the AST is created and the code is in incomplete erroneous state.

The `compare()` function is declared in advance (Figure 4.5) to be a friend function of the class A. Thus, it is not a problem for this function to access even private fields of A, for comparison purposes in this example case.

The function `printOut()` is not related anyhow to classes declared. Thus, it represent “external” for the class B code. Only public members are accessible, but not protected or private. The attempt to input them, simply fails, they are highlighted red, and are not bound to anything.

In this way the *Projectional C++* gives for the programmer only a chance to input correct from the encapsulation point of view constructions. As the members, accessible in each place of code, are provided by the *Projectional C++*, instead of typing the member name, the programmer usually will have a choice from a short drop-down list of options.

Expressions to Address Class Members

Members are usually accessed relatively to some object. The object can be designated as an expression of type class or a pointer to class, in particular, `this` expression. The resulting access represents nothing else, but an expression itself.

Thanks to *concept* inheritance in *JetBrains MPS* , 2.2.2, 3.1.1, the creation of a new

expression is reduced to inheriting from the existing one, and this is almost all what has to be done to implement object oriented member access expressions. Inheriting the **OoDotOrArrowExpression** concept from the *Expression* concept, we get the ability to use the expression, designed for member access, wherever an expression in general can be used.

The abstract concept **OoDotOrArrowExpression** serves as a parent for **OoDotExpression** and **OoArrowExpression**. The commonality between the two, is that an object is accessed in the left part, and a member is selected in the right part, as well as the way to decide the access to members. The access is defined then, which left part is going to be possible in such expressions.

Within the class methods it is also possible in C++ to address class members as local variables. In the projectional implementation described, it is not possible. Instead, `this` expression has to be used. It makes inputting slower, but allows to easily distinguish between members of the class and other variables or functions. For an example, please, see the implementation of the copy-constructor in the Figure 4.6. Instead of **this->val** syntax, simply `val` could be used in C++ text.

4.2.3 Polymorphism

There are several ways to achieve polymorphic behavior in C++. The purists of the language differentiate between the polymorphism based on virtual functions or based on templates. More general opinion can include in the notion of the polymorphism also functions overloading and operator overloading, also called *ad hoc* polymorphism, polymorphism for concrete one purpose. Occasionally various operations with `void*` type are also classified as a polymorphic programming.

In this section we are writing only about the class-related virtual functions polymorphism, and the way it is implemented in *Projectional C++*.

Virtual Functions Polymorphism in C++

At first, we describe the polymorphism, as it is implemented in the C++ programming language, pointing out the places, where it could be improved.

Dislike many other popular object-oriented programming languages, e.g. in Java, in the C++ there is no pure notion of an interface. Instead, a base class, its public part, is used as an interface declaration for the descendants. Functions designated to be a part of the interface must be declared `virtual` and they can be overloaded in the subclasses.

The virtual functions in the base-interface class can be implemented as well, providing some “default” common enough behavior. Otherwise they are left *pure virtual*, meaning that no implementation is provided and the pointer to the function in the table of pointers to virtual functions is zeroed. The syntax for *pure virtual* functions is rather not obvious¹ and a bit cumbersome requiring to type one re-

¹especially when not knowing about the zero pointer value semantics

served word, one punctuation sign and one digit to express a simple fact of pure virtuality or, simply, absence of implementation, Listing 4.4.

Listing 4.4: Pure Virtual Function Syntax Example

```
class Animal
{
public:
    virtual void voice() = 0;
};
```

The approach of classes with virtual functions as interfaces is more flexible compared to languages with the notion of an interface is directly introduced. In C++ it is possible to create partially implemented base classes, what can not be done when implementing and interface in Java or C#, where the approach is “all or none” regarding the implementation of interface functions. The presence of interfaces in the language can be though considered a more clean way to program.

In order to implement a declared in a base class function a descendant must declare and implement a virtual function, matching the full (including a return type) signature of a declared in the base class function, Listing 4.6. The connection to the “interface” function declaration stays subtle however. It is not immediately clear, whether the declared new function in the descendant is an override of an existing in the base class function or an independent declaration of an entirely new function in the descendant class.

This knowledge affects the changing process greatly, as the override should change from the interface, together with all the implementations. The absence of a clear, explicit override syntax we call here an “*override syntax absence*”.

Whenever a class and all of its ancestors do not provide an implementation of a certain virtual function, created as a pure virtual in the declaring class, the class is called an *abstract* class. It is not possible to construct instances of an *abstract* class. C++ however does not have any special syntax to explicitly declare a class *abstract*, Listing 4.4. The programmer usually has to be aware (from documentation, implementation, or, the worst case, compilation errors) whether a given class is *abstract*. We will call this phenomenon an “*abstract class syntax absence*”.

Overriding a function is an active action of the programmer, and it is initiated by the programmer. I.e. the programmer want to state, that the new function is designed to override an exiting one, and which is the overridden function. The abstract property of a class, oppositely, is not a quality a programmer directly gives to a class. It can be rather deduced from the analysis on the base classes automatically, by editor. So in this case no actions are needed from the programmer side. Because of this two similar absence of syntax phenomena are resolved or have to be improved on differently from the *Projectional C++* point of view.

In order to use an interface, declared in some class, the using code has to get a pointer to an instance of any inheriting the interface descendant class instance.

Thus type system has to allow a pointer to the descendant to be treated in the way as a pointer to the base class would be. The same should hold, normally, for the reference types, but it is not used very often on practice, and is omitted in the implementation.

As this typing rule represents the core of polymorphic behavior, we will start from it below, describing further the polymorphism in the *Projectional C++* implementation.

Special Typing for a Pointer to Class

The problem solved here is enabling the usage of pointers to descendants instead of pointers to ancestors, Listing 4.5.

Listing 4.5: Example Usage of a Pointer to Descendant Class

```
class Shape {};  
  
class Circle: public Shape {};  
  
void draw(Shape* shape){  
    // ...  
}  
  
int main(){  
  
    Circle* c = new Circle();  
  
    // Call with a Circle* parameter instead of the declared Shape*  
    draw(c);  
  
    return 0;  
}
```

The **PointerType** concept is implemented in the *pointers* language in *mbeddr*. Following the goal of non-invasive changes to *mbeddr* the *Projectional C++* implementation needs to add the typing rules for pointers to classes without changing the *pointers mbeddr* language, where the typing system for pointer type is defined.

In the case when a type of a pointer to a base class is expected, a pointer to a subclass should also be accepted, like in the Listing 4.5.

The type system of the pointer language will try to check the compatibility of the two pointer types. It will fail to do so, as the *mbeddr* languages are not aware of the *Projectional C++* extensions² by design.

²**Class** concept in this case

In a case like this a replacement rule can be used, see 3.1.5. The *Projectional C++* provides such a replacement rule for the pointer type, which checks, whether a class pointed to, is a passing descendant of the class required by an expression, where the pointer was used, and performs the necessary typing.

In the Section 5.3 we discuss more on the approach taken here, its limitations and the potential ways to overcome them.

4.2.4 Safer Casting for a Pointer to Class

C++ Problematic The type casting for class types in C++ has a number of disadvantages.

- The `const_cast` is usually a signal of a design error, since the declared `const` property of a value is taken away.
- The `static_cast` allows for wrong conversions from a base class to a derived class, which could cause a failure in the run-time, as no checks are performed.
- The `reinterpret_cast` allows to ignore the possibility of a completely meaningless conversion, which can lead to a run-time crashes, neither run-time nor compile-time checks are performed.
- The `dynamic_cast` has usually low compile-time support, and relies on the run-time type information to perform checks on the run-time. This information may not be available, being, for example omitted for performance gains.

Implementation in *Projectional C++* A new construction for type conversions is introduced, which can be considered a slight improvement over the existing in C++ casts. The **as** construction translates to the C++ `dynamic_cast`. Additionally, checks are added to improve the security of the construction.

```
class NonPoly /copyable and assignable/ {
public:
    void hello()
    int32 getFive()
    NonPoly() (constructor)
}

class NPChild : public NonPoly /copyable and assignable/ {
public:
    NPChild() (constructor)
}

testcase NonPolymorphicCasting {

    NonPoly* parent = new NonPoly();

    (parent as NPChild* )->hello();

    assert(0) (parent as NonPoly* )->getFive() == 5;

} NonPolymorphicCasting(test case)
```

Figure 4.7: Casting Example

The Figure 4.7 demonstrates some of the introduced in *Projectional C++* features related to class type conversions.

The new **as** construction is being checked in the coding-time. For example, the cast from `parent` to `NPChild` is signaled as an error, since these class hierarchy is not polymorphic, and the `dynamic_cast` in the basis of **as** would not work on it.

The next cast from `parent` to `NonPoly` is signaled with warning, because the `parent` pointer does already have the requested type. Such casting may signal a lack of understanding by the programmer while coding.

The **as** construction returns 0 at run-time when conversion fails. Thus a good programming style should include the check for it in the run-time.

When **as** is used to cast a polymorphic class, it checks, whether the cast makes sense. For this the related classes must be in the same class hierarchy. When a zero result is possible, the node is highlighted with warning, for the programmer to take an action of checking. Casting between unrelated classes is presented as an error.

Some implicit type conversions are always meaningful, thus a conversion from a pointer to a child class to a pointer to a parent class is recognized by *Projectional C++* and is allowed, as described in 4.2.3.

The casting can be further improved through introducing new analysis. At first, a fast type of cast, like `static_cast` or even `reinterpret_cast` can be used in translation, when a data-flow analysis can prove, that the conversion is always meaningful. Secondly, unnecessary casts can be eliminated in this way.

Overriding a Virtual Function

The Listing 4.6 demonstrates, how overriding of a virtual function happens in C++. The function `getArea()` is initially defined in the class `Shape` and is then overridden in the class `Circle`. The Listing 4.6 demonstrates as well the *override syntax* *absece* in C++.

Listing 4.6: Example of an Overridden Function - Text Code

```
class Shape {  
    public:  
        Shape();  
        virtual double getArea();  
};  
  
class Circle : public Shape {  
    public:  
        Circle(double r);  
        virtual double getArea();  
    private:  
        double mRadius;  
};
```

In the Figure 4.8 the same example is demonstrated, but in the *Projectional C++* implementation. In fact, the code shown in the Listing 4.6 can be generated from the demonstrated projectional sample in the Figure 4.8, by invoking all *TextGens* in *JetBrains MPS*.

When a method declaration is created, it can be set to be an override of a method in a base class. Right after an empty method declaration is created, it can be set to be an override, so that the only thing which stays, is to pick a method from a base class to be overridden. The override is automatically named, the parameters and the return type are set accordingly, the `virtual` property is immediately set. This is yet another work saver for the programmer.

After the override has been linked to the overridden method, the projectional editor checks, if the override full signature stays precisely the same as the one of the overridden method. Thus if the latter changes, it is going to be indicated in the former. The overridden method is shown next to the override declaration Figure 4.8, which compensates on the *override syntax* *absece*.


```
class Shape /copyable and assignable/ {  
public:  
    Shape() (constructor)  
    virtual double getArea()  
}  
  
class Circle : public Shape /copyable and assignable/ {  
public:  
    Circle(double r) (constructor)  
    virtual double getArea() overrides Shape::getArea()  
private:  
    double mRadius  
}
```

Figure 4.8: Example of an Overridden Function - Projection

The additional, out of C++, visual syntax in the *Projectional C++*, should not confuse the reader. It is only present in the projectional editor, and, when an *AST* is generated into a text code, the regular C++ syntax is achieved. However in this case the *AST* stores *more* than needed to generate and compile the C++ code.

This subsection is one of the examples, that storing more information can be useful, it is generalized in the Section 5.2.

Pure Virtual Functions

In the example above, Listing 4.6, one improvement to the code can be made. As the `getArea()` for a random shape can not be determined, it makes sense to make the `getArea()` function *pure virtual*. As said before, a *pure virtual* function has no implementation in the declaring class, and serves only the overriding purpose. Semantically in C++ it sets the pointer in `vptr` to 0 and thus has reflecting it syntax, see the similar example in the Listing 4.4.

This syntax can be seen as not obvious, as it reflects more the under-the-hood implementation of the mechanism, rather than the original programmer intention to build a basis for an overrides chain, while taking advantage of polymorphism.

Additionally, as discussed above, declaring a *pure virtual* function requires a significant amount of the syntactical overhead.

These were the disadvantages of the C++ programming language the *Projectional C++* tries to improve on.

In the *Projectional C++* implementation, one *intention* is reserved to make a function *pure virtual*. The *intention* automatically sets the needed pure virtual and virtual flags of the function declaration, and the projection changes. That is why out of the statement `virtual double getArea() = 0;` the programmer has to input only the name `getArea`, pick the type `double`, and toggle the pure virtual intention for the declaration in the `Shape` class.

The result of the intention work in projection can be seen in the Figure 4.9.

```
pure virtual double getArea() = 0
```

Figure 4.9: Example of a Pure Virtual Method - Projection

The word `pure` is added by the projectional editor. This makes the reading of the code easy and natural. The `= 0` part is preserved for the C++ programmer with habits, used to the original C++ syntax. And, as in many other cases, the semicolon is omitted as it is nothing but syntactic help to the compiler, which does not have to appear in the projection.

This example demonstrates, how the lower level syntax can be made more readable. The general principle on it is formulated in the Section 5.2.

Abstract Classes

If any of the *pure virtual* functions, in the inheritance chain leading to a class, is not implemented by this chain, or inside the class itself, the class is called an *abstract* class. It is not possible to construct an instance of an *abstract* class, as such classes have not implemented methods.

The programmer has to know which classes are *abstract*, and are intended for inheritance and further implementation only. One of the reason for this, is to not to try instantiation of the abstract class. Another reason is to exactly identify *abstract* classes, designed to serve as extension points.

Above we discuss the *abstract class syntax absence* in C++. It leads to the need for the programmer to determine somehow him/herself if a given class is *abstract*, the source code representation of a class does not give any information on it, unless some naming conventions require *abstract* classes to be named specially.

An improvement to this situation would be a behavior, when an editor can perform an analysis and determine if a class is *abstract*, hinting on it to the user. In the case of the projectional editor, this analysis is especially computationally efficient³, as the *AST* is readily available, and the quick analysis can be performed by a simple recursive algorithm on the inheritance chains.

After an *abstract* class has been determined, it is possible to modify the editor representation for it, and show that it is abstract, Figure 4.10.

In this example a typical class hierarchy is created to support user interface programming. A user of this *API*, when searching for a button, could try using the `Button` class, which is designed to be *abstract*, and serve as a base for the further implementations, e.g. `PushButton` in the example, or check boxes, radio buttons and similar, later.

³in comparison to textual editors, with the need to parse, see the Section 5.1 on comparison to the textual approach, and Section 5.4 on complexity of analyses

```
abstract class Widget /copyable and assignable/ {
public:
    explicit Widget(Widget* parent) (constructor)
    pure virtual Size getDimensions() = 0
}

abstract class Button : public Widget /copyable and assignable/ {
public:
    Button() (constructor)
    pure virtual boolean isPressed() = 0
}

class PushButton : public Button /copyable and assignable/ {
public:
    PushButton() (constructor)
    virtual Size getDimensions() overrides Widget::getDimensions()
    virtual boolean isPressed() overrides Button::isPressed()
}
```

Figure 4.10: Determining Abstract Classes

The projectional editor, however, checks on the fly, if a certain class is abstract, adding a special `abstract` word in front of its declaration. This makes the reading easier, and allows for quicker understanding of the code.

This example demonstrates a general principle, see the Section 5.2, of a advised practice to perform quick analyses and inform the user.

Additionally, the creation and usage of abstract class instances is checked, and forbidden by type analysis. This is described separately in the Section 4.6.

4.3 Operator Overloading

C++ Problematic The operator overloading feature in C++ allows to redefine semantics for a given operator when used with certain types. Indeed, this represents a language engineering methods, when some language construction (operators) are extended to support new features (work with new types). The projectional way to support such needs would be extending the language with new construction. However, moving towards the *STL* support, it is good to provide the operator overloading usual for C++.

Most often, the operator overloading feature is used together with class types. A very common examples are iterators with their increment, equality and dereferencing; standard input and output streams with stream operators `<<` and `>>`; and `std::string` concatenation with operator `+`.

Listing 4.7: String Concatenation with Overloaded Operator `+`

```
#include <string>
#include <iostream>
using namespace std;

int main( )
{
    string s1 ( "Blue" );
    string s2 ( "berry" );
    cout << "The_string_concatenation_is:" << s1 + s2 << endl;
}
```

In the Listing 4.7 one can find 4 overloaded operators:

- for `std::string` output,
- for `const char*` output,
- for `std::endl` output, and
- for `std::string` concatenation.

```
class Coords /copyable and assignable/ {
public:
    Coords() (constructor)
    Coords(int32 xx, int32 yy) (constructor)
    Coords operator + (Coords arg )
    Coords operator - (Coords arg )
    int32 operator [] (int32 index )
    int32 getX()
    int32 getY()
private:
    int32 mX
    int32 mY
}

int32 Coords::operator[](int32 index) from Coords {
    return (index == 0) ? this->getX() : this->getY();
}

Coords Coords::operator+(Coords arg) from Coords {
    return Coords(this->mX + arg.mX, this->mY + arg.mY);
}

Coords Coords::operator-(Coords arg) from Coords {
    return Coords(this->mX - arg.mX, this->mY - arg.mY);
}
```

Figure 4.11: Operator Overloading: Definition

Implementation in *Projectional C++* We will discuss the implementation of the operator overloading in *Projectional C++* based on the example. The Figure 4.11 shows (partially) a definition of the `Coords` class. The class represents a vector in the two-dimensional space. Three operators are overloaded for it:

- `operator +` performs the addition of two vectors,
- `operator -` subtracts one vector from another one,
- `operator []` allows to reference x and y coordinates of the vector in the array fashion.

Other members of the `Coords` class should be self-describing, given the vector semantics.

Inside the class the overloaded operators get declared. A reader can notice a high degree of similarity between an operator overload declaration and a method declaration, as both have a return type and arguments. Thus a common base *concept* was created, **`AbstractImplementableAsMethod`**. It allows to link implementation to it, or a method definition, in C++ terminology.

The difference between a method declaration and an overload declaration, is that the overload declaration has an operator designator instead of a name. An abstract *concept* **`OperatorDesignator`** has been created to serve as a base for all possible operator designators for overloading, like `+`, `-`, `[]` in this example and more.

Creating a concrete operator designator, and inheriting it from the abstract **`OperatorDesignator`**, makes it possible to define a new operator for overloading. Thus declaration and definition of an operator overload task is resolved in a modular way.

Left, stays the way, overloaded operators can be incorporated into the existing hierarchy of expressions.

```
Coords v1 = Coords(1, 2);
Coords v2 = Coords(2, 3);
Coords v3 = v1 + v2;

assert(0) v3.getX() == 3;
assert(1) v3.getY() == 5;

Coords v4 = v2 - v1;

assert(2) v4.getX() == 1;
assert(3) v4.getY() == 1;
assert(4) v4[1] == 1;
```

Figure 4.12: Operator Overloading: Usage

The Figure 4.12 demonstrates, how the defined operator overloads could be used. The `assert` statements are taken from the special *mbeddr* language designed to create test cases. They test the condition and if it is `false` the execution stops.

At first, in the example two `Coords` objects are created. Next, a third object is created as their sum. The `+` operator used is nothing else but an instance of the **PlusBinaryExpression** from *mbeddr*. Next, the newly created `v3` object gets tested. After that, the `v4` object is created as a difference between `v2` and `v1`. Again, the operator `-` used to calculate the difference is an instance of the **MinusBinaryExpression** in *mbeddr*. Then, `v4` values get tested. And finally, the `[]` operator is used with `v4` to get its second coordinate. The operator used is an instance of the reused from *mbeddr* **ArrayAccessExpression** concept.

The reuse of existing expressions from *mbeddr* is highly beneficial.

For example, the **ArrayAccessExpression** features a complex behavior. At first the indexed object is typed as an expression. After that, after `[]` gets typed by the programmer, the indexed object is transformed into an instance of the **ArrayAccessExpression** concept. The **ArrayAccessExpression** has two children. First is the expression which corresponds to array. The indexed object is moved to be a child of the new **ArrayAccessExpression**. The second child is an expression, which represents the index. It gets the input focus, after the replacement discussed above happens.

Next, if the indexed expression is about to be deleted, a special action⁴ takes place, which replaces the **ArrayAccessExpression** with its child with the role⁵ `array`. Thus the deleting of index resembles the usual behavior as in text editors, where just the index disappears, not the whole expression together with the indexed object.

The decision to not to create special expressions, which would represent the usage of the overloaded operators, helps to avoid code duplication, reprogramming the behavior of existing expressions in *mbeddr*.

Alternatively, the expressions in *mbeddr* could be inherited and changed. But the degree of changes, possible through inheritance is limited, as described in Section 5.3, and creation of a second set of the same looking expressions could potentially confuse the programmer, when he or she is going to instantiate one of the many `+` operators, for example.

The existing expressions could not be reused as-is, however. Their type system, specified in *mbeddr*, is not aware of the **ClassType**, introduced by *Projectional C++*. Thus the class objects would get rejected by the type system, as the type for the resulting expression would not be figured out by *mbeddr*.

Changing the *mbeddr* type system, hard coding the necessary behavior for classes, would introduce a dependency of *mbeddr* code on the *Projectional C++* code. The goal of this work, however, is to avoid such situations, as described in the Section 1.3.

The need to extend *mbeddr* in order to allow correct typing for the **ClassType** in existing behavior was necessary.

The solution for this problem was found to be as follows. For each of the expression kind in *mbeddr* an *interface concept* could be introduced, which will participate

⁴See 3.1.10

⁵See 3.1.1

in the type system for the expression, and, if found to be one of the expression parts, be delegated with the task of the type calculation. Then, the **ClassType** is changed to implement the newly create *interface concepts*, and the code is added to it, to compute the typing. The **ClassType** looks up the corresponding **Class** for the presence of overloads, and if an overload for the operation in question is found, the overloaded operator return type is taken as the result, otherwise an error is reported.

For example, the **ClassType** implements a newly created in *mbeddr* concept, *interface concept* **ISelfTypingInBinaryExpression**. The **ClassType** implements this *interface concept*. Thus, when a type of a binary expression is calculated, the **ClassType** is delegated with the task to determine the possibility to be involved in the binary operation under question, and to calculate the resulting type.

In the Figure 4.12 when calculating `v3`, for example, the **PlusBinaryExpression** delegates to the **ClassType** corresponding to `Coords` class, to figure out, if the operation is possible. According to the declarations in the Figure 4.11 the `Coords` class has an overload for the `+` operator, the argument type is `Coords` class, thus the operation is determined to be possible, and the return type of the operator, namely `Coords` class, is taken as the result type for the **PlusBinaryExpression**.

As the **ISelfTypingInBinaryExpression** *interface concept* is declared in *mbeddr*, the only dependency created by using it, is the existing dependency of the *Projectional C++* on *mbeddr*, keeping *mbeddr* development separate from the *Projectional C++*.

The current *Projectional C++* implementation has some limitation in the operator overloading:

- Not every operator is ready for overloading, and *mbeddr* has to be further extended to support it, this is, however, not an entirely new task, but rather repetitive application of the approach described above.
- C++ features not only member operators, but also static operator overloads, this is not supported by *Projectional C++* in the current version, a very similar to member operators approach can be taken to implement it.

4.4 Templates

C++ Problematic Templates represent a powerful tool in the C++ programming language.

In fact, templates, especially used together with a preprocessor, represent a language engineering tool, which allows for extending C++ with additional constructions, not originally present in the language, [20]. In this regard an approach taken in projectional editing is an alternative, as projectional language modularity is considered to be a basis for language extending, 2.2.2.

However, templates have to be supported to some extent in the *Projectional C++*, as *STL* is based on templates entirely. Without supporting templates, it would not

be possible to provide a usual for a C++ programmer standard library. Mostly templates are used to abstract over some type in *STL*.

Templates bare a pure textual structure in C++. A template code is not even syntactically checked before instantiation, i.e. template code is not even parsed before an instantiation happens.

When instantiating a template, the assumptions taken in the template code on a template parameter are checked against a concrete template parameter, instantiating the template. These assumptions are implicit in C++. The template parameter is assumed to be capable of everything, which is possible in C++: participation in all types of expressions and statements is assumed, in each role.

The described features of template code can present a source of various kinds of errors, for instance:

- A syntactic error found on the time, the template code is used first, and not before, when the code is created
- The template code receives precise semantic meaning, only during instantiation, before the instantiation it is not known, and it can be understood wrongly, when, for example, the template code is called somewhere, not being instantiated.
- Assumptions put on the template parameter may conflict, when one template parameter is to be used with several template code fragments
- The assumptions are hidden from the programmer being implicit requirements in the template code

In projectional editing, constraints are required, as they define, what can be constructed in principle, 3.1.4. This contradicts with the “unconstrained” nature of template parameters. For instance, when a template parameter represents a class-like type, any method can be called on an object of the type. However, in the projectional editor, only methods, previously defined, can be called on a class type. This demonstrates an example of contradiction in nature of templates in C++ and the projectional editing with constraints in general.

Implementation in Projectional C++ As a way to support templates in *Projectional C++* we introduce a term of C++ concepts. This term is not to be confused with *concepts* in projectional editing.

A C++ concept explicitly describes an assumptions put on a template parameter. A template code is required to declare, which C++ concept a template parameter belongs to, before the parameter can be used. The C++ concept defines the way a template parameter could be used in the template code.

The Figure 4.13 demonstrates how a template code can be composed with the use of C++ concepts.


```
concept Comparable {
    public:
        int8 compare(Comparable c1)
}

realizes Comparable
class NumberWrapper /copyable and assignable/ {
    public:
        int8 compare(NumberWrapper other)
        NumberWrapper(int8 v) (constructor)
    private:
        int8 mValue
}

template <class T: Comparable>
class OrderedList /copyable and assignable/ {
    public:
        OrderedList() (constructor)
        int8 compare(T first, T other)
}

int8 OrderedList::compare(T element, T other) from OrderedList {
    return element.compare(other);
}
```

Figure 4.13: Template Code Sample in *Projectional C++*

At first `Comparable` concept is declared. It puts a requirement on a type to have a function `compare()` in its public section.

Next, a class `NumberWrapper` is declared to realise the `Comparable` concept. The editor will check the class upon the requirement.

A template class `OrderedList` declares a template parameter `T` and specifies that it satisfies the `Comparable` concept. This makes an object of type `T` usable as if it was satisfying the requirements as declared by `Comparable`. This is demonstrated in the `OrderedList::compare()` function.

When instantiating a template, it is checked if either the parameter given realizes the needed C++ concept, or, more flexibly, if it satisfies the C++ concept requirements, without declaring the realization explicitly.

The support for templates by the *Projectional C++* is, of-course, limited, when compared to traditional C++ facilities. It is evaluated in the Section 5.5.

4.5 Other C++ Language Features

4.5.1 Exceptions

Exceptions are not yet supported by the *Projectional C++*. The primitive support could be easily achieved by implementing `try catch` and `throw` statements.

However, it represents a special task for the future, to make a special, improved over original C++, exceptions support. This may include:

- Analysis for the exceptions to be caught always, including an analysis for correct exception typing.
- *Informative analysis* to tell the user, which functions can generate exceptions, and the types of the exceptions.

4.5.2 Standard Output Stub

Since the *STL* is not yet supported by the *Projectional C++*. There is no way to use the C++ standard output, which is very common for various C++ programs.

A special statement has been developed to provide a primitive support for `std::cout`. The `cout << x` statement is capable of having every *JetBrains MPS concept* instead of `x`. This reflects the high flexibility of the `std::cout` shift operator overloads.

This facility is designed to be replaced later by a proper calls to *STL* version for *Projectional C++*.

4.6 Advanced IDE Functionality

As the projectional editor works directly with an *AST*, it is possible to provide some programming on the *AST* to improve the user experience. we call this additional programming as an advanced editor functionality, and discuss it in this section.

4.6.1 Primitive Renaming Refactoring

Directly from the nature of the projectional editor, without any additional effort, comes a feature to perform primitive renaming refactorings⁶.

If a node of an *AST* gets to be referenced somewhere else, it is referenced by the use of its unique internal identifier. The name of the node is a property of the node, which is not playing any role in referencing the node from somewhere else. Thus renaming, dislike the way it is performed in text editors, does not involve replacing the name all around the code. Instead, just the name property of a node is changed.

The renaming refactoring comes out of the box, without any additional efforts, thanks to the nature of the projectional editing.

As an example - renaming a class or a method would mean just changing its name where it is declared first. No search for usages and multiple replacements are going to be involved.

As a disadvantage here one can think of moving a code from one place to another. For example, moving a method from one class to another. The member fields of the source class, even if present in the destination class, will not immediately fit into the moved code, as it is still referencing not available anymore identifiers of the source class. This effect is also mentioned in the Section 5.1.

4.6.2 Getter and Setter Generation

In order to provide an access to encapsulated class properties, often expressed as member fields in C++, two access functions are usually defined, known as a getter and a setter. The getter is used to read the property, and the setter is used to set the property to a new value, after checking the validity of the new value.

The job of declaring and prototyping the two functions can be automated with a *JetBrains MPS intention*, Figure 4.14.

⁶More complex renaming, like renaming a function *together with* all its overrides, are not covered by the default behavior of a projectional editor

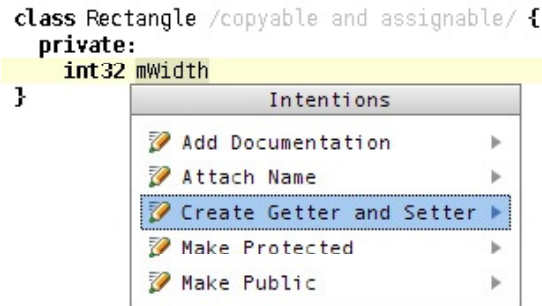


Figure 4.14: Calling the Generation of Getter and Setter

The result of the *intention* work is, as expected, two methods declared and prototyped, Figure 4.15.

```

class Rectangle /copyable and assignable/ {
public:
  int32 getWidth()
  boolean setWidth(const int32 theWidth)
private:
  int32 mWidth
}

boolean Rectangle::setWidth(const int32 theWidth) from Rectangle {
  this->mWidth = theWidth;
  return true;
}

int32 Rectangle::getWidth() from Rectangle {
  return this->mWidth;
}
  
```

Figure 4.15: Getter and Setter Generated

The way the editor names the getter and setter can be controlled through the **NamingConventions** concept, which is discussed in 4.6.3.

The getter and setter are declared in the public section of the class, which is automatically created, if not found there already.

The getter is rather simple, it just returns the value of the member field. The setter is somewhat more complicated.

Firstly, it is designed to return a `bool` value by default. This is made to remind the programmer, to include some checking of the value and return `false`, if the check locates a wrong value passed.

Secondly, the parameter of the setter is typed appropriately. As C++ by itself imply the performance maximization, the type of the parameter for the setter depends

on the member field type. And when the type represents a composite structure, like a class, it is passed by a constant reference, instead of value, Figure 4.16.

```
boolean Widget::setSurface(const Rectangle& theSurface)
    this->mSurface = theSurface;
    return true;
}
```

Figure 4.16: Setter Works with a Constant Reference for Classes

Passing a composite parameter as a value involves an overhead of allocating the necessary memory and then copying the contents in the newly allocated instance. To access the parameter in both cases pointer arithmetic is still going to follow.

4.6.3 Naming Conventions

In the C++ development projects some code writing conventions are usually agreed upon. For example, in Google coding style guide for C++, [24], it is stated that all member fields must end up with “_” sign.

For the consistency and uniformity purposes each project has to have some agreements on the way the code is composed. They can include code formatting rules and naming rules.

To some extent the formatting conventions are fixed by the way the projectional editor shows the *AST*, see, for example, 4.2.1.

The naming rules, however, should be additionally controlled. The naming rules, accepted in a project, we call naming conventions here.

In order to perform the naming conventions controll a new *concept* has been introduced, called **CppNaming Conventions**, Figure 4.17. It is created once per *JetBrains MPS model*.

```

C++ Naming Conventions
Member prefix:  m
Getter prefix:  get
Setter prefix:  set
Setter argument prefix:  the
```

Figure 4.17: C++ Naming Conventions Concept

In the **CppNamingConventions** one can give a standard prefixes for getters and setters, which are used during the code generation, see 4.6.2. The argument prefix is used in the setter generation, to name the setter argument.

The member prefix is used on the member fields to check their naming. It possible to change the prefix and the editor will control each of the member field names to comply.

Whenever a field is not named in a proper way, an error *intention* is available, see 3.1.9, which automatically renames the field, Figure 4.18.

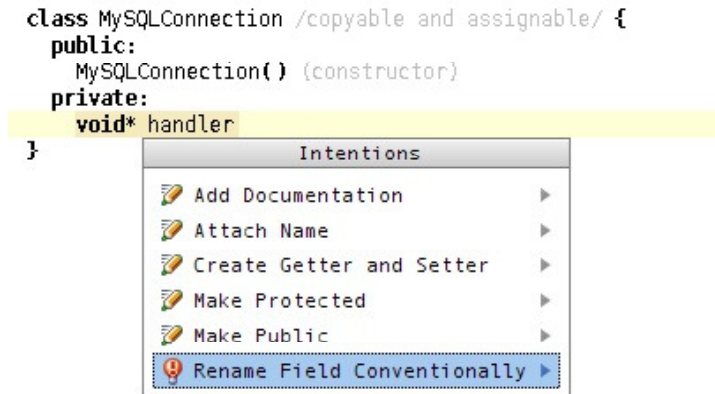


Figure 4.18: Intension to Rename a Field - Naming Conventions

The **CppNamingConventions** *concept* was created to demonstrate some new possibilities, which can be added to the projectional C++. In this case the naming conventions can be seen as a part of project configuration, in a very common sense. This is generalized in the Section 5.2.

Some remarks on the **CppNamingConventions** *concept* are given additionally in 5.1.1.

4.6.4 Method Implemented Check

When using the C++ programming language it is possible to declare a class in one file, and then implement its methods in other, potentially several, files. As there is no clear concept of a module in the language itself (more on this in the Section 4.1.2) usually different coding standards have to improve on it, requiring, for example in the Qt Project [28], one class to be declared in a the-same-named header file, and the implementation for it to be in one similar named .cpp file.

As the language itself does not argue about the place for methods, *IDEs* usually do not check if the method is implemented. Neither do compilers. And only at the linking stage it can appear, that the linker is not able to locate the method. The error message from the linker can be rather obscure, as the linker operates on a much lower abstraction level, rather than the programmer using the C++ language.

After introducing the new module *concept* as in the Section 4.1.2, it is possible to check each method and find out if they all are implemented on the very early coding stage.

A check is introduced in the *Projectional C++*, which respects inheritance chains, with overloaded functions and *pure virtual* functions, and creates a warning for the

programmer hinting that a certain method has not been implemented. Together with the class declaration, generating the assignment operator declaration and a copy constructor, the method implemented check makes the programmer to fully define the class together with the most important methods, affecting the memory operations behind the class instances life-cycle.

4.6.5 Abstract Class Construction Check

In this work we have already defined the notion of *abstract* classes in C++ and some related to them questions in 4.2.4 and in 4.2.3. Mainly the *abstract class syntax absence* and the problem of determining *abstract* classes were discussed.

```
abstract class MyObject /copyable and assignable/ {
public:
    pure virtual string getName() = 0
}

void greet(MyObject object) {
    greet (function)
}
```




Figure 4.19: The Abstract Class Construction Check Signaling an Error

An opened question which stayed, however, is providing some help to the programmer in the usage of such classes. Namely, any instantiation of an *abstract* class has to be forbidden. The *abstract* class as a type, however, should stay, and the pointer type to it should not be anyhow affected by the fact that the class is *abstract*.

The decision was taken to check the places, where an instance of an *abstract* class can appear, and deprecate such situations, marking the corresponding node as error nodes. *JetBrains MPS* supports so-called non-type-system checks, which come useful in this situation. Any node on the *AST* can be analyzed, and if the error happens to be detected, there is a chance to associate it with the node and a textual error message, which will clarify the programmer, what exactly went wrong.

Among the places, where a class can be instantiated are variable declarations field declarations, method and function arguments. The return type of the function can imply an *abstract* class instantiation. For each of such places a check is performed, and if the class type is detected, it is checked against being *abstract*. Error message appears to indicate the problem, if found, Figure 4.19.

The procedure of determining if a class is *abstract*, can happen every time, when the check is performed. These are all variable declarations, function and method arguments and return types, and memory allocations. The amount of computational load can be significant. The question of this complexity is discussed in the Section 5.4.

4.6.6 Array Deallocation Check

Whenever some allocated on the heap data is about to be deallocated, in C++ two operators can be involved, `delete` or `delete[]`. The first one is dedicated to work with memory, allocated for a single object by the operator `new`, the second deallocates memory, allocated for an array of object by the operator `new[]`.

The C++ standard does not specify any concrete behavior for wrong deallocation of an array with an operator `delete` (without square brackets), describing it as undefined, [16].

A simple check is performed, and array deallocation is marked, when is performed wrongly.

Of-course, a complete check for this can only be performed by a complex analysis of the data-flow. This is left for the future work.

4.6.7 Suggestions for the Future Work

The advanced *IDE* functionality can be grown incrementally.

Among the necessary checks to increase the *Projectional C++* quality one can find:

- Detection of virtual class
- Calculation of class-sizes
- A check for virtual destructor in a virtual class
- A check for a default constructor when an array of objects is created
- A check that an exception thrown gets caught eventually

And indeed many more. Such checks are left for the future work.

5 Lessons Learned

In this chapter we present the lessons, learned while building the *Projectional C++*.

5.1 Comparison with Textual Approach

It is important to compare the *projectional approach* to build editors for languages to the well-adopted textual approach. To the opinion of author the *projectional approach* has a number of advantages, which could make it more popular in the future, as well as, naturally, some disadvantages.

Below we present the advantageous aspects of projectional editing. We group them by the party, which benefits from the advantage.

Advantages for an end-user or a programmer, who uses a projectional *IDE*:

- In a projectional editor the programmer can potentially type less, as the editor is aware *completely* about all the possible constructions, dislike various code-completing helpers in the textual editors, which can refuse to work at all in some cases¹. Thus the programmer may rely on the auto-completion much more, which can make the typing itself faster.
- As an *AST* is readily available in a projectional editor, there is no need to pre-parse the code in order to perform analysis on it to detect mistakes or for another purpose. In a textual editor before any analysis the program has to be parsed first. Parsing is a computationally expensive operation. Repeating it after each time a piece of code is modified puts a high load on the developer's machine and can slow it down significantly.
- Different naming conventions and coding standards can be replaced by decorations and the way a projectional editor projects the *AST*. This can increase the code readability, and make some of the coding guidelines not necessary anymore, reducing the amount of work, a programmer has to accomplish. For example, a member variable, can be shown differently from a local variable in an method. This eliminates the need in many of the coding conventions. Naming conventions are, however, usual to programmers, and their are implemented in a shape of analysis in the *Projectional C++* (Sections 4.6.3 and 5.1.1).

¹when a program is in unparsable state, or when there is no source code for a library, sometimes, when a code base is too big to be indexed, the second problem is well known to C++ programmers

- Nowadays, in *JetBrains MPS* the approach of generating a text code is taken, before the projected *AST* could be further processed. For example, *mbeddr* is designed to at first generate a textual C code, before it can be compiled into an object code. However, taken into account the fact, that an *AST* in a projectional editor represents the same, or even more, information as an *AST* resulting after parsing the text code generated, in future it is possible, to process the projected *AST* itself, without generating a text code at all. For example, produce object code from it directly. Thus, in future, the compilation/processing of code from a projectional editor can be made much faster and effective when compared to the textual approach, where parsing takes place.

Advantages for an *IDE* developer:

- In order to support refactorings an ultimate “understanding” of the code is required by the environment. It is not always possible, however, especially this problem is well-known with complicated languages like the C++ programming language. The parsing problem, and various checks related to it distract the *IDE* creator, from focusing on the refactoring implementation itself. As an *AST* is available in a projectional *IDE*, the implementation of refactorings represents a more straightforward task, disjoint from parsing.
- Projectional editors have a flexibility to adopt new language constructions. As a projectional editor allows for language modularity (Section 2.2.2), it is possible to extend a language, without modifying an editor significantly, installing extensions for it or similar.

As problematic or disadvantageous the following aspects of projectional editors can be concerned, they usually affect both *IDE* user and developer:

- A special problem with the projectional approach is moving the code around. As all nodes of the *AST* get referenced by the use of their internal identifiers, and their names do not participate in it, after a piece of code has been moved to another location on the *AST*, a special processes of binding the nodes has to be executed. For example, if there was a variable *x* in the code defined before the moved snippet, and in the new location for the snippet another variable with the same name *x* is defined, the new *x* will not get referenced by the moved code snippet, as it references the old one (not available anymore) by its internal identifier. In *JetBrains MPS* the manual process of rebinding is always required, i.e. the programmer will have to go over all nodes, which reference the old context, and input them again, to connect to the new context². In textual editors, there is no such problem, but another one exist -

²Sometimes a special function to re-analyze and rebind nodes can be used in *JetBrains MPS*, however it does not work flawlessly and represents in any case an additional concern and work

the moved code snippet can change its semantics in a wrong way after being associated with a new context, and not checked entirely. For example, a reference to a variable can start to reference some another, locally defined, more close to the new code snippet location, variable with the same name as one, more global, used before.

- A very specific issue relevant to projectional editors is the format to store the projectional code and the version control for it. In *JetBrains MPS* an AST gets serialized as XML, and is stored in a file. The XML resulted, is, generally speaking, not a human-readable code, despite the XML nature. The line-by-line merging as employed in regular text-oriented version control systems (CVS, SVN, Git, Mercurial) does not apply, breaking the XML, or asking the user to merge, presenting with unreadable XML code. The approach taken in *JetBrains MPS* is providing a special merge driver, which handles merging for the projectional code in a proper way. The driver is not perfect however, still requiring the user to finish the job manually sometimes, especially when it comes to non-trivial conflict resolutions.
- New languages are developed themselves using a special defining projectional languages in *JetBrains MPS*. So the evolution of a language under development, and its version control is also an issue. Each new incremental iteration of a language in *JetBrains MPS* gets internally an increment in the language version number. When a second language is referencing the modified one, the version number is taken into account. The update for the first language then requires an update to the second, using the first, language, as well as to all other languages, which use the updated one. If two updates happened at the same time for a language, then two *different* versions with the same version number appear, which presents a problem for the referencing the changed language languages. All this version control issues are still up to be thoroughly thought of, and are not yet implemented well enough.
- The question of language evolution and code in it is to be researched on. When a language defined in a projectional editor is modified, the old code may turn to be not matching the language description anymore. For example, nodes may stop satisfying constraints, or have a child/reference with a role, deleted in the new language version, or, vice versa, have a nothing in a place where the new version language requires some child, reference or property. This renders the code in a former language version incorrect in a newer one. The question of the code update to a new language version appears. For example, a script can be provided with each new language version, which updates the code to the version in question. This is not automated however in *JetBrains MPS*, so that the update process is seamless for the language user. This is another problem to work on in the future. The problem described, of-course, is not relevant to the text code editors, as it is, since the language evolution there is rather untypical.

5.1.1 Some Additional Remarks on Naming Conventions

Few remarks concerning the **CppNamingConventions** *concept* are to be made here:

- The marking of special variables or object, keywords or type names, can be performed by changing editors for them. The special naming will not be needed then. Such way would mean however no opportunity to introduce a project-dependent marking, as it starts to be common for all projects, being a part of the projectional C++ implementation.
- The naming checks can be generalized to use compliance to regular expressions, instead of just prefixes. As an advantage comes the ability to adopt a much broader set of different naming conventions. Disadvantageous is the increase of the computational load in the projectional editor, this is discussed also in the Section 5.4.
- The **CppNamingConventions** in *Projectional C++* is just a *concept* in a *Jet-Brains MPS model*. It represent a similar *concept* to the **CppImplementationModule** or the **BuildConfiguration** *concepts*. Dislike many conventional editors, which store such settings as a workspace, project or *IDE* configuration, the *Projectional C++* makes it a part of the program code itself. It is advantageous, since all the programmers in a team have to follow the same naming conventions set up *once* in a project on the start phase, and no environment (re-)configuration is needed to work on the project by any of the joining developers. This principle is generalized in the Section 5.2. The projectional approach is also discussed and compared to the conventional one in the Section 5.1.
- The naming conventions can of-course be extended to incorporate class names, function names, additional naming for methods, like “is”- prefix for the boolean return type.

5.2 Generalized Principles of the Projectional Approach

In this chapter we formulate some of the general principles, which can be taken into account when designing new languages in the projectional editors, which are meant to represent, especially, the existing already text languages.

5.2.1 Targeting Semantics

When implementing a language for projectional editor, one should target semantics of it, rather than an existing syntax. For example, extensions can be provided, which raise the abstraction level to be closer to the application of the language. The

code in the target text language is generated then from the higher level constructions.

Another place to think of targeting semantics is, where the target language constructions are low-level and full of compiler-helping syntax. These constructions can be cleaned out, helping the programmer to focus on their semantics, instead of typing and syntax. C++ brings various examples of it: *pure virtual* methods declaration, pointer-to-method type usage, and similar.

5.2.2 Store More Information

The language in the projectional editor can, and often should, contain *more* information as it is needed to just generate a text in the target language. This information may be used to improve the generation results, or analysis. Example is the overridden method link in the override in the *Projectional C++* (Section 4.2.4).

The disadvantage of this way can be a problem to extend the information, taken from an importer of the native text language (Section 2.2.3).

5.2.3 Configuration as a Part of Source Code

Usually a project consists not only of the source code, but of some configuration for it, like naming conventions, generator configuration, build configuration, other specific to the project information.

It presents advantageous to store this configuration together with code as a part of it. This eliminates the need to separately configure an environment of each developer before the development process may start.

Usually editor preferences are not shared among users, like in Eclipse for example, stored in a individual for each machine workspace part. This brings a need to configure each development environment separately, and maintain the similarity of configuration.

This should exclude, however, the pure developer-machine-specific configuration.

5.2.4 Hide Redundant Syntax

Usually, textual languages contain a lot of syntax, which helps parsers of the language to process the code. In C-like languages these are semicolons, curly braces, braces and brackets.

This syntax has nothing to do usually with the code semantics, so it could be not projected at all, without changing the meaning of the code. Decreasing the amount of projected symbols the code can be made more readable.

Formatting³ can also be considered the redundant syntax, and addressed by projection.

³it is important for some languages, like Python, and less relevant to C as syntax complication

5.2.5 Make Old Syntax Readable

Whenever a syntax of the target language happened to be not well readable by itself, a projectional editor can change it. The amount of punctuation can be lowered and some phenomena named in a human language.

As an example we are bringing here a *pure virtual* method declaration (Section 4.2.4).

5.2.6 Show the Core, Hint on Details

Not necessarily all the information represents the core meaning of the language construction. The most important information can be shown first, and the rest can be shown as a hint, especially when it can be figured out by the projectional editor automatically.

As an example we can consider a friend function declaration in the *Projectional C++* (Section 4.2.2).

5.2.7 Perform Analyses and Inform the User

Performing various analyses on the *AST* in the projectional editor, it is possible to improve the overall editing experience.

We suggest the logical division of analyses on two types: *informative analysis* and *preventive analysis*.

An *informative analysis* can be performed to find out more about the edited code. Various newly found properties can be shown as hints for the user. Abstract classes determination is an example of informative analysis (Section 4.2.4). Another example is class copying and assignment analysis (Section 4.2.1).

A *preventive analysis* can be performed to prevent programming mistakes. In general, this topic can go deep, and it is considered separately in, e.g., [7]. In this work as an example of such an analysis for C++ the detection of abstract class instantiation attempts can serve (Section 4.6.5).

When implementing analysis, one should mind the complexity of it, and take the decision, whether to implement it as a *self-running analysis*, or on as an *analysis on demand*, see the Section 5.4.

5.3 Projectional Language Extensibility

In general the extensibility and modularity are very important concepts for projectional editing (Section 2.2.2).

In *JetBrains MPS* the extensibility consists of creating a new language and there some new *concepts*, which represent an extension. When creating *concepts* in *JetBrains MPS* one deals with several views of them, see Section 3.1. In this section we consider extensibility, and the most important, how well it is possible in *JetBrains MPS*, per view on the language.

5.3.1 Structure Extensibility

This view is the same as the view on *concept* declarations.

Extensibility is implemented here by inheriting from the base *concept*. It is rather straightforward, since it is very similar to the object oriented programming languages concept of inheritance, with one difference, actually originated from the Java notion of interface, as there is one base *concept*, but several *interface concepts* which could be implemented.

5.3.2 Editor Extensibility

It is hard to extend a language in terms of changing an editor concept (Section 3.1.2) for an existing *concept* in *JetBrains MPS*. Namely, there are no direct ways to perform inheritance there.

So, if the way a *concept* is edited or displayed has to be changed, one should take work around ways to achieve the needed behavior.

One way is inheritance from the *concept*, and changing the editor concept for the descendant.

Another way, is mixing some interface calls into the editor, and overriding the methods in the inheriting concept. This way limits the editor to the way it was originally programmed is limited.

These both ways, however, do not change the way instances of the old *concept* are presented.

In the new 3.0 version of *JetBrains MPS* an ability to have several editors for one *concept* is present. It is up to the future research, on how it will change the editor extensibility.

5.3.3 Constraints Extensibility

Constraints, similar to the editor, does not extend well in *JetBrains MPS*. Namely, there is no way to newly define the constraints for an existing *concept*. When creating a new concept, there is no way to reuse constraints from existing one, as they are not accessible.

As an example, when extending the *mbeddr C* to the *Projectional C++*, the naming of identifiers had to be changed, so that C++ keywords are accounted as well. They naming rules for identifiers are constrained in the **IIIdentifierNamedConcept** in *mbeddr*. So in its constraints concept a limiting behavior is programmed. There is, however, no way to reuse it explicitly.

Another example would be the reference constraints, where a variable declaration would be forbidden to use an *abstract* class as a type. It is not possible to redefine those constraints, just adding a language, and not editing the existing one directly.

As a workaround two methods are proposed. First, the constraining behavior can be taken out into a separate code fragment in a Java-like class, the abstract

factory pattern could be implemented, [8], and the polymorphic behavior achieved in this way. Second, is to create a check, additionally constraining and marking as errors the places, where the new constraints have been violated.

The first workaround is work intensive to implement originally in the base language. The second workaround does not allow for extending the constraints, making them weaker, and lets the not allowed nodes in the code completion.

Additionally, it is noteworthy to mention, that it is possible to redefine a constraint for a certain role, when inheriting from a *concept*.

In the future, a research could be made, how *JetBrains MPS* could be improved to allow for easier constraints extensibility.

5.3.4 Behavior Extensibility

Behavior is very similar to Java classes and their methods. It is easy to extend behavior of a *concept* in *JetBrains MPS* as all the object oriented methods for polymorphism can be involved in the very same way as for Java classes.

5.3.5 TextGen Extensibility

TextGens are also very well extensible. When generating a text for a *concept*, the children are output with the textgen **append** command, without specifying, how exactly it should be done. Polymorphically the matching *TextGens* are invoked, and this extends the *TextGen* of the previously defined *concept*.

For example, when generating a text for a function, each statement of the body is generated to text. For each statement the *TextGen* of the statement itself is executed. Thus, if we add a new kind of statement, all we need is to define a *TextGen* for it, and it will be polymorphically invoked from the *TextGen* for the function. The text for the function will be generated correctly, without the need to change the function *TextGen* implementation anyhow.

5.3.6 Generators Extensibility

Generators perform language transformations in *JetBrains MPS* (Section 3.1.8). As this work does not directly implement language transformations, it is left for future research, to investigate, how extensible the generators are.

5.3.7 Intentions Extensibility

Intentions are described in the Section 3.1.9.

There may be a need to modify an *intention* after extending the language. There is no direct way to do it in *JetBrains MPS*.

For example, there is explicit way to forbid an *intention* to work on a newly defined *concept*, no matter it is based on some *concept* for which the *intention* is defined.

As a workaround an injection of external polymorphic code from a Java-like class can be taken, similarly to the way it is described above for constraints, with the same practical outcome of a high programming intensity when creating the base language.

Alternatively, an *intention* can delegate its function to the *concept* under question, so that the whole manipulation is made by the target *concept* itself. This will lead, however in a necessity to define a general behavior in the base concept, which can be behaving wrong in one of the particular cases, or to the need to implement the polymorphic methods called in the *intention* in *each* of the descendant *concepts*.

5.3.8 Type System Extensibility

Type System in *JetBrains MPS* is generally speaking another way of constraining. And exactly as in the situation with constraints there is no direct way to change the type system behavior, when extending an existing language with a new one. For example, when a new kind of expressions is added, which has to be typed differently, when used together with some existing expression type, and the existing expression type system is determining the type, it is not possible to redefine this behavior or extend it naturally with some provided by *JetBrains MPStools*.

The workarounds consist from injecting polymorphic behavior in the type system calls, or from using *JetBrains MPS* own workaround, like the replacement rule, as for example in the Section 4.2.3.

Hopefully, in the future versions of *JetBrains MPS* this is going to be taken care of, and some ways to extend naturally, by the means of the typing system itself will be present.

5.3.9 Analyses Extensibility

Analyses⁴ are also subjects to challenge the language extensibility. If an analysis is relying on the exact *concepts* to work, and is not assuming that a new language could extend those, a problem happens.

For example, *mbeddr* data flow analysis, can analyse a C++ code snippet, using some class `Circle`, to instantiate it `Circle c;` and produce an error, that the variable `c` has not been initialized, which is not true in the case of a class with a constructor. Either the analysis should delegate some features to *concept*, or employ some external polymorphic calls as possible workarounds. In the first case the analysis stops to be a separate programming from the language itself, as delegated analysis methods are found now in the *concept* behaviors. In the second case the development can get more complex initially, as the code should be written in the very beginning polymorphic and abstract enough to allow non-invasive modification in future.

⁴Including but not limited to non-type-system rules. For example, a complex *analysis on demand* can be implemented in a *JetBrains MPS* plugin.

Again, some specific support for analyses from *JetBrains MPS* itself could improve the situation, by providing some special means to develop extensible analyses.

5.3.10 Extensibility Overview

Here we summarize in a table the degree of extensibility in *JetBrains MPS*, provided for languages, per view on a language, and the quality of known workarounds.

View	Extensibility	Workarounds Quality
Structure	High	-
Editor	No	Poor
Constraints	Low	Good
Behavior	High	-
TextGen	High	-
Generators	-	-
Intentions	No	Medium
Type System	Low	Medium
Analyses	No	Medium

As an outcome it appears, that *JetBrains MPS* does not provide a high degree of extensibility, which would allow a pure modular language engineering. The views, which are not extensibility aware could be improved, and the task of improvement can be no trivial⁵.

5.4 Analyses and Complexity

As it is stated before (Section 5.2.7) when constructing a language with an editor for it, it makes sense to provide the language with some analyses. Two types of analysis by application are considered: *informative analysis* and *preventive analysis*. Two types of analysis by the way they are initiated are defined: *self-running analysis* and *analysis on demand*.

A work flow of an analysis can be split into three major steps: initiation, running and reporting the result to the user. On each of the steps the environment (*JetBrains MPS* in this case) can provide certain support for the analysis, making the development of it easier. Below we discuss it step-by-step.

5.4.1 Analysis Initiation

It can be beneficial for the overall *IDE* performance to implement all computationally heavy analyses as *analyses on demand*. Thus the user invokes them when needed, and the question of initiation is solved.

⁵the author implies does from the absence of good workarounds currently

For the *self-running analyses* the question of automatic initiation is to be solved. In *JetBrains MPS* there is no way to define, when a certain check is to be run. Thus two problems occur: some checks run too often, and decrease unnecessarily the system performance, or other checks do not happen often enough, and the user is not informed on time on the results⁶.

As a solution to this an *API* extension for can be proposed: for each analysis it should be possible to define an event, on which the analysis has to repeat, as well as which nodes of the *AST* have to be covered.

For example, for the *informative analysis* identifying *abstract* classes (Section 4.2.4) the running event can be defined through the declaration of a new method or a new inheritance relationship established. The affected nodes of the *AST* can be correspondingly described as the changed by the modification classes.

Thus the analysis will never run when changes made do not require it, and will always be run when it has to, and only on the affected nodes.

5.4.2 Analysis Running

After an analysis has been initiated, the running phase comes. Some analyses can be computationally complex, as they can require external tools running, like SMT solvers, for example, [7], or involve themselves complex algorithms.

As an example of a computationally intensive analysis, the *preventive analysis* for *abstract* classes instantiation can be taken (Section 4.6.5). At first, the amount of nodes of an *AST* is high, as they include local variable declarations, function parameters, function return types, class member variables and more. Each of the nodes is checked like this: at first the type is extracted, then the type is checked to be a **ClassType**. When an instance of the **ClassType** is found, the **Class** is checked on being *abstract*. For this all of its method declarations are checked on being *pure virtual*, and then all the base classes are checked on being *abstract*. If we take a reasonably big code base, like, for example the Qt library, which contains about 1000 classes⁷, the amount of nodes to check and the associated computations can be immense⁸.

Another example of a computationally intensive analysis could be received, if **CppNamingConventions** *concept* would be implemented for all named objects, and in a complex way, including regular expressions, as described in the Section 5.1.1.

As analyses can be started automatically, the computational load on an *IDE* can be increased as some analyses may start in parallel.

This all may present a performance problem, and a certain support from the *JetBrains MPS* is needed to handle the task of efficient analysis development:

⁶There is a way to re-run *self-running analyses* in *JetBrains MPS* manually, by pressing F5

⁷989 classes in Qt 5.1

⁸If we assume, that each class out of 1000 classes in a library has 1 parent, 3 member fields, 3 methods, each with 1 parameter, 1 return type, and 1 local variable, we get up to 100 000 nodes to be addressed by the check.

- As discussed in the previous subsection, it should be possible to control, when *self-running analyses* start, and the scope of their work.
- A value caching is needed, to store the information figured out by the analyses. For example, for each class, it could be saved, if it was found to be an *abstract* class, and the cached value should be valid, until the event to re-run the analysis is detected. It may be necessary, to retain the values after the *IDE* restart,
- As an analysis may take some time to execute, there has to be a way, to inform the user on the background process running, so that the user interface is more clear about analyses and their run time. Currently, *JetBrains MPS* does not inform the user about it.
- There has to be a way to limit and prioritize the analyses running at the same time. For example, *preventive analyses* can be preferred over *informative analyses*, and the total amount of analyses running in parallel could be limited to some number.

The task of providing a better support for analyses in *JetBrains MPS* represents a challenge which lies out of scope for this work. However, this work demonstrates by example the need in such analyses-specific support.

5.4.3 Reporting the Results of an Analysis

Reporting a result after an analysis has completed is very important, since it has to convey the information to the user in a right way, so that the user can take all corresponding actions when needed.

For the time being three forms of reporting have been used in *JetBrains MPS*:

- Error or warning markup by non-type-system checks (Section 3.1.6).
- *Informative analysis* hinting in the editor, as for *abstract* classes, for example, see the Section 4.2.4.
- Plug-in created with a custom user interface for an *analysis on demand*, as described in [7].

A problem with non-type-system checks is that an error could appear in a root node A after a modification of a node B. For example, if B is a class, changed to be *abstract*, and A is an implementation module, where the class B was instantiated. A must turn to be invalid, but the error is not going to be seen to the programmer, as he/she is working in another root node, in one, where the B class is defined.

JetBrains MPS needs to provide some support which will allow to modify the way, root nodes look in the project explorer⁹, if an error is found in a node. For

⁹See left window panel on the Figure 3.1

example, if a modification of one module, causes an error in another one, this capability is explicitly useful and should immediately come into action, to inform the programmer about a problem at the moment, the problem appears.

Alternatively, some user interface element may be provided to output analysis messages in some form to the user, like a log window with hyper references to the error nodes.

An *informative analysis* analysis, as for example copyability and assignability analysis (Section 4.2.1), is integrated with the editor concept for the class¹⁰. This makes the editor and the analysis being built in dependence on each other. This, in turn, makes the code more complex. Instead, some methods to decorate nodes could be provided, separately from editor implementation. This would allow to control the way, how *informative analysis* results are displayed to the user separately.

Finally, when creating plug-in analyses, the user interface for them has to be created in standard Java libraries for the user interface. Some patterns could be figured out, and offered as a *JetBrains MPS API* for the user, which would allow, for example, a parallel execution of the analysis code or an external tool, presenting the results in some commonly met form (table, diagram, decorations for code), and invalidating the results of the analysis, when needed.

These all are suggestions to improve *JetBrains MPS* based on the experience gained during working on this Master Thesis, they can be proposed as a future work or improvements to the *JetBrains MPS* developer team.

5.5 Templates

The support for templates, as described in the Section 4.4, presents some advantages and disadvantages for the *Projectional C++* usage.

Among the disadvantages are:

- Incompleteness of the support for templates, thus it will not allow every construction possible in textual C++.
- The need to prepare C++ concepts before writing the template code, there questions of code duplication can appear, when declaring two C++ concepts with the same content.
- Importing of native C++ code is made more complex, as C++ concepts have to be generated, this involves parsing the template code and extracting requirements for the template parameters, and checking existing classes for compatibility with the extracted C++ concepts.

Advantageous are the following points:

¹⁰See the Section 3.1.2 for editor concept or editor view

- The requirements on the template parameter are made explicit for the programmer through the use of C++ concepts.
- Checks for C++ concept compliance make the template code programming and usage more predictable.

The challenges present above as disadvantages of the C++ concepts approach could be resolved in the future by improving on the C++ concepts through:

- Making the template support with C++ concepts more complete
- Developing techniques to auto-generate C++ concepts from a given code, preparing it to be generalized
- Developing a special importer, which will figure the concept definitions out of the existing textual C++ code.

Alternatively, other ways to support C++ templates in the *Projectional C++* could be researched.

6 Conclusion

Here we briefly review the accomplished contributions and a future work possible.

6.1 Accomplished Contributions

In this work we were extending *mbeddr* C language with programming constructs from the C++ programming language, which resulted in a software, we call here the *Projectional C++*.

A new *IDE* for C++ has been created, which supports projectional editing for a subset of the C++ programming language. The new *IDE* has been designed with several goals in mind.

First, the *Projectional C++* should serve as a modular basis for the future extensions to C++. The potentially possible extensions have been figured out and proposed as a future work.

Second, the experience of the *Projectional C++* programming has to be more safe and informative, when compared to the regular C++ programming. Various pitfalls, usual for C++ programming, have been explained in this work, and tools have been introduced withing the new *IDE*, designed to compensate on the pitfalls.

While improving on the C++ programming experience, an application of analyses has been found to be useful. Various analyses have been applied in *Projectional C++*. The analyses have been classified orthogonally by the purpose to *informative analyses* and *preventive analyses*, and by the running type to *analyses on demand* and *self-running analyses*.

A method to support to some extent a project coding guidelines, precisely, naming conventions, has been proposed in this work. The idea to store the project related information together with the source code has been formulated, its advantages have been listed.

The projectional approach to create an *IDE* has been compared to a traditional textual approach. The advantages of the projectional approach have been listed. The potential problems while developing, using and evolving a projectional *IDE* and a code produced by it, have been identified.

The *Projectional C++* as a language has been designed, to represent in the end a complete enough subset of the C++ programming language for the *STL* to be recreated in it in the future. The creation of a projectional *STL* copy was out of scope for this work, however. The completeness of the *Projectional C++* language

was described in this work, and the future work was proposed, which is going to be needed in order to support *STL*.

Generalized principles of language re-engineering in a projectional *IDE* have been discovered and formulated. The principles can be reused when creating an *IDE* for a language, to make the language more readable, more expressive, higher cross-platform, and safer and more convenient to use for the programmer.

Various language modularity and extensibility problems have been considered on practice while developing the *mbeddr* C++ extension. The *Projectional* C++ has been developed in such a way, that the *mbeddr project* languages do not have a dependency on *Projectional* C++, which allows for, to a certain degree, separate development of the projects.

In parallel while extending *mbeddr* to build a new C++ *IDE* the facilities for extensibility, provided by *JetBrains MPS* were researched. Extensibility has been analyzed separately for each view on the language. Whenever the degree of extensibility was not considered to be high, workaround and future *JetBrains MPS* improvements were proposed. for *JetBrains MPS*.

The question of building analyses in *JetBrains MPS* for a new language has been discussed. Three phases of analysis running were identified, and for each phase potential problems were highlighted. *JetBrains MPS* improvements have been proposed to make the analysis creation more productive.

Finally the potential future work has been described, including the ways to get the full C++ language support, the need to test the new *IDE* on practice, the problem to create an importer for the textual C++ code and its potential complications have been described.

6.2 Future Work

Here we briefly describe the way, *Projectional* C++ could be developed in the future.

6.2.1 Full Language Support

One of the main target for *Projectional* C++ in the future has to be developing all of the original C++ features. This is needed both for the convenience of a *Projectional* C++ user, and for the ability to import an existing code base, which can use all the constructions, possible in C++.

One of the big challenges for the language completeness is a development of full templates support.

A very important part of the C++ programming language, is undoubtedly the *STL*. In order to acquire all language capabilities as is usual for a C++ programmer, after supporting all features of the language itself, the *STL* has to be implemented in the *Projectional* C++. Alternatively, if a powerful importer is developed first, the *STL* could be potentially imported.

6.2.2 Investigating the Language Use

In order to continue the *Projectional C++* development a user has to be found for the *Projectional C++*, who will use the language on practice. This will allow to figure out in the fastest way, which language features left are the most desirable on practice, which new features, similar to those described in the Section 4.6, can be developed and so on.

No matter the C++ programming language is not completely supported by the *Projectional C++*, the ability to use the object-oriented programming paradigm in *mbeddr* represents a qualitative improvement over the existing C language in *mbeddr*. This fact represents an advantage, which can attract any *mbeddr* user towards the *Projectional C++* even before the C++ programming language is entirely supported.

6.2.3 Extending the Projectional C++

Following one of the goals to create *Projectional C++* extensions for it could be created in a modular fashion.

As examples of such extensions could be:

- Language constructions emulated by preprocessor and templates as in [20].
- Classes extensions to support messaging as in Objective-C, or signals and slots as in the Qt project.
- Object-oriented design patterns could be research for the ability to support them on the language level
- Development of higher-level models, which would generate to classes together with semantic analyses for them

Other *Projectional C++* extensions can be invented, including specific extensions for various domains.

6.2.4 Projectional C++ Importer and Other Tools

An importer for the *Projectional C++* could be developed, which would allow to reuse in the *Projectional C++* the existing textual code base. One of the special challenges to develop such an importer would be a conversion from regular C++ templates into the *Projectional C++* templates with C++ concepts.

A debugger of *mbeddr* could be extended in order to support the *Projectional C++*.

6.2.5 JetBrains MPS Evolution

This work suggests some improvements for *JetBrains MPS* itself, see the Section 5.3 and the Section 5.4 for example.

If *JetBrains MPS* gets updated, taking some of the mentioned potential improvements into consideration, the *Projectional C++* could be improved by taking advantage of the new *JetBrains MPS* features.

Appendix

Glossary

abstract a class in C++, having at least one method declared pure virtual in ancestors, but never implemented in the ancestors or the class itself, instances of such class can not be created. 46, 52, 65, 73, 77, 78

abstract class syntax absence a phenomenon in C++, consisting in absence of any syntax to explicitly declare a class abstract. 46, 52, 65

action is a JetBrains MPS term, which corresponds to a automations, specific to actions, occurring while editing. 27

analysis on demand is an analysis, which the user must invoke explicitly in the *IDE*, it is usually computationally expensive, c.f. *self-running analysis* . 27, 72, 75, 76, 78, 81

API Application Programming Interface. 5, 52, 77, 79

AST Abstract Syntax Tree. 2, 3, 5, 9, 11–13, 15, 19, 20, 23–26, 44, 51, 52, 60, 61, 63, 65, 67–69, 72, 77, 87, 88

base concept is a JetBrains MPS concept, which serves as an inheritance base or parent concept for a given concept, e.g. Statement concept for IfStatement concept. 19

concept is a class-like type, describing a node type in the *AST* when talking about projectional editing. 2, 3, 13–15, 17–30, 34, 36, 37, 41, 44, 45, 47, 55, 56, 58, 60, 62–64, 70, 72–75, 77, 88

DSL Domain Specific Language. 9, 11, 14, 17, 19, 25

Embedded C++ is a language subset of the C++ programming language, intended to support embedded software development. 1, 4

Extended Embedded C++ is a improvement of Embedded C++, bringing back the omitted language features, and a memory-aware *STL* version. 1

IDE Integrated Development Environment. 2–7, 9, 11, 17, 64, 66–68, 70, 76–78, 81, 82, 87, 88

- informative analysis** is performed to inform the user about some code properties, to enhance understanding of the code and its properties. 60, 72, 76–79, 81
- intention** is a special procedure in *JetBrains MPS* which can be used for automatic manipulations on the *AST* with a node of a given *concept*. 26, 37, 41, 42, 51, 61, 62, 64, 74, 75
- interface concept** is a JetBrains MPS concept, which serves for inheriting a concept behavior interface, can not serve as a base concept. 20, 23, 56, 57, 73
- JetBrains MPS** is a language engineering environment allowing to construct incrementally defined domain specific languages. ix, xi, 2–6, 14, 17–21, 23–30, 37, 41, 44, 50, 60, 61, 63, 65, 68–70, 72–79, 82–84, 88
- mbeddr** same as mbeddr project. xi, 2–7, 14, 19, 24, 27–30, 34, 35, 38, 47, 55–57, 68, 73, 75, 81–83
- mbeddr project** is a JetBrains MPS based language workbench, representing C language and domain specific extensions for the embedded software development. ix, 1, 4–6, 15, 17, 19, 22, 27, 28, 30, 82
- model** correspond to one single JetBrains MPS file unit, in the mbeddr context it corresponds to C or C++ project, like one library or one executable.. 30, 63, 70
- override syntax absence** a phenomenon in C++, consisting in absence of any syntax to explicitly designate a method, being an override of another method. 46, 50
- preventive analysis** is performed to inform the user about the potential mistakes in advance, in order to prevent them. 24, 72, 76–78, 81
- projectional approach** is an approach to create an editor for a language, when the editor is aware of the *AST* for the code, and shows the code to the user, projecting the *AST* itself, and allowing to edit the *AST* directly. 6, 7, 11, 67
- Projectional C++** a C++ flavor introduced by this work, based on mbeddr C++ implementation in the JetBrains MPS environment. 4, 6, 7, 30, 33–35, 37, 39–42, 44–51, 55–60, 64, 66, 67, 70–73, 79–84
- pure virtual** are methods in a C++ class, for which intentionally no implementation is provided, they serve purely for overloading purposes, describing a pure interface. 45, 51, 52, 64, 71, 72, 77
- self-running analysis** is an analysis, which determines itself the point of time, when it is performed, or this moment is determined automatically by the *IDE*, there is no need to explicitly run such analysis. 72, 76–78, 81, 87

STL Standard Template Library. 1, 30, 31, 53, 57, 58, 60, 81, 82, 87

TextGen is an special kind of generator in JetBrains MPS, dedicated to produce a textual representation of a node of a given concept. 25, 50, 74

Bibliography

- [1] VDC Research. Survey on embedded programming languages, http://blog.vdcresearch.com/embedded_sw/2010/09/what-languages-do-you-use-to-develop-software.html.
- [2] Embedded C++. Official website, <http://www.caravan.net/ec2plus/>.
- [3] Embedded C++. Objectives behind limiting C++, <http://www.caravan.net/ec2plus/objectives/ppt/ec2ppt03.html>.
- [4] Bjarne Stroustrup. Quote on Embedded C++, http://www.stroustrup.com/bs_faq.html#ec++.
- [5] IAR Systems. Extended Embedded C++, http://www.testelect.com/iar/extended_embedded_c++.htm.
- [6] Markus Voelter, Daniel Ratiu, Bernhard Schätz, and Bernd Kolb. mbeddr: an extensible c-based programming language and ide for embedded systems. In *SPLASH*, pages 121–140, 2012.
- [7] D. Ratiu, M. Voelter, Z. Molotnikov, and B. Schätz. Implementing modular domain specific languages and analyses. In *Proceedings of the 9th Workshop on Model-Driven Engineering, Verification and Validation*, 2012.
- [8] E. Gamma, R. Helm, R. Johnson, and J. Vlissides. *Design patterns: elements of reusable object-oriented software*. Addison-Wesley Professional, 1995.
- [9] Paul Hudak. Modular Domain Specific Languages and Tools. In *ICSR '98*, jun 1998.
- [10] Eric Van Wyk. Modular Domain-Specific Language Extensions. In *1st ECOOP Workshop on Domain-Specific Program Development (DSPD)*, 2006.
- [11] Markus Voelter. Language and IDE Development, Modularization and Composition with MPS. In *GTTSE 2011*, LNCS. Springer, 2011.
- [12] Markus Voelter. Embedded Software Development with Projectional Language Workbenches. In Dorina Petriu, Nicolas Rouquette, and Oystein Haugen, editors, *Model Driven Engineering Languages and Systems, 13th International Conference, MODELS 2010, Oslo, Norway, October 3-8, 2010. Proceedings*, Lecture Notes in Computer Science. Springer, 2010.

- [13] M. Voelter, D. Ratiu, B. Schaetz, and B. Kolb. mbeddr: an Extensible C-based Programming Language and IDE for Embedded Systems. In *Proceedings of SPLASH Wavefront 2012*, 2012.
- [14] Bjarne Stroustrup. *The C++ Programming Language, Special Edition*. Addison-Wesley, 2000.
- [15] Herbert Schildt. *C++: A Beginner's Guide, Second Edition*. McGraw-Hill Osborne Media, 2003.
- [16] Standard for programming language c++ (c++11).
- [17] Stephen Prata. *C++ Primer Plus, Sixth Edition*. Addison-Wesley Professional, 2011.
- [18] Scott Meyers. *Effective C++: 55 Specific Ways to Improve Your Programs and Designs (3rd Edition)*. Addison-Wesley Professional, 2005.
- [19] David Vandevoorde Nicolai Josuttis. *C++ Templates: The Complete Guide*. Addison-Wesley Professional, 2002.
- [20] Andrei Alexandrescu. *Modern C++ Design: Generic Programming and Design Patterns Applied*. Addison-Wesley, 2001.
- [21] Andrei Alexandrescu. *Modern C++ Design: Generic Programming and Design Patterns Applied*. Addison-Wesley Professional, 2001.
- [22] Bjarne Stroustrup. Classes: An abstract data type facility for the c language. *Sigplan Notices*, 17:41–52, 1982.
- [23] Class layout recommendations, Possibility.com. <http://www.possibility.com/cpp/cppcodingstandard.html>.
- [24] Google style recommendations for C++, <http://google-styleguide.googlecode.com/svn/trunk/cppguide.xml>.
- [25] Open Office C++ Coding Standard, http://wiki.openoffice.org/wiki/cpp_coding_standards.
- [26] Qt Project Documentation Page, contains Q_DISABLE_COPY macro. <http://qt-project.org/doc/qt-5.0/qtcore/qobject.html>.
- [27] Boost C++ Libraries. Official Website, <http://www.boost.org/>.
- [28] Qt Project. The Qt Project Coding Guidelines, http://qt-project.org/wiki/category:developing_qt.