

**Title of Thesis with all Formula,  
Symbols, or Greek Letters Written out in Words**

by

Patrick Di Salvo

A Thesis

presented to

The University of Guelph

In partial fulfilment of requirements  
for the degree of

Master of Pokemon, Poke master

in

Computer Science

Guelph, Ontario, Canada

© Patrick Di Salvo, July, 2099

## ABSTRACT

TITLE OF THESIS WITH ALL FORMULA,  
SYMBOLS, OR GREEK LETTERS WRITTEN OUT IN WORDS

Patrick Di Salvo  
University of Guelph, 2099

Advisor:  
Dr. Sherlock Holmes

Present your abstract here. This template is just an example of an outline to consider for your thesis. It is a good idea to double-check with the current University's thesis requirements here:

<https://www.uoguelph.ca/graduatestudies/current-students/preparation-your-thesis>

## Acknowledgments

Present your acknowledgements here.

## Table of Contents

## List of Tables

## List of Figures

# Chapter 1

## Introduction

Amidakuji is a custom in Japan which allows for a pseudo-random assignment of children to prizes [?]. Usually done in Japanese schools, a teacher will draw  $N$  vertical lines, hereby known as *lines*, where  $N$  is the number of students in class. At the bottom of each line will be a unique prize. And at the top of each line will be the name of one of the students. The teacher will then draw 0 or more horizontal lines, hereby known as *bars*, connecting two adjacent lines. The more bars there are the more complicated (and fun) the Amidakuji is. No two endpoints of two bars can be touching. Each student then traces their line, and whenever they encounter an end point of a bar along their line, they must cross the bar and continue going down the adjacent line. The student continues tracing down the lines and crossing bars until they get to the end of the ladder lottery. The prize at the bottom of the ladder lottery is their prize [?]. See Figure ?? for an example of a ladder lottery.

The word Amidakuji has an interesting etymology. In Japanese, Amida is the Japanese name for Amithaba, the supreme Buddha of the Western Paradise. See [image](#) —[image ref](#)— for a picture of Amithaba. Amithaba is a Buddha from India and there is a cult based around him. The cult of Amida, otherwise known as Amidism, believes that by worshipping Amithaba, they shall enter into the his Western Paradise. Amidism began in India in the fourth century and made its way to China and Korea in the fifth century, and finally came to Japan in ninth century. It was in Japan, where the game Amidakuji began. It is known as 'Ghost Legs' in China and Ladder Lotteries in English.

The game Amidakuji began in Japan in the Muromachi period, which spanned

from 1336 to 1573. During the Muromachi period, the game was played by having players draw their names at the top of the lines, and at the bottom of the lines were pieces of paper that had the amount the players were willing to bet. The pieces of paper were folded in the shape of Amithaba's halo, which is why the game is called Amidakuji. Kuji is the Japanese word for lottery. Hence the name of the game being Amidakuji.


## **1.1 Thesis Statement**

This thesis presents solutions to four problems pertaining to Amidakuji. The problems that this thesis presents solutions to are firstly the counting problem, secondly the minimal height problem, thirdly the encoding problem and fourthly the problem of creating a Gray Code for generating canonical ladders within different sets of ladder lotteries.

## **1.2 Overview of Thesis**

This thesis is broken down into several sections. Firstly, an introduction to Amidakuji, and how they pertain to computer science will be presented. This will be followed by a literature review of ladder lotteries in which discussions of solved problems will be provided, along with the commonalities between ladder lotteries and other mathematical objects. Following the literature review, the methodology used to conduct the research will be discussed. This section will focus primarily on the algorithms used to generate the data for this research. Following the methodology section, the findings of the research will be discussed and analyzed. In this section there will be proofs and formulas for certain propositions made about ladder lotteries. This section will contain the bulk of the findings for this thesis. Following the results section, a summary of future work will be provided. In this section, the failures and successes of this research will be analyzed. There will also be commentary on open



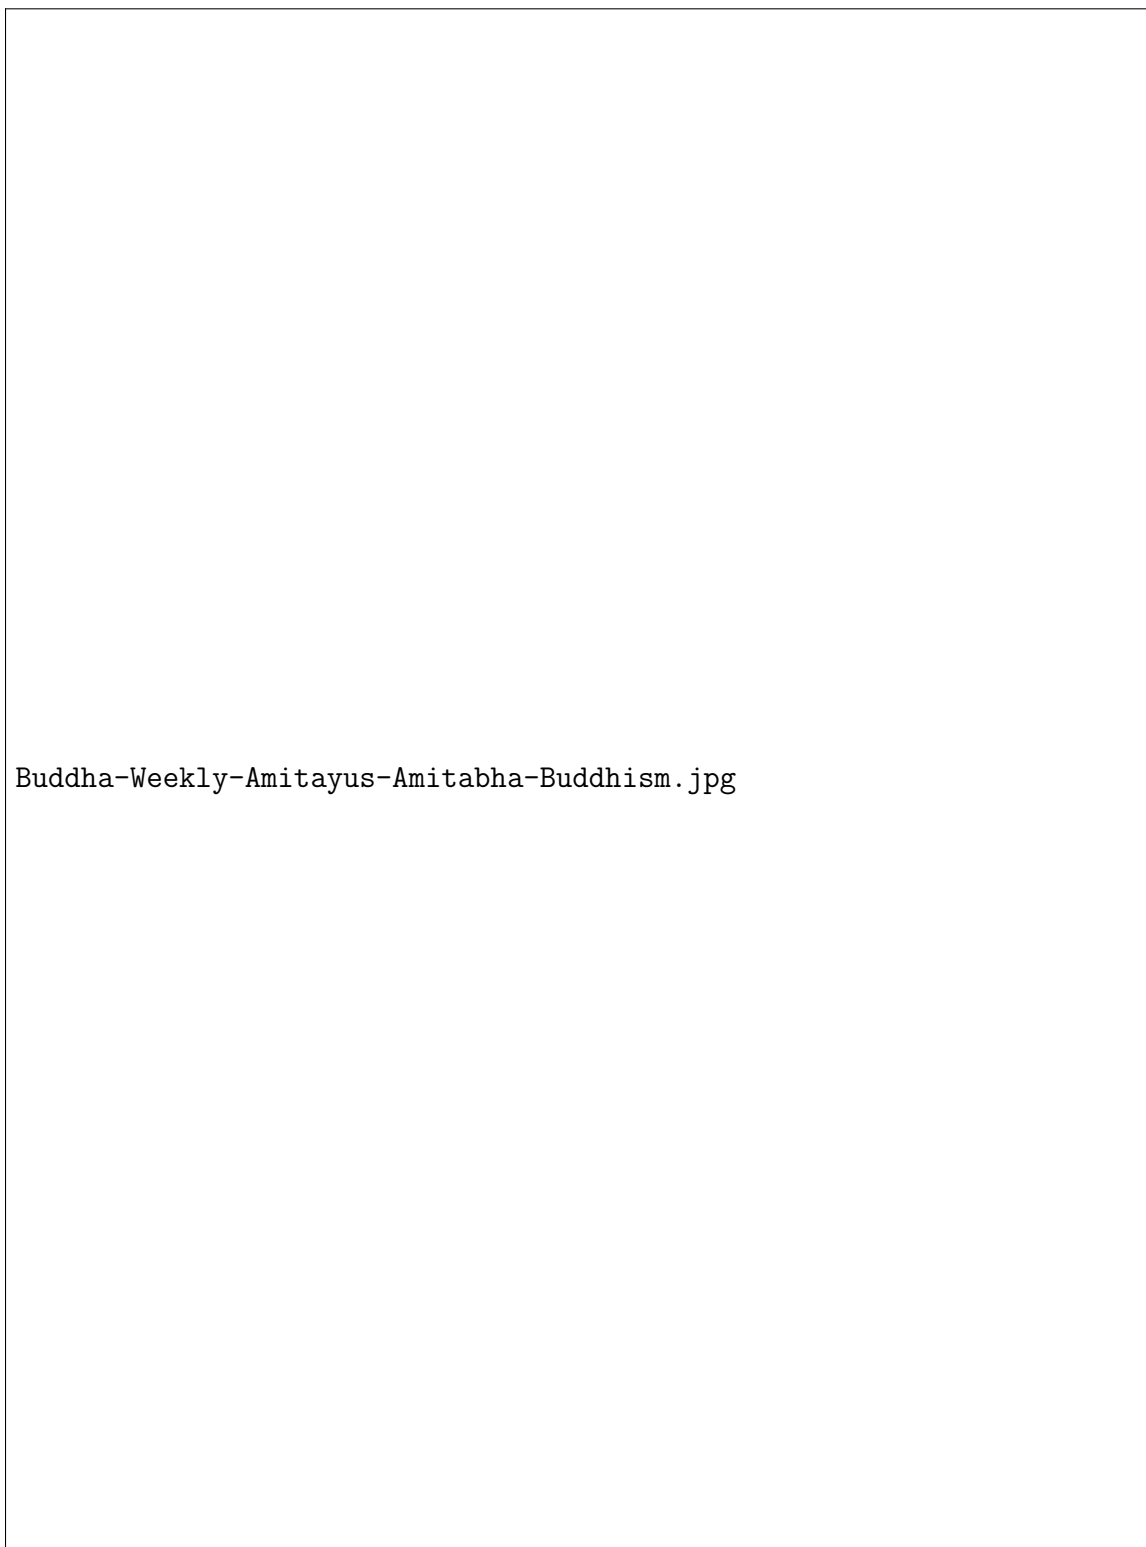

Buddha-Weekly-Amitayus-Amitabha-Buddhism.jpg

Figure 1.1: A picture of Buddha Amithaba

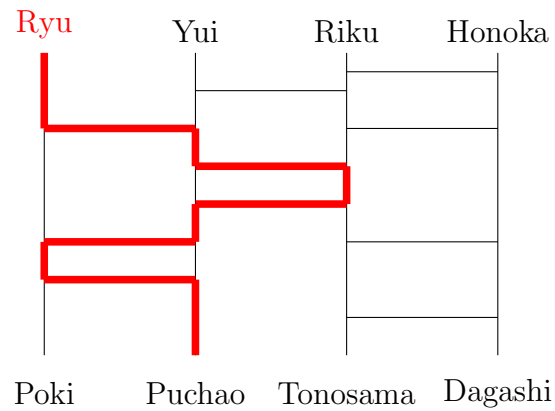


Figure 1.2: A ladder lottery where Ryu gets Puchao, Yui gets Dagashi, Riku gets Tonosama and Honoka gets Poki. You can see that Ryu's path is marked by red bars.

(unsolved) problems related to ladder lotteries and a discussion of how research on ladder lotteries could be used in other fields. Finally, a conclusion that summarizes the thesis will be provided.

# Chapter 2

## Background

An interesting property about ladder lotteries is that they can be derived from a *permutation* which is a unique ordering of objects. For the purposes on this paper, the objects of a permutation will be integers ranging from  $[1 \dots N]$ . *Optimal ladder lotteries* are a special case of ladder lotteries in which there is one bar in the ladder for each *inversion* in the permutation. An *inversion* is a relation between two elements in  $\pi$ ,  $\pi_i$  and  $\pi_j$ , such that if  $\pi_i > \pi_j$  and  $i < j$  then  $\pi_i$  and  $\pi_j$  form an inversion. For example, given  $\pi = (4, 3, 5, 1, 2)$ , its inversion set is  $Inv(\pi) = \{(4, 3), (4, 1), (4, 2), (3, 1), (3, 2), (5, 1), (5, 2)\}$ . Every permutation has a unique, finite set of optimal ladder lotteries associated with it. Thus, the set of optimal ladder lotteries associated with  $\pi$ , hereby known as  $OptL\{\pi\}$ , is the set containing all ladder lotteries with a number of bars equal to the number of inversions in  $\pi$ . See Fig. 2.1 for an example of an optimal ladder in  $OptL\{(4, 3, 2, 1)\}$ . For each optimal ladder in  $OptL\{\pi\}$ , the  $N$  elements in  $\pi$  are listed at the top of a ladder and each element is given its own line. At the bottom of a ladder is the *sorted permutation*, hereby known as the *identity permutation* [?]. The identity permutation of size  $N$  is defined as follows -  $I : (1, 2, 3, \dots, N)$ . Each ladder in  $OptL\{\pi\}$  has the minimal number of horizontal bars to sort  $\pi$  into the identity permutation. Each bar in a ladder from  $OptL\{\pi\}$  uninverts a single inversion in  $\pi$  exactly once. For the remainder of this paper, only optimal ladder lotteries will be discussed. Therefore when the term ladder lottery is used, assume optimal ladder lottery.



Figure 2.1: Two ladders for the permutation  $(4, 3, 2, 1)$ . The left ladder is an optimal ladder and the right ladder is not. Therefore the left ladder belongs to  $optL\{(4, 3, 2, 1)\}$ . The bold bars in the right ladder are redundant, thus the right ladder is not optimal

## 2.1 Literature Review

### 2.1.1 Literature Overview

The study of ladder lottieres as mathematical objects began in 2010, in the paper **Efficient Enumeration of Ladder Lotteries and its Application**. The paper was written by four authors, Yamanaka, Horiyama, Uno and Wasa. In this paper the authors present an algorithm for generating all the ladder lotteries of an arbitrary permutation,  $\pi$ . Since this paper emerged, there have been several other paper written directly about ladder lotteries. These papers include **The Ladder Lottery Realization Problem**, **Optimal Reconfiguration of Optimal Ladder Lotteries**, **Efficient Enumeration of all Ladder Lotteries with K Bars**, **Coding Ladder Lotteries** and **Enumeration, Counting, and Random Generation of Ladder Lotteries**.

### 2.1.2 Efficient Enumeration of Laddder Lotteries and its Application

In their paper, **Efficient Enumeration of Ladder Lotteries and its Application**, the authors provide an algorithm for generating  $OptL\{\pi\}$  for any  $\pi$ , in  $\mathcal{O}(1)$  per ladder.

This is the first and only published algorithm for generating  $OptL\{\pi\}$ . The paper also presents the number of ladder lotteries in  $OptL\{(11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1)\}$  which is 5,449,192,389,984. This is a very impressive accomplishment for reasons which will be discussed later in the literature review.

The authors' algorithm is based on several key concepts, the most important of which is the *local swap operation*. This is the minimal change operation that transitions from one ladder in  $OptL\{\pi\}$  to the next ladder. The local swap operation is essentially a 180 degree rotation of three bars in the ladder, all at different levels in the ladder, such that the bottom bar is rotated to the top, the middle bar stays in the middle and the top bar is rotated to the bottom. If the bars undergo a 180 degree rotation to the right, then this is known as a *right swap operation* and if the bars undergo a 180 degree rotation to the left then this is known as a *left swap operation*. To go to the next ladder in the set, the current ladder,  $L_i$  undergoes a right swap operation to get the ladder  $L_{i+1}$ . See figure –ref– for an example of a local swap operation. The *route* of an element is the sequence of bars in the ladder, from top left to bottom right, that an element must cross in order to reach its correct position in the identity permutation. Note that each bar has two elements that cross it, therefore the bar belongs to the route of the greater of the two elements. It is important to note that when a right swap operation occurs, two of the three bars belong to the route of a greater element and one bar belongs to the route of a lesser element. Once rotated, the bar of the lesser element is above the bars of the greater element.

The *clean level* refers to the smallest element in  $\pi$  such that none of its bars have undergone a right swap operation. If there is no such element, then the clean level is the maximum element in  $\pi + 1$ . The *root ladder* is the only ladder in the set with a clean level of 1; in other words, the root ladder is the only ladder in which no bars have undergone a right swap operation. The root ladder is unique to  $OptL\{\pi\}$ . To see the root ladder of  $OptL\{(4, 5, 6, 3, 1, 2)\}$  please refer to figure ???. Since none of the bars in the root ladder have undergone a right swap operation, it is the only ladder

in  $OptL\{\pi\}$  that has a clean level of 1. The root ladder is also the original descendant ladder in the set. Insofar as the enumeration algorithm is based on performing a right swap operation on a previous ladder, then every other ladder must have at least one right swap operation. Since the root ladder has no right swap operations, then it must be the descendant of every other ladder.

The algorithm for generating  $OptL\{\pi\}$  in the paper was the backbone of the research for this thesis. However, the algorithm in this paper had some issues. These issues presented several issues during the research for this thesis. The first issue in the paper is that the authors do not provide an algorithm for generating the root ladder in  $OptL\{\pi\}$ . Seeing as every other in the set is derived from the root ladder, it is essential to build the root ladder without performing a right swap operation. Yet the paper does not provide such an algorithm. The second issue in this paper is that there is no algorithm for performing a local swap operation on a ladder. Although the authors do a good job explaining under what conditions a local swap operation can be performed, the actual operation itself is trickier than it seems. The last issue in the paper is that it contains an error. The error is that one of the diagrams is incorrect. The diagram is of all the ladders in  $OptL\{(5, 6, 3, 4, 2, 1)\}$ . This diagram contains 76 ladders when there are actually only 75. The error was confirmed by the author Yamanaka in an email correspondence he and I had. These issues will be resolved in the Methodology and Implementation section.

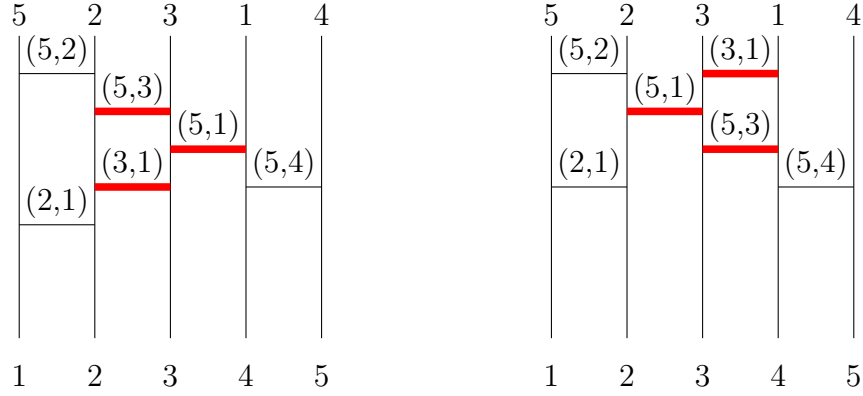


Figure 2.2: Example of a local swap operation. When a right swap operation is performed on the left ladder, the result is the right ladder. When a left swap operation is performed on the right ladder, the result is the left ladder.

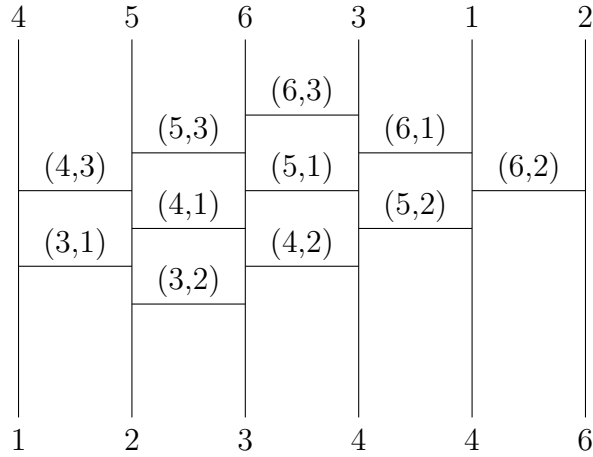


Figure 2.3: The root ladder for  $OptL\{(4, 5, 6, 3, 1, 2)\}$ . Notice how none of the bars have undergone a right swap operation. This is clear when considering that there is no bar of a lesser element above the bar(s) of a greater element.

### 2.1.3 Ladder-Lottery Realization

In their paper **Ladder-Lottery Realization** the authors provide a rather interesting puzzle in regards to ladder lotteries. The puzzle is known as the ladder-lottery realization problem. In order to understand the problem, one must know what a *multi-set* is. A *multi-set* is a set in which an element appears more than once. The exponent above the element indicates the number of times it appears in the set. For example, given the following multi-set,  $\{3^2, 2^4, 5^1\}$  the element 3 appears twice in the set, the element 2 appears four times in the set and the element 5 appears once in the set. The ladder-lottery realization puzzle asks, given an arbitrary starting permutation and a multi-set of bars, is there a *non-optimal* ladder lottery for the arbitrary permutation that uses every bar in the multi-set the number of times it appears in the multi-set. For an example of an affirmative solution to the ladder lottery realization problem, see figure –fig ref –.

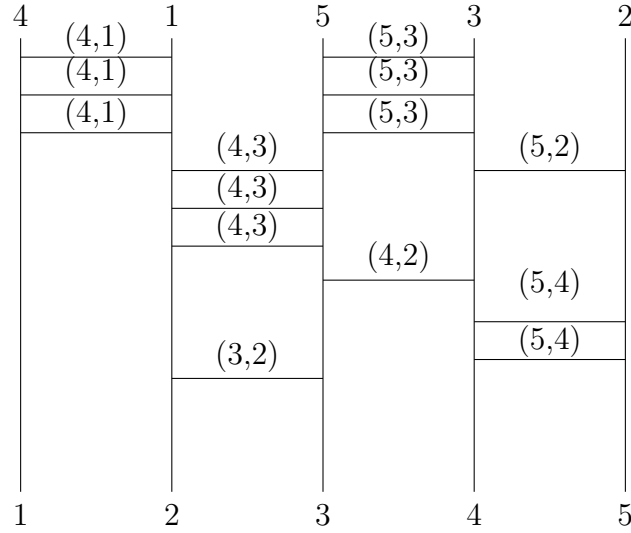


Figure 2.4: An affirmative solution to the Ladder Lottery Realization Problem given a starting permutation  $(4, 1, 5, 3, 2)$  and the multi set of bars  $\{(4, 1)^3, (4, 3)^3, (4, 2)^1, (5, 4)^2, (5, 3)^3, (5, 2)^1, (3, 2)^1\}$



The authors prove that the ladder-lottery realization problem is NP-Hard by reducing the ladder-lottery realization to the One-In-Three 3SAT, which has already been proven to be NP-Hard. The One-In-Three 3SAT problem is a problem such that given a set of variables ( $X$ ), a collection of *disjunctive clauses* ( $C$ ) which are disjunctive expressions of over literals of  $X$ . Each clause in  $C$  contains exactly must contain three literals then is there a truth assignment for  $X$  such that each clause in  $C$  has exactly one true literal. For example, let  $X = \{p, q, r, s, t\}$  and let  $C = \{C_{p,q,s}, C_{r,q,s}, C_{p,s,t}, C_{r,t,q}\}$ , the question is whether it is possible for each clause to have exactly one true literal. The answer in this case is yes. If  $p = T, r = T, q = F, s = F$  and  $t = T$  then all the clauses in  $C$  have exactly one true literal. The authors reduce the ladder lottery-realization problem to the One-In-Three 3SAT problem by devising four gadgets. The result of the reduction is that the arbitrary starting permutation is equivalent to a derivation of the initial set of variables,  $X$ , in the One-In-Three 3SAT problem and the multi-set of bars is equivalent to a derivation of the initial set of clauses,  $C$ , in the One-In-Three 3SAT problem.

The authors note that there are two cases in which the ladder-lottery realization problem can be solved in polynomial time. These cases include the following. First, if every bar in the multi-set appears exactly once and every bar corresponds to a permutation, then an affirmative solution to the ladder-lottery realization instance can be demonstrated in polynomial time. Second, if there is an inversion in the permutation and its bar appears in the multi-set an even number of times, then a negative solution to the ladder-lottery realization instance can be solved in polynomial time.

## 2.2 Optimal Reconfiguration of Optimal Ladder Lotteries

In **Optimal Reconfiguration of Optimal Ladder Lotteries**, the authors provide a polynomial solution to the minimal reconfiguration problem. The prob-

lem states that given two ladder is  $OptL\{\pi\}$ ,  $L_i$  and  $L_m$ , what is the minimal number of local swap operations to perform that will transition from  $L_i$  to  $L_m$ . The authors do so based on the local swap operations previously discussed along with some other concepts. The first of these concepts is termed the *reverse triple*. Basically, a reverse triple is a relation between two arbitrary ladders,  $L_i, L_m$ , such that if a bar is right swapped in  $L_i$  or  $L_m$  and the bar forms a reverse triple between  $L_i$  and  $L_m$  then the bar must be left swapped in  $L_m$  or  $L_i$ . Or if it is left swapped in  $L_i$  or  $L_m$  and the bar forms a reverse triple between  $L_i$  and  $L_m$  then the bar must be right swapped in  $L_m$  or  $L_i$ . Essentially, a reverse triple means that if a bar is right or left swapped in one ladder, then it must be the opposite in another ladder for bar to create a reverse triple between the two ladders. The second of the concepts is the *improving triple*. The improving triple is essentially a bar that can be left/right rotated such that the result of the rotation the bar removes a reverse triple between two arbitrary ladders  $L_i$  and  $L_m$ . The solution for transition from  $L_i$  to  $L_m$  with the minimal length reconfiguration sequence is achieved by applying improving triple to the reverse triples between  $L_i$  and  $L_m$ . That is to say, the length of the reconfiguration sequence is equal to the number of reverse triples between  $L_i$  and  $L_m$ .

The second contribution of this paper is that it provides a closed form upper bound for the minimal length reconfiguration sequence for any permutation of size  $N$ . That is to say, given any permutation,  $\pi$ , of size  $N$  what is the maximum length of a minimal reconfiguration sequence between two ladders in  $OptL\{\pi\}$ . The authors prove that it is  $OptL\{\pi_{N,N-1,\dots,1}\}$  that contains the upper bound for the minimal length reconfiguration sequence between two ladders  $L_i$  and  $L_m$ . Moreover, it is only the root ladder and terminating ladder in  $OptL\{\pi_{N,N-1,\dots,1}\}$  whose minimal reconfiguration sequence is equal to the upper bound. That upper bound is  $N\binom{N-1}{2}$ . This is because the number of reverse triples between the root ladder and the terminating ladder in  $OptL\{\pi_{N,N-1,\dots,1}\}$  is equal to  $N\binom{N-1}{2}$ . Thus, in order to reconfigure the root to the terminating ladder, or vice versa, each reverse triple between them must

be improved.

## 2.3 Efficient Enumeration of all Ladder Lotteries with K Bars

In this paper, the authors apply the same algorithm used in Efficient Enumeration of Optimal Ladder-Lotteries and its Application for generating all ladder lotteries with  $k$  bars. The number of elements in The inversion set of  $\pi$  also known as  $Inv\{\pi\}$  provides the lower bound for  $K$  and the upper bound is positive infinity. Therefore  $K = [|Inv\{\pi\}| \dots N]$

## 2.4 Coding Latter Lotteries

### 2.4.1 Overview

In this paper, the authors provide three methods to encode ladder-lotteries as binary strings. Coding discrete objects as binary strings is an appealing theme because it allows for compact representation of them for a computer.

### 2.4.2 Route Based Encoding

The first method is termed *route based encoding method* in which each route of an element in the permutation has a binary encoding. Let  $L_k$  be a ladder lottery for some arbitrary permutation  $\pi = (p_1, \dots, p_N)$ . The route of element  $p_i$  is encoded by keeping in mind  $p_i$  crosses bars in its route going left zero or more times and crosses bars in its route going right zero or more times. The maximum number of bars  $p_i$  can have is  $N - 1$ , therefore the upper bound for the number of left/right crossings for  $p_i$  is  $N - 1$ . Let a left crossing be denoted with a '0' and let a right crossing be denoted with a '1'. Let  $C_{pi}$  be the route encoding for the  $i^{th}$  element in  $\pi$ . To construct  $C_{pi}$ , append 0 and 1 to each other representing the left and right crossings

of  $p_i$  from the top left to bottom right of the ladder. If the number of crossings for  $p_i$  is less than  $N - 1$ , append 0s to the encoding of the route of  $p_i$  until the encoding is of length  $N - 1$ . Let  $LC_L$  be the route encoding for some arbitrary ladder in  $OptL\{\pi\}$  is  $C_{p_1}, C_{p_2}, \dots, C_{p_N}$ . For an example of the route encoding for the root ladder of  $(3, 2, 5, 4, 1)$  refer to Fig. 2.5. In Fig 2.5 you will see that  $C_{p_1}$  is 1100. Underlined 0s are the 0s added to ensure the length of  $C_{p_1}$  is  $N - 1$ . Since the length of  $C_{p_i}$  is  $N - 1$  and the number of elements in  $\pi$  is  $N$  then the length of  $LC_L = N(N - 1)$ . Hence the number of bits needed for  $LC_L$  belongs to  $\mathcal{O}(n^2)$ .

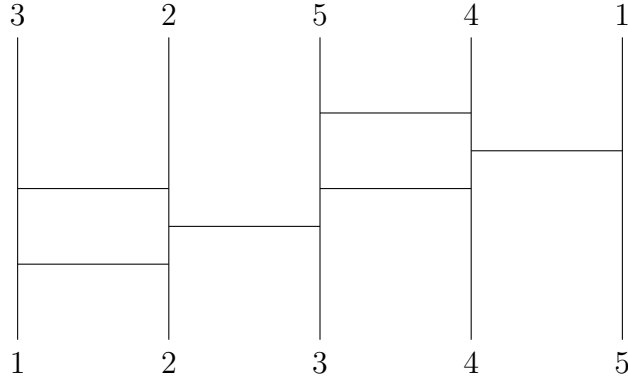


Figure 2.5: The route encoding for the following ladder lottery is 11000100110001000000

### 2.4.3 Line Based Encoding

The second method is termed *line based encoding* which focuses on encoding the lines of the ladder-lottery. Each line is represented as a sequence of endpoints of bars. Let  $L$  be an optimal ladder-lottery with  $N$  lines and  $B$  bars, then for some arbitrary line  $i$  there are zero or more right/left endpoints of bars that come into contact with line  $i$ . Let 1 denote a left end point that comes into contact with line  $i$  and let 0 denote a right end point that comes into contact with line  $i$ . Finally, append a 0 to line  $i$  to denote the end of the line. Then line  $i$  can be encoded, from top to bottom,

as a sequence of 1s and 0s that terminates in a 0. Let  $lc_i$  be the line encoding for line  $i$ . Given the ladder in Fig. 2.5,  $lc_3$  is 0010. The 0 denotes the end of the line. Let  $LC_L$  be the line encoding for some arbitrary ladder, then  $LC_L = lc_1, lc_2, \dots, lc_n$ . Let  $L_{2.5}$  refer to the ladder in Fig. 2.5, then  $LC_{L_{2.5}} = 1100100110001000$

In order to reconstruct  $L_k$  from  $LC_{L_k}$ , or in other words decode  $LC_{L_k}$  it is important to recognize that the first line only has left endpoints attached to it. Since left end points are encoded as a 1 then it is guaranteed that the first 0 represents the end of line 1. Secondly, the last/ $N$ th bar has only right end points attached to it. Therefore  $lc_n$  will only have 0s. Therefore,  $lc_n$  does not require a terminating 0. Thirdly, for any line  $i + 1$ , if line  $i + 1$  has a 0 then there must be a corresponding 1 in line  $i$ . That is to say, if the right end point of a bar is on line  $i + 1$  then that same bar must have a left endpoint on line  $i$ . To decode  $LC_L$  start by decoding line 1. The line will contain 0 or more left end points. To decode  $lc_{i+1}$  where  $i + 1 > 1$ , go to  $lc_i$  and match each 1 in  $lc_i$  with a 0 in  $lc_{i+1}$ . Let  $k$  = the number of 1s in  $lc_i$ . Let  $j$  = the number of 0s in  $lc_{i+1}$  then  $k = j - 1$ ; due to the last 0 in  $lc_{i+1}$  denoting the end of line  $i + 1$ . Intuitively, this means match every left end point of a bar in line  $i$  with a right end point in line  $i + 1$ . The last 0 represents the end of line  $i + 1$ . For the 1s in  $lc_{i+1}$  draw a left end point on line  $i + 1$  relative to where the 1 occurred to its left and right neighbor in  $lc_{i+1}$ . For an example of a full decoding of  $LC_{L_{(4,2,3,1)}}$  please refer to Fig. 2.6.

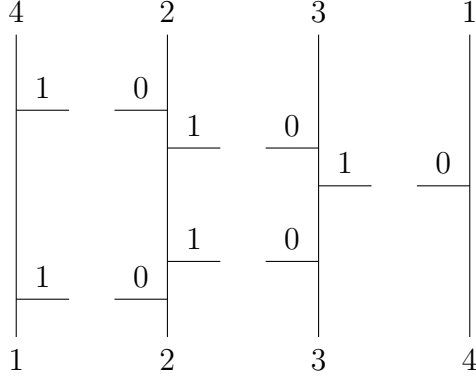


Figure 2.6:  $LC_{L(4,2,3,1)} = lc_1 = 11\underline{0}$ ,  $lc_2 = 0110\underline{0}$ ,  $lc_3 = 010\underline{0}$ ,  $lc_4 = 0$

Since each bar is encoded as two bits, and there are  $N - 1$  bits as terminating bits; one for each line in  $L$ , then the number of bits required is  $N + 2B - 1$ , where  $N$  is the number of lines and  $B$  is the number of bars. Encoding and decoding can be done in  $\mathcal{O}(n + b)$  time. Clearly the line-based encoding trumps the route-based encoding in both time and space complexity.

#### 2.4.4 Improved Line-Based Encoding

Although the line-based encoding is better than the route based encoding, it can still be further optimized. The authors provide three improvements to the line-based encoding. These three improvements can be combined to really help improve the line based encoding's space efficiency.

##### Improvement 1

Since the  $N$ th line has only right endpoints attached to it, then it actually does not need to be encoded. Right endpoints are denoted as 0 and left endpoints are encoded as 1, therefore the number of right endpoints for line  $N$  is equal to the number of 1s in  $lc_{n-1}$ . Thus, there is no need for  $lc_n$ . The encoding with improvement one for the ladder in Fig. 2.6 is  $11\underline{0}0110\underline{0}010$ .

## Improvement 2

Improvement Two is based off of the fact that given any two bars,  $x, y$  let  $l_x$  denote the left endpoint of bar  $x$ , let  $l_y$  denote the left endpoint of bar  $y$ , let  $r_x$  denote the right end point of bar  $x$  and let  $r_y$  denote the right end point of bar  $y$ . Let line  $i$  be the line of  $l_x$  and  $l_y$  and let line  $i + 1$  be the line of  $r_x$  and  $r_y$ .

**Theorem 2.4.1** *There are three possible cases for the placement of  $x$  and  $y$  in some arbitrary ladder from  $\text{Opt}L\{\pi\}$ . The first case is that there is at least one other bar,  $z$ , with a right end point,  $r_z$  between  $l_x$  and  $l_y$  on line  $i$ . The second case is that there is at least one other bar  $z$ , with a left end point,  $l_z$ , between  $r_x$  and  $r_y$  on line  $i + 1$ . The third case is that there is at least one bar,  $z$ , with a right end point,  $r_z$ , between  $l_x$  and  $l_y$  on line  $i$  and there is at least one other bar,  $z'$  with a left end point,  $l_{z'}$ , between  $r_x$  and  $r_y$  on line  $i + 1$ . For an example of all three cases refer to Fig 2.7.*

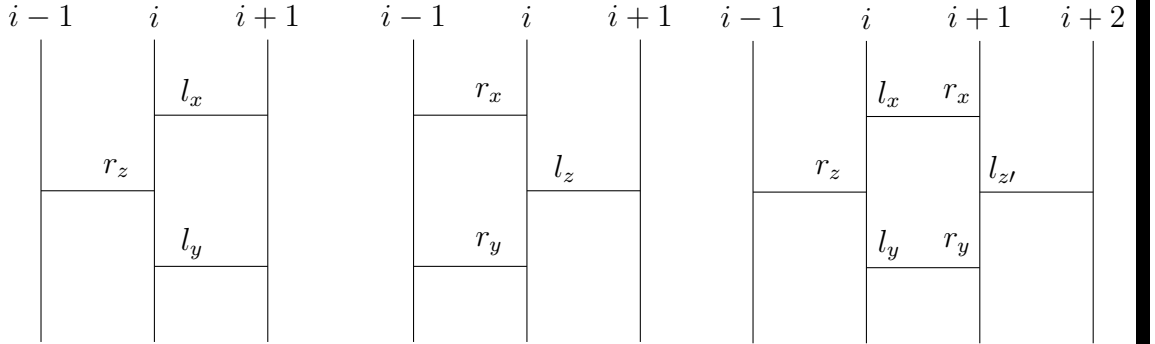


Figure 2.7: Three examples of the three cases for the placement of bars  $x$  and  $y$  in a ladder-lottery

*Proof.* Suppose that none of the above cases hold. Let  $L_\pi$  be an optimal ladder-lottery with bars  $x$  and bar  $y$ . If none of the cases hold then  $x$  and  $y$  are directly above/below each other without the endpoint of some third bar  $z$  between  $l_x$  and  $l_y$  or between  $r_x$  and  $r_y$ . Let  $x$  be the bar for the inversion of two elements  $p$  and  $q$  in  $\pi$ . As  $p$  and  $q$  travel through the ladder they will cross each other at bar  $x$ ; thus uninverting them. Since bar  $y$  is directly below bar  $x$ , then  $p$  and  $q$  will cross bar  $y$

thus re-inverting them. Therefore, there will need to be a third bar that uninverts  $p$  and  $q$  a second time. Since this third bar is redundant,  $L_\pi$  is non-optimal which is a contradiction. Let  $x$  be a bar for two elements in  $\pi$ ,  $p$  and  $q$  such that  $p$  and  $q$  do not form an inversion. Then  $x$  will invert  $p$  and  $q$  and  $y$  will uninvert them. Thus making both  $x$  and  $y$  redundant bars which is also a contradiction. Therefore one of the above cases must hold.  $\square$

Knowing that one of the three above cases must hold is beneficial for improving the line-based encoding. If  $l_x$  and  $l_y$  on line  $i$  have no  $r_z$  between them, then there must be at least one  $l_{z'}$  between  $r_x$  and  $r_y$  on line  $i + 1$ . Since a left endpoint is encoded as a 1 and a right endpoint is encoded as a 0, a 1 can be omitted for the encoding of line  $i + 1$  if  $l_x$  and  $l_y$  have no  $r_z$  between them on line  $i$ . That is to say, if there is not a 0 between the two 1s for  $l_x, l_y$  in  $lc_i$ , it is implied that there is at least one 1 between the two 0s for  $r_x, r_y$  on  $lc_{i+1}$ . Hence, one of the 1s in  $lc_{i+1}$  can be omitted. The line encoding with improvement two for the ladder in Fig 2.6 is 110010000000.

### Imrpovement 3

Improvement three is based off of saving some bits for right end points/0s in  $lc_{n-1}$ . Since line  $n$  has no left end points, then then there must be some right endpoints between any two consecutive bars connecting lines  $n - 1$  and line  $n$ . If you refer to Fig. 2.7, then the only configuration for lines  $n - 2, n - 1, n$  is the middle configuration. Knowing this, then given two bars,  $x$  and  $y$  with  $l_x/l_y$  on line  $n - 1$  and  $r_x/r_y$  on line  $n$ , there must be at least one bar,  $z$ , with its  $r_z$  between  $l_x$  and  $l_y$  on line  $n - 1$ . Thus, for every 1 in  $lc_{n-1}$  except the last 1 in  $lc_{n-1}$ , a 0 must immediately proceed any 1 in  $lc_{n-1}$ . Since this 0 is implied, it can be removed from  $lc_{n-1}$ . For an example of improvement three with its line encoding for  $lc_{n-1}$  please refer to Fig. 2.8.



$n - 2$	$n - 1$	$n$
	1	0
0		
0		
	1	0
0		
	1	0
0		
	<b>1</b>	0
0		

Figure 2.8: The line coding for  $lc_{n-1}$  with improvement three is 1011100. As always, 0 denotes the end of the line encoding. The red, bold 1 represents the last left end point in  $lc_{n-1}$ , therefore the proceeding 0 must be included in  $lc_{n-1}$ . For every other 1 in  $lc_{n-1}$ , a 0 is omitted following said 1.

### Combining All Three

The combination of all three improvements can be done independently. Let  $IC_L$  be the *improved line-based encoding* for some ladder  $L$  by applying improvements 1-3 to  $LC_L$ . Recall that  $LC_L$  denotes the line-based encoding for some ladder  $L$ .  $LC_L$  for the ladder in Fig. 2.9 is 11010101000101010000. By applying improvement one, we get 110101011000101010. Notice how the last three 0s from  $LC_L$  were removed because they represented  $lc_n$ . By applying improvement two to improvement one we get 1101001100010010. Notice how the second, and eighth 1 were removed because they are implied by the successive 0s. By applying improvement three to the result of improvement two we get 110100110001010. Notice how the last 0 was removed from improvement two. This is because the 0 implied in  $lc_{n-1}$  due to the configuration between of bars connecting line  $n - 1$  and line  $n$ . Thus,  $IC_L$  for Fig. 2.9 is  $IC_{2.9} = 110100110001010.$

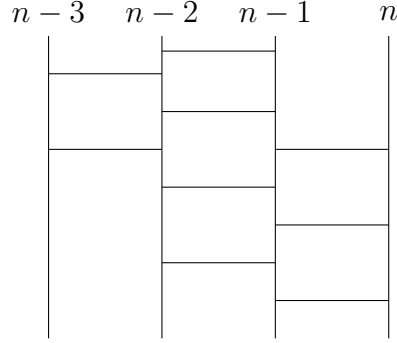


Figure 2.9: A ladder used to illustrate all three improvements  $IC_L$ .  $IC_L = 110100110001010$

## 2.5 Enumeration, Counting, and Random Generation of Ladder Lotteries

In this paper, the authors consider the problem of enumeration, counting and random generation of ladder-lotteries with  $N$  lines and  $B$  bars. It is important to note that the authors considered both optimal and non-optimal ladders for this paper. Nonetheless, the paper is still fruitful for its modelling of the problems and insights into ladder-lotteries. The authors use the line-based encoding,  $LC_L$  for the representation of ladders that was discussed in the review of **Coding Ladder Lotteries**.

### 2.5.1 Enumeration

The authors denote a set of ladder lotteries with  $N$  lines and  $B$  bars as  $S_{n,b}$ . The problem is how to enumerate all the ladders in  $S_{n,b}$ . The authors use a *forest structure* to model the problem. A *forest structure* is a set of trees such that each tree in the forest is disjoint union with every other tree in the forest. Consider  $S_{n,b}$  to be tree in the forest. That is to say, a union disjoint subset of all ladders with  $N$  lines and  $B$  bars. Then  $F_{n,b}$ , or the forrest of all  $S_{n,b}$ s is the set of all ladders with  $N$  lines and  $B$  bars. For an example of a forest for  $F_{3,2}$  refer to Fig.

The authors create  $F_{n,r}$  by defining a removal sequence for each  $LC_L$ . Each ladder,  $L$ , in  $F_{n,r}$  is a leaf node. By removing the second last bit of  $LC_L$  the result is  $P(LC_L)$  and the resulting substructure is some *sub-ladder*,  $P(L)$ , which is an incomplete ladder containing unmatched endpoints of bars or a missing line. For example, given  $LC(L) = 10100$ ,  $P(LC_L) = 1010$ . Notice how the second last bit was removed. By removing the second last bit from  $P(LC_L)$  we get  $P(P(LC_L))$  and  $P(P(L))$  respectively. The removal sequence is repeated until the sub-ladder consists of two lines with 0 endpoints attached to line 2 and 0 to  $r$  left endpoints are attached to line 1. There are  $r + 1$  terminating sub-ladders, i.e., roots of trees in  $F_{n,r}$ . The removal sequence is unique for each ladder in  $F_{n,r}$  is unique. For an example  $F_{3,2}$  please refer to Fig 2.10.

### 2.5.2 Counting

The authors provide a method and algorithm to count all ladders with  $N$  lines and  $B$  bars. According to the authors, the enumeration algorithm is much slower than the counting algorithm. The counting algorithm works by dividing ladders into four types of sub-ladders. For sub-ladder,  $R$ , its type is a tuple  $t(n, h, p, q)$  where  $n$  is the number of lines,  $h$  is the number of half bars,  $p$  is the number of unmatched end-points on line  $n - 1$  and  $q$  is the number of unmatched end-points on line  $n$ . From this type there are four sub-divisions of sub-ladders

**Case 1:**  $h < p + q$  or  $n < 2$

There are zero ladders because it is impossible for the root sub-ladder to have less than two lines. It is also impossible for the number of half bars,  $h$ , to be less than the number of detached left end points on line  $n - 1$  plus the number of detached end points on line  $n$ .

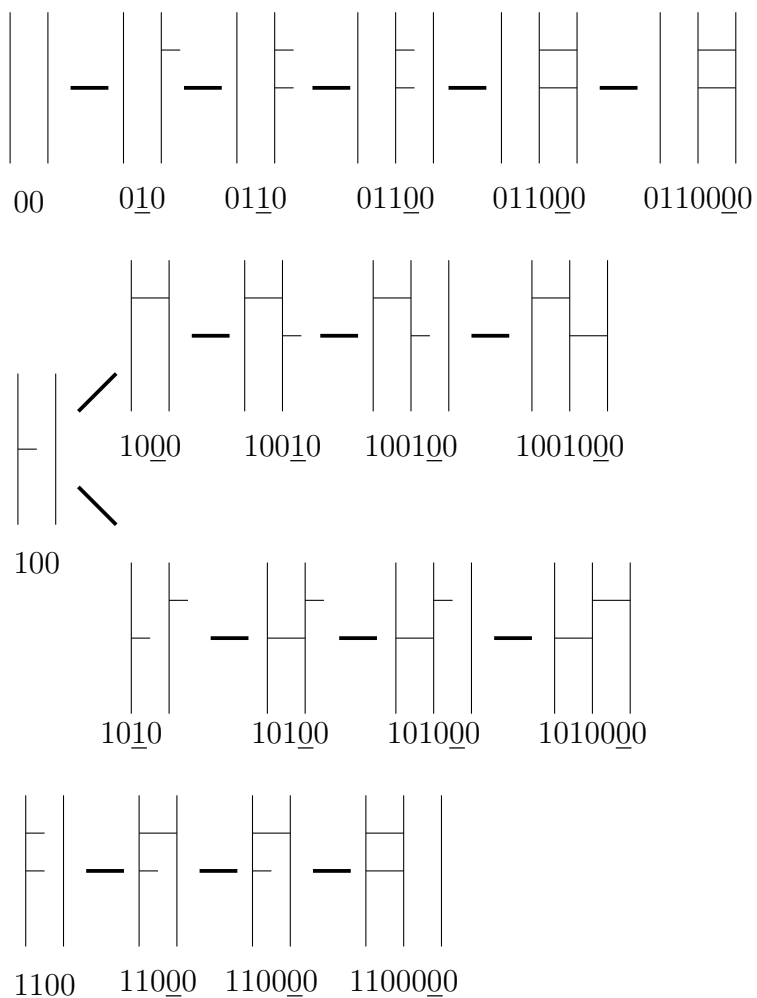


Figure 2.10: The forrest,  $F_{3,2}$  where 3 is the number of lines and 2 is the number of bars. All ladders with 3 lines and 2 bars are leaf nodes of one of three trees  $S_{3,2}$ . The underlined bits are the inserted second last bit from the parent's line-encoding resulting in the child's line encoding

**Case 2:**  $n = 2$  and  $h = p$  and  $q = 0$

There is only one ladder because the number of half bars on the last/ $2nd$  line is 0 since  $q = 0$ . Therefore all half bars are on the  $n - 1th/1st$  line of the sub-ladder. This is known because  $h = p$  which means the number of half bars is the same as the number of unmatched bars on line  $n - 1/1st$ . Hence, the unmatched half bars on the  $1st$  line must be connected to the  $2nd$  line. Once these are all matched the ladder will be complete. Thus, there is only one ladder for this case.

**Case 3:**  $(n \geq 3$  or  $h > p)$  and  $q = 0$

If this is the case, then there are no endpoints attached to line  $n$ , but the number of half bars is greater than the number of endpoints attached to line  $n - 1$ , which means there is some line(s)  $n - t$ ,  $t > 2$  that have end points attached to them. Let  $R$  be a sub-ladder of type  $R = t(n, h, p, q)$  with the above values for  $n, h, p, q$ . The  $LC_R$  must have a 0 for the second last bit. This 0 designates either the end of line  $n - 1$  or a right endpoint of a bar attached to line  $n - 1$ . If the second last bit in  $LC_R$  is the right end point of some bar, then  $P(R) = t(n, h - 1, p + 1, q)$ . This is because the  $n - 1th$  bar has a right end point that must be connected to some left endpoint at line  $n - 2$ . Since the removal sequence of the second last bit ensures that there cannot be a right end-point detached from a left end-point. Only left end-points can be detached from right end-points. However, if the second last bit of  $LC_R$  designates the end of line  $n - 1$ , then  $P(R) = t(n - 1, h, 0, p)$ . This is because the removal of the second last bit is the removal of the end of line  $n - 1$  in  $R$ . Thus, line  $n$  must be empty in  $R$  since the last bit in  $LC_R$  designated the end of line  $n$ . Thus, if line  $n$  is empty and the end point of line  $n - 1$  has been removed from  $LC_R$ , resulting in  $P(LC_R)$ , the last bit in  $P(LC_R)$  must be the end of line  $n - 1$  in  $R$  resulting in a pre-ladder with one less line than  $R$ .

In order to count the number of ladders of type  $t(n \geq 3, h > p, q = 0)$  the authors demonstrate an injection from  $t(n \geq 3, h > p, q = 0)$  to  $t(n - 1, h, 0, p) \cup$

$t(n, h - 1, p + 1, q)$ . They then demonstrate that the  $|t(n \geq 3, h > p, q = 0)| = |t(n - 1, h, 0, p)| + |t(n, h - 1, p + 1, q)|$ .

**Case 4:**  $h \geq p + q$  and  $q > 0$

Let  $R$  be a pre-ladder of type  $t(n, h, p, q)$ . Then the second last bit of  $LC_R$  is either a 0 or a 1. If it is a 0 then it represents a right end point attached to line  $n$ . Thus, removing it to get  $P(LC_R)$  is in effect detaching a right end point from some left end point on line  $n - 1$ . Therefore, the parent,  $P(R)$  is of type  $t(n, h - 1, p + 1, q)$ . Seeing as in the parent, there is now a left end point detached from its right end point in  $R$ . However, if the second last bit of  $LC_R$  is a 1, then this indicates the left half of a bar on line  $n$ . But since there is no bar  $n + 1$ , this left end point must be detached. Therefore, by removing this 1 in  $LC_R$  results in a parent with one less detached end point on line  $n$ . Thus  $P(R)$  is of type  $t(n, h - 1, p, q - 1)$ . This leads the authors to conclude  $|t(n, h \geq p + q, q > 0)| = |t(n, h - 1, p + 1, q)| + |t(n, h - 1, p, q - 1)|$ .

## Random Generation

The random generation of ladder lotteries with  $n$  lines and  $b$  bars is done by the recurrence relations in the counting and enumerating sections. The goal is to produce some  $L$  of type  $t(n, 2b, 0, 0)$  where the number of half bars equals the total  $2(b)$  and there are no detached end points on lines  $n - 1$  and  $n$ . This implies that there are no detached endpoints on any line  $n - t$  where  $t \geq 2$  because the removal sequence from the  $LC_{pre-ladder}$  ensures that any line before  $n - 1$  has no detached endpoints. Thus, if  $L$  is of type  $t(n, 2b, 0, 0)$  it is no longer a pre-ladder but a complete ladder with  $n$  lines and  $b$  bars.

The authors use an algorithm to generate a random integer,  $x$ , in  $[1, |t(n, h, p, q)|]$ . where  $t(n, h, p, q)$  corresponds to some parent type of ladder.  $t(n1, h1, p1, q1)$  corresponds to one child type of  $t(n, h, p, q)$  and  $t(n2, h2, p2, q2)$  corresponds to the other child type. If  $x \leq |t(n1, h1, p1, q1)|$  then generate a pre-ladder of type  $t(n1, h1, p1, q1)$

else generate a pre-ladder of type  $t(n2, h2, p2, q2)$ . Continue until there is type  $t(n, 2b, 0, 0)$  which corresponds to a complete ladder lottery with  $n$  lines and  $b$  bars.

## Chapter 3

### Methodology and Implementation



# Chapter 4

## Evaluation

# Chapter 5

## Summary and Future Work

Conclude your thesis with a re-cap of your major results and contributions. Then outline directions for further research and remaining open problems.