

Arxiv Agent: Intelligent Research Paper Assistant

Youxin Zhu
Zimo Qi
Kongchang Zhou
Gengshang Dong
Yixuan Ding

Southern Univ. of Science and Technology (SUSTech)

June 3, 2024

Outline

1 Motivation

2 Our Framework

- Our Framework
- Data Crawling & Processing
- LLM Similarity Match
- Retrieval Augmented Generation

3 Showcase

4 Conclusion & Future Work

Motivation


Demanding Scenario

- Too much paper on Arxiv, covering various fields and research topics.
- Every day, a large number of new papers are published on ArXiv.
- Searching for suitable papers and following the latest ones is a very time-consuming and laborious process!




- Can we solve the problems above? YES!

Our Framework

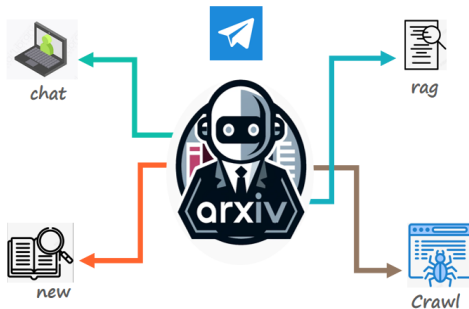

- Chat: Ask any question to our agent!
- RAG: Query for related information about paper from arxiv!
- New: Acquire the recently new papers related to your prompt!
- Crawl: Crawl the papers and update database!


Data Crawling & Processing

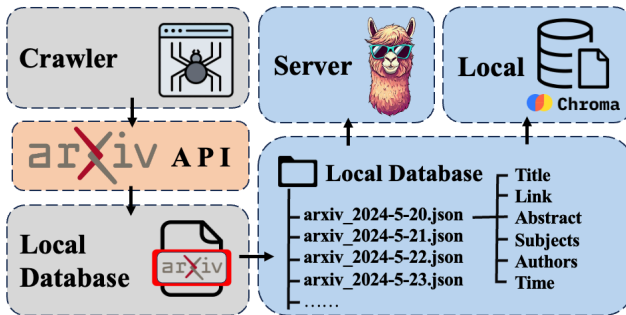


- Arxiv API: ask for papers in specific date, specific domain
- Local database: arrange the daily papers in json files, used for further query.

LLM Similarity Match

LLM Similarity Match Module

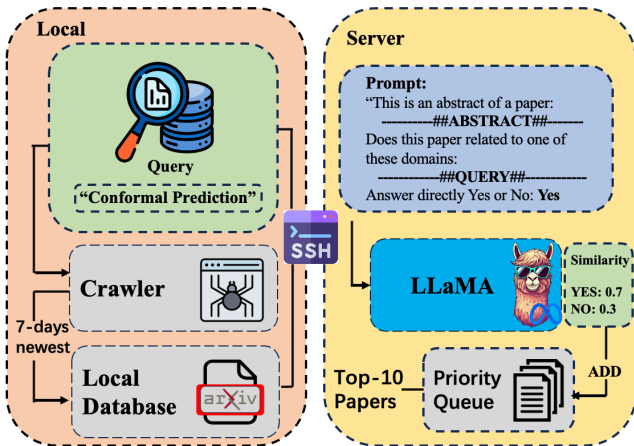

LLM Similarity Extraction & Evaluation

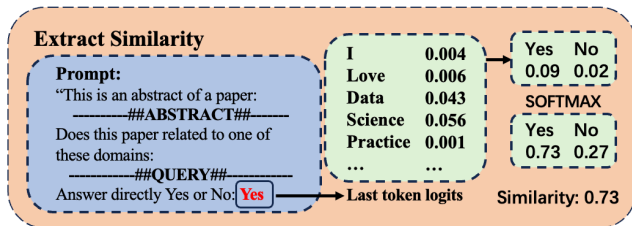


Keywords	recall
CLIP	0.8
GNN	0.8
RLHF	1
Optimization	0.9
Attention Mechanism	0.7

Table 1: Recall of LLM similarity match


- Method: combine abstracts and queries as prompts, ask LLM for similarity and extract the last token logits.
- Validation: choose 50 papers related to 5 keywords, ask for top-10 recommendations for each keywords and calculate the recalls.

Retrieval Augmented Generation Module

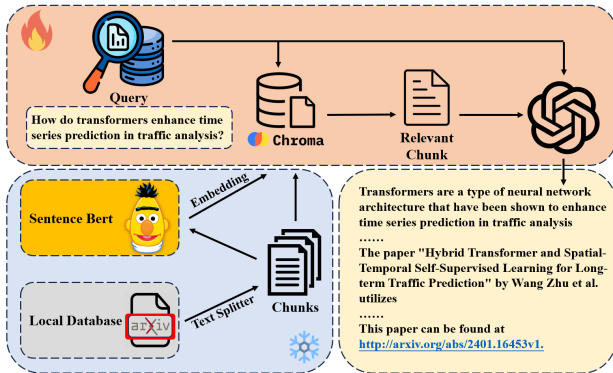

- **Frozen:** Chunks split from local database first embedded by Sentence Bert then stored in vector database.
- **Inference:** Given query, vector database retrieve related chunk. query and chunk are given to LLM for generation.

Retrieval Augmented Generation Evaluation

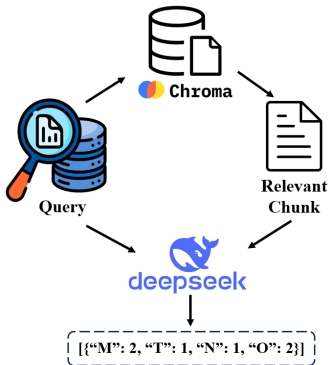

Thought	M	T	N	O
2	70	55	2	67
1	35	54	23	38
0	4	0	84	4

Table 1. Performance of Retrieval

Large Language Model for Evaluation
(Out of 109 docs)

Prompt Organization:

- System Character Acting
- Rating mechanism:
 - 0 for irrelevant
 - 1 for somehow relevant
 - 2 for highly relevant
- Chain of Thought Guiding:
 - M**: How well the retrieved context matches the query intent.
 - T**: How trustworthy the retrieved context is.
 - N**: How well the retrieved context covers the proper nouns in the query.
- Final output (**O**): Based on the importance above, JSON format.

Showcase

Showcase

Showcase

Conclusion & Future Work

Conclusion:

- In this project, we propose **Arxiv Agent**, an intelligent research paper assistant that helps users acquire latest news of paper on Arxiv and support query for any information related by retrieval augmented generation. Behind the scene, the agent update local database by web crawling.

Future Work:

- Our current framework is relatively simple and required further developed (Function and Robustness).
- For crawling process, current achievement is based on Arxiv API, crawling is limited every time.
- For retrieval augmented generation, performance is limited when coming across hard query (e.g. Search for paper of a specific author). Fine-tuning or other advanced technique needs investigated.
- For LLM similarity match, filtering the targeted papers to a smaller range, decreasing matching time.

Reference



Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, and Haofen Wang.

Retrieval-augmented generation for large language models: A survey.
arXiv preprint arXiv:2312.10997, 2023.



Paul Thomas, Seth Spielman, Nick Craswell, and Bhaskar Mitra.

Large language models can accurately predict searcher preferences.
arXiv preprint arXiv:2309.10621, 2023.